

Wired with net labels: labels with the same name are one net. CELL0 (bottom of stack) is the V− net.
ADBMS1818 Figure 112, isoSPI filtering per Fig. 104(B). See ../docs/slave-18s-design-basis.md.


U1 ADBMS1818 (64-LQFP_EP, EP = V−)

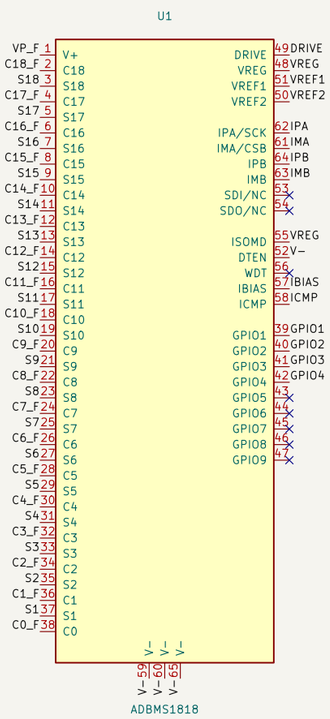


CELL INPUTS R100–R118: 10 ohm series on C0–C18

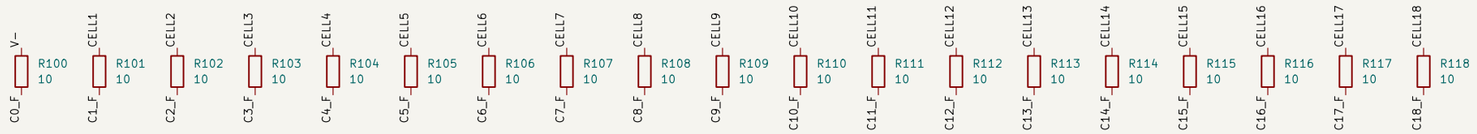


C101–C118: 100 nF 100 V, Cn (after 10 ohm) to V−

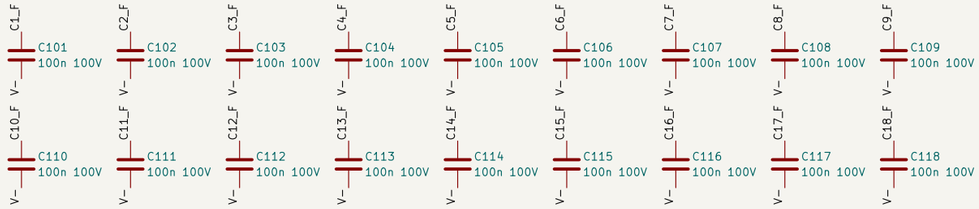

R201–R218: 33 ohm 1 W balance, cell n node (before 10 ohm) to Sn

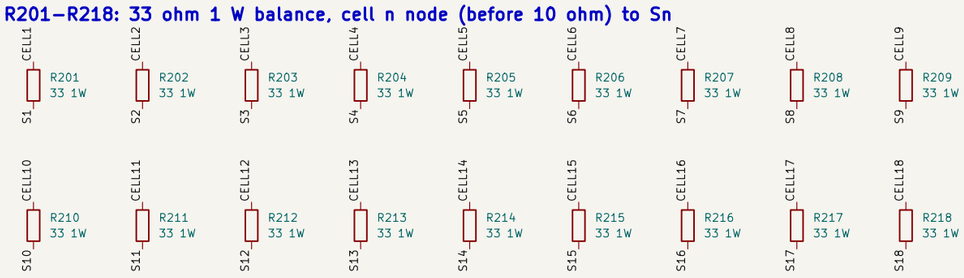


SUPPLY: V+ filter, DRIVE NPN -> VREG, VREF1/2

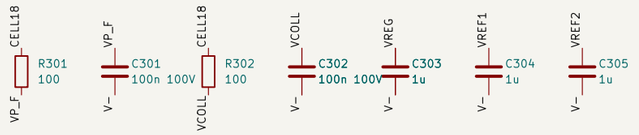


isoSPI BIAS: IBIAS–1k–ICMP–1k–V−



isoSPI PORT A: 2x51 ohm split term + 10 nF CTs

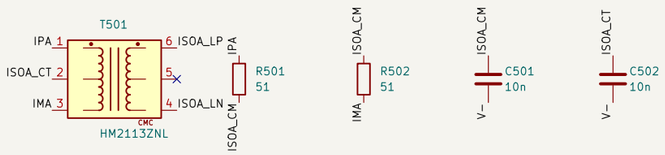


isoSPI PORT B: 2x51 ohm split term + 10 nF CTs

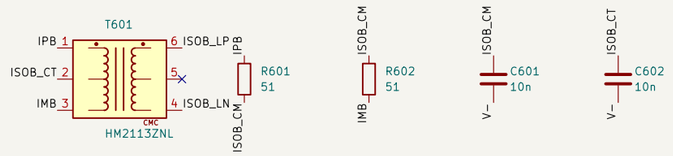


THERMISTORS: 100k to VREF2 + 100 nF, GPIO1–3 cell NTC, GPIO4 onboard



CONNECTORS (JST PH)

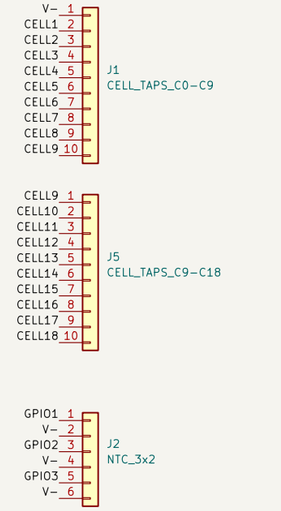





Not for manufacture
Baseline: ADBMS1818 datasheet Figure 112 typical application

Sheet: /
File: adbms1818-slave-18s.kicad_sch

Title: ADBMS1818 18S slave module

Size: A3	Date: 2026-11-05	Rev: 0-draft
KiCad E.D.A. 10.0.6		Id: 1/1