

(12) **UK Patent Application** (19) **GB** (11) **2 236 647 A** (13)
(43) Date of A publication 10.04.1991

(21) Application No 8922206.1

(22) Date of filing 03.10.1989

(71) Applicant
James Bartley Bage
9 Church Street, Ampthill, Bedfordshire, MK45 2PJ,
United Kingdom

(72) Inventor
James Bartley Bage

(74) Agent and/or Address for Service
James Bartley Bage
9 Church Street, Ampthill, Bedfordshire, MK45 2PJ,
United Kingdom

(51) INT CL⁵
G03B 42/00

(52) UK CL (Edition K)
H5R RCQ


(56) Documents cited
None

(58) Field of search
UK CL (Edition J) **G2X XBX, H5R RCQ RFQ**
INT CL⁴ **G03B 42/00**

(54) **Electro magnetic radionic camera**

(57) A method of obtaining photographic images of specific portions of the human body or of animals, birds, insects, trees, bushes, flowers, plants, seeds or the like, including psychic phenomena, comprises sensing radiation from a sample of the object with an infra-red sensor 5 from which signals are passed to conductor plates 8, 9 between which a photographic medium is placed.


DIAGRAM ONE.

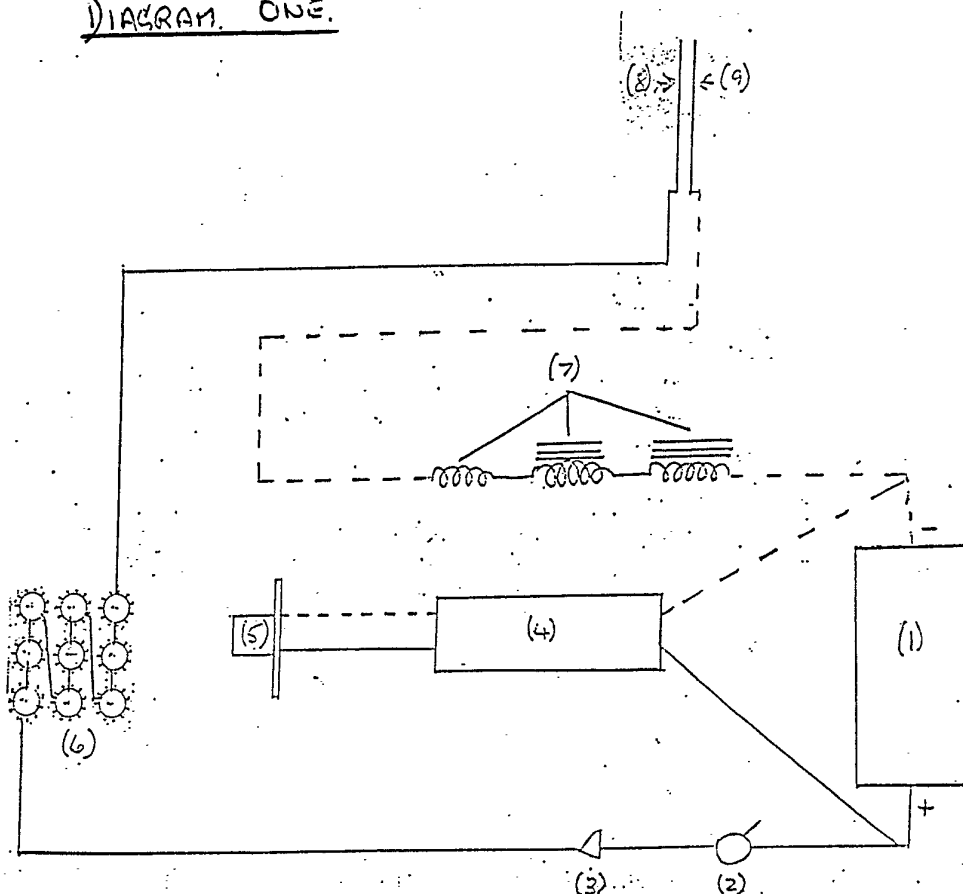

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

GB 2 236 647 A

DIAGRAM. ONE.

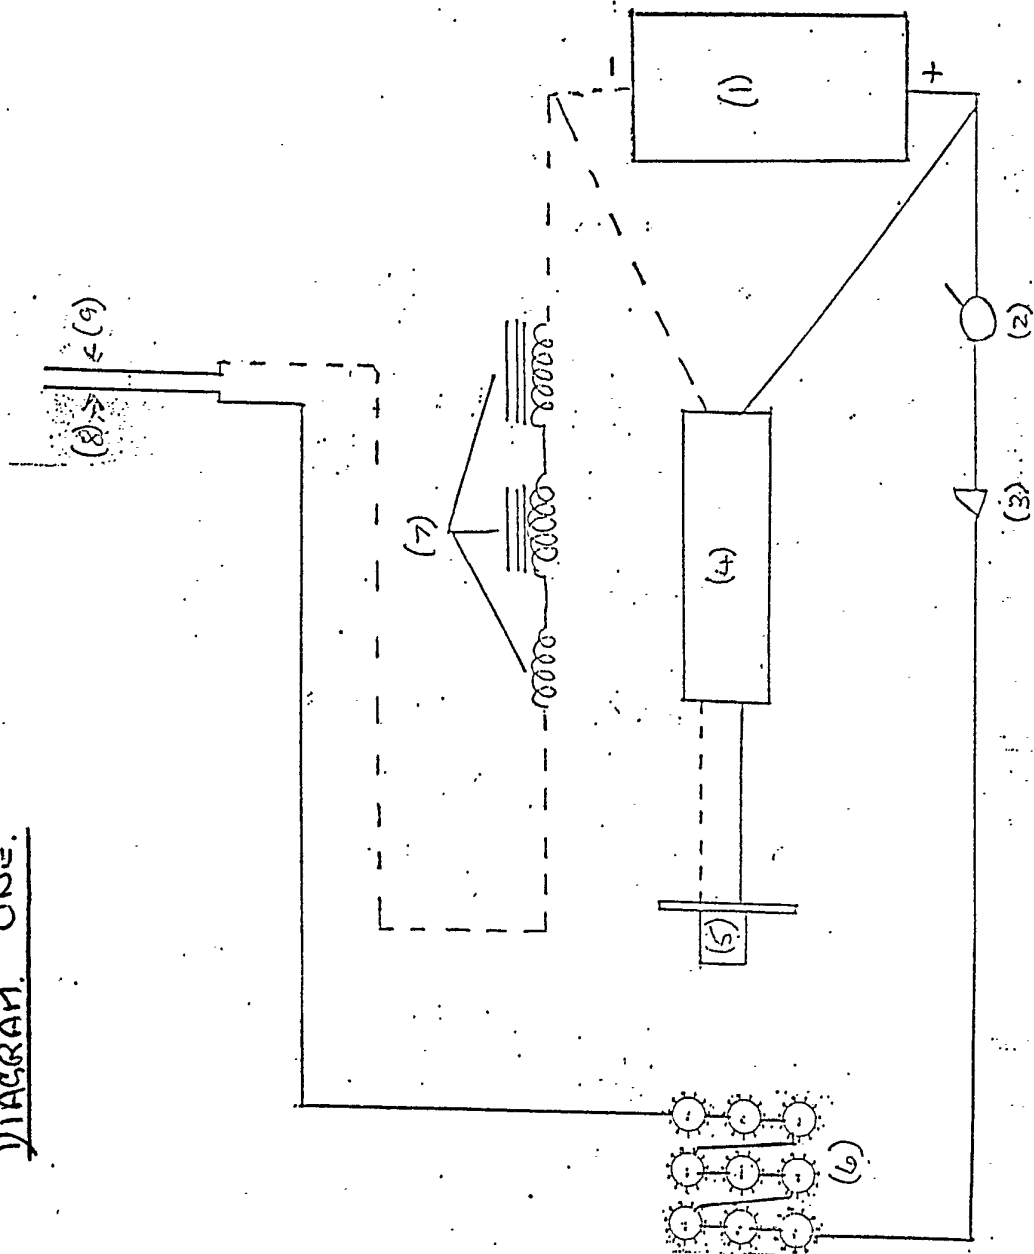

Electro Magnetic Radionic Camera.Specification.

This invention relates to a method of obtaining photographic images of healthy and diseased parts of the Human Body. Animals. Birds. Insects. Tree's. Bush's. Flowers. Plants. Seeds. Psychic phenonema, and other inanimate objects. The camera can be housed in its entirety in a case measuring 33cm. X 49cm. X 14cm, making it a completely portable unit. According to the present invention, the camera functions through the medium of harnessing the energy rays emitted from a donor "Body", from which a sample has been taken, and subjecting the electrical circuit of the invention to this emitted energy from the donor "Body", which is then led through a tuning device consisting of multi variable potentiometers or impedance rheostats, to the conducting plates, between which the film or photographic paper has been placed.

a specific embodiment of the invention will now be described by way of example with reference to the accompanying drawing in which.

Figure (1). shows a diagramatic plan of the complete circuit together with the conductor plates.

The requirements necessary to implement functioning of the Electro Magnetic Radionic Camera to produce photographic images. are.

- (1). Electrical source of power. Can be Battery or Mains. electricity.
- (2). On/Off switch of the simple make and break type.
- (3). Timer.
- (4). Amplifier.
- (5). Infra red sensor.
- (6). Potentiometers. These can be of the multi selective type with single specific values counting from 0 to 10. Where more than one of this type potentiometer is used, they must be wired or connected in series.

(2).

- (7). Filters. These can consist of coils of insulated wire,. Solenoids wound on both iron and air cores in series.
- (8). Positive conductor plate. Can be made of Copper. Silver or any suitable conducting material.
- (9). Negative conducting plate. Materials as (8).

The required photographic paper, or film, and the donor "Body" sample required in order to take a photographic image, are not shown in Diagram One.

The Positive side of the circuit, is wired from the positive terminal of the power source (1) in Diagram One. to the on/off switch (2) in Diagram One. to the timer (3) in Diagram One. to the amplifier (4) in Diagram One. to the infra red sensor (5) in Diagram One. to the potentiometers (6) in Diagram One. to the positive conducting plate (8). in Diagram One.

The Negative side of the circuit is wired from the negative terminal of the power source (1) in Diagram One. to the amplifier (4) in Diagram One. to the filters (7) in Diagram One. to the negative conducting plate (9) in Diagram One.

Infra Red Sensor.

The infra red sensor, acts as a shutter of the camera and is affected through the introduction of the donor "Body" sample to the proximity of the infra red sensor, that is to say, that the sensor is used to isolate a selected area to be photographed, and in so doing, produces changes in the electromotive force in the electrical circuit. These changes of force are utilised to excite the circuit, producing an electro magnetic field, which is led through the potentiometers, resulting in the energy waves, being converted into energy patterns through the selected tuning on the potentiometers resulting in distortion or change of the lines of force that spread accross the emulsion face of the film, or photographic paper, producing a photographic image, that can be chemically developed.

The Amplifier.

The amplifier is required to amplify the energy introduced into the circuit via the sample from the donor "Body"

The Potentiometers.

The potentiometers are connected in series so as to produce a condenser action. They are multi adjustable, each one being able to be set from 0 to 10. They do in fact act as a tuning device. The potentiometers are positioned between the power source (1) Diagram One and the positive conducting plate (8) Diagram One.

Negative and Positive Conducting plates.

The Negative conducting plate (9) Diagram One and the Positive Conductin plate (8). Diagram One, act as a photographic device in effect as fixed condensers. They can be spaced between 8mm and 25mm apart, between which the film or photographic paper is placed.

The invention relates to a method of obtaining photographic images as describe on Page (1).

The action consists in subjecting a photographic plate, film, or photographic paper to an electromotive force so as to produce an electro magnetic field which provides a means susceptible to the energy rays or electrons of the atoms of the object or area to be photographed.

To produce a change in voltage drop accross an electrical circuit to correspondingly influence the afore mentioned electro magnetic field, via a sample from the donor "Body" This sample, can be of Blood. Hair. Sputum. Handwriting etc, or any part of the subject, or subject matter to be photographed. When the sample from the donor "Body" is presented to the Infra red sensor, the energy transmitted from the donor "Body" to the sample, produces sufficient energy to effect a change in the circuit by way of a minute voltage drop, this in turn is led through the tuning potentiometers and influences the said electro magnetic field by reason of the applied direction of polarity of the source of the potential.

Description.

The camera functions through the medium of harnessing the energy rays emitted by the donor "Body" via a sample from the donor "Body". This sample can be of a Blood spot. Hair. Sputum. Handwriting, or any part of the donor "Body".

In practice, a sample from the donor "Body" is placed close to the surface of the Infra red sensor (5) Diagram One, so that the energy rays or radiations will impinge upon the cathode of the Infra red sensor (5) Diagram One, resulting in negative electrons being emitted from the cathode. This in turn, places a negative potential on the anode circuit, resulting in an increased resistance being placed across the Infra red sensor, resulting in a minute change of current in the anode circuit.

Due to this change in current, there will be a voltage drop across the circuit. This voltage drop is led through the potentiometers (6) Diagram One, which are used as the selection or tuning device. The tuning is effected by setting the energy pattern of the area to be photographed numerically on the potentiometers (6) Diagram One.

The change in dielectric stress of the condenser like arrangement of conducting plates (8) & (9). Diagram One caused by the change of potential applied to the conducting plates (8) & (9). Diagram One, produces corresponding changes in the electro magnetic field, which is then contained in the emulsion face of the photographic paper or film. This field is in the nature of an electro magnetic field with appropriate lines of force, depending upon the particular setting, set numerically on the potentiometers or tuning device (6) Diagram One.

As the tuned electromotive force which produces the field, is varied or regulated by the energy derived from the nervous system or organism of the donor "Body" being photographed, the electro magnetic field is varied accordingly.

The tuning device, can comprise of any suitable number of potentiometers (6) Diagram One, connected in series, as shown in Diagram One, to afford a wide range of selection,

(5).

The Potentiometers (6) Diagram One. are capable of tuning on a scale from 0 to 10.

In order to be able to take a photograph, you have to dial in the energy pattern of the area to be photographed on the potentiometers (6) Diagram One. For example, if we wished to photograph "Cancer of the Spine" that the donor "Body" is suffering from, we would dial in the number 5 on the first potentiometer. 0 on the second. 2 on the third. 4 on the fourth. 2 on the fifth. 7 on the sixth. 9 on the seventh potentiometer. This is the energy pattern of Cancer of the spine expressed numerically, as 5024279.

The camera is now set to photograph Cancer of the spine.

Using the sample from our donor "Body" to act as a catalyst we trigger the action needed to effect the photograph.

In fact what happens, is that the donor "Body", is in tune with the sample taken from it, and that energy is passing between the donor "Body" and the sample in a continuous stream. (Time and distance are irrelevant).

When the sample is presented to the Infra red sensor (5) Diagram One. energy generated by the donor "Body" flows through the sample in sufficient strength to effect negative electrons being emitted from the cathode of the Infra red sensor (5) Diagram One, this in turn places a negative potential on the anode of the Infra red sensor (5) Diagram One, resulting in an increased resistance being placed across the infra red sensor (5) Diagram One, which in turn results in a minute change of current in the anode circuit.

Due to this change in current, a voltage drop is effected.

This voltage drop is led through the potentiometers (6) Diagram One., on which we had set our energy pattern for Cancer of the spine, expressed numerically as 5024279. The energy pattern is then carried on an electro magnetic field to the Positive conducting plate (8) Diagram One. The energy pattern being carried on this electro magnetic field flows on to, and becomes trapped in the emulsion face of the film or photographic paper. Developing the film, is by way of developing normal Black and White film, resulting in a

(6).

picture of Cancer of the spine, that the donor "Body" is suffering from, and from which can only be obtained by use of the donor "Body" sample.

The camera, will produce the same photograph effect when a numerically expressed energy pattern is selected on the Potentiometers (6) Diagram One., and the same donor "Body" sample is used, no other criteria is required to obtain repetitive results.

Claims.

(1). A method of obtaining photographic images of selected areas or portions of Human Bodies. Animals. Fish. Birds. Insects. Tree's. Bush's. Flowers. Plants. Seeds. Psychic phenonema, and other inanimate objects, consisting in forming an electro magnetic field on which is carried the energy pattern of the area to be photographed to the film or photographic paper situated between the Positive and Negative conductor plates of the circuit, and producing changes in the electromotive force in the circuit, by means of an Infra red sensor being exposed to the influence of the radiant energy being emitted from the donor "Body", via the introduction of the sample taken from the donor "Body" being introduced to the Infra red sensor.

(2). Method of obtaining photographic images of selected area or portions of. Human Bodies. Animals. Fish. Birds. Insects. Tree's. Bush's. Flowers. Plants. Seeds. Psychic phenonema. and other inanimate objects, consisting in creating a magnetic field by an electrical device. Locating the photographic paper or film between the Positive and Negative conductor plates in the circuit, and by locating a sample taken from the donor "Body" close to the Infra red sensor, so that the energy flowing from the donor "Body", through the sample, places a resistance accross the Infra red sensor, which in turn, produces a change of current in the anode circuit, which in turn, produces a voltage drop accross the circuit. This voltage drop is led through the Potentiometers and then on to the Conducting plates.

(3). Method of obtaining photographic images of selected area's or portions of. Human Bodies. Animals. Fish, Birds. Insects. Tree's. Bush's. Flowers. Plants. Seeds. Psychic phenonema, and other inanimate objects. Comprising a means for applying an electro magnetic field on which is carried the energy pattern as set on the potentiometrs, to obtain the desired photograph on the emulsion side of the photographic paper or film.

An infra red sensor, adapted to produce changes in the electromotive force in the current by introducing a sample taken from the donor "Body", from which you wish to take a photograph.

The resultant change in drop of current and voltage drop (as pper claim 2) is led through the potentiometers which are connected in parallel to the Infra red sensor and source of power.

(4). Device for obtaining photographic images of selected area's or portions of. Human Bodies. Animals. Fish. Birds. Insects.. Tree's. Bush's. Flowers. Plants. Seeds. Psychic phenonema, and other inanimate objects. Comprising an Infra red sensor. Power source, connected at the negative side via a filter to the cathode of the Infra red cell. A series of potentiometers connected in parallel with Infra red cell , and the source of current. The Positive side terminates at the positive conducting plate, and the Negative side is led through the filters to the negative conducting plate. The film being placed between the two conducting plates.

(5). Device for obtaining photographic images of. Human Bodies. Animals. Fish. Birds. Insects. Tree's. Bush's. Flowers. Plants. Seeds. Psychic phenonema, and other inanimate objects. According to claims 4 and 5 , wherein the Negative side of the source of power is connected to the cathode of the Infra red sensor via one or more solenoids or coils of insulated wire wound on iron cores, and air cores.

(6). Device for obtaining photographic images of selected area's or portions of Human Bodies. Animals. Fish. Birds. Insects. Tree's. Bush's. Flowers. Plants. Seeds. Psychic phenonema, and other inanimate objects, according to claim 4 and 5. Wherein a portable casing houses the complete unit.

(7). Device for obtaining photographic images of selected area's or portions of Human Bodies, Animals. Fish. Birds. Insects. Tree's. Bush's. Flowers. Plants. Seeds. Psychic phenonema, and other inanimate objects. Substantially as described with reference to the accompanied drawing Diagram One.

LEGEND FOR DIAGRAM ONE.

- | | |
|-----|----------------------------|
| (1) | POWER SOURCE |
| (2) | ON/OFF SWITCH. |
| (3) | TIMER. |
| (4) | AMPLIFIER. |
| (5) | INFRA RED SENSOR. |
| (6) | POTENTIOMETERS. |
| (7) | FILTERS |
| (8) | POSITIVE CONDUCTING PLATE |
| (9) | NEGATIVE CONDUCTING PLATE. |