



Device protection from harmful energy impacts



Фиг. 1

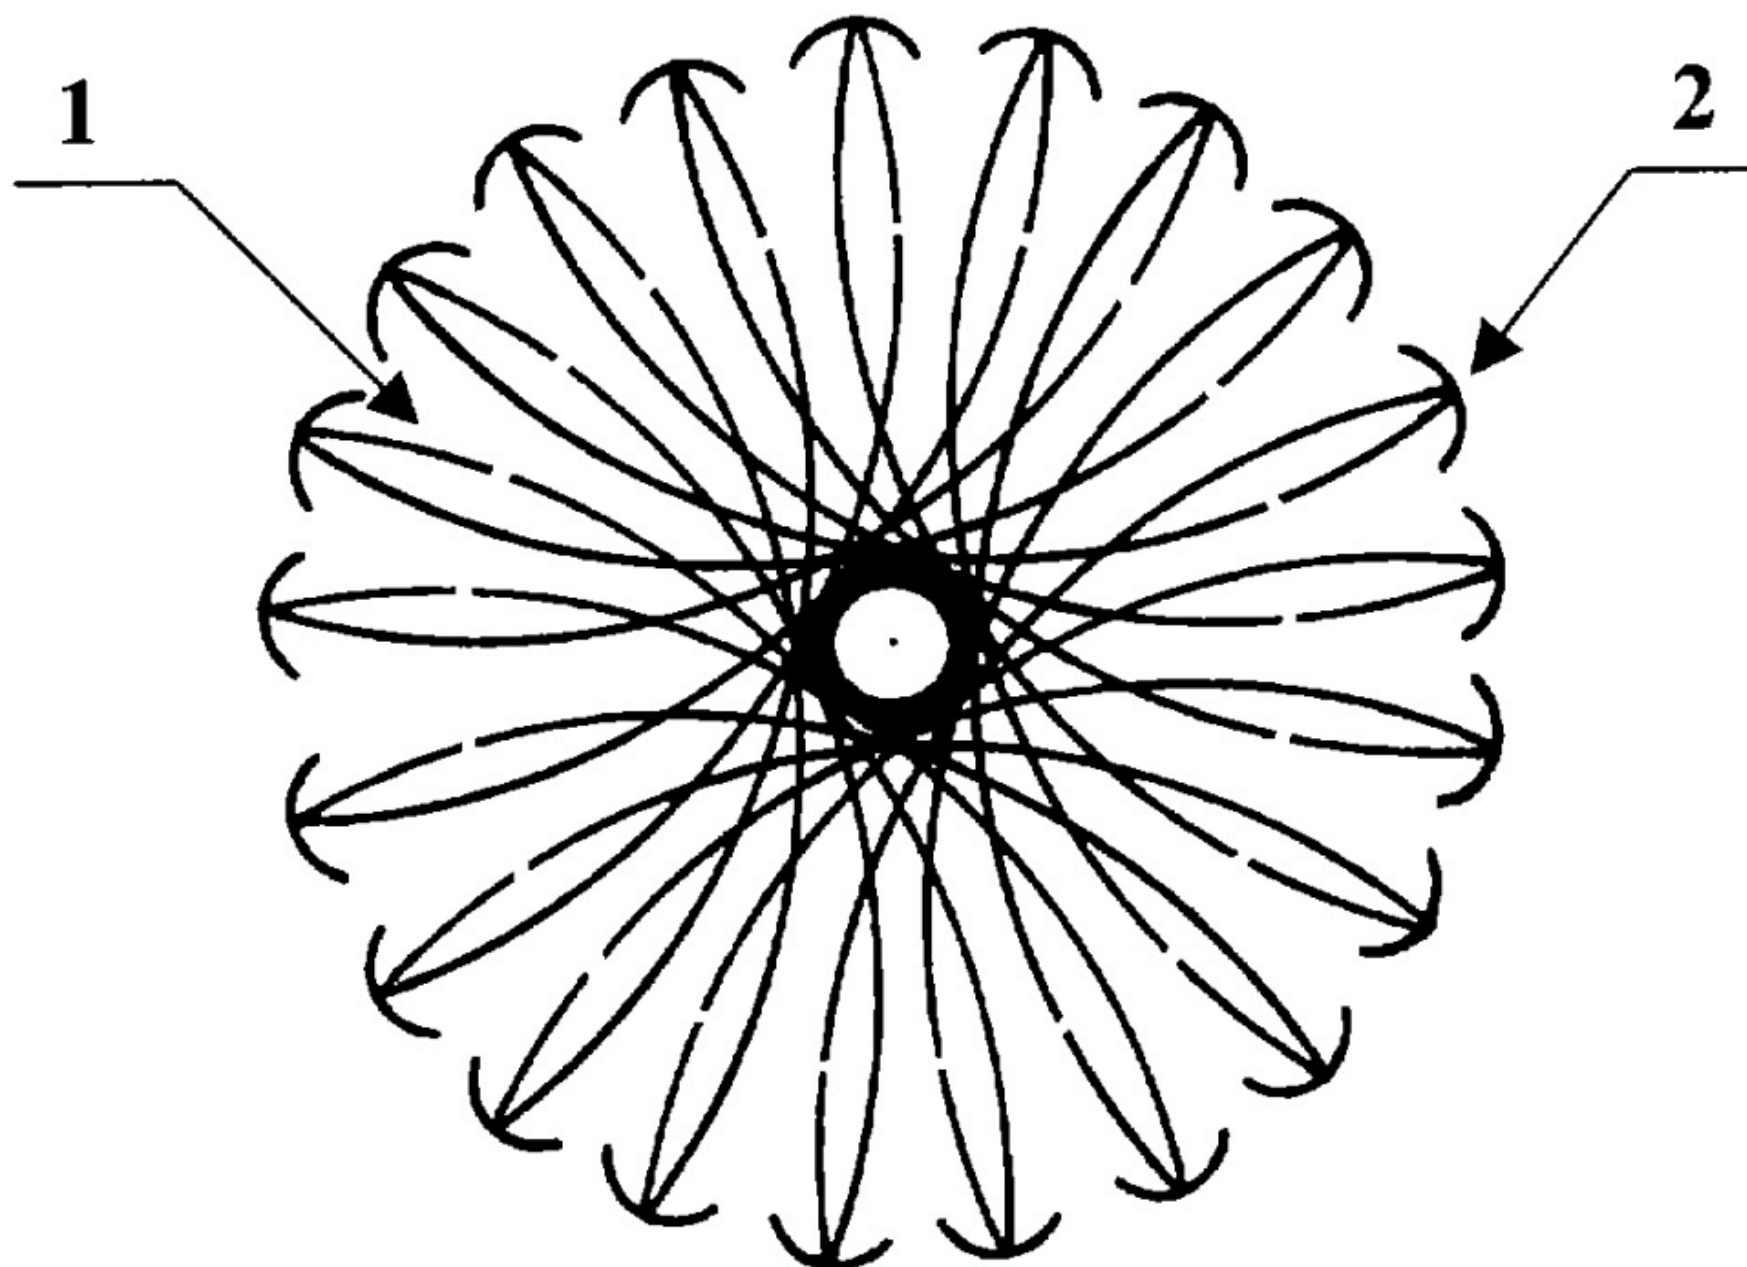

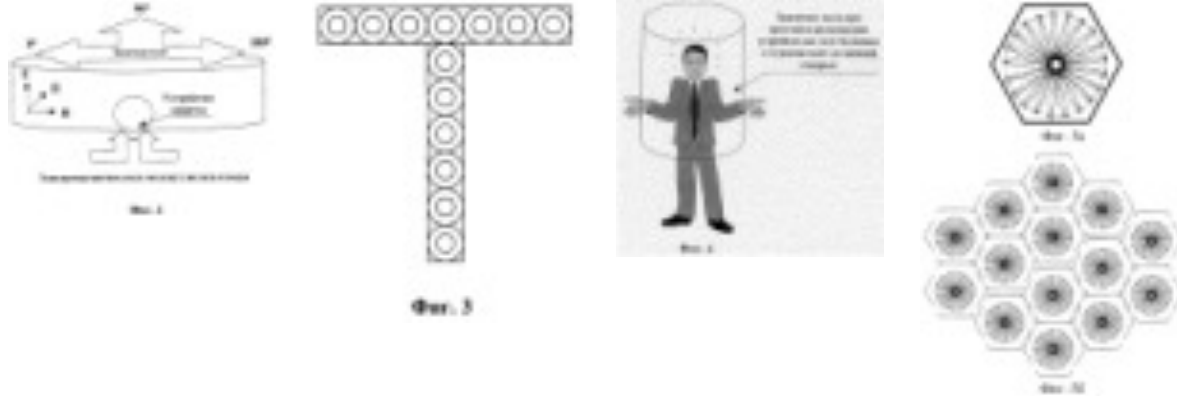

The invention relates to medical technology, and is intended to protect the wearer from harmful energy-informational field of man-made and biological origin. Device protection from harmful energy impacts includes an odd number of conductive strip elements, evenly placed around the circle, having the form ellipsoidally open loop vibrators, forming a log periodic antenna, each of the vibrators provided with a semicircular reflector backward waves, placed far from the center of the end while loop vibrator configured to wavelengths that are multiples of the wavelength of spectra of electromagnetic fields molecules of iron and water. The strip elements may be placed on a dielectric substrate made of a homogeneous insulating material. The insulation material used fiberglass laminate, ceramic or paper. The device can be placed on the body, on vertical surfaces, tables, jobs, the walls of the administrative, business and residential premises. The technical result is the creation of protective bioenergy screen, reflecting the energy information and energy fields of tehk medical technology and is designed to protect the wearer from harmful energy-informational field of man-made and biological origin.

Research of influence of various physical fields on human activity showed that the informational effect on the human body have signals of any power of nature, the intensity of which lies in the range $10^{-2} \dots 10^{-12} \text{W/m}^2$ (see Biophysics, T. 40, 1995, page 624... 638).

The mechanism of biological effect of information and energy fields, in particular electromagnetic radiation on human activity, was established by a group of researchers, who proved the existence of the resonant properties of the spectra of water and aqueous cells in the range 40...52 GHz, 60. . 68 GHz and 100...120 GHz (see "Special role "millimeter - wave aquatic environment" in nature", Biomedical electronics, 1, 1998).

The resonance quality factor of the water-containing cells in accordance with the performed measurements is about 300.

The bond energy in the molecules of living cells is measured and hundredths of eV. When the average bond energy of the molecule in the cells of 1.0 eV ($1,6 \cdot 10^{-19} \text{J}$) the harmful impact of information and energy fields may begin to manifest itself at the level of the energy field: $W_p = 1,6 \cdot 10^{-19} : 300 \cdot 10^{-21} \text{J/C}$ shows that the ratio "signal/noise" ratio on average is more than 5. This means that the signals of harmful energy field will always be accepted (selected) resonances aqueous cells even on the cosmic background noise.

Since the human body is an aqueous medium at 70...80%, and the water and the water-containing cells have a selective resonance properties, harmful impact on the human body will be regular due to the huge amount of information and energy fields generated by space objects, emissions of anthropogenic origin, field of biological nature, generated by biological objects.

The impact of these energy-information fields can be very different, ranging from termination of life before the appearance of cancer and mutants with unusual properties (see Problem space security, book 4, "Theoretical

foundations of bio-energy exchange", publishing house "Intan", St. Petersburg, 1999).

According to the fundamental law of the material world physical field can bite, having the same origin, similar spectra frequencies and vzaimokompensiruyutsya interaction in space. Airspace, by its nature, is a linear space, i.e. it does not lead to a transformation of the spectra and fields. Therefore, any energy and information protection is only possible through the creation of correlated fields or based on nonlinear spaces and absorbing media.

A device to protect living organisms from the adverse effects of electromagnetic and other fields (see U.S. patent, WO 9608207 A1, A 61 B 19/00) that generates an electromagnetic field. These fields are superimposed in opposite to the external field, compensate for its adverse action. Since this device is fully compensate for the bad field fundamentally cannot because of errors broadband phasers, residual electromagnetic energy-field will affect people.

The known device protection from radiation (see Russian Federation Patent 2033200, class A 61 N 1/16, Patent of the Russian Federation 2071366, class a 61 N 1/16) ensuring the protection of personnel working in the area of the electromagnetic radiation through the formation of the local zone is aktivnih decisions on the basis of resonance of the spiral and silver plate, these devices may not be able to form a compensating field of information and energy fields, with quantum-wave nature.

The known device for forming a protective energy field (see Russian Federation Patent 2057552, class A 61 N 1/16, Patent of the Russian Federation 2033200 class. And 61 N 1/16) providing for the establishment of biological screen due to the excitation of a discharge lamp and an oscillating circuit. In essence discharge unit is a variant of nonlinear plasma antenna, forming a spherical quantum wave and electromagnetic fields. Together, these fields are simultaneously radiated into space and creating a biological screen in a fairly large area, simultaneously irradiated protected biological objects located in the zone of action of the device, which in some cases is undesirable.

Known utility model protection device from the energy field (see Certificate for a utility model 0002741, class a 61 N 39/00), in which the biological screen is formed of an infrared source of electromagnetic energy and diverging optical radiation. Considering the device is intended for bioenergy protect doctors follistem from IR fields of sick people. Effective protection of the individual from the majority of information and energy fields technogenesis and power spectrum as well as the lack of correlation patterns of physical interaction with the fields generated by the movements of the water-containing molecules of the cells of the human body.

A device bioenergetic protection of human rights and living organisms (see the Description of the invention to the patent of Russian Federation RU 2151618 C1, A 61 N 1/16), which forms a flat absorbing field and, in principle, ensures the protection of people against exposure to all types of frontal incident energy and information fields. Considering the device is stationary, is designed to protect jobs, administrative, academic and residential premises.

However, most of the time the active part of the population may be outside the protected workplaces and premises (on the road, cottages, gardens, fields, beaches and other) and almost constantly exposed to harmful information and energy fields. In these cases, the use of these units to protect possible, but not very comfortable.

Known protection device energy impacts (see certificate for a utility model RU 20458 U1, A 61 N 1/16), which consists of a non-magnetic housing and placed in it the core of ferromagnetic Mathers by its physical nature is a memory device field biogenerator and reacts only on the spectra of the fields, which correlate with spectra biogenerator. Because each person has their own individual spectra of emission and absorption, this device has a limited ability to protect against energy impacts.

A device for protection from harmful radiation (see the description of the invention to the patent of Russian Federation RU 2177343 C1, And 61 N 1/16), in the case of which is placed a plate with a source of compensating radiation in the form of a double spiral of Archimedes and storage device for the introduction of relevant information in memory to specify properties for protection. Consider the device generates a counter field in antiphase, allowing harmful field in a certain frequency range can be compensated. However, in the range of the resonance frequency of water containing human cells consider the device to work in a large volume can not because of design features and dimensions of the spiral, which limits its ability to protect in a narrow range of frequencies.

A device for active protection from weak bioenergetic fields of different origin (see the description of the invention to the patent of Russian Federation RU 2132204 C1, 6 And 61 N 1/16, 2nd electromagnetic field. Consider the device practically protects against the imprinting of low-frequency fields, significantly affecting the activity of the Central nervous system (1...20 Hz). However, this field can oppress its own nervous system, that is a definite drawback.

A device for neutralizing the adverse effects of the environment on the human body (see the description of the invention to the patent of Russian Federation RU 2177345 C2, And 61 N 1/16), which contains a multilayer structure with magnetic plates and deposited on the plate security codes in the form of a set of different geometric shapes.

Consider nearly gemfire in a limited area of the field, the spectra of frequencies which coincide with the resonant properties of the code figures. Because options energy impacts and fields can be countless, to accurately guess the codes and the kinds of figures is difficult, which limits the possibilities of this device.

Known protection device energy impacts (see the description of the invention to the patent of Russian Federation RU 2177342 C2, And 61 N 1/16), which contains a bundle of electrically conductive elements in the form of a set of geometric shapes and is entrained magnetic field in the area of the device and the energy absorption of harmful fields due to the formation of eddy currents in conductive plates. However, the capabilities of these units are limited due to the narrow coverage of the space and lack of resonance elements, responsive to frequency spectrum of harmful fields.

The objective of the invention is to provide a device of protection from the harmful effects of energy-information fields.

The technical result of the invention is to provide a protective bioenergy screen reflecting incident energy information and energy fields from any direction in the region $0^{\circ} \dots 180^{\circ}$ when the flow capacity of up to 10^{-16} J/s and more.

The basis of the physical principle of the device bio-protection from energy-information fields based on the properties of quantum correlations between spatially separated quantum interacting systems. The nature of quantum correlations provides almost instant impact on the field, does not depend on distance and distributed quantum-interacting system with the same spectra of emission and absorption.

The creation of protective bioenergy screen, reflecting the harmful energy information and energy fields, is due to the resonant enhancement of their own izlucent, evenly placed around the circle, having the form ellipsoidally open loop vibrators, forming a log periodic antenna, each of the vibrators provided with a semicircular reflector backward waves, placed far from the center of the end while loop vibrator configured to wavelengths that are multiples of the wavelength of spectra of electromagnetic fields molecules of iron and water.

The strip elements may be placed on a dielectric substrate made of a homogeneous insulating material and the insulating material can be used fiberglass laminate, ceramic, paper or cloth.

Determining the physical principle of the strip loop resonator is the barrier effect of changing the density of the medium, which varies sharply at the border of the "free field" and strip lines. The more pronounced this difference, the greater the effect of the resonance ability of the loop resonators. Q loop resonators depends on the conductivity of the material and dielectric losses surrounding the resonator. According to preliminary estimates, technical merit loop resonators may vary within wide limits from 100 to 1000. This means that the proposed ustroystvami spectra of molecules of iron and water field energy not less than the value: $W_{arr} =$

$$(100 \dots 1000) \cdot (10^{-16} \dots 10^{-19}) = (10^{-13} \dots 10^{-17}) \text{ J.}$$

It is known that the molecular electromagnetic field have energy of about 10^{-16} J. for psychics and about 10^{-19} J for normal healthy people.

In addition to forming a compensating counter field, the device enables the operation of the absorbing black body.

Since the electromagnetic wave energy-informational field is transverse, when entering it into the internal area of the loop vibrator she repeatedly reflected from the strip of items from different angles and when you reach the gap in the strip vibrator goes into the zone of interference of waves, where the final fade out.

By a combination of both physical processes provides a high degree of protection of people against exposure to harmful information and energy fields technological and biological origin.

The invention is illustrated by drawings, where Fig.1 shows a General view of the device of Fig.2 is a view of the formed protective field; Fig.3 is a diagram of the device for personal protection of a person; Fig.4 of a kind - formed protective field device of Fig.3; Fig.5 - principles primeneniya an odd number of conductive strip elements 1, evenly placed around the circle, having the form ellipsoidally open loop vibrators with a semicircular strip reflector backward wave 2 far from the center of the end and made on the basis of electrically conductive material.

The device operates as follows.

All human processes are accompanied by electromagnetic phenomena, the range of which lies in a wide interval of frequencies from low to 10^{16} Hz or more.

A source of microwave and millimeter-wave electromagnetic field (wave length this field defines the distance between the iron atoms in the atomic lattice) is the structural skeleton of iron atoms in the hemoglobin molecule (see Petrachovich, N. "Russian idea", 2, 1992, page 66).

The main doublet resonance frequencies of water and aqueous cells is located on the frequencies and 50.3 51.8 GHz, which generate two types of electromagnetic waves - radial and transverse.

Loop resonator 1 concentrates all kinds of electromagnetic waves of the cells of an organism within its capacity and in virtue of its resonance properties, strengthens them in the Q times, where Q q loop resonator.

The shape and size of loop resonator tuned to the wavelength, multiple wavelengths lebani cells may be different, strip vibrators placed evenly around the circle.

Strip vibrators are placed on a dielectric substrate of a homogeneous insulating material, which is used fiberglass laminate, ceramic, paper, or fabric.

Enhanced electromagnetic field of the body cells is radiated into space in the form of a semicylinder in the front plane of the device (see Fig.2). The radius of the formed cylindrical counter protective field is 30 cm and the height of the box from the bottom of the device is also equal to ≈ 30 see

To the front of the incident energy field device is operating in the "black" body. Because the electromagnetic wave is inherently a transverse electric field component in achieving the strip vibrators reflected from them at different angles and due to the interference fades.

The main impact of information and energy fields on humans occurs through the energy centers ("chakras"), which are placed along the spine of the person. The proposed device has limited protection, so for individual protection of the person proposed design in the form of a set of devices (T-shaped shavlan in Fig.4.

For collective protection of people working and living areas offer a variant of roll manufacture in which the device is tightly placed on the dielectric by "cell" principles hexagons (see Fig.5).

Claims

1. Device protection from harmful energy impacts, characterized in that it includes an odd number of conductive strip elements, evenly placed around the circle, having the form ellipsoidally open loop vibrators, forming a log periodic antenna, each of the vibrators provided with a semicircular reflector backward waves, placed far from the center of the end while loop vibrator configured to wavelengths that are multiples of the wavelength of spectra of electromagnetic fields molecules of iron and water.
2. The device according to p. 1, wherein the strip elements are placed on a dielectric substrate made of a homogeneous insulating material.
3. The device according to p. 2, characterized in that the insulation material used fiberglass laminate, ceramic or paper.

Same patents:



Device for neutralizing the harmful effects of // 2210397

The invention relates to a device for neutralizing the harmful effects and can be used to restore the energy of a biological object, and also to neutralize geopathic zones

Device for influencing the objects of animate and inanimate nature // 2207165


The invention relates to medicine, namely to devices energy impacts on the objects of animate and

inanimate nature, and aimed at stabilizing structures of objects and processes occurring in them, by neutralizing the negative impact of technogenic and natural character




Harmonizer to improve the condition of the biological object and the surrounding space // 2204424

The invention relates to the fields of physics, biology, agriculture, environment, technology, health, improvement of the biological object

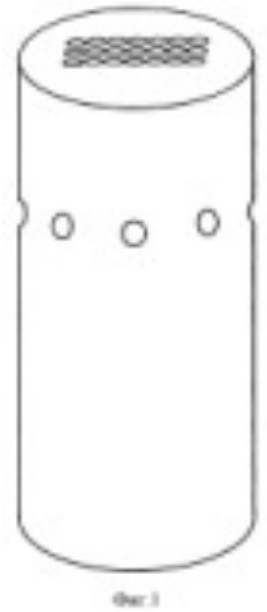

Device for physiotherapy with biofeedback // 2203698

The invention relates to medicine, in particular to physical therapy, and is intended for prevention and drug-free polyfunctional treatment of various diseases of musculoskeletal system, nervous system, cardiovascular diseases and other diseases

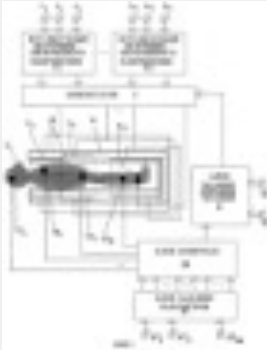

The protection device energy impacts // 2203695

The invention relates to medical equipment, devices protection of medical personnel and patients from exposure to negative emissions accompanying the operation of the electrical, energy and electronic devices, and can also be used to reduce the activity of toxic substances in



food products and solutions of different origin




The material for the manufacture of therapeutic blankets // 2203107

The invention relates to materials intended for the manufacture of therapeutic blankets used for non-drug treatment of various diseases

Biological screen // 2203106

The invention relates to medicine, namely to devices that provide neutralizing the influence of weak electromagnetic radiation impinging on the human body, and can also be used for correction of the functional state of a biological object




The protection device energy impacts // 2197289

The invention relates to the fields of medical technology and ecology, and is intended to protect the human body from negative energy and information influence of technogenic zones (TK) generated by sources of electromagnetic fields and radiation (industrial, office and household appliances), natural and/or artificial geopathic zones (GPZ), as well as to improve the emotional state of the human body



Container for food and/or drugs // 2196564

The invention relates to packaging means, intended for the storage and transportation of foodstuff, medicine, cosmetic, hygiene and other means simultaneously enhancing their bioactive properties and increase the positive impact on living organisms, including human

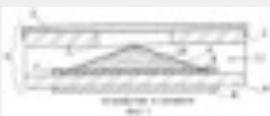

Device for modulation of energy effects // 2195339

The invention relates to medicine, in particular to devices for protecting living organisms from exposure to external energy fields, with simultaneous effects on organisms energy spectrum of the radiation, selected using known methods of homeopathy



Device for neutralization of harmful effects // 2245175


FIELD: devices for neutralization of geopathogenic and electromagnetic rays of natural and artificial origin within a wide frequency band, as well as for sanitation of the human organism.

SUBSTANCE: the device has two skeleton regular pyramids of metal located symmetrically relative to each other and oriented in space according to the parts of the world, horizontal antenna positioned in parallel with the bases of the pyramids, the antenna is provided with receivers at the ends oriented to the opposite sides, and a radiator. Each of the pyramids is made tetrahedral with a truncated vertex by 1/3 of the height, and the radiator is made in the form of a hollow ball and positioned between the pyramids for connection with them. A grid of two groups of vertically installed plates made for

connection perpendicularly to each other is positioned inside the radiator. The pyramids with the radiator are positioned inside the cube, whose each face is made with a central hole, the base of the upper pyramid is connected to the upper face of the cube, and the base of the lower pyramid - to the lower face of the cube, the horizontal antenna passes through the holes in the side faces of the cube and is rigidly connected to the grid, the antenna receivers are made in the form of hollow metal balls, a cone truncated by 1/3 of the height with the base diameter equal to the cube side is located on the upper face of the cube coaxially with the pyramids, a hemisphere with additional antennas is installed on top the cone, the cube, radiator and grid are made of metal. The inner surface of the radiator, truncated cone and antenna receivers may be coated with a layer of a mixture of fine-disperse ceramic, organic and metal powders connected by a binding mass.

EFFECT: enhanced efficiency of neutralization of harmful effects of geopathogenic and electromagnetic rays.

3 cl, 5 dwg

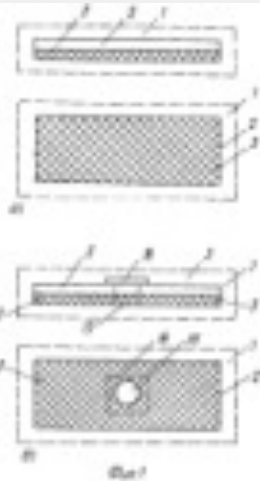

Method and device for protecting human being against electric instrument radiation // 2246328

FIELD: medicine; medical engineering.

SUBSTANCE: method involves using non-metal plates having raw natural amber layer as air ion radiator. Maximum air ion concentration area is formed in the radiation source zone for protecting human beings. A plate is placed vertically in lateral position at the level of radiation source casing of the electric instrument or at the top above the casing. Device has fastening means available for mounting the air ion radiator in the instrument radiation source zone. Additional radiators are mounted in the room for increasing air saturation with negative air ions and protecting against instrument radiation.

EFFECT: wide range of functional applications.

12 cl, 5 dwg



Device for protecting against energetic actions // 2259215

FIELD: medical engineering.

SUBSTANCE: device has two plates manufactured from insulation material bearing metal applicators. Four polygons are arranged on one side of the first plate. Two of them are arranged symmetrically to each other taking one-third of plate surface in its central region. They have saw teeth turned towards each other. Another one-third of the plate has a polygon having one angle turned towards the plate center and two others being directed towards the corresponding plate angles. Polygon having 8 rays occupies the last one-third of the plate surface, two of the rays crossing plate symmetry axis and 6 others resting upon plate edges. Polygons are designed as n-rayed stars where $3 < n < 8$, and at least one of them is directed towards neighboring star ray. Archimedes spiral having 3 coils is arranged on one side of the second plate and one having 2.5 coils on the other side. Both plates are mechanically joined with insulating washer into single unit by means of metal buckles.

EFFECT: increased negative radiation extinction level; uniform frequency response function in high frequency bandwidth.


1 dwg

Method for transmitting data // 2259853

FIELD: radio engineering.

SUBSTANCE: method involves transmitting data with data-transmitting device being an element capable of changing geopathogenic radiation at receiver location. The data are received with a receiver being geopathogenic radiation parameter-recording unit. Data reception and transmission takes place in synchronous mode. Geopathogenic radiation is used as information-carrier signal.

EFFECT: simplified transmission process; high confidentiality level.

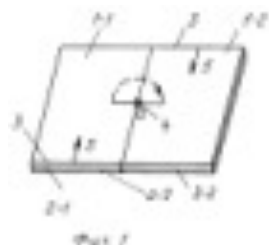

Device for adjusting external electromagnetic field and method for manufacturing the device // 2262361

FIELD: medical engineering.

SUBSTANCE: device has minimum n units, where $n \geq 2$. Every unit has minimum two members, each having active para- or ferromagnetic layer. Active layers of the members are joined and polarized with the external electromagnetic field before being connected on the same side with contact surfaces or from the side opposite to the contact surfaces. Method involves mounting the units on the same plane in a way that n_i unit position relative to n_{i-1} unit position is determined by rotating the unit from n_{i-1} unit position relative to rotation center per an angle of $360^\circ/n$.

EFFECT: enhanced effectiveness of treatment; wide range of functional applications; reduced risk of traumatic complications.

2 cl, 6 dwg

Method for reducing artificial electromagnetic radiation action hazard // 2262955

FIELD: medicine.

SUBSTANCE: method involves forming electromagnetic wave directed towards biological object having predominating right polarization in the electromagnetic oscillation-emitting source system.

EFFECT: reduced risk of harmful action upon biological object objects.

3 tbl




Medical material // 2310483

FIELD: medicine; physiotherapy.

SUBSTANCE: medical material has electro-insulating layer and plated shielding layer, attached to at least one side of electro-insulating layer. Shielding layer is made in form of scales. Any scale has one end attached to electro-insulating layer; other free end of scale adjoins other scales. Scales resembles cycloid-type fish scales.

EFFECT: improved efficiency of medicinal influence of material; prolonged service life of material.

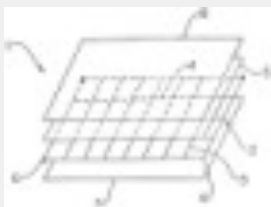

Radiation shielding mat and its manufacturing process // 2322712

FIELD: radiation shielding means and their manufacturing processes.

SUBSTANCE: proposed radiation shielding mat has mesh 2 made of copper fibers 3 interwoven with carbon fibers 4 and liquid oak moss solution 5 applied to mentioned mesh 2. Mat creates shielding barrier protecting against terrestrial and electromagnetic radiations and ensures deviation of these radiations.

EFFECT: enhanced reliability of protection against terrestrial and electromagnetic radiations.

10 cl, 1 dwg



External electric field alteration object protector // 2337724

FIELD: medicine.

SUBSTANCE: external electric field alteration object protector is offered for generation of electric field of specified electric field intensity nearby living and nonliving objects including ground-isolated close-meshed mesh. Protector has closure failure of mesh surface shape, accumulator for mesh energising providing required potential difference between object and mesh, voltage control, mesh wire covering, mesh space shape variability, mesh frame reinforcement with nonconductor and protected object grounding.

EFFECT: invention allows for controlled voltage of generated electric field.

2 dwg

Method of correction of diseases of people dependent on geliophysical factors of environment // 2338563

FIELD: medicine.

SUBSTANCE: place the patient or a part of his body tested on oncological disease in a shielded space with residual magnetic induction $42 \text{ mTl} > B_{\text{rest}} > 250 \text{ nTl}$ and the factor of shielding higher than 1. Duration of an exposition makes $t > 40$ minutes, quantity of sessions $N \geq 1$.

EFFECT: offered invention allows carrying out correction of human diseases.

1 ex