```
set radiox -815.2; set radioy 1629.4
When the RFID tag has phase /radians/ {
 When /calibrator/ is the RFID tag calibrator {
  When tag $calibrator has center /c/ size /size/ {
   lassign [cameraToProjector $c] cx cy
   set trueDist [expr {sqrt(($cx-$radiox)*($cx-$radiox              y-$ra
   Wish $this is labelled "true distance: $trueDist\nra
  }
 }
}
```
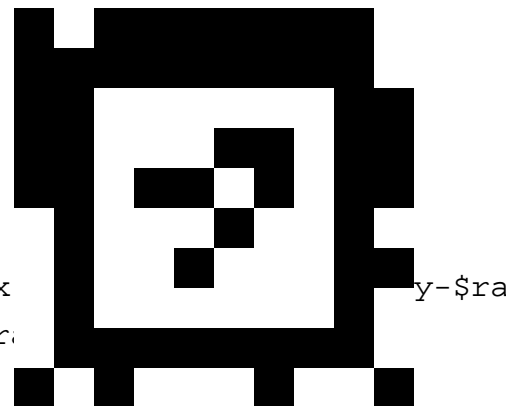
65 (Fri, 02 Dec 2022, 02:58:22 am)

```
When /calibrator/ is the RFID tag calibrator {
 When tag $calibrator has center /c/ size /size/ {
  lassign [cameraToProjector $c] cx cy
  set trueDist [expr {sqrt(($cx-$radiox)*($cx-$radiox) + ($cy-$radioy)*($cy-$rad
  Wish display runs [list Display::circle $radiox $radioy $trueDist 5 green]
 }
}
```