



Custom PCIe x4

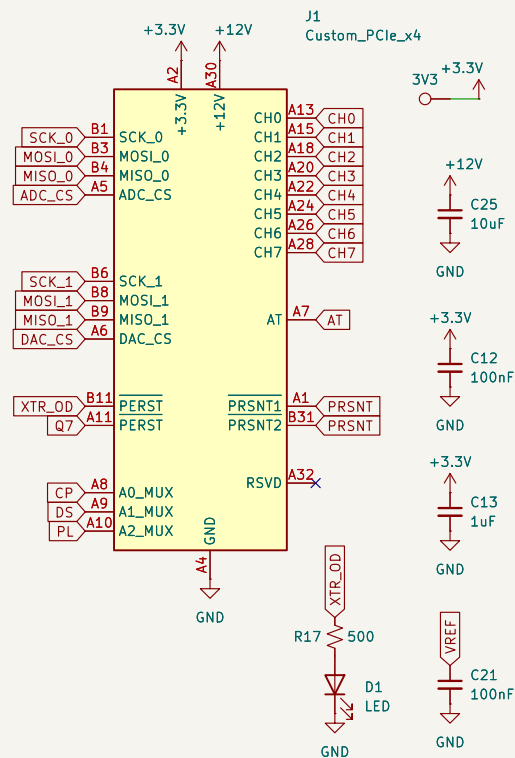


Precision Reference

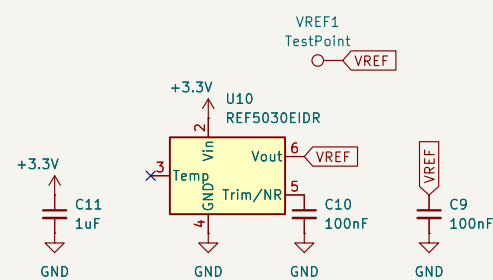


Best to use REF5030EIDR

DAC

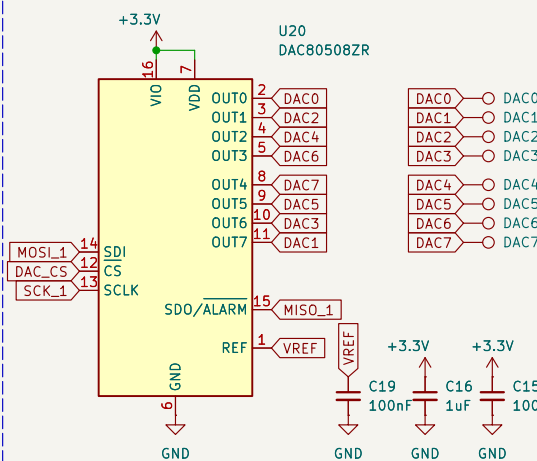


Finish the pico driver
Internal reference span error: 0.2%
Figure out DAC power up sequence

ADC

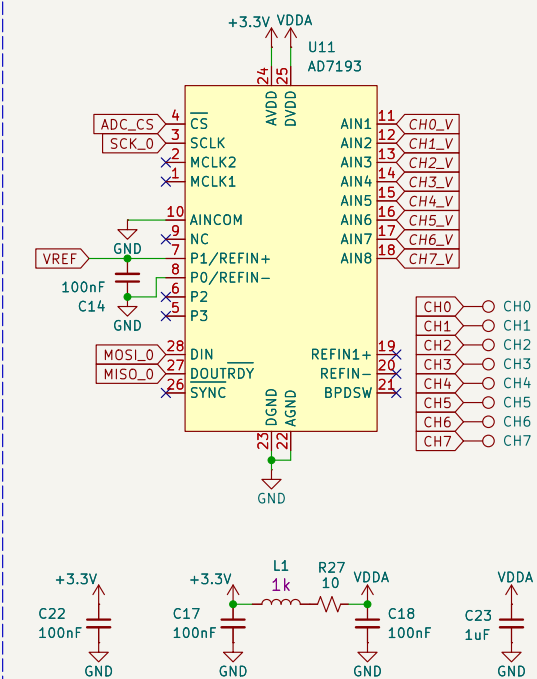

Use X7R for C17, C18


Voltage Sense Divider

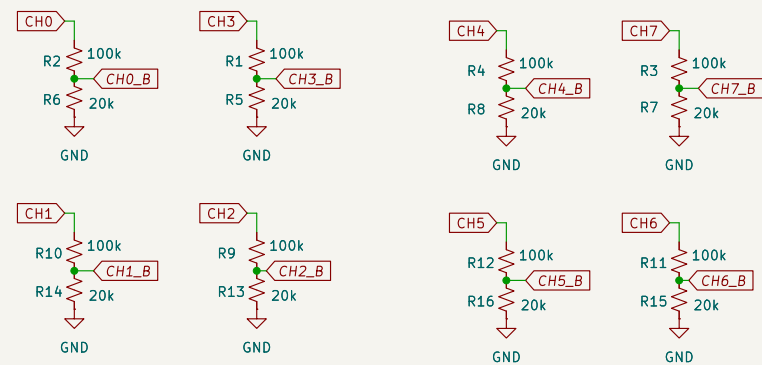

Make sure to buy 0.1% tolerance with 10ppm resistors for best performance
27k: ERA-2VRB2702X

100k YAGEO RT0603BRD07100KL: -55D-+155D 100kΩ 100mW 75V Thin Film Resistor ±0.1% ±25ppm/D
0603 Chip Resistor - Surface Mount ROHS
20k Vishay MCT06030D2002BP500: -55D-+125D 100mW 20kΩ 75V Thin Film Resistor ±0.1% ±25ppm/D
0603 Chip Resistor - Surface Mount ROHS


XTR200

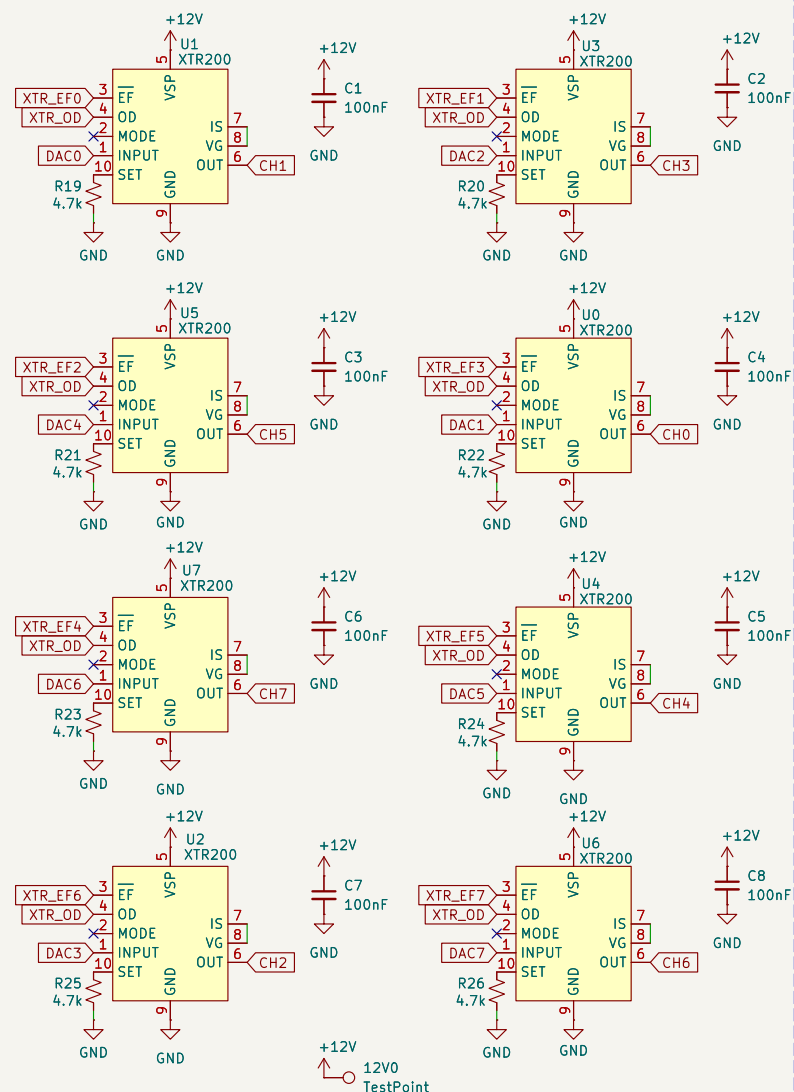


Use capacitors above 16V
CC0603KRX7R9BB104 - C14663
100nF 50V X7R ±10% 0603 Multilayer Ceramic Capacitors MLCC - SMD/SMT ROHS

YAGEO RT0603BRD074K7L 4.7k -55D-+155D 100mW 4.7kΩ 75V

Buffers

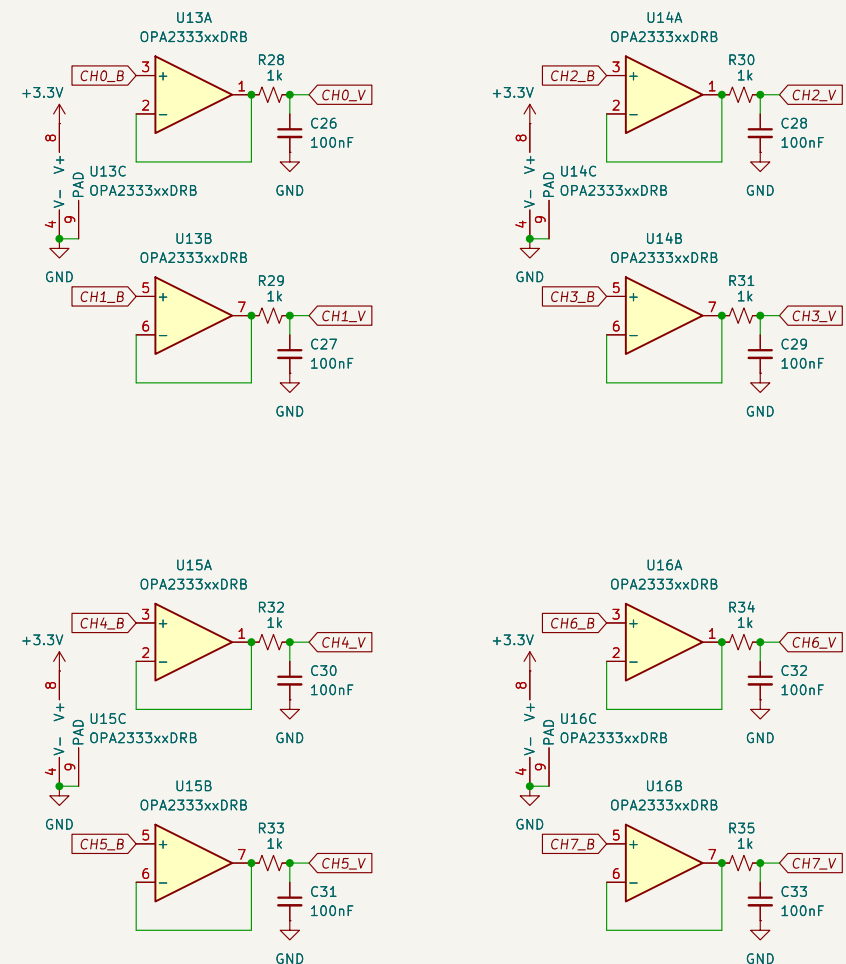

Architecture

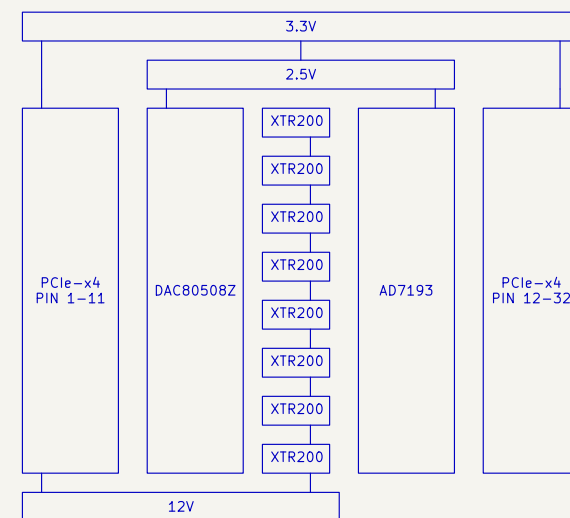

Foosa <https://tinyurl.com/2yfhrjrp>

Sheet: /

File: daughterboard.kicad_sch

Title: OuttaControl

Size: A3 Date: 2026-01-15

KiCad E.D.A. 10.0.5

Rev: 1

Id: 1/1

<https://tinyurl.com/2yfhrjrp>