

# 9601/DM9601 Retriggerable One Shot

#### **General Description**


These retriggerable one shots provide the designer with four inputs; two active high and two active low. This permits a choice of either leading-edge or trailing-edge triggering, independent of input transition times. When input conditons for triggering are met, a new cycle starts and the external capacitor is rapidly discharged and then allowed to charge again. The retriggerable feature allows for output pulse widths to be expanded. In fact a continuous true output can be maintained by having an input cycle time which is shorter than the output cycle time. Retriggering may be inhibited by tying the  $\overline{\mathbb{Q}}$  output to an active low input.

#### **Features**

- High speed operation—input repetition rate > 10 MHz
- Flexibility of operation—optional retriggering/lock-out capability
- Output pulse width range—50 ns to ∞
- Leading or trailing edge triggering
- Complementary outputs/inputs
- Input clamping diodes
- DTL/TTL compatible logic levels
- Alternate Military/Aerospace device (9601) is available.
   Contact a National Semiconductor Sales Office/Distributor for specifications.

## **Connection Diagram**

#### **Dual-In-Line Package**



TL/F/6610

Order Number 9601DMQB, 9601FMQB, DM9601J, DM9601W or DM9601N See NS Package Number J14A, N14A or W14B

#### **Function Table**

	Inp	Out	puts		
<b>A</b> 1	A2	В1	B2	Q	Q
Н	Н	Х	Х	L	Н
Х	Χ	L	Χ	L	Н
Х	Χ	Χ	L	L	Н
L	Χ	Н	Н	L	Н
L	Χ	1	Н	几	$\Box$
L	Χ	Н	1	几	$\Box$
Х	L	Н	Н	L	Н
Х	L	1	Н	几	$\Box$
Х	L	Н	1	几	$\Box$
Н	$\downarrow$	Н	Н	几	$\Box$
↓	$\downarrow$	Н	Н	$\Gamma$	$\Box$
↓	Н	Н	Н	$\Gamma$	Ţ

H = High Logic Level
L = Low Logic Level
X = Either Low or
High Logic Level
↑ = Low to High Level
Transition
↓ = High to Low Level
Transition
↓ = Positive Pulse
↓ = Negative Pulse

### **Absolute Maximum Ratings (Note)**

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage 7V
Input Voltage 5.5V
Operating Free Air Temperature Range

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

## **Recommended Operating Conditions**

Symbol	Parameter		Military			Commercial			Units
			Min	Nom	Max	Min	Nom	Max	Jints
V <sub>CC</sub>	Supply Voltage		4.5	5	5.5	4.75	5	5.25	V
V <sub>IH</sub>	High Level Input Voltage	$T_A = -55^{\circ}C$	2						V
		T <sub>A</sub> = 0°C				1.9			
		T <sub>A</sub> = 25°C	1.7			1.8			
		T <sub>A</sub> = 75°C				1.6			
		T <sub>A</sub> = 125°C	1.5						
V <sub>IL</sub>	Low Level Input Voltage	$T_A = -55^{\circ}C$			0.85				
		T <sub>A</sub> = 0°C						0.85	V
		T <sub>A</sub> = 25°C			0.9			0.85	
		T <sub>A</sub> = 75°C						0.85	
		T <sub>A</sub> = 125°C			0.85				
Гон	High Level Output Current				-0.72			-0.96	mA
l <sub>OL</sub>	Low Level Output Current				10			12.8	mA
T <sub>A</sub>	Free Air Operating Temperature		-55		125	0		75	°C

## Electrical Characteristics over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units	
VI	Input Clamp Voltage	$V_{CC} = Min, I_I = -12 \text{ mA}$			-1.5	V	
V <sub>OH</sub>	High Level Output Voltage	$V_{CC} = Min, I_{OH} = Max$ $V_{IL} = Max, V_{IH} = Min, (N)$	2.4			V	
V <sub>OL</sub>	Low Level Output	$V_{CC} = Min, I_{OL} = Max$	MIL			0.4	
Volta	Voltage	V <sub>IL</sub> = Max, V <sub>IH</sub> = Min (Note 4)	СОМ			0.45	V
I <sub>IH</sub>	High Level Input Current	$V_{CC} = Max, V_I = 4.5V$				60	μΑ
I <sub>IL</sub>	I <sub>IL</sub> Low Level Input Current	V <sub>CC</sub> = Max	$MIL V_{IN} = 0.40V$			-1.6	- mA
			$COMV_{IN}=0.45V$			-1.6	
.03	Short Circuit Output Current	V <sub>CC</sub> = Max (Notes 2 and 4)	MIL	-10		-40	mA
			СОМ	-10		-40	
Icc	Supply Current	V <sub>CC</sub> = Max				25	mA

Note 1: All typicals are at  $V_{CC} = 5V$ ,  $T_A = 25^{\circ}C$ .

Note 2: Not more than one output should be shorted at a time.

Note 3: Unless otherwise noted,  $R_{\mbox{\scriptsize X}}=$  10k between PIN 13 and  $V_{\mbox{\scriptsize CC}}$  on all tests.

 $\textbf{Note 4:} \ \text{Ground PIN 11 for V}_{OL} \ \text{test on PIN 6, V}_{OH} \ \text{and I}_{OS} \ \text{tests on PIN 8.} \ \text{Open PIN 11 for V}_{OL} \ \text{test on PIN 8, V}_{OH} \ \text{and I}_{OS} \ \text{tests on PIN 6.}$ 

Switching Characteristics	at $V_{OO} = 5V$ and $T_A = 25^{\circ}C$ (See Section 1	for Test Waveforms and Output Load)
Switching Onalacteristics	11 VCC — 3 V 3110 1 X — 23 C 13ee 3eciion i	TOLLIEST MAYELOTTIS AND CORDULTORUS

Symbol	Parameter	From (Input) To (Output)	Conditions	Min	Max	Units	
t <sub>PLH</sub>	Propagation Delay Time Low to High Level Output	Negative Trigger Input to True Output	$C_L = 15 \text{ pF}$ $C_X = 0$ $R_X = 5 \text{ k}\Omega$		40	ns	
t <sub>PHL</sub>	Propagation Delay Time High to Low Level Output	Negative Trigger Input to Complement Output			40	ns	
t <sub>PW(MIN)</sub>	Minimum True Output Pulse Width				65	ns	
t <sub>PW</sub>	Pulse Width		$R_X = 10 \text{ k}\Omega$ $C_X = 1000 \text{ pF}$	3.08	3.76	μs	
C <sub>STRAY</sub>	Maximum Allowable Wiring Capacitance		Pin 13 to GND		50	pF	
R <sub>X</sub>	External Timing Resistor		DM96		25	kΩ	
R <sub>X</sub>	External Timing Resistor		DM86		50	kΩ	

## **Operating Rules**

- 1. An external resistor  $R_X$  and an external capacitor  $C_X$  are required for operation. The value of  $R_X$  can vary between the limits shown in switching characteristics. The value of  $C_X$  is optional and may be adjusted to achieve the required output pulse width.
- 2. Output pulse width  $t_{\mbox{\scriptsize PW}}$  may be calculated as follows:

$$t_{PW} = K\,R_X C_X \left[1 + \frac{0.7}{R_X}\right] \text{(for } C_X > 10^3 \text{ pF)} \label{eq:tpw}$$
  $K \approx 0.34$ 

 $R_X$  in  $k\Omega$ ,  $C_X$  in pF and  $t_{PW}$  in ns. (For  $C_X < 10^3$  pF, see curve.)

- 3.  $R_X$  and  $C_X$  must be kept as close as possible to the circuit in order to minimize stray capacitance and noise pickup. If remote trimming is required,  $R_X$  may be split up such that at least  $R_{X(MIN)}$  must be as close as possible to the circuit and the remote portion of the trimming resistor  $R < R_{X(MAX)} R_X$ .
- 4. Set-up time  $(t_1)$  for input trigger pulse must be > 40 ns. (See *Figure 1*).

Release time ( $t_2$ ) for input trigger pulse must be > 40 ns. (See *Figure 2*).






FIGURE 1




5. Retrigger pulse width (see *Figure 3*) is calculated as follows:

$$t_{W} = t_{PW} + t_{PLH} = K \, R_{X} C_{X} \left[ 1 + \frac{0.7}{R_{X}} \right] + t_{PLH} \label{eq:two_eq}$$



#### Typical "K" Coefficient Variation vs Timing Capacitance


The multiplicative factor "K" varies as a function of the timing capacitor,  $C_X$ . The graph below details this characteristics





TL/F/6610-5


\*For further detailed device characteristics and output performance, please refer to the NSC one-shot application note, AN-366.


## **Typical Performance Characteristics**

















## **Schematic Diagram**

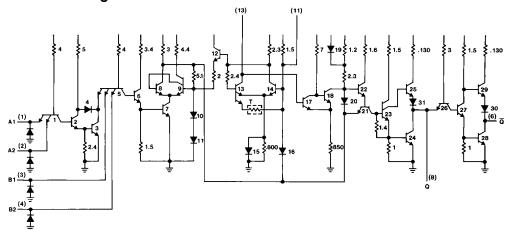

TL/F/6610-7

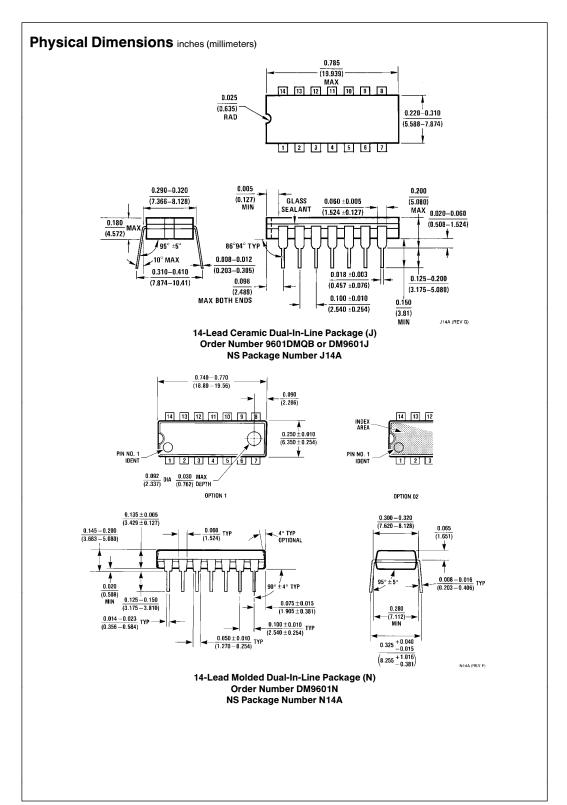

## Physical Dimensions inches (millimeters) (Continued)



14-Lead Ceramic Flat Package (W) Order Number 9601FMQB or DM9601W NS Package Number W14B

#### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor** National Semiconducto Corporation 1111 West Bardin Road Arlington, TX 76017 Tel: 1(800) 272-9959 Fax: 1(800) 737-7018

**National Semiconductor** Europe

Fax: (+49) 0-180-530 85 86 Fax: (+49) 0-180-530 8b so Email: cnjwge@tevm2.nsc.com Deutsch Tel: (+49) 0-180-530 85 85 English Tel: (+49) 0-180-532 78 32 Français Tel: (+49) 0-180-532 8 8 80 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor** National Semiconductor Hong Kong Ltd. 13th Floor, Straight Block, Ocean Centre, 5 Canton Rd. Tsimshatsui, Kowloon Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960 National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.

# National Semiconductor was acquired by Texas Instruments.

http://www.ti.com/corp/docs/investor\_relations/pr\_09\_23\_2011\_national\_semiconductor.html

This file is the datasheet for the following electronic components:

DM9601 - http://www.ti.com/product/dm9601?HQS=TI-null-null-dscatalog-df-pf-null-wwe 9601 - http://www.ti.com/product/9601?HQS=TI-null-null-dscatalog-df-pf-null-wwe