



117.6V Max
100.8V Nominal
70V Min

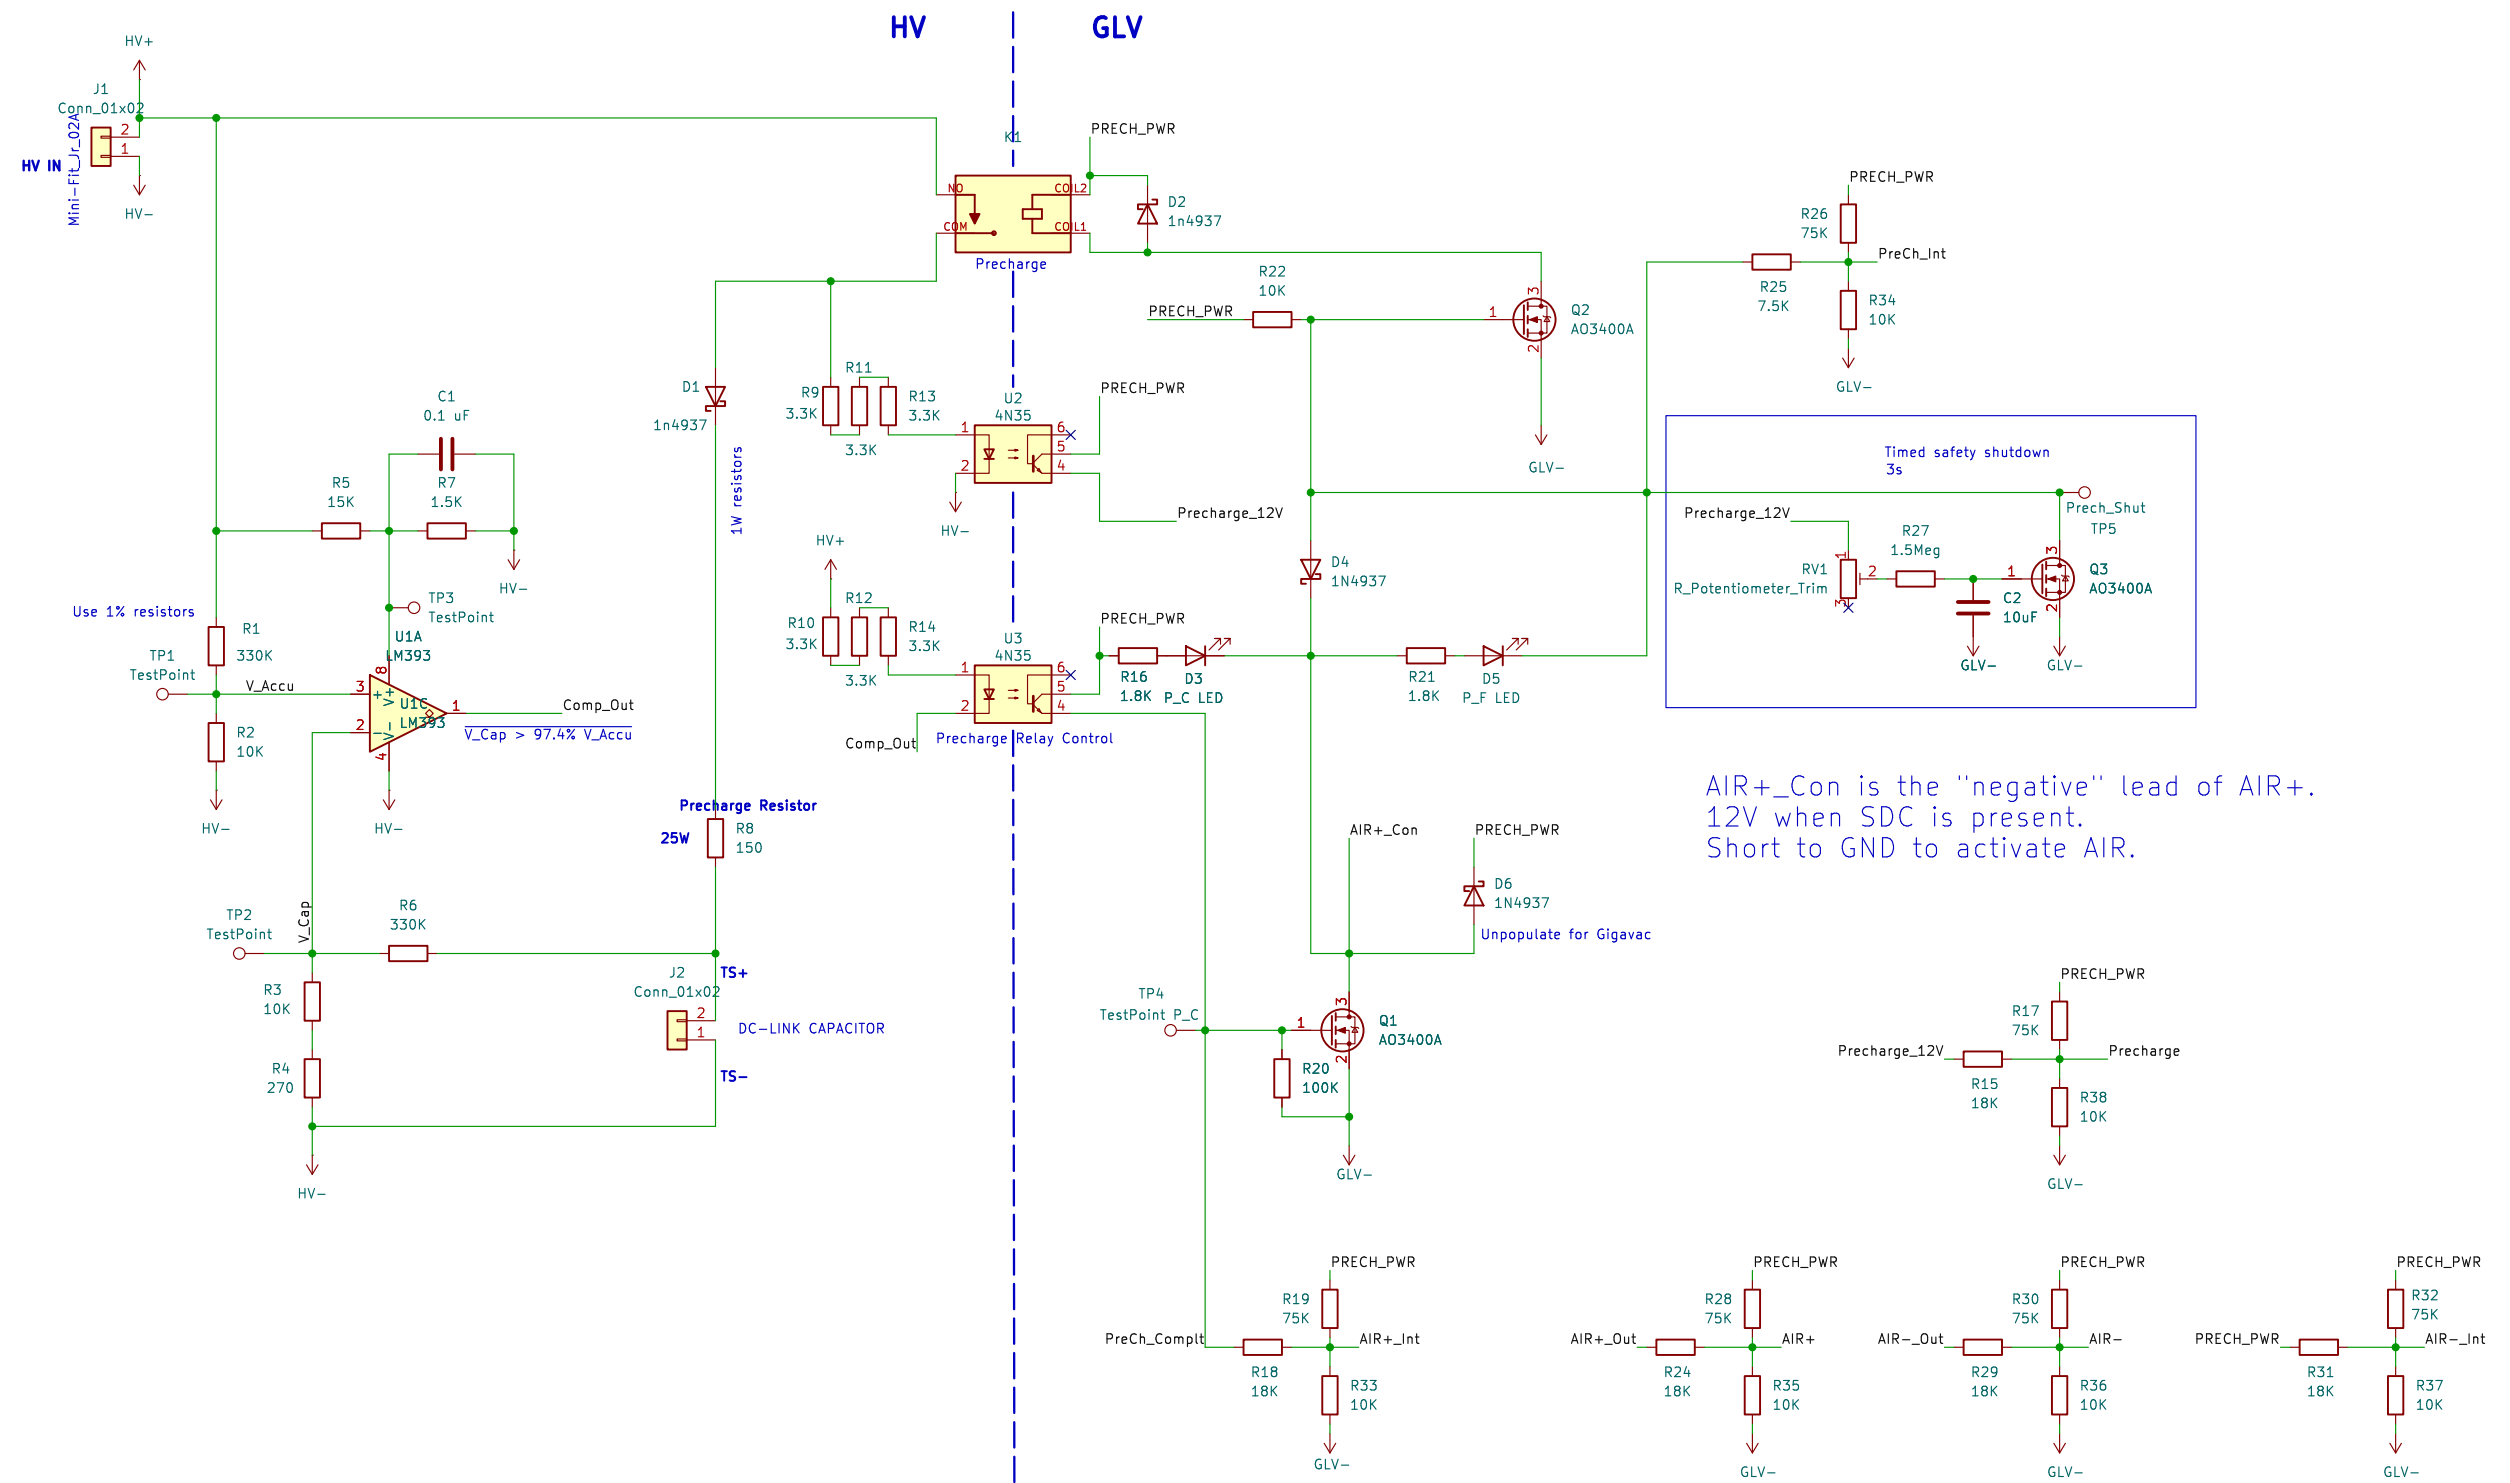


AIR+_Con is the "negative" lead of AIR+.
12V when SDC is present.
Short to GND to activate AIR.


Mounting Holes



LV Supply and Signals

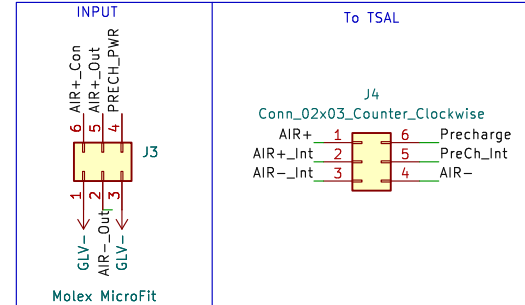

Mounting Holes



evanscesil@gmail.com		
Formula Barton Racing		
Sheet: /		
File: Precharge.kicad_sch		
Title: Precharge Circuit		
Size: A3	Date: 2024-11-01	Rev: 3.2
KiCad E.D.A. 8.0.7		Id: 1/1