



117.6V Max  
100.8V Nominal  
70V Min

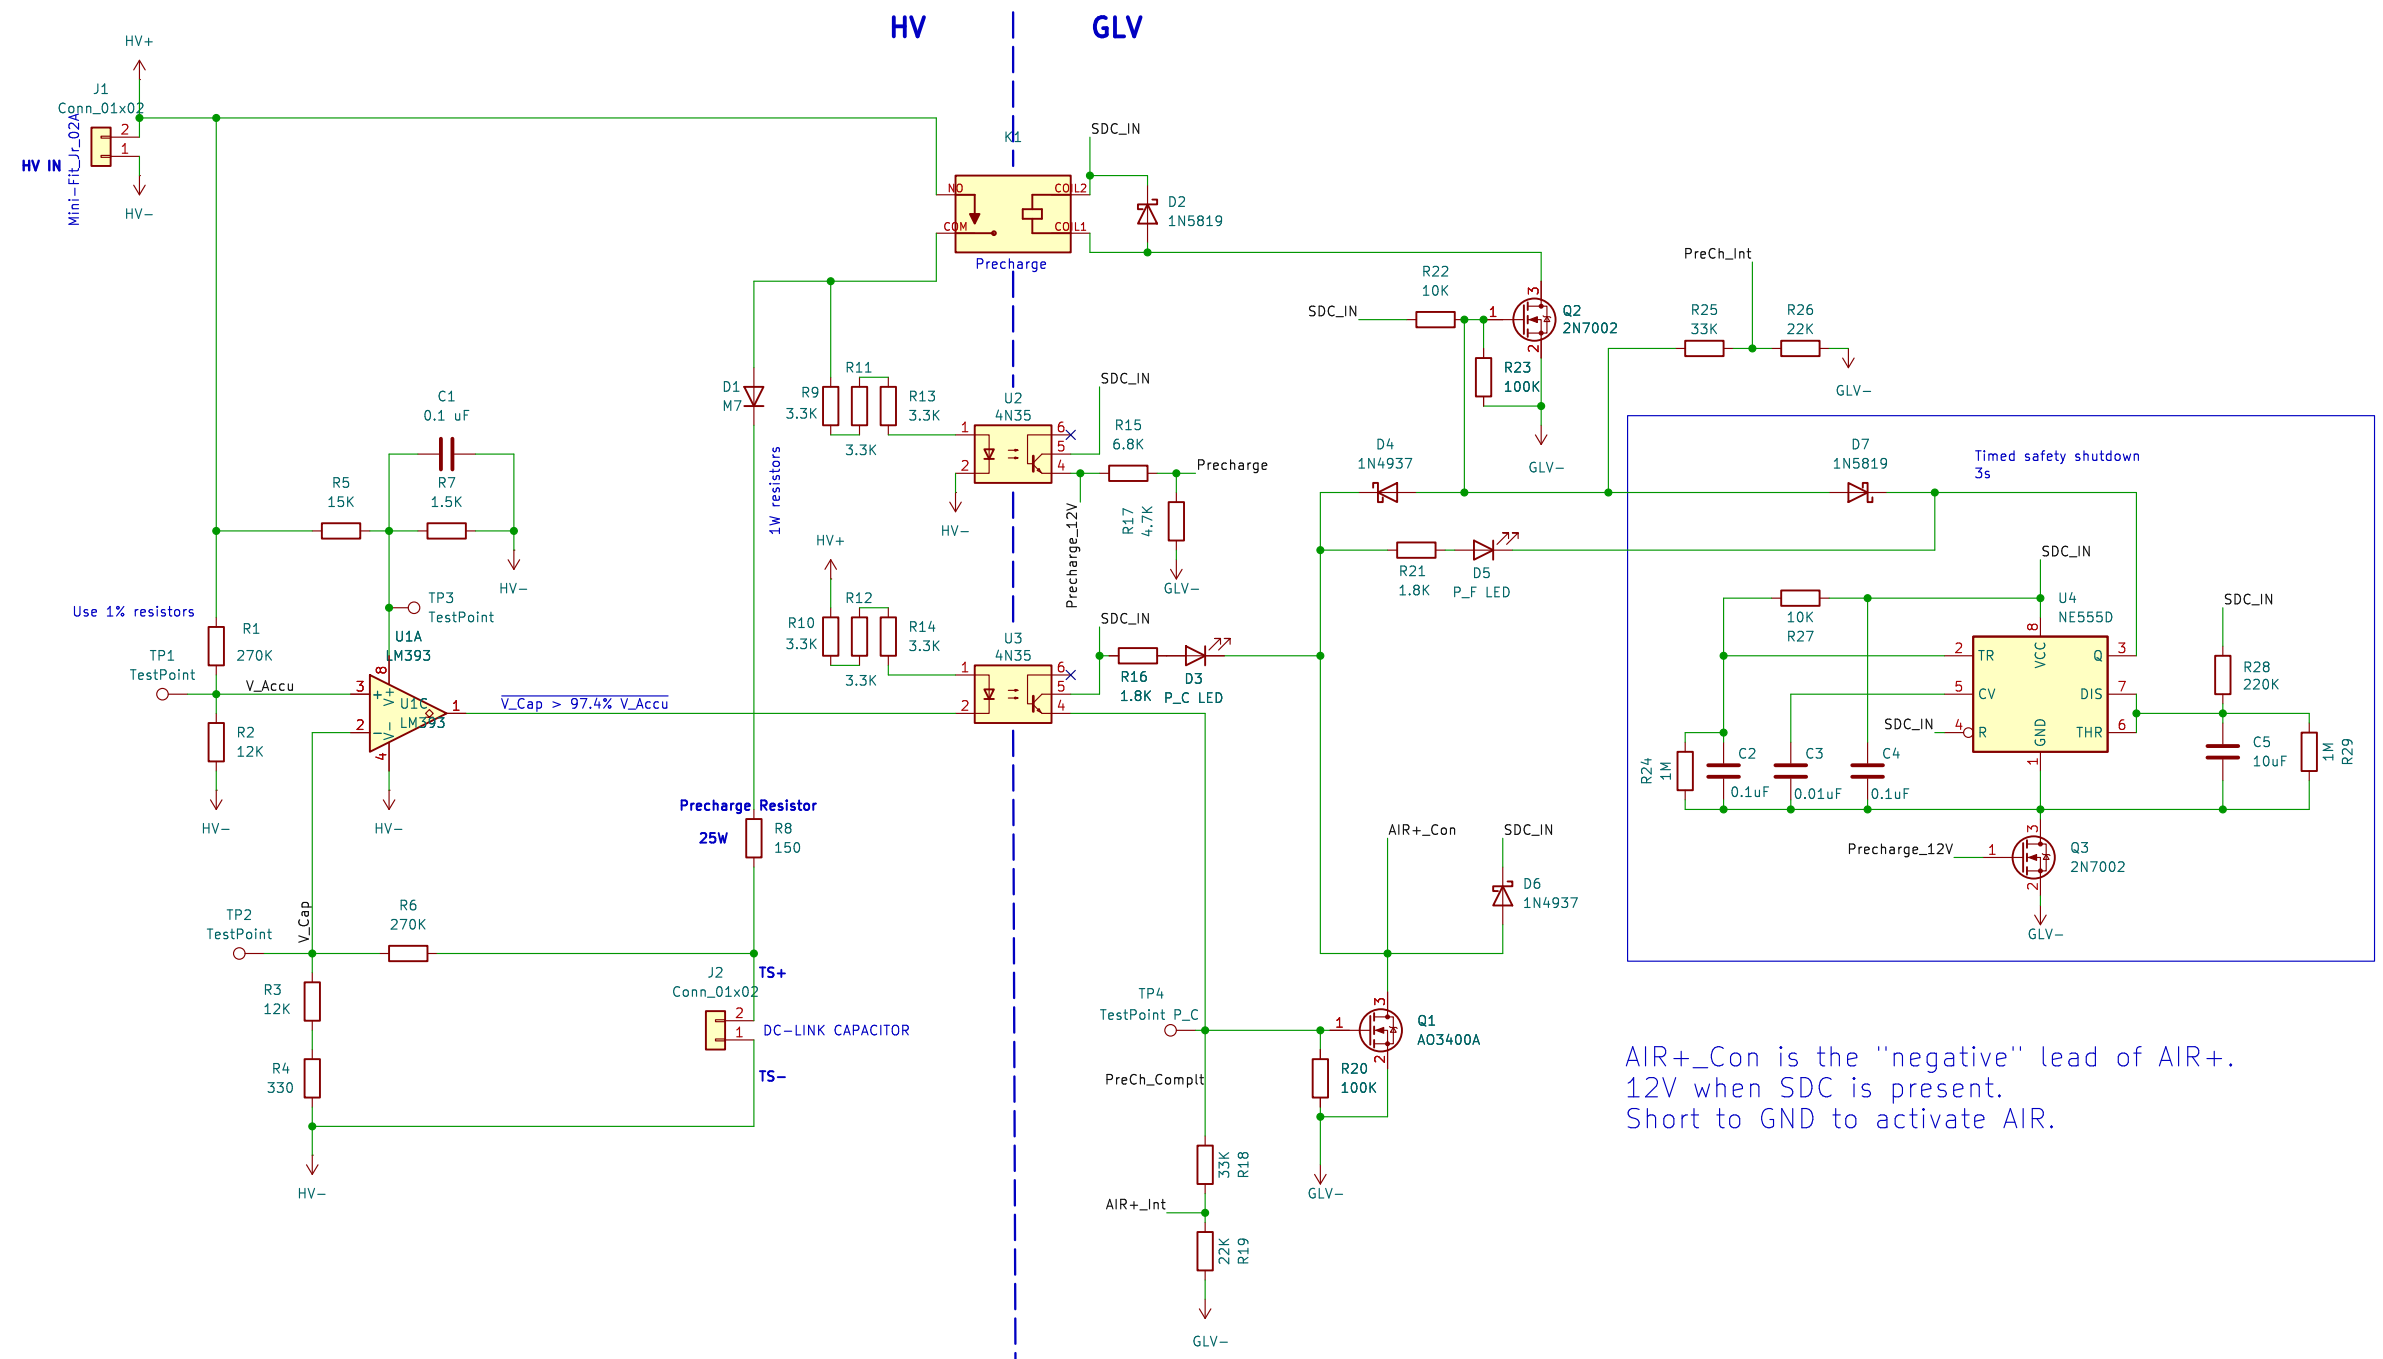


AIR+\_Con is the "negative" lead of AIR+.  
12V when SDC is present.  
Short to GND to activate AIR.


### Mounting Holes



### LV Supply and Signals

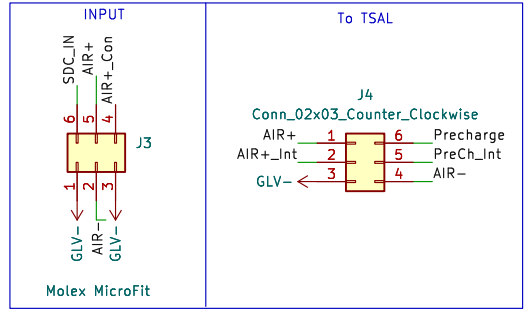

### Mounting Holes



Evans Cesil Thomas (evanscesil@gmail.com) <b>Formula Barton Racing</b>		
Sheet: / File: Precharge.kicad_sch		
<b>Title: Precharge Circuit</b>		
Size: A3	Date: 2024-09-20	Rev: 2.1
KiCad E.D.A. 8.0.4		Id: 1/1