

4


3

2

1


D

D

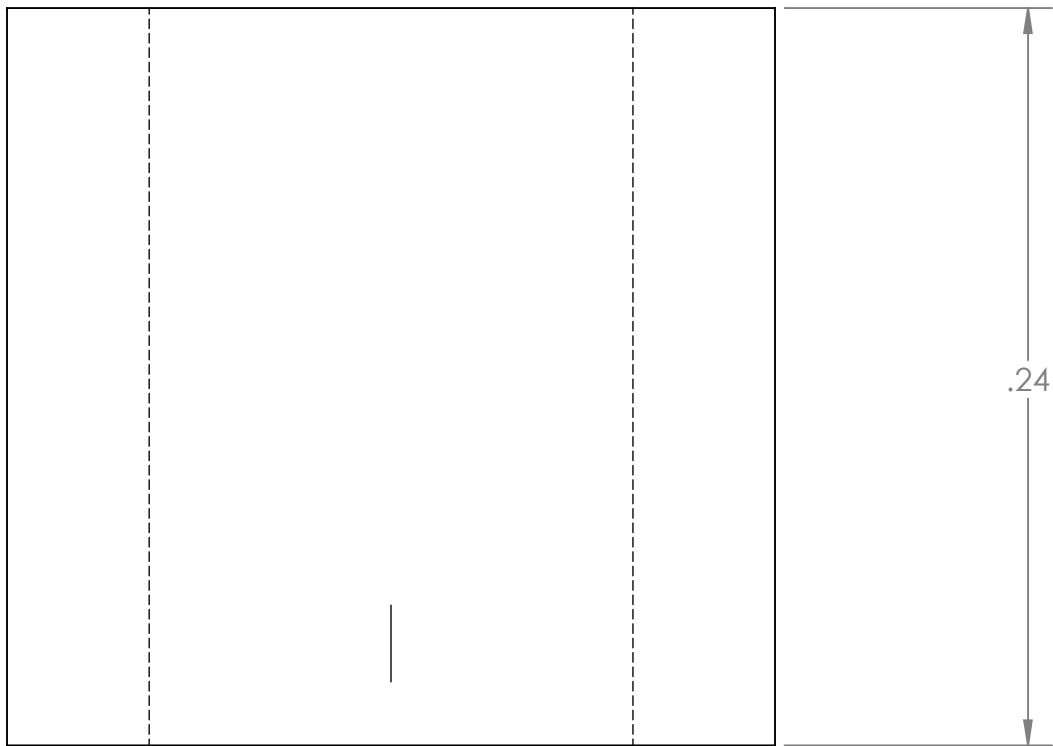

C

C

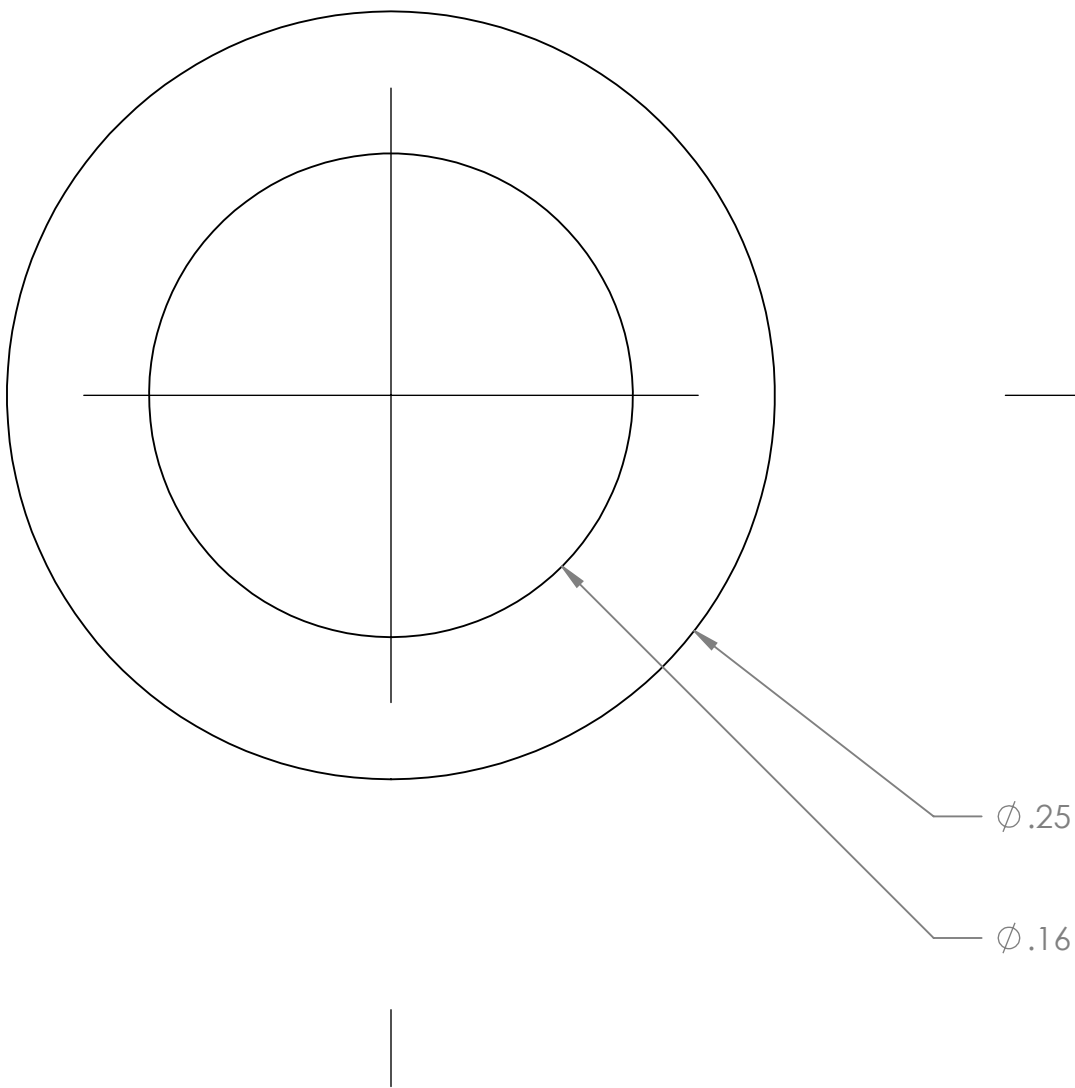

B

B

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ALL NON-DIMENSIONED PART FEATURES ARE TO BE TAKEN FROM THE SOLID MODEL.
2. 0.01 in MAX CHAMFER
3. INTERNAL AND EXTERNAL RADII 0.01 in MAX.
4. PARTS TO BE BURR FREE

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FORMULA RACING AT UC DAVIS. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FORMULA RACING AT UC DAVIS IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME		DATE		FORMULA RACING AT UC DAVIS					
		DIMENSIONS ARE IN INCHES TOLERANCES (UNLESS OTHERWISE SPECIFIED): FRACTIONAL $\pm 1/32$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 3^\circ$ TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005		DRAWN				TITLE: APPS Spacer Right					
				CHECKED									
				ENG APPR.									
				MFG APPR.									
				Q.A.									
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5		COMMENTS: See Notes Section				SIZE		DWG. NO.		REV	
		MATERIAL 6061-T6 (SS)						C		BR-0000X-AA-APPS Spacer, Right			
NEXT ASSY		USED ON											
APPLICATION		DO NOT SCALE DRAWING						SCALE: 16:1		WEIGHT: 0.00		SHEET 1 OF 1	

A

3

2

1