

4

3

2

1

D

D

C





C

B

B

A

A

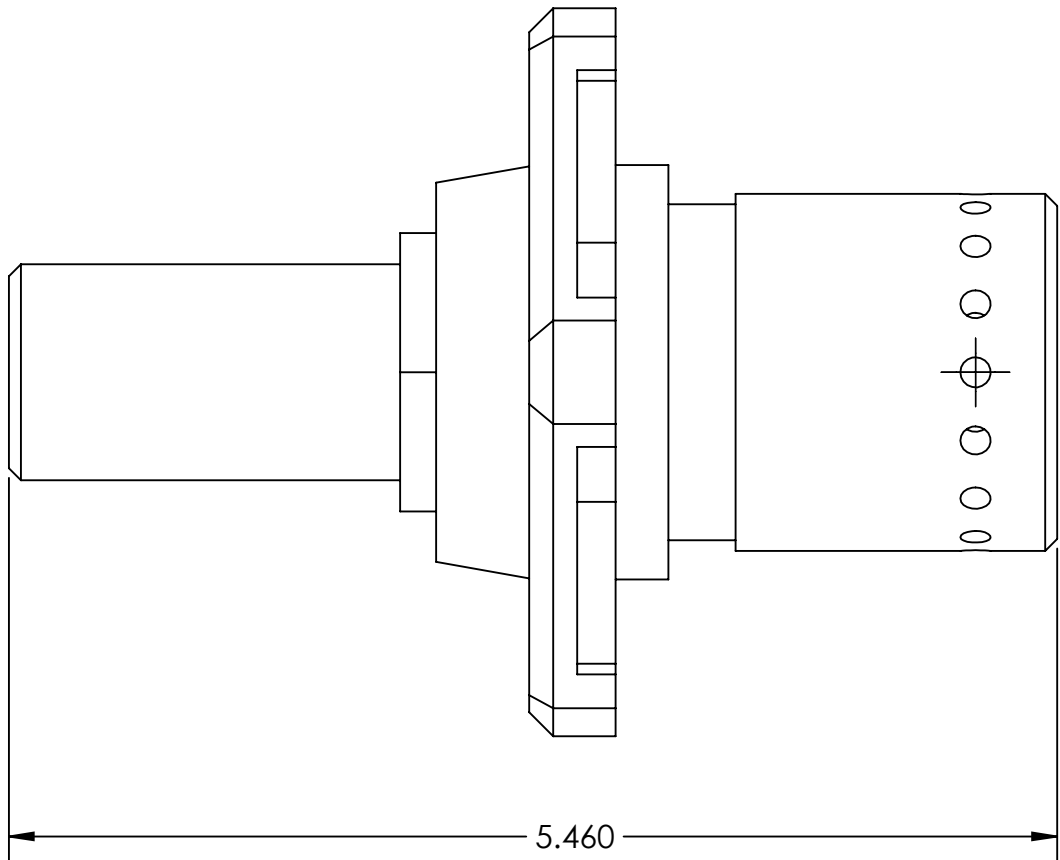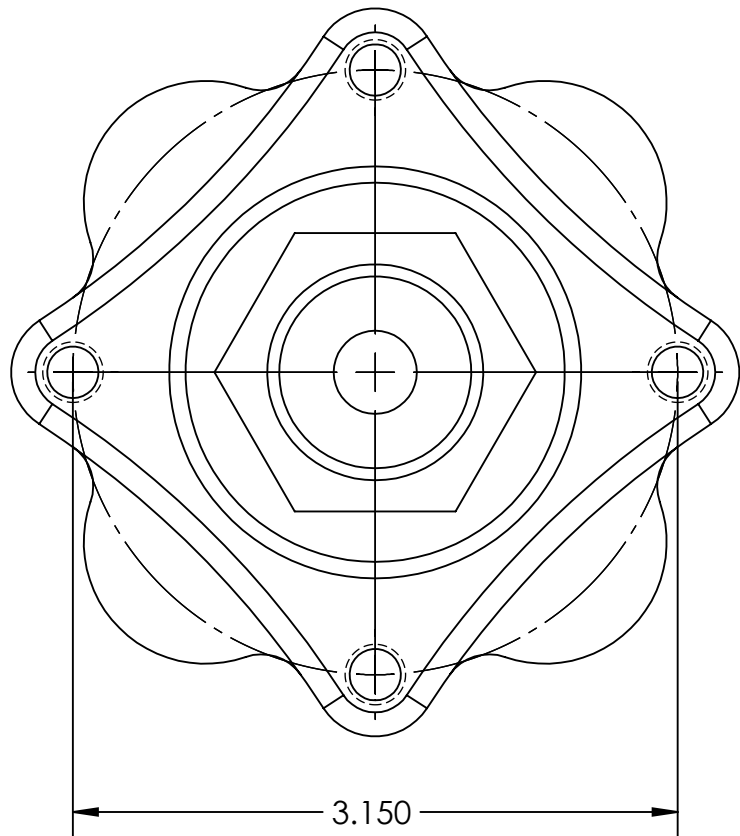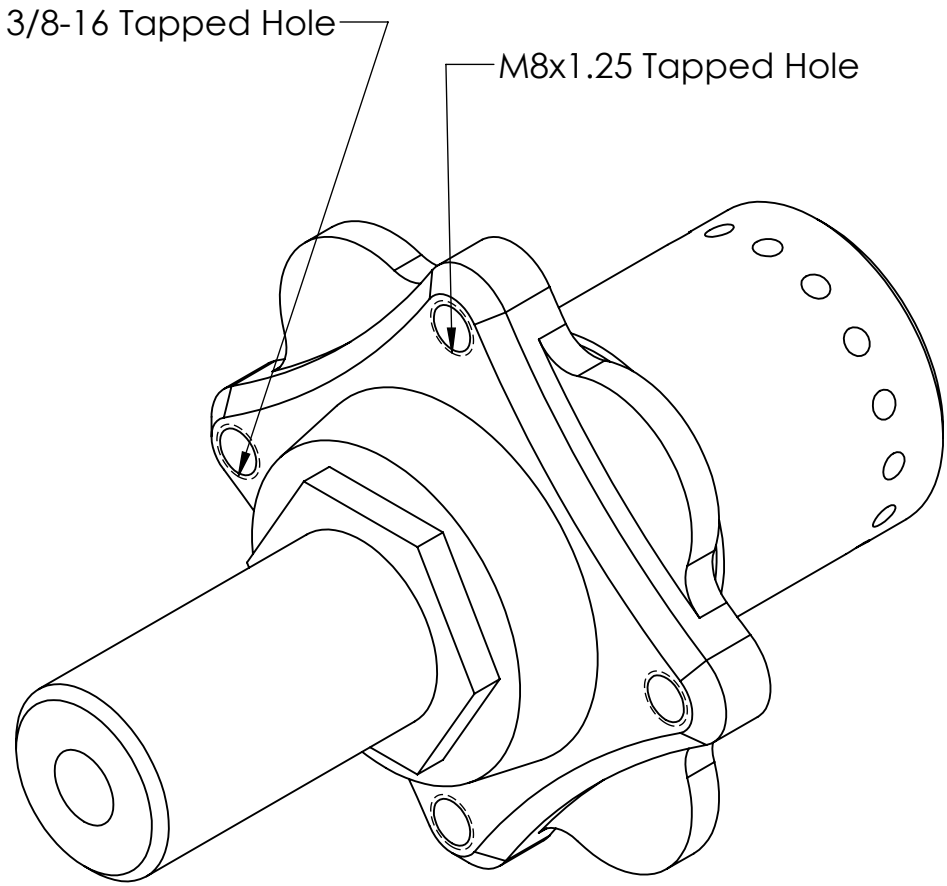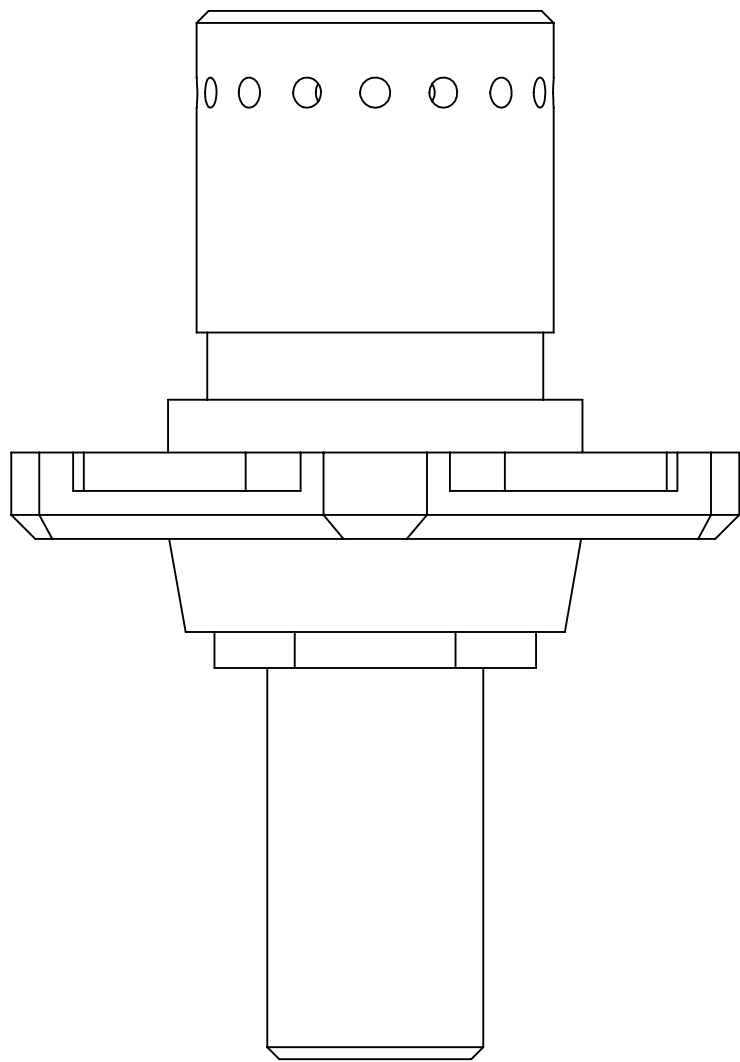

NOTE External Threads:
7/8 - 12 UN, Class 3A
MAX Major Diam: 1.8745
Max Minor Diam: 1.7758
1 left-handed thread and
1 right-handed thread

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ALL NON-DIMENSIONED PART FEATURES ARE TO BE TAKEN FROM THE SOLID MODEL.
2. 0.01 in MAX CHAMFER
3. INTERNAL AND EXTERNAL RADII 0.01 in MAX.
4. PARTS TO BE BURR FREE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FORMULA RACING AT UC DAVIS. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FORMULA RACING AT UC DAVIS IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	FORMULA RACING AT UC DAVIS	
		DIMENSIONS ARE IN INCHES	DRAWN			TITLE:	
		TOLERANCES (UNLESS OTHERWISE SPECIFIED):	CHECKED			FE10 Front Wheel	
		FRACTIONAL ± 1/32	ENG APPR.			Hub	
		ANGULAR: MACH ± 1° BEND ± 3°	MFG APPR.				
		TWO PLACE DECIMAL ±0.01	Q.A.				
		THREE PLACE DECIMAL ±0.005	COMMENTS:				
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5				SIZE	DWG. NO.
		MATERIAL				C	WT- -AB-Wheel Hub Front
		7075 T6					
		FINISH					REV
NEXT ASSY	USED ON						AB
APPLICATION		DO NOT SCALE DRAWING				SCALE: 1:1	WEIGHT:
						SHEET 1 OF 1	