

D

D

C


C

B



B

A

A

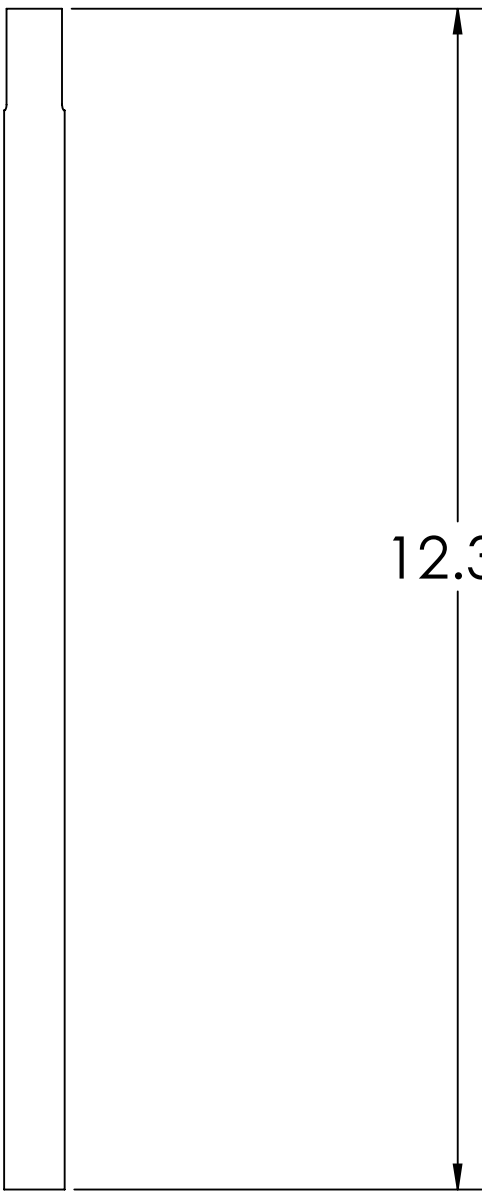


12.30

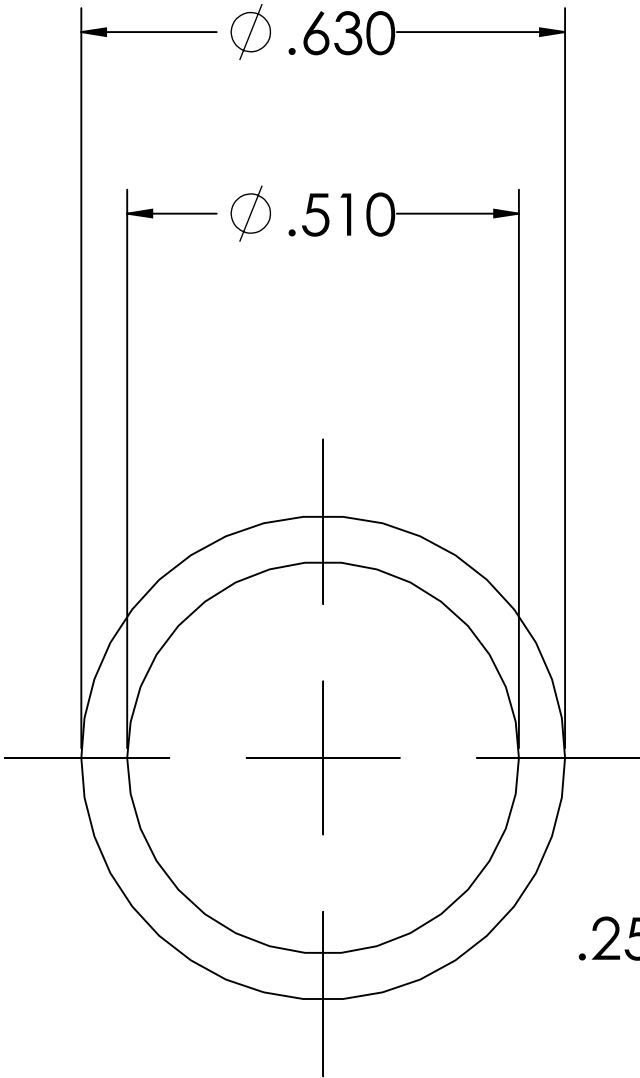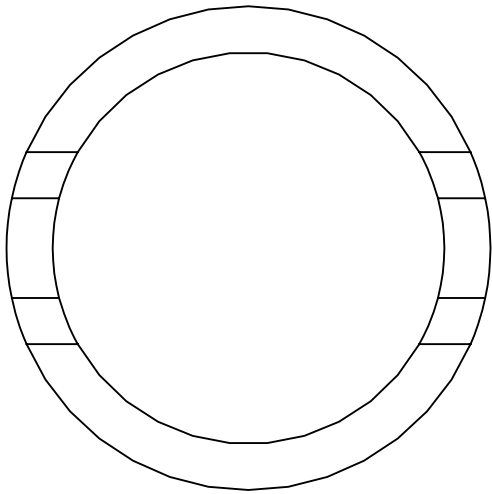

$\phi .630$


$\phi .510$

$.250^{+.003}_{-.000}$

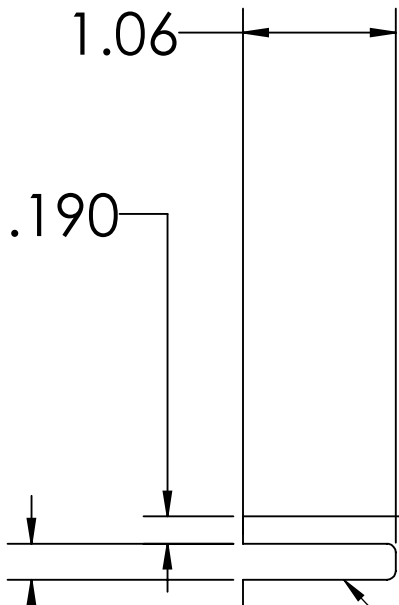

1.06

.190

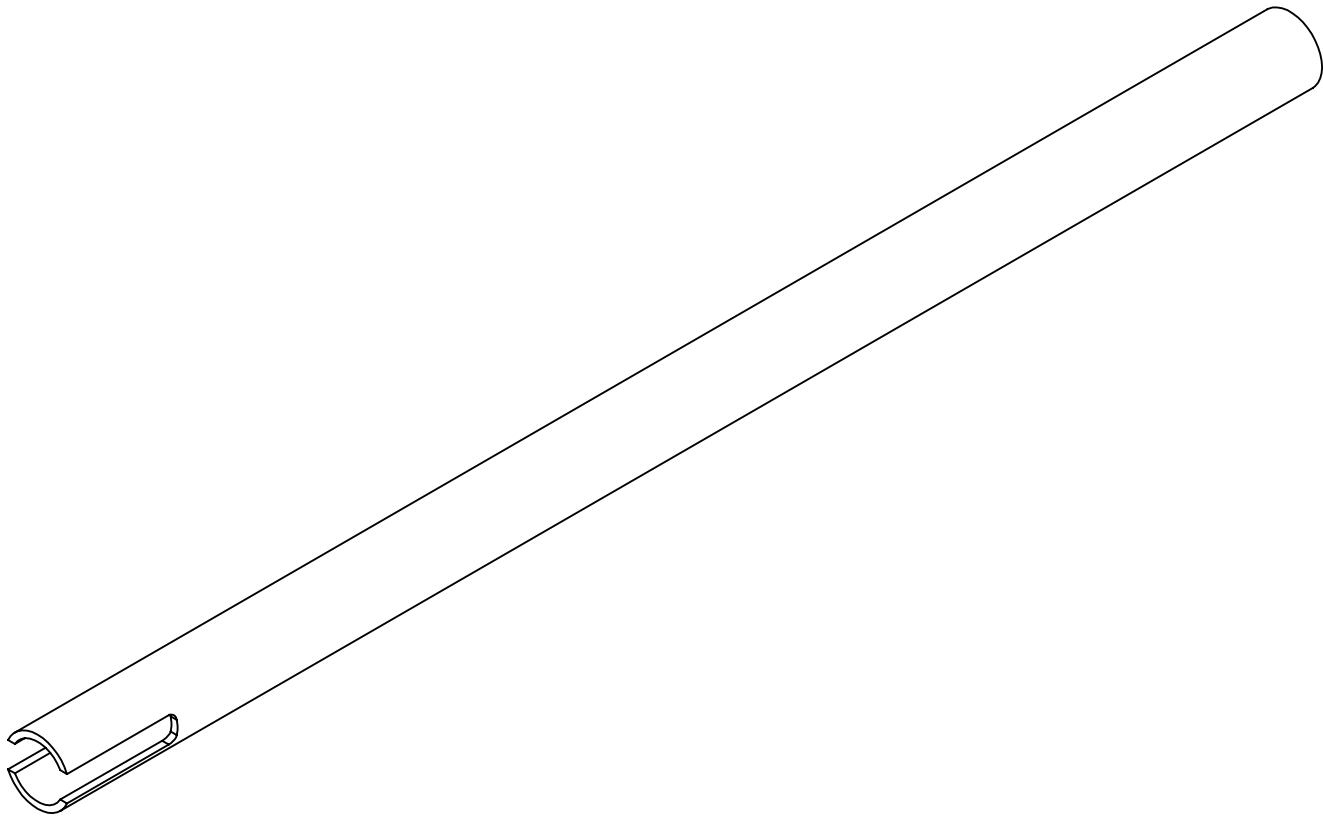

A

$\phi 0.001$ A

// 0.001 A

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ALL NON-DIMENSIONED PART FEATURES ARE TO BE TAKEN FROM THE SOLID MODEL.
2. 0.01 in MAX CHAMFER
3. INTERNAL AND EXTERNAL RADII 0.01 in MAX.
4. PARTS TO BE BURR FREE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FORMULA RACING AT UC DAVIS. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FORMULA RACING AT UC DAVIS IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME		DATE		FORMULA RACING AT UC DAVIS	
		DIMENSIONS ARE IN INCHES TOLERANCES (UNLESS OTHERWISE SPECIFIED): FRACTIONAL ± 1/32 ANGULAR: MACH ± 1° BEND ± 3° TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005		DRAWN		Anthony Castellanos		02/10/24	
				CHECKED				TITLE:	
				ENG APPR.				Lower A-Arm Tub	
				MFG APPR.					
				Q.A.					
				COMMENTS:					
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5							
		MATERIAL: AISI 4130 Steel, annealed at 865C							
		FINISH				SIZE		DWG. NO.	
NEXT ASSY		USED ON				C		SP-RR Lower A-Arm Tube	
								REV	
								RR	
APPLICATION		DO NOT SCALE DRAWING				SCALE: 1:2		WEIGHT:	
								SHEET 1 OF 1	