

D

C

B


A

D

C



B

A

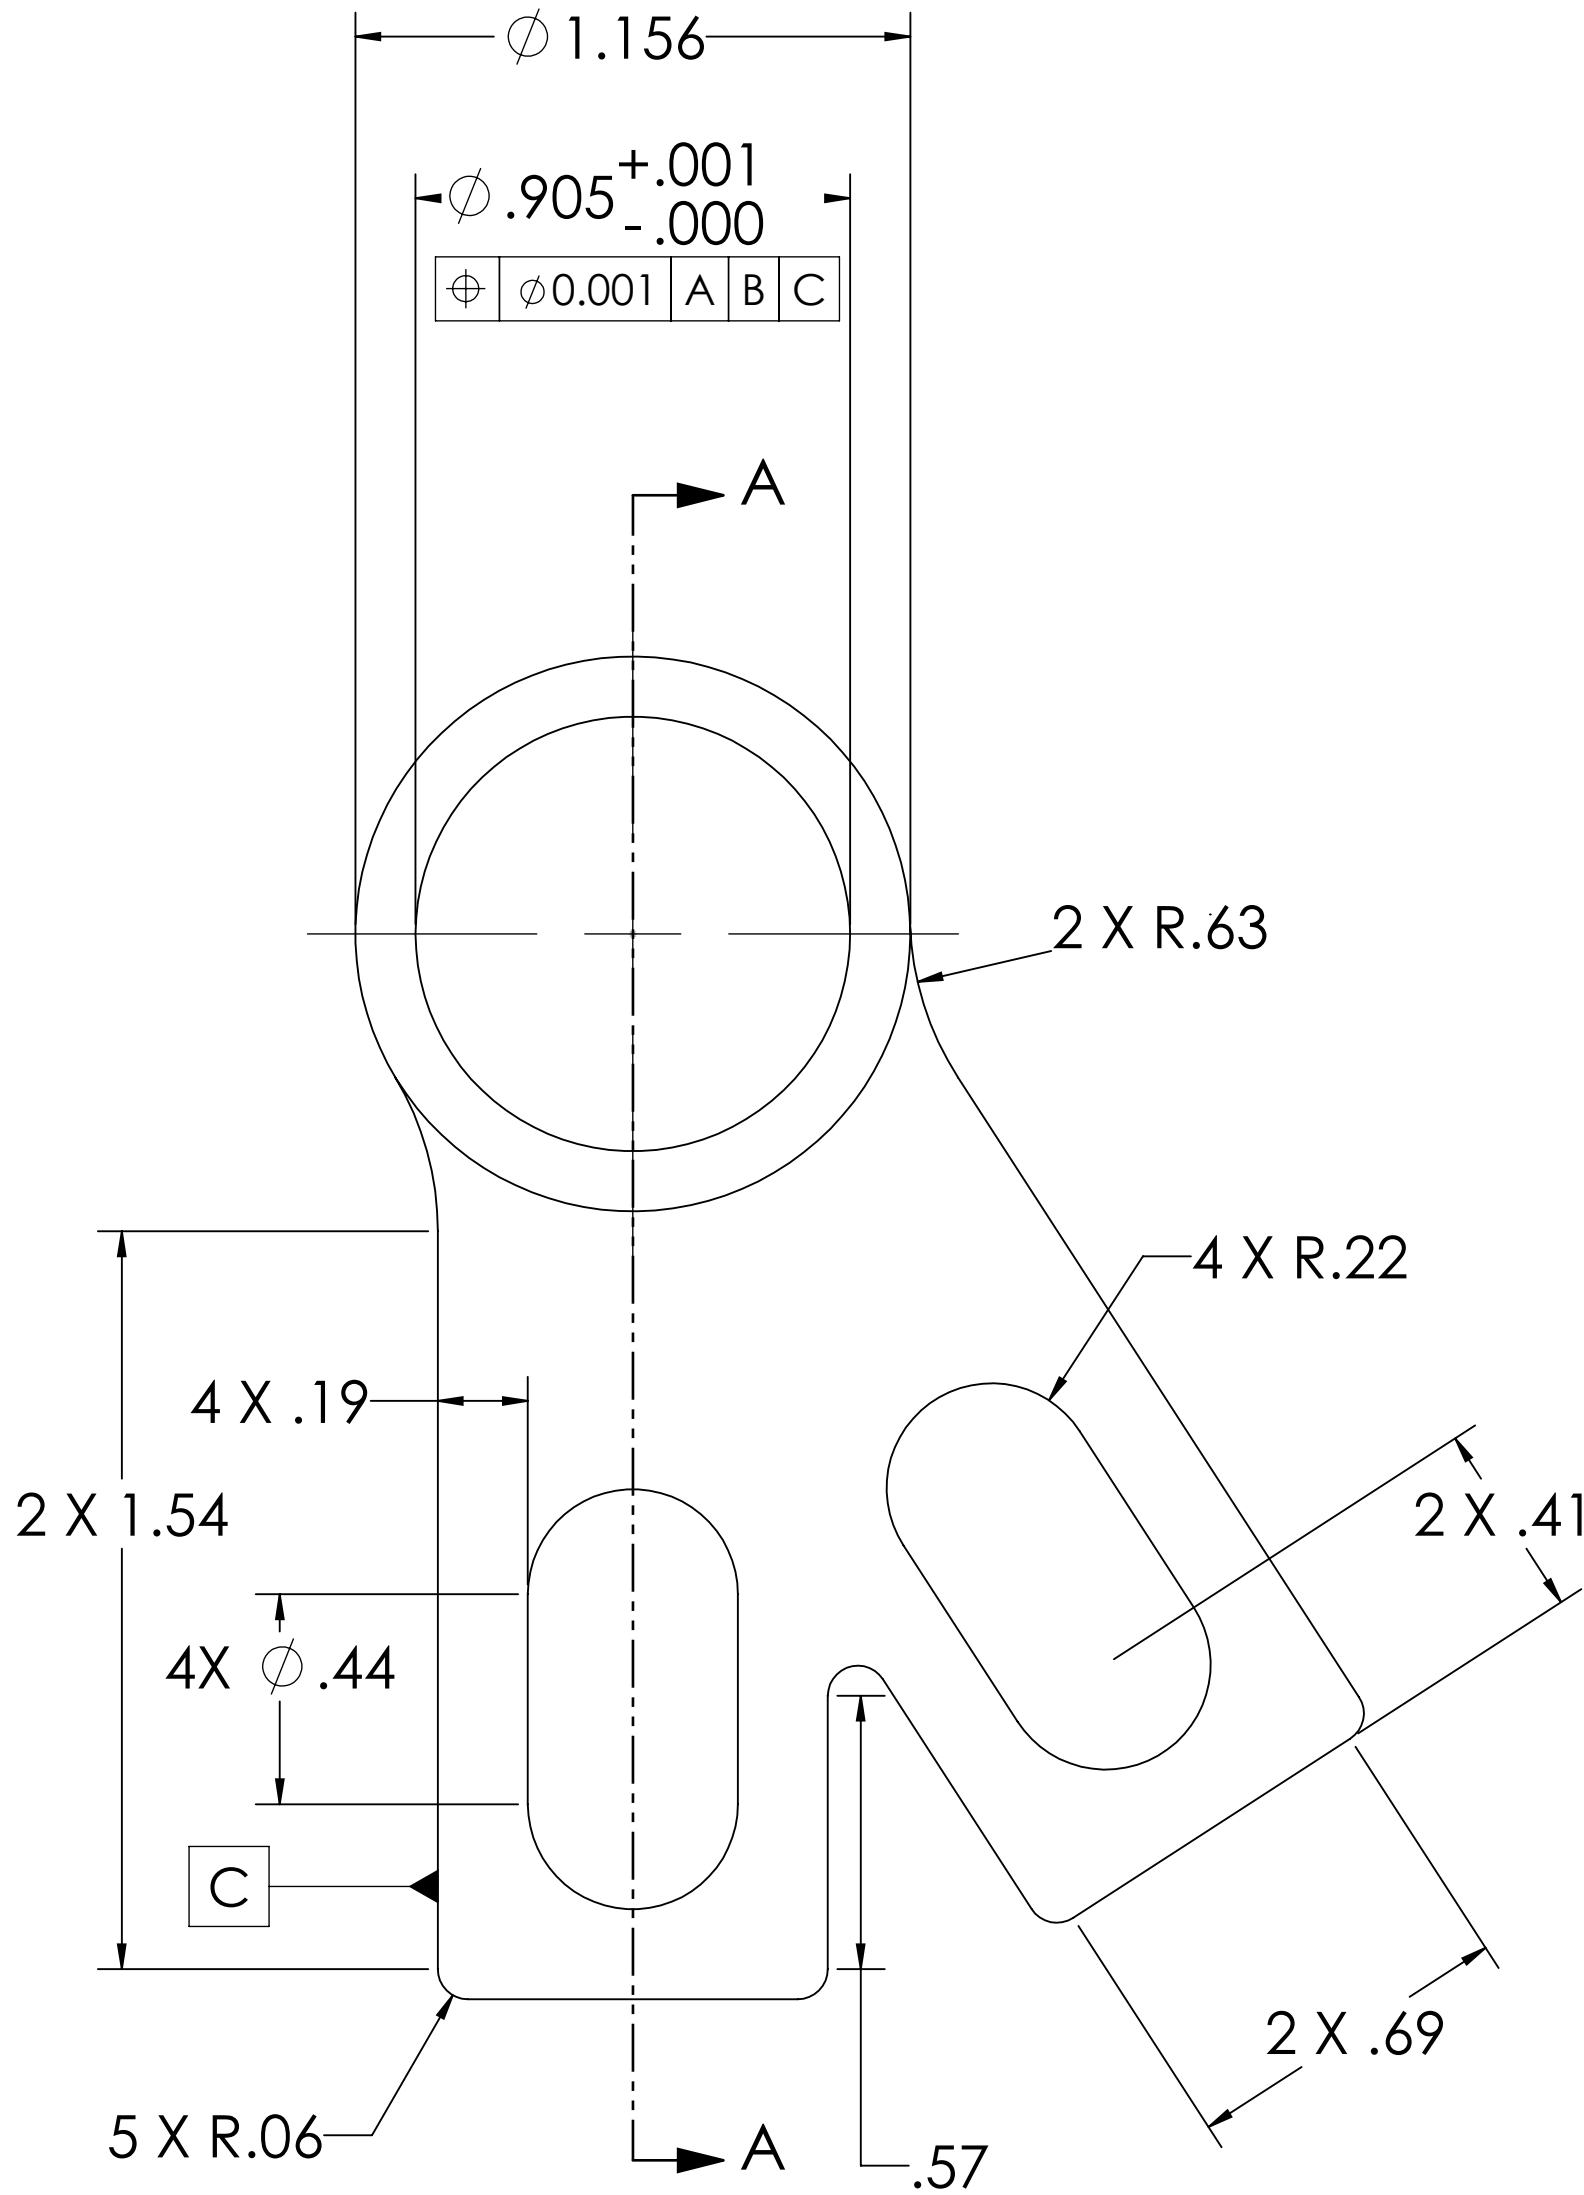

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ALL NON-DIMENSIONED PART FEATURES ARE TO BE TAKEN FROM THE SOLID MODEL.
2. 0.01 in MAX CHAMFER
3. INTERNAL AND EXTERNAL RADII 0.01 in MAX.
4. PARTS TO BE BURR FREE

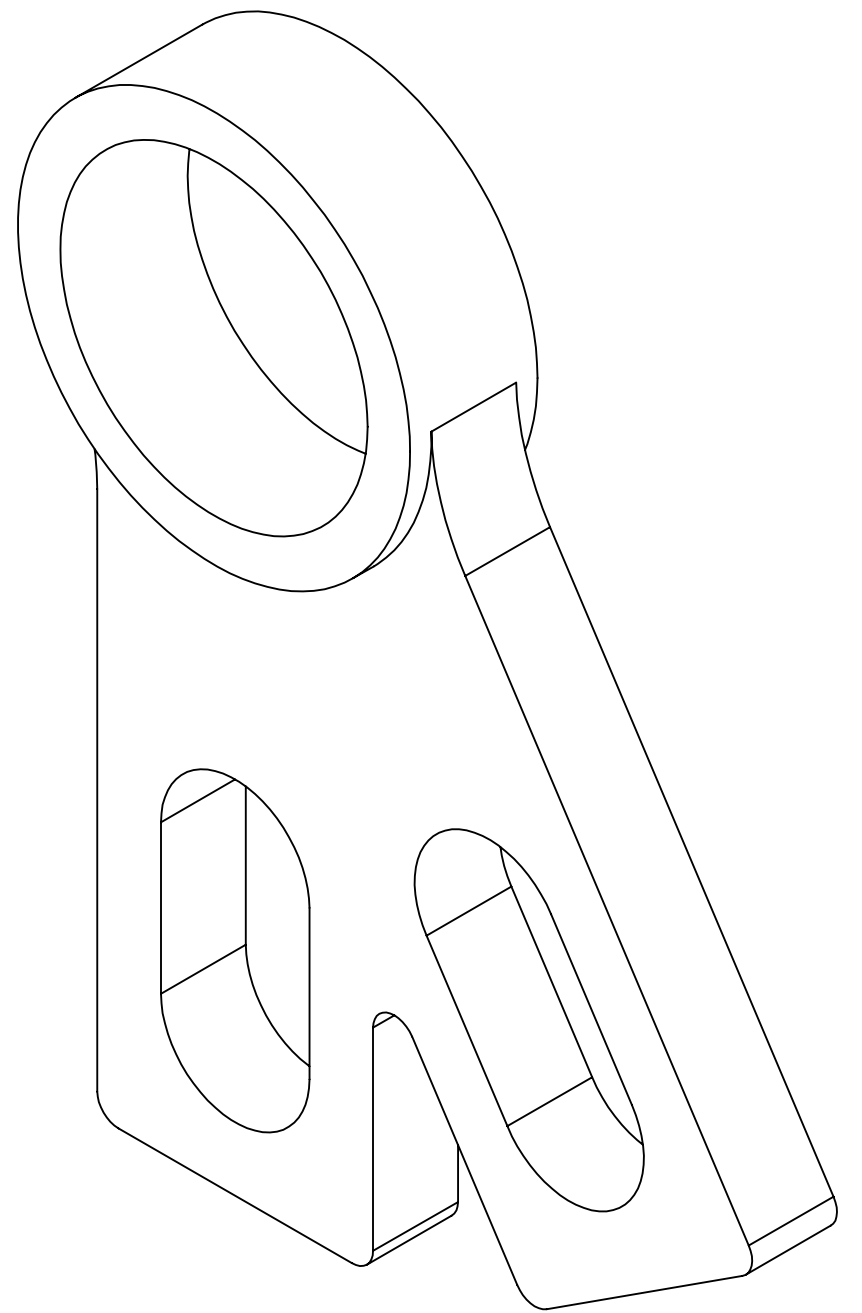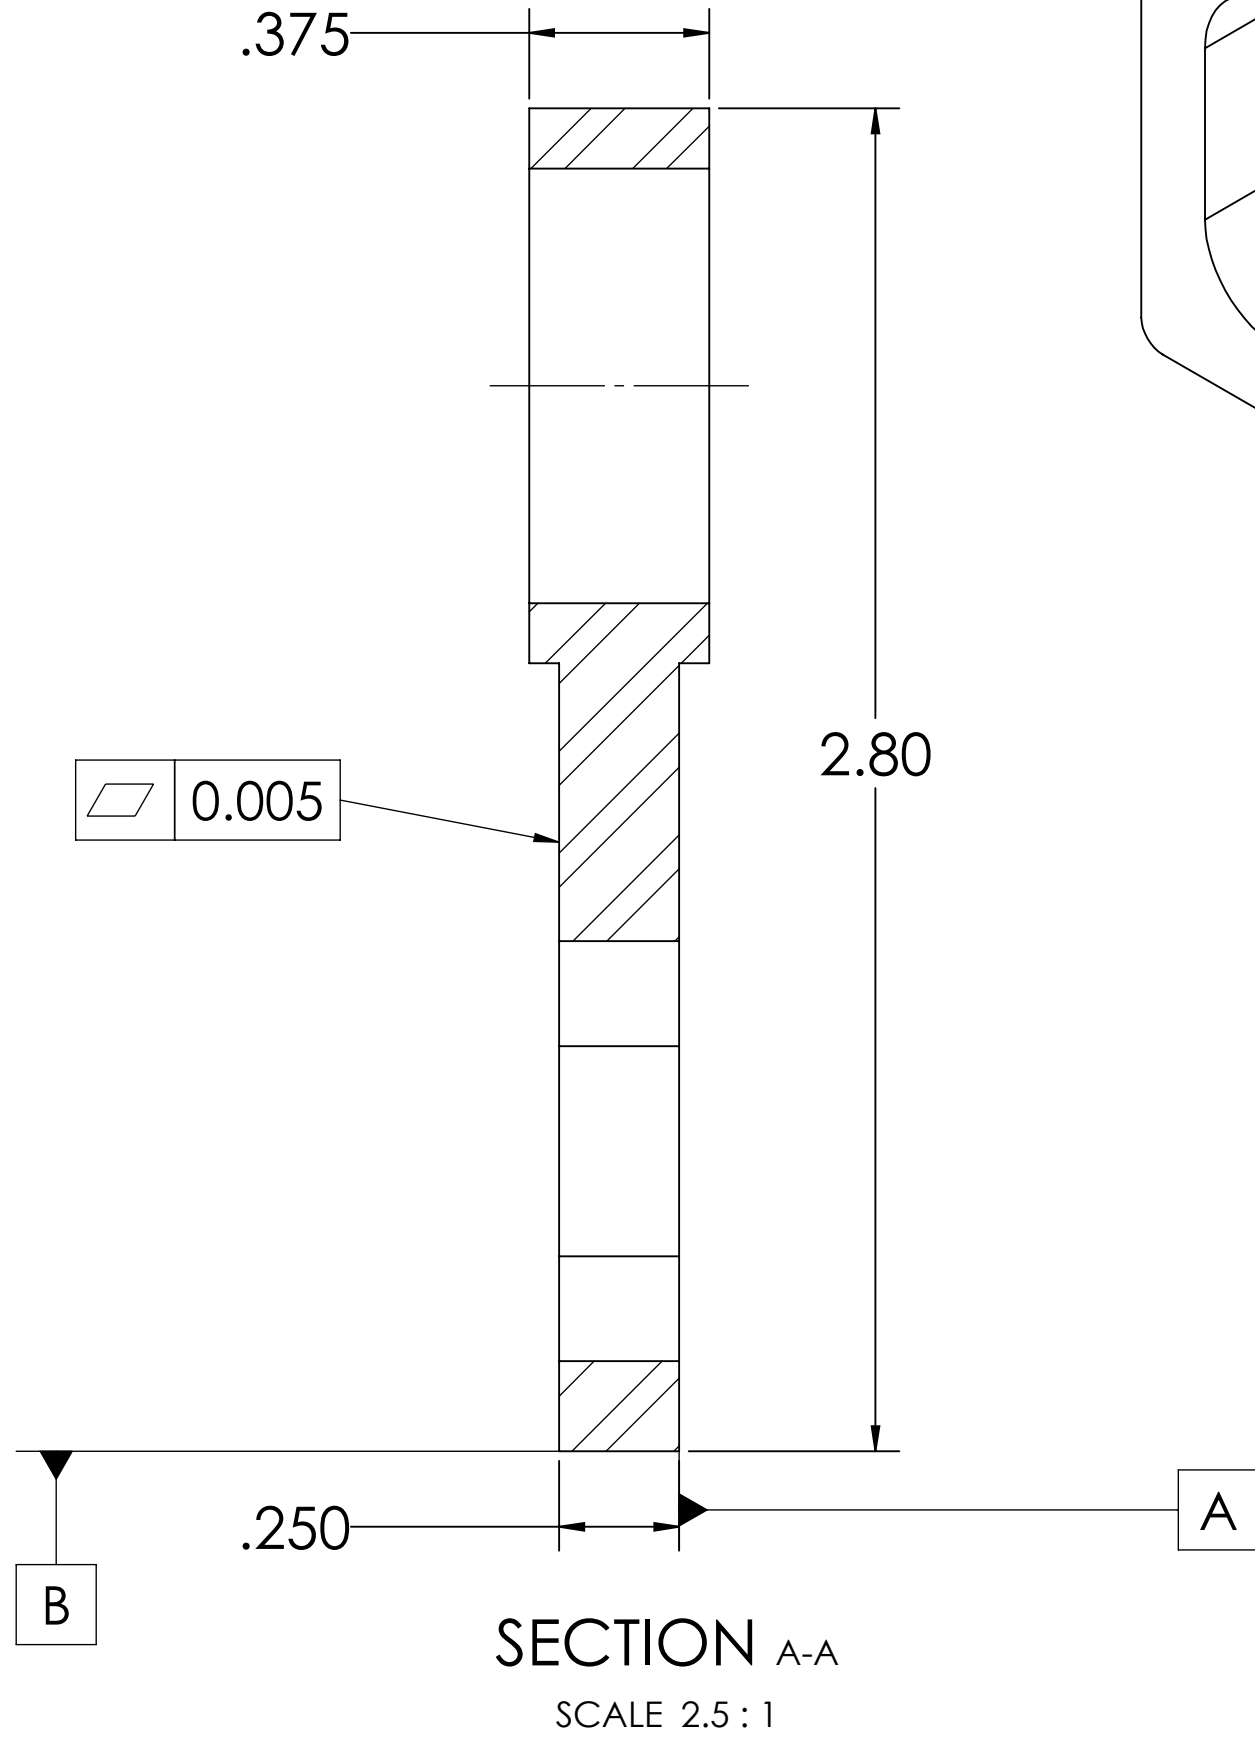

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FORMULA RACING AT UC DAVIS. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FORMULA RACING AT UC DAVIS IS
PROHIBITED.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES (UNLESS OTHERWISE SPECIFIED): FRACTIONAL: $\pm 1/32$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 3^\circ$ TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5
		MATERIAL AISI 4130 Steel, annealed at 865C
FINISH		
NEXT ASSY	USED ON	
APPLICATION		DO NOT SCALE DRAWING

FORMULA RACING
AT UC DAVIS

TITLE:
Lower Apex F

SIZE DWG. NO. REV
C SP-10002-AE-Lower Apex F AE

SCALE: 2:1 WEIGHT: SHEET 1 OF 1