

D

C

B




A

D

C

B

A

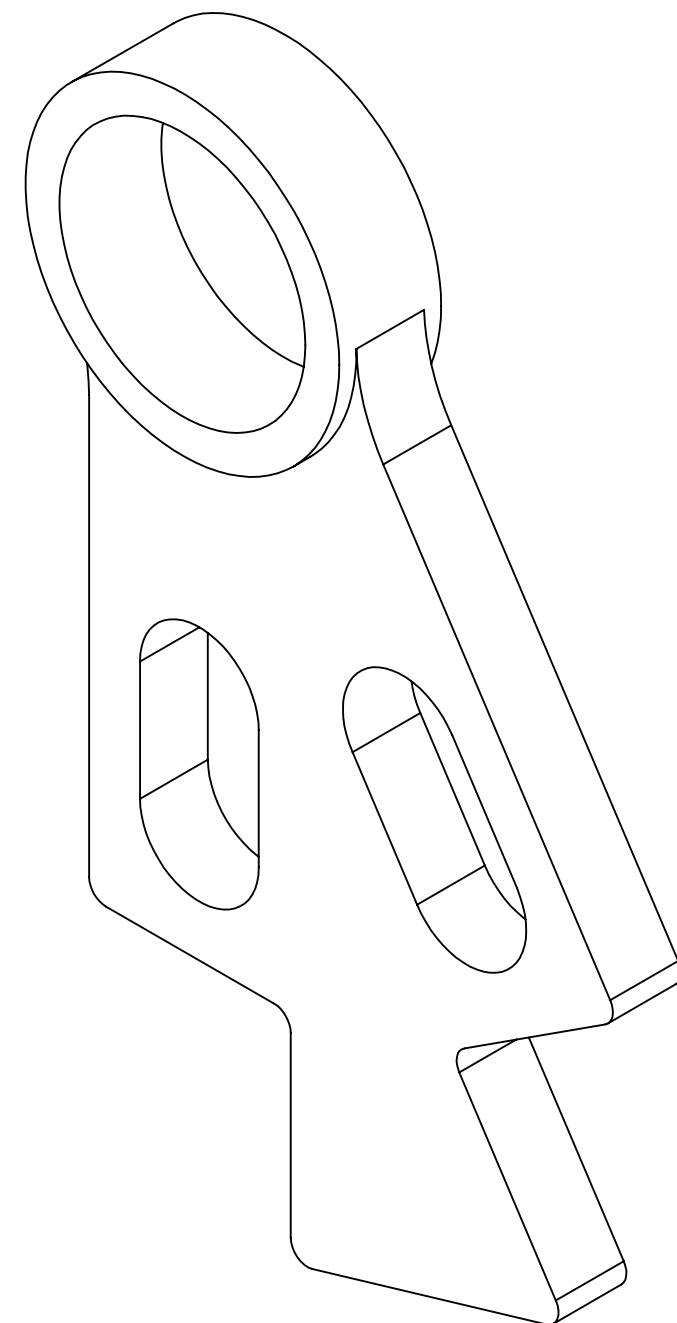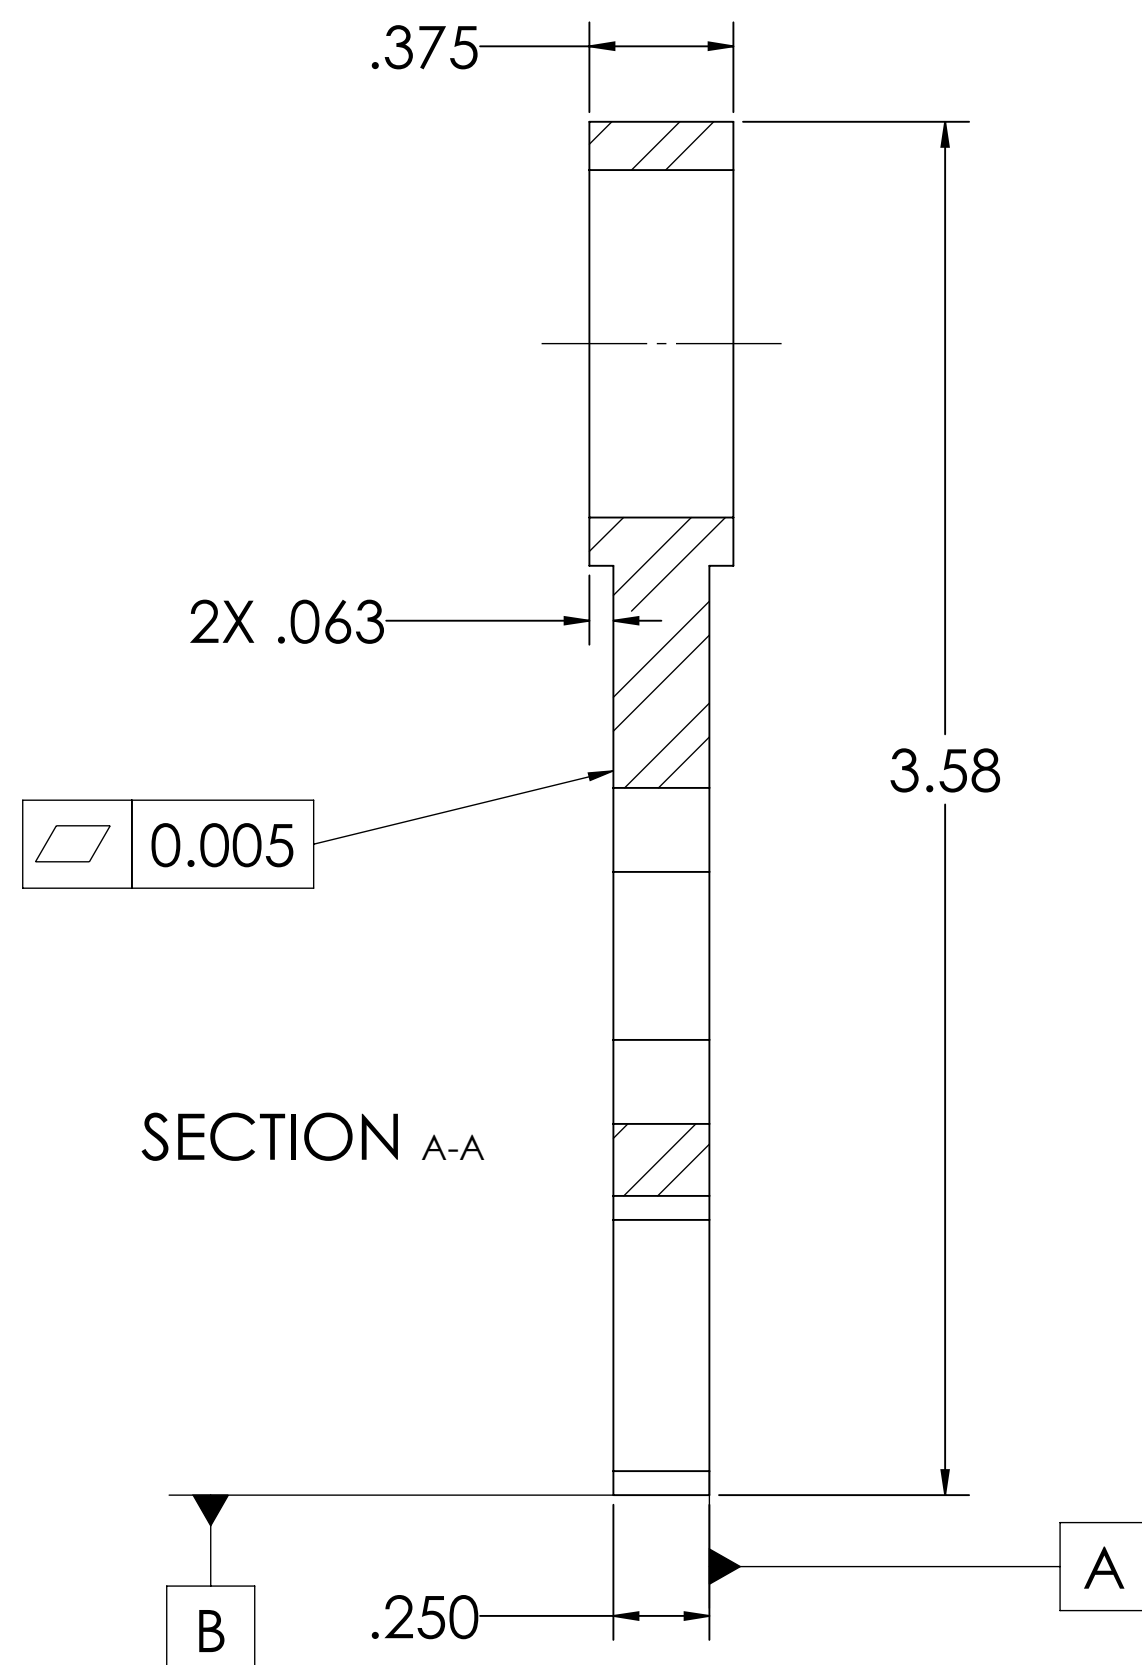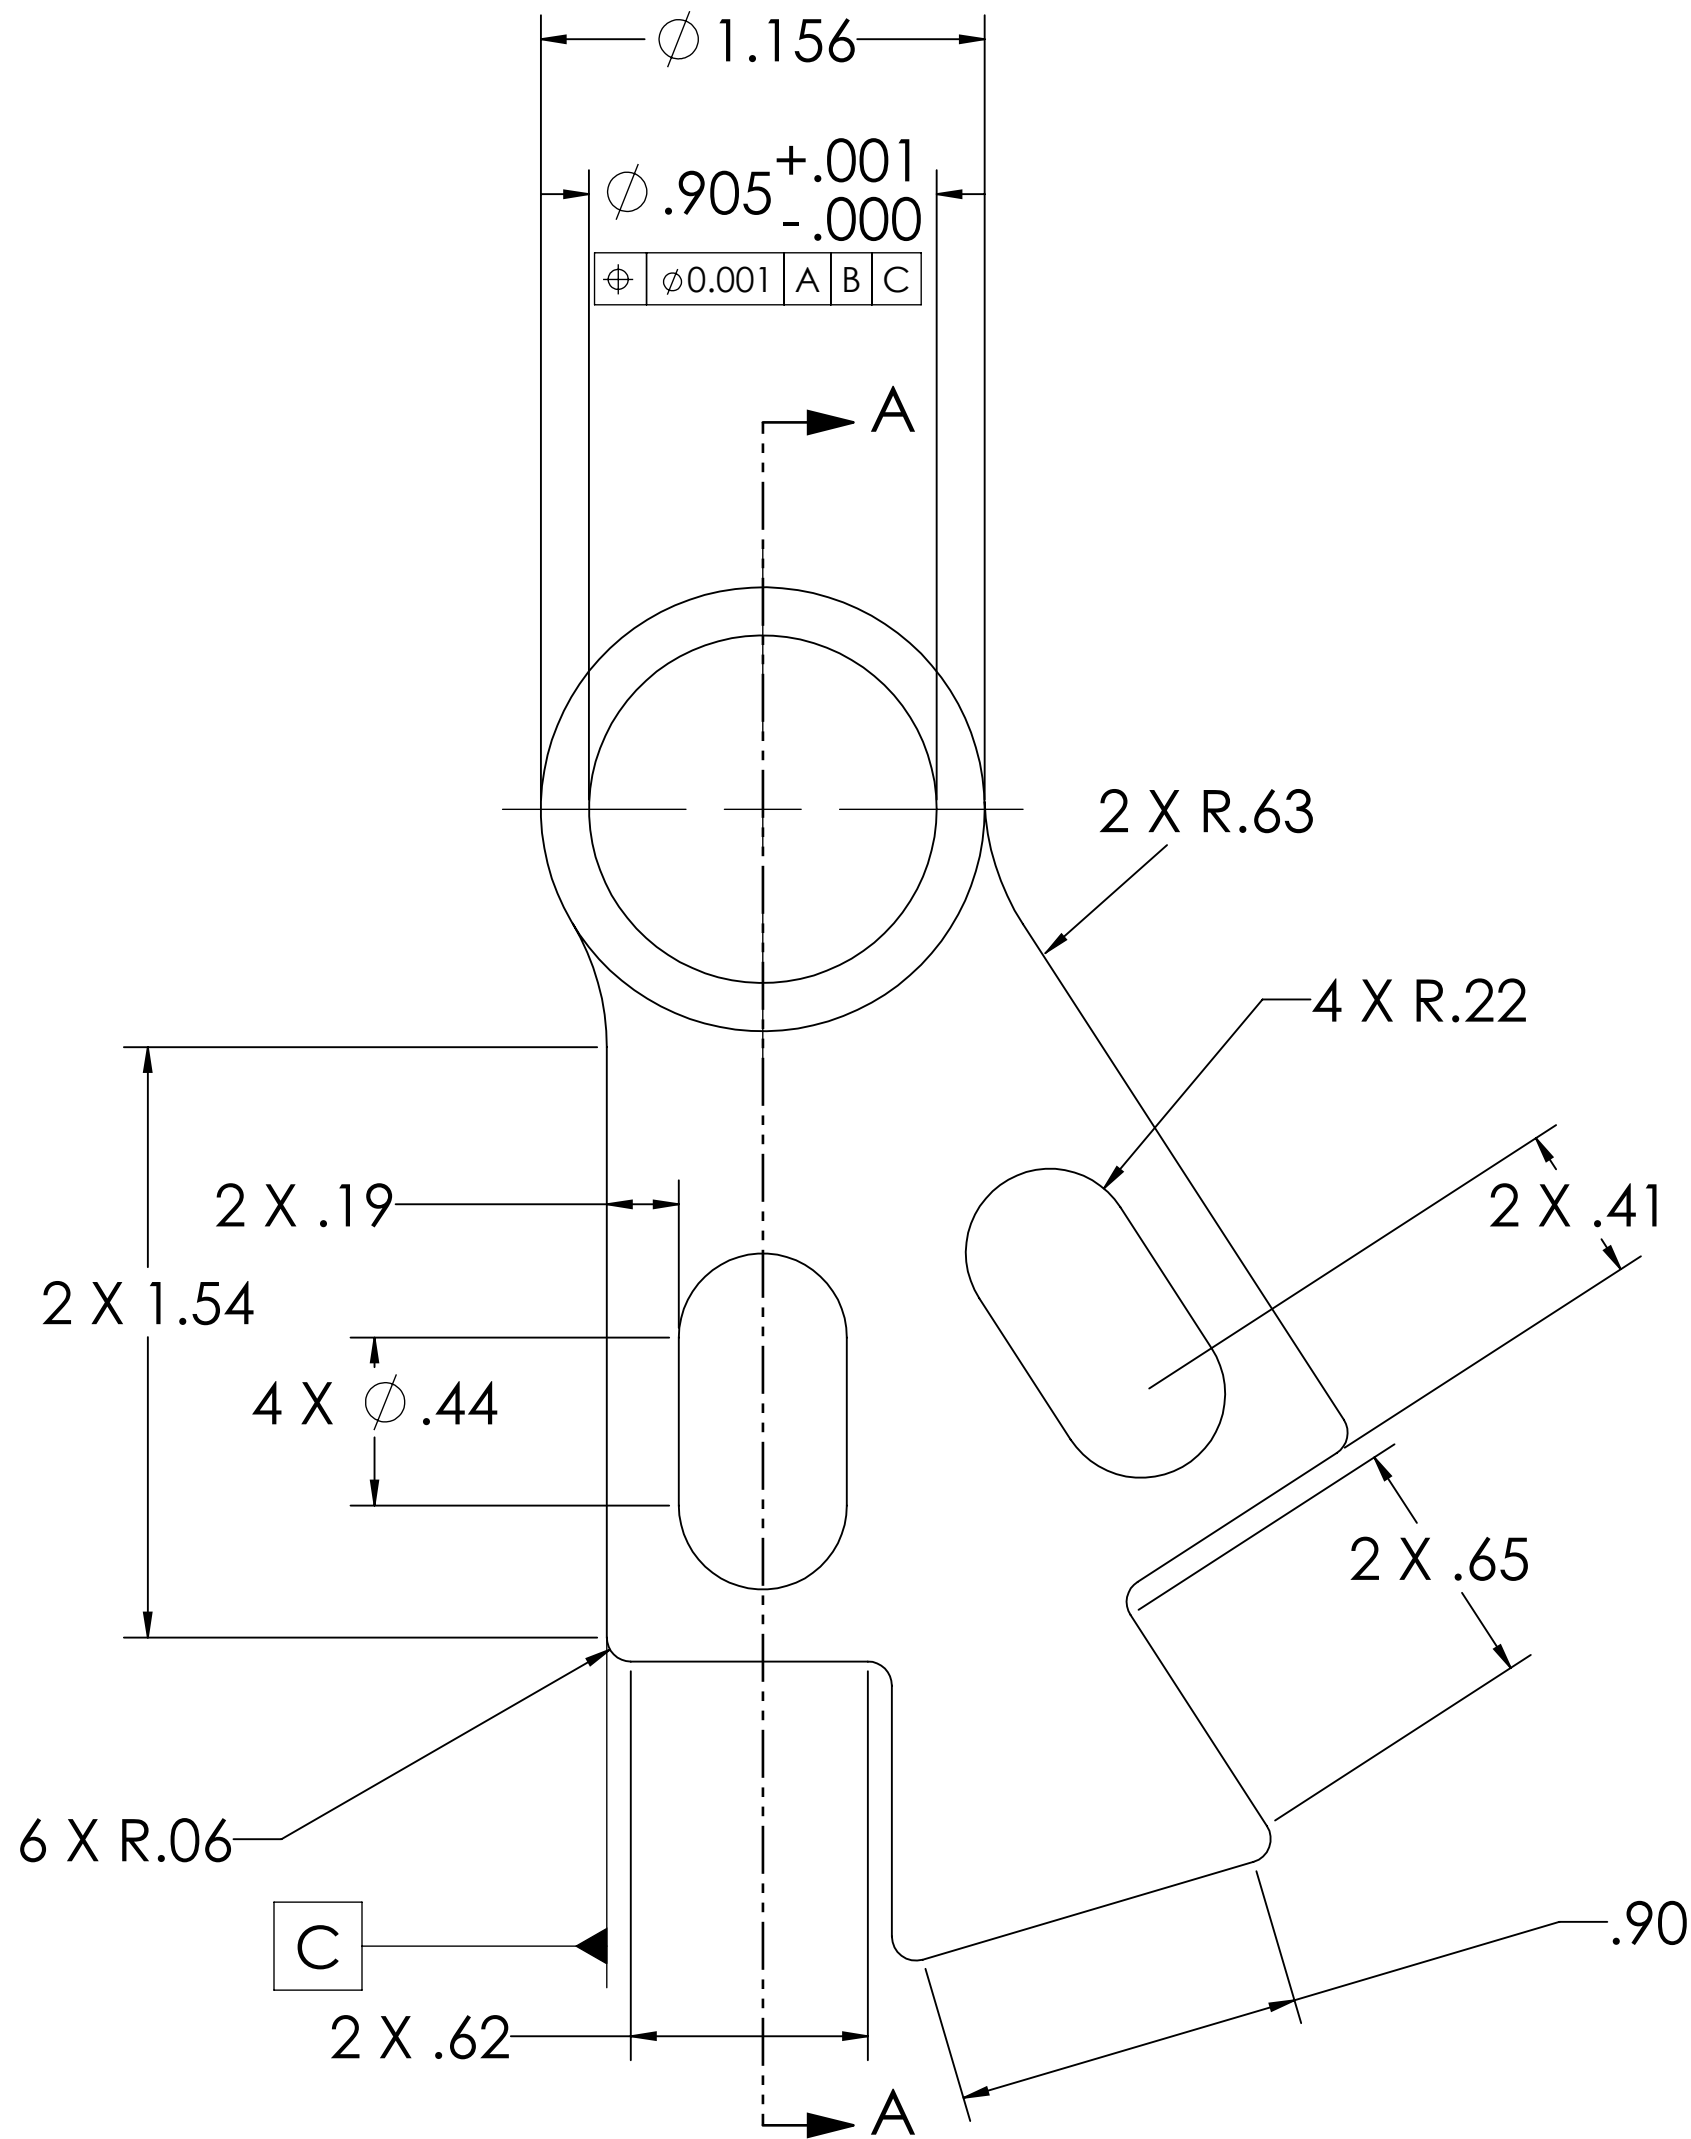

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ALL NON-DIMENSIONED PART FEATURES ARE TO BE TAKEN FROM THE SOLID MODEL.
2. 0.01 in MAX CHAMFER
3. INTERNAL AND EXTERNAL RADII 0.01 in MAX.
4. PARTS TO BE BURR FREE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FORMULA RACING AT UC DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FORMULA RACING AT UC DAVIS IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	FORMULA RACING AT UC DAVIS	
		DIMENSIONS ARE IN INCHES		DRAWN	Anthony Castellanos	02/15/2024	TITLE:
		TOLERANCES (UNLESS OTHERWISE SPECIFIED):		CHECKED			AF-Lower Apex F
		FRACTIONAL: ± 1/32		ENG APPR.			
		ANGULAR: MACH ± 1° BEND ± 3°		MFG APPR.			
		TWO PLACE DECIMAL ± 0.01		Q.A.			
		THREE PLACE DECIMAL ± 0.005		COMMENTS:			
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5					
		MATERIAL: AISI 4130 Steel, annealed at 865 C					
		FINISH					
NEXT ASSY	USED ON						
APPLICATION		DO NOT SCALE DRAWING					
SIZE	DWG. NO.	REV					
C	SP-10002-AF-Lower Apex F	AF					
SCALE: 2:1		WEIGHT:	SHEET 1 OF 1				