Shielded cable for automotive electric powertrain

FHLR2GCB2G
2 x 6.0 mm²   T180   0.6/1.0 kV

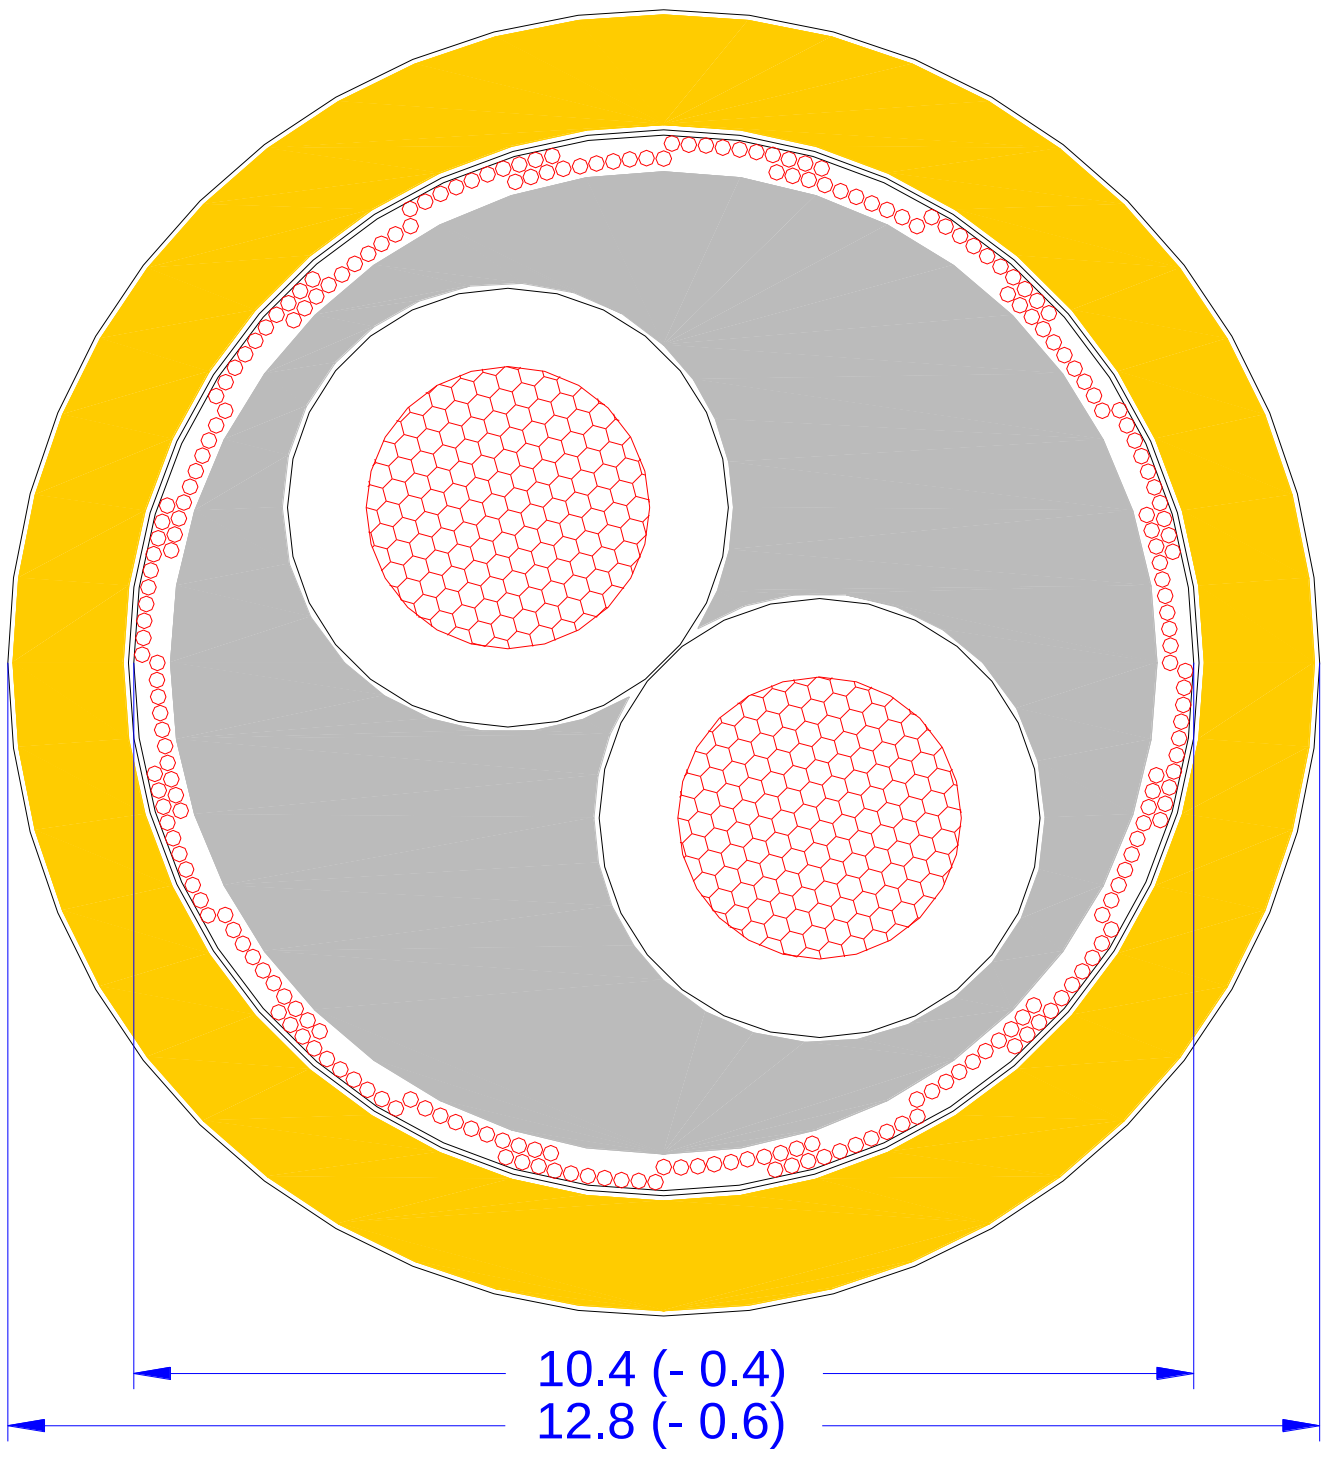

Specification	*LV 216-2 table A5* *Daimler AG C52 / 8.142* *VW N 108 041* *BMW GS 95007-6-2*

Cores 6.0 mm²	
Conductor material:	*E-Cu ETP1 according DIN EN 13602*
Conductor design:	*stranded bare copper 84 x max. 0.31 mm*
Core insulation:	*mod. SiR*
Core diameter:	*4.3 mm (- 0.3)*
Insulation wall thickness:	*min. 0.28 mm*
Colour code:	*red and black*

Stranding	
1. layer:	*2 cores 6.0 mm²*
Lay length:	*100 mm (± 10)*

Inner filler	
Sheath material:	*mod. SiR*
Outer diameter:	*9.7 mm (- 0.4)*
Wall thickness	*min. 0.38 mm*
Colour code:	*nature*

Shielding	
Screening braid:	*tinned copper max. 0.16 mm optical covering min. 85 %*
Diameter:	*10.4 mm (- 0.4)*
Foiled shielding:	*ALU-PET foil metal side in contact to screen overlap min. 20 %*

Outer sheath

Sheath material:	*mod. SiR*
Outer diameter:	*12.8 mm (- 0.6)*
Wall thickness:	*min. 0.82 mm*
Colour code:	*orange similar RAL 2003*

Marking

Outer sheath is printed:

COROFLEX [nnn] 9-2641 FHLR2GCB2G 2 x 6.0 mm²/T180 ϟ ATTENTION HIGH VOLTAGE MAX 600 V AC / 1000 V DC ϟ [xx…xx]

[nnn]:	*code of production plant*
[xx…xx]:	*internal code*
Distance of marking:	*max. 200 mm*

Electrical properties

Conductor resistance: (DC, 20 °C)	*max. 3.2 mΩ/m*	*6.0 mm²*
	max. 5.4 mΩ/m	*shielding*
Test voltage:	*eff. 8.0 kVolt*	*spark test*
	eff. 5.0 kVolt	*5 minutes*
Nominal voltage: (AC / DC)	*max. 600 / 1000 Volt*	

Mechanical properties

Bend radius:

- min. 3 x cable-Ø:	*static installation*
- min. 6 x cable-Ø:	*dynamic installation*
Weight of cable:	approx. 290 g/m

Thermal properties

Operating temperature:	*- 40 °C to + 180 °C*	*(3000 h)*
Short term ageing	*up to + 205 °C*	*(240 h)*

Annex: Continuous current load as a function of ambient temperature calculated simulation according to LV112-3

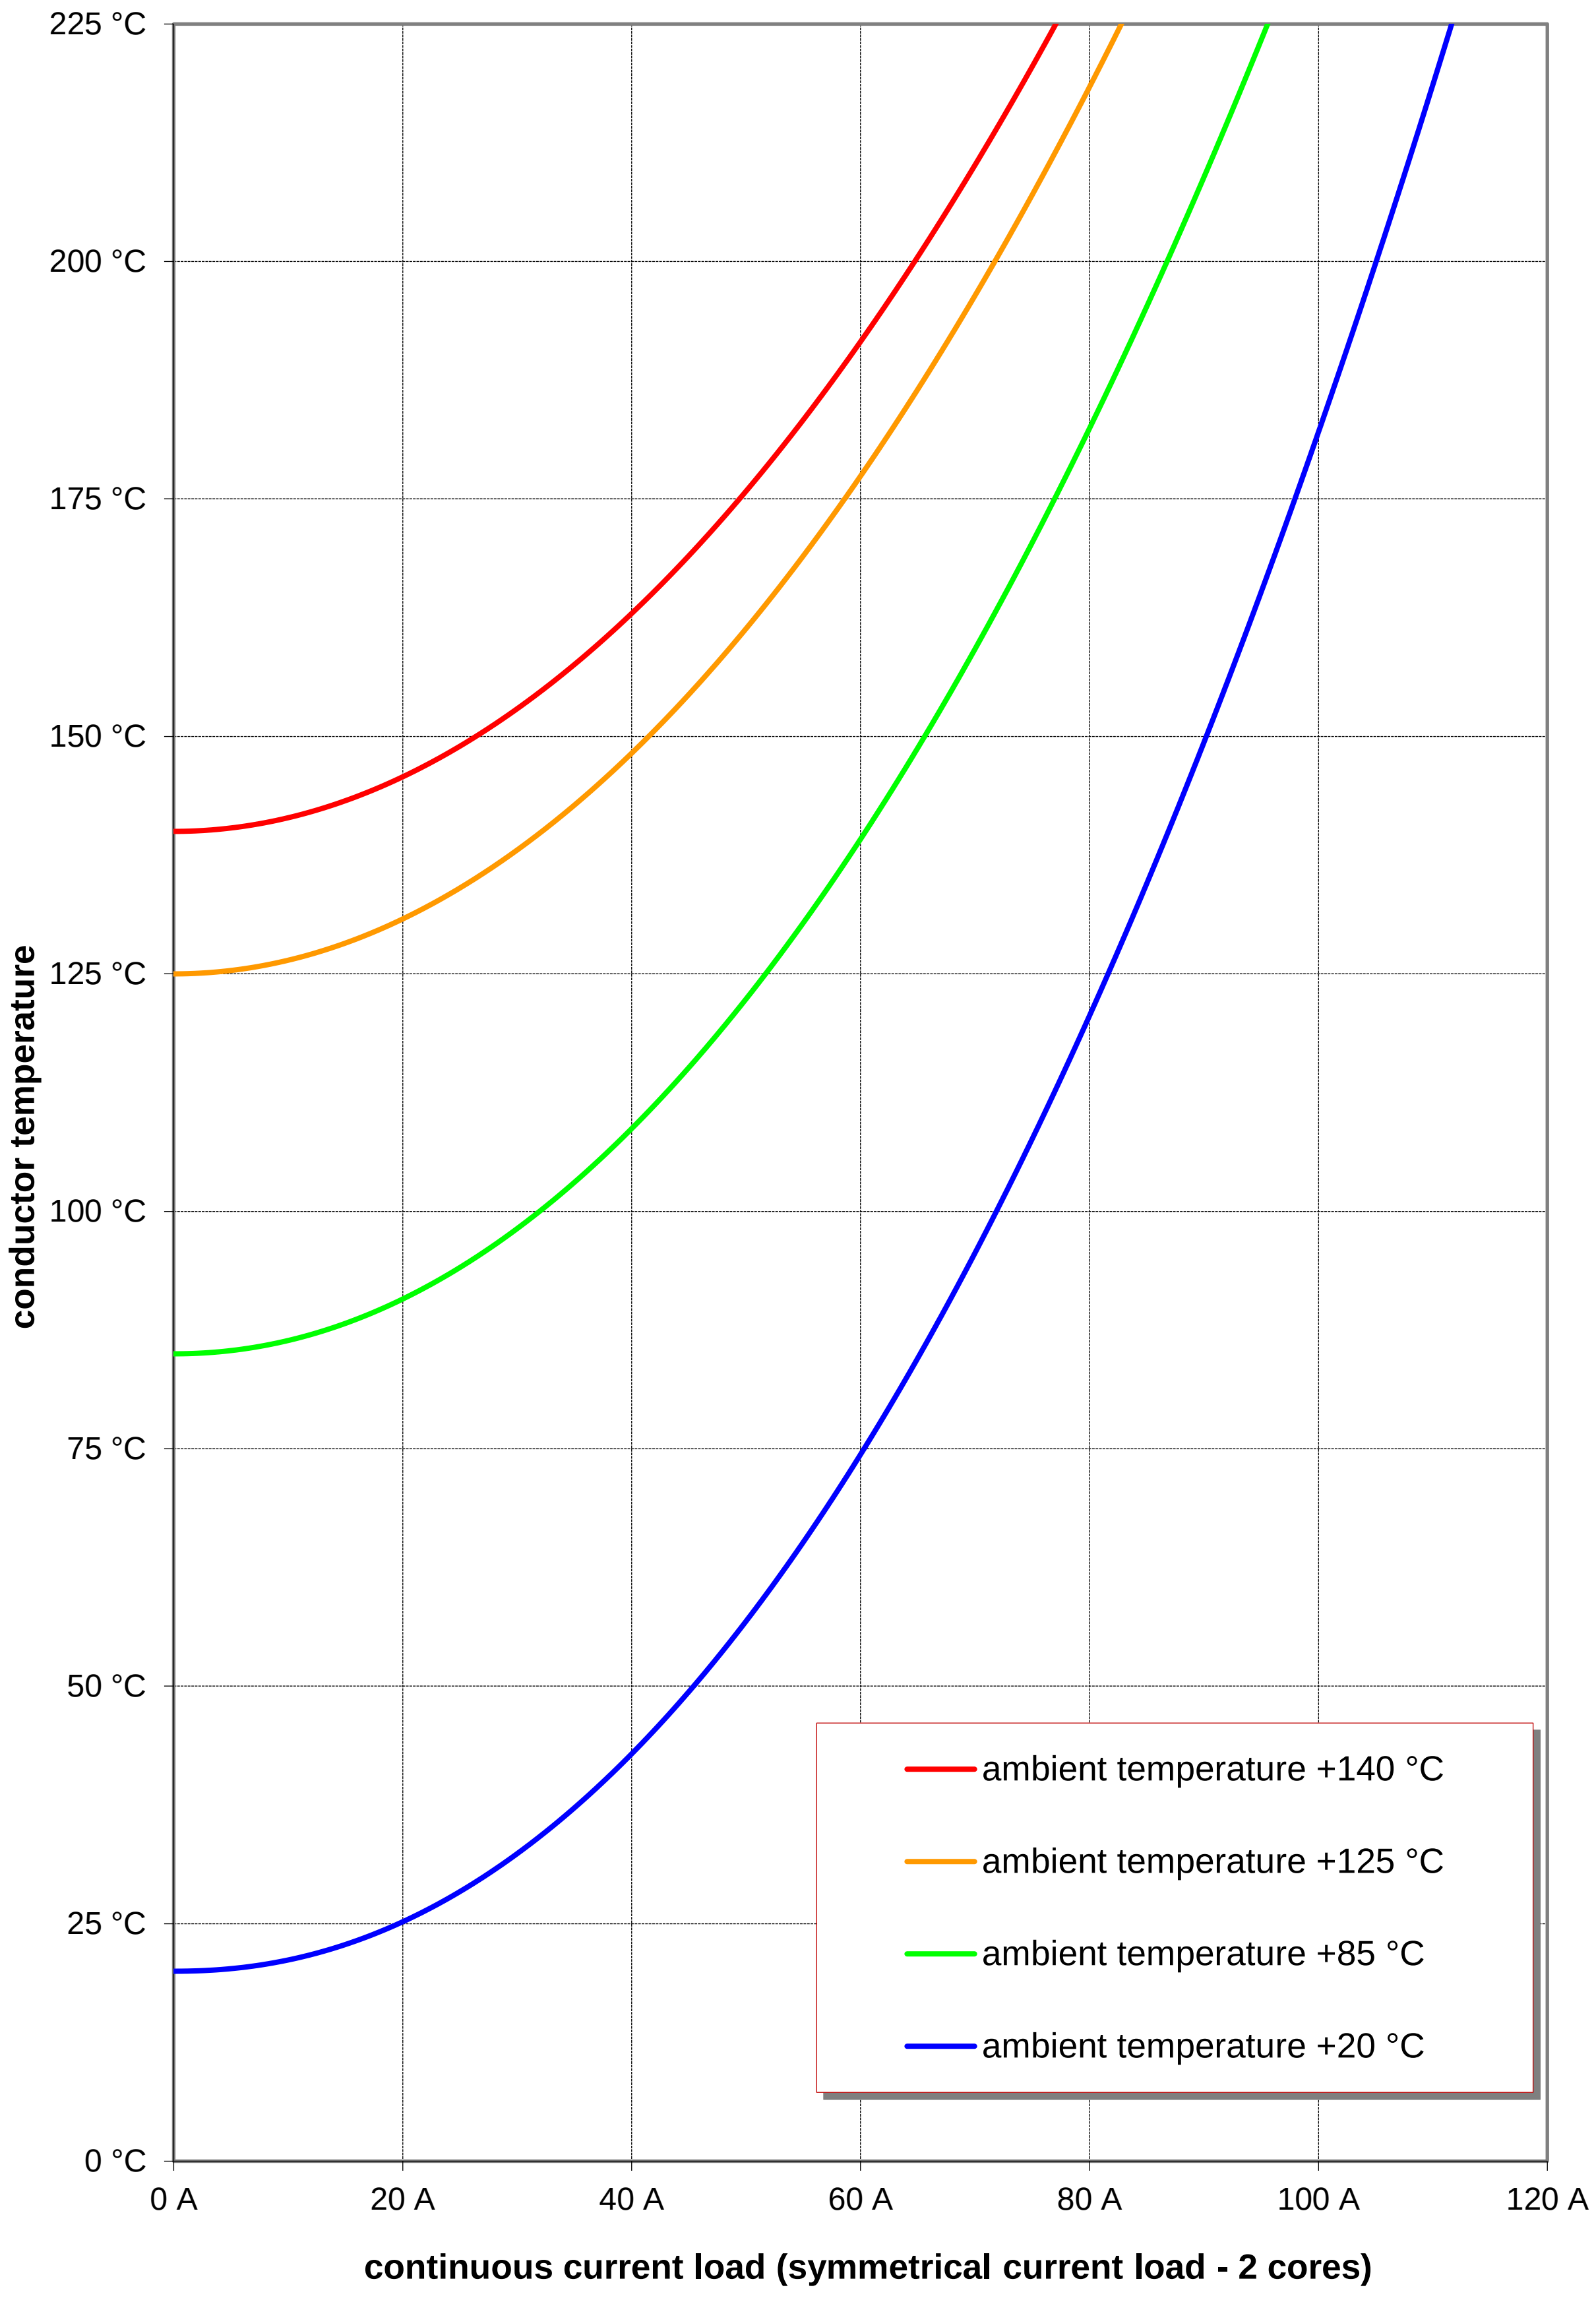

Annex: Short-term current load as a function of ambient temperature
calculated simulation according to LV112-3

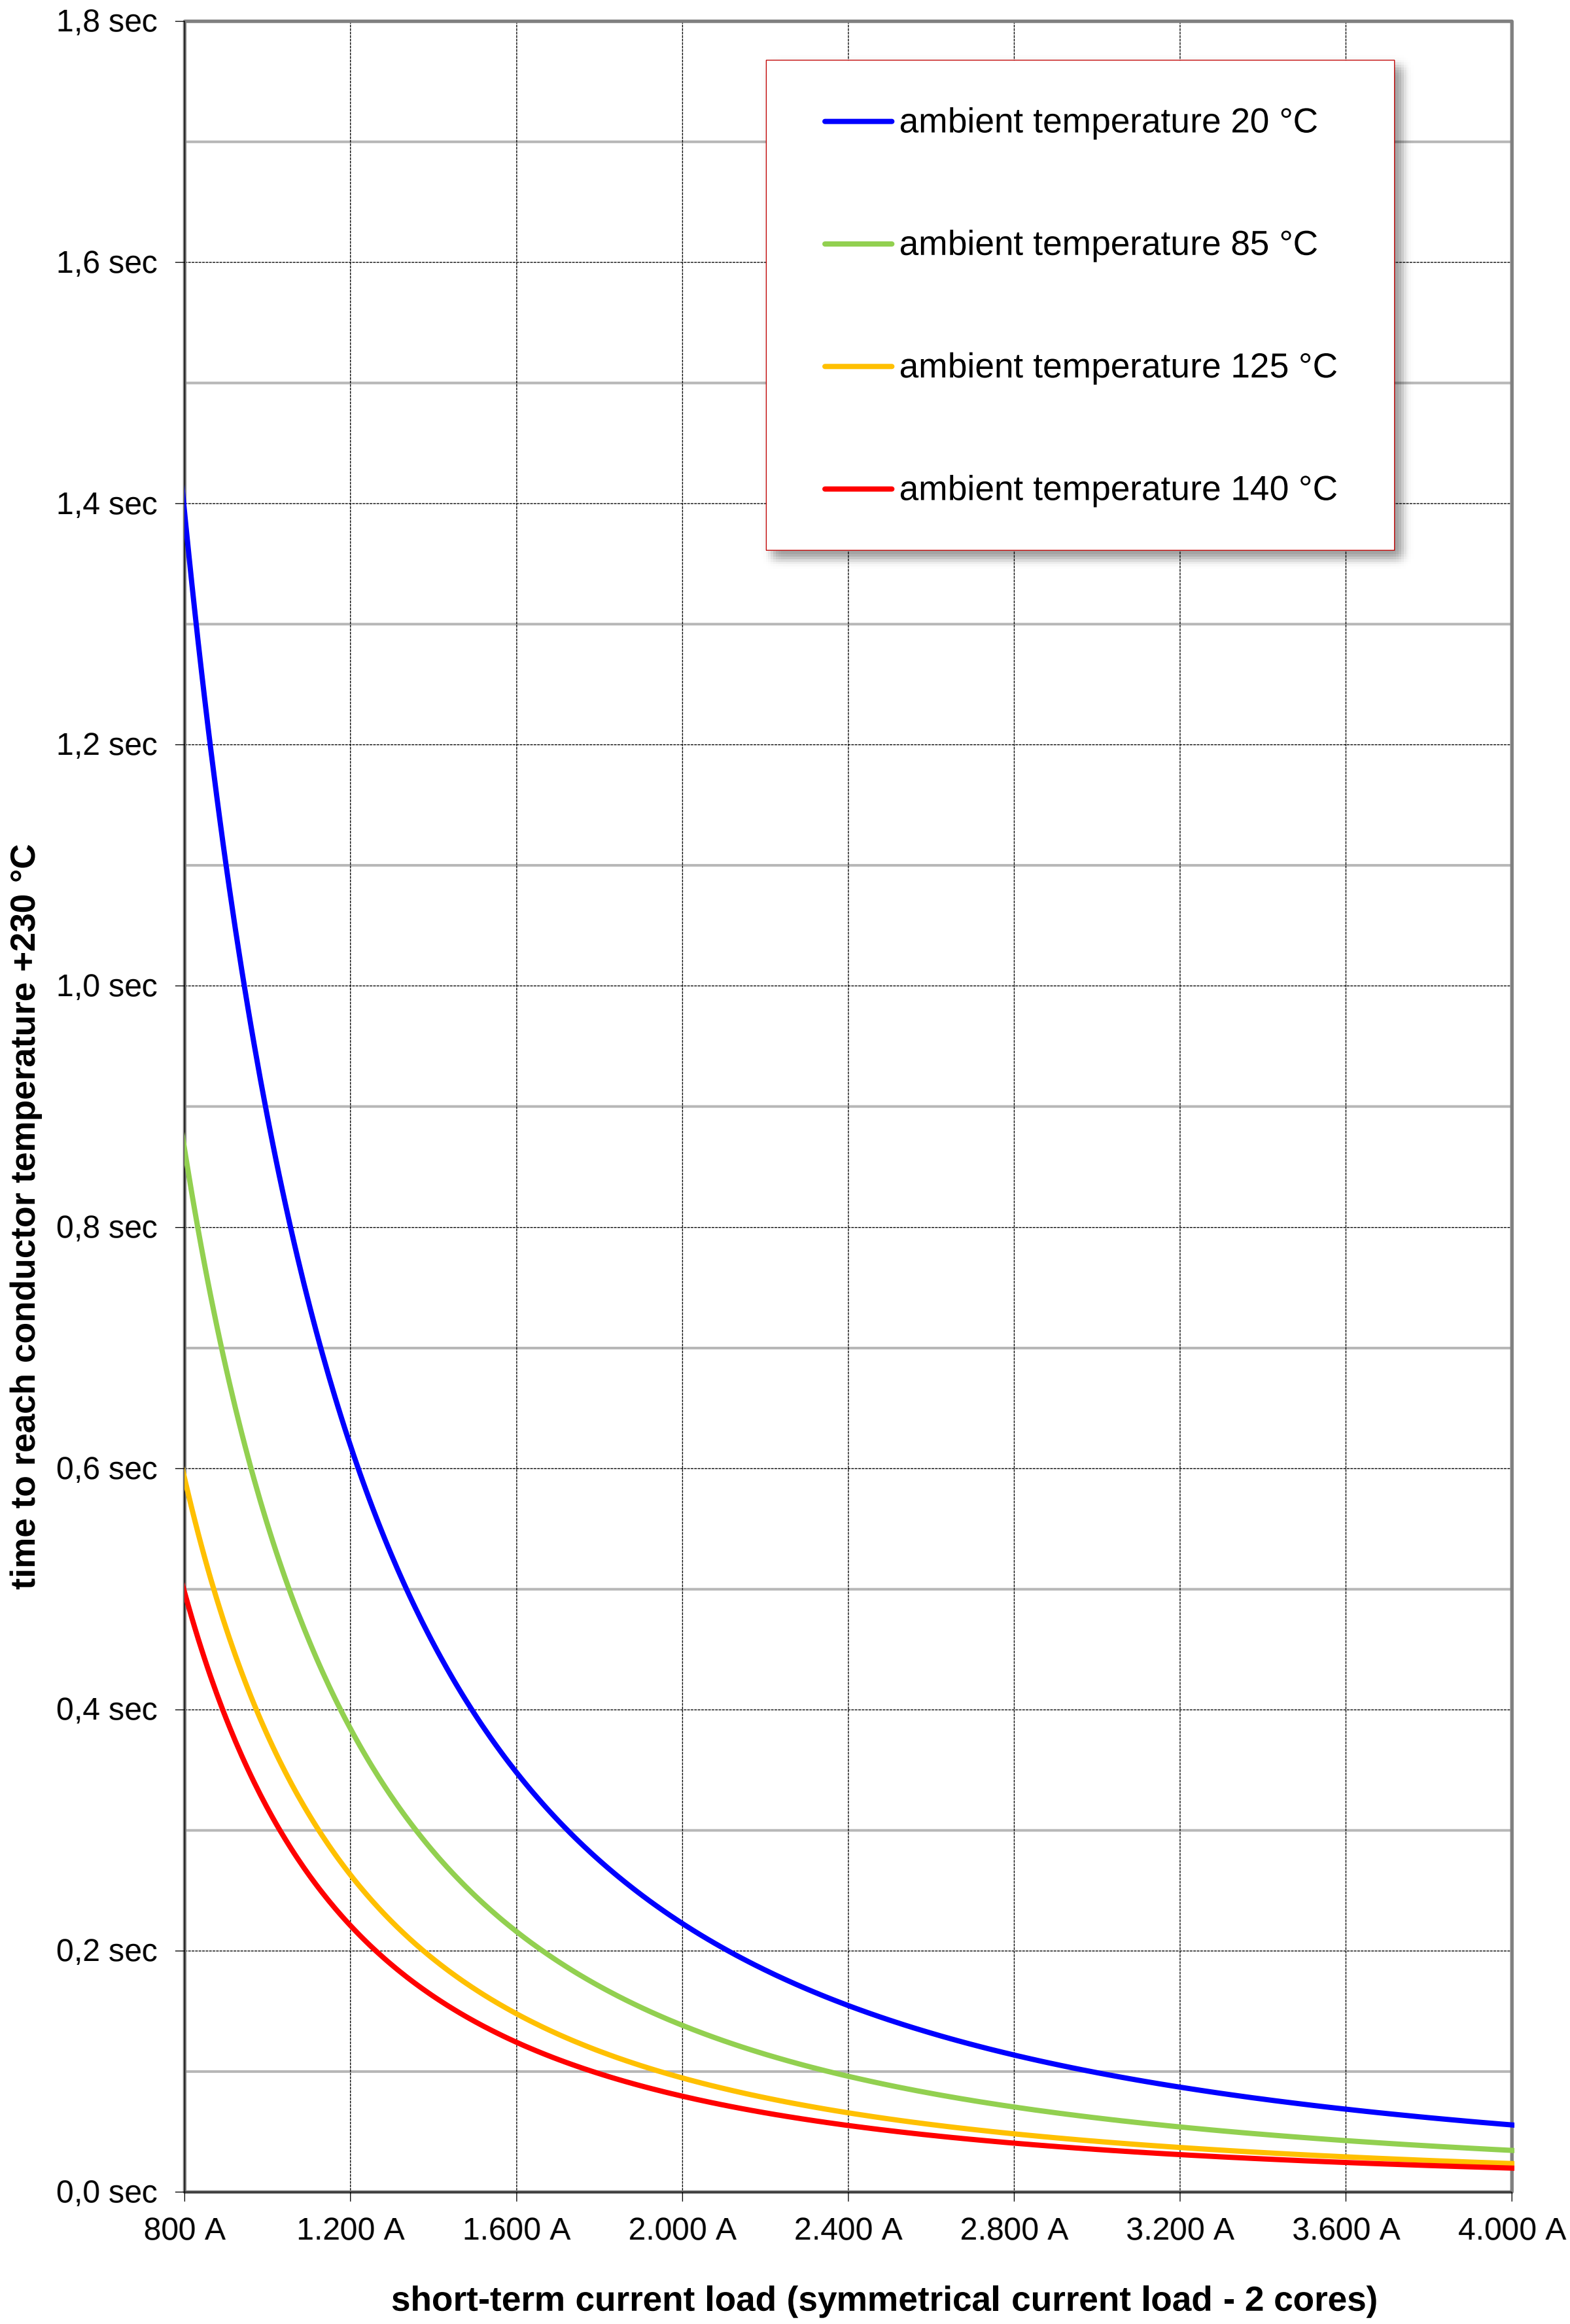

Annex: Short-term current load as a function of ambient temperature
calculated simulation according to LV112-3

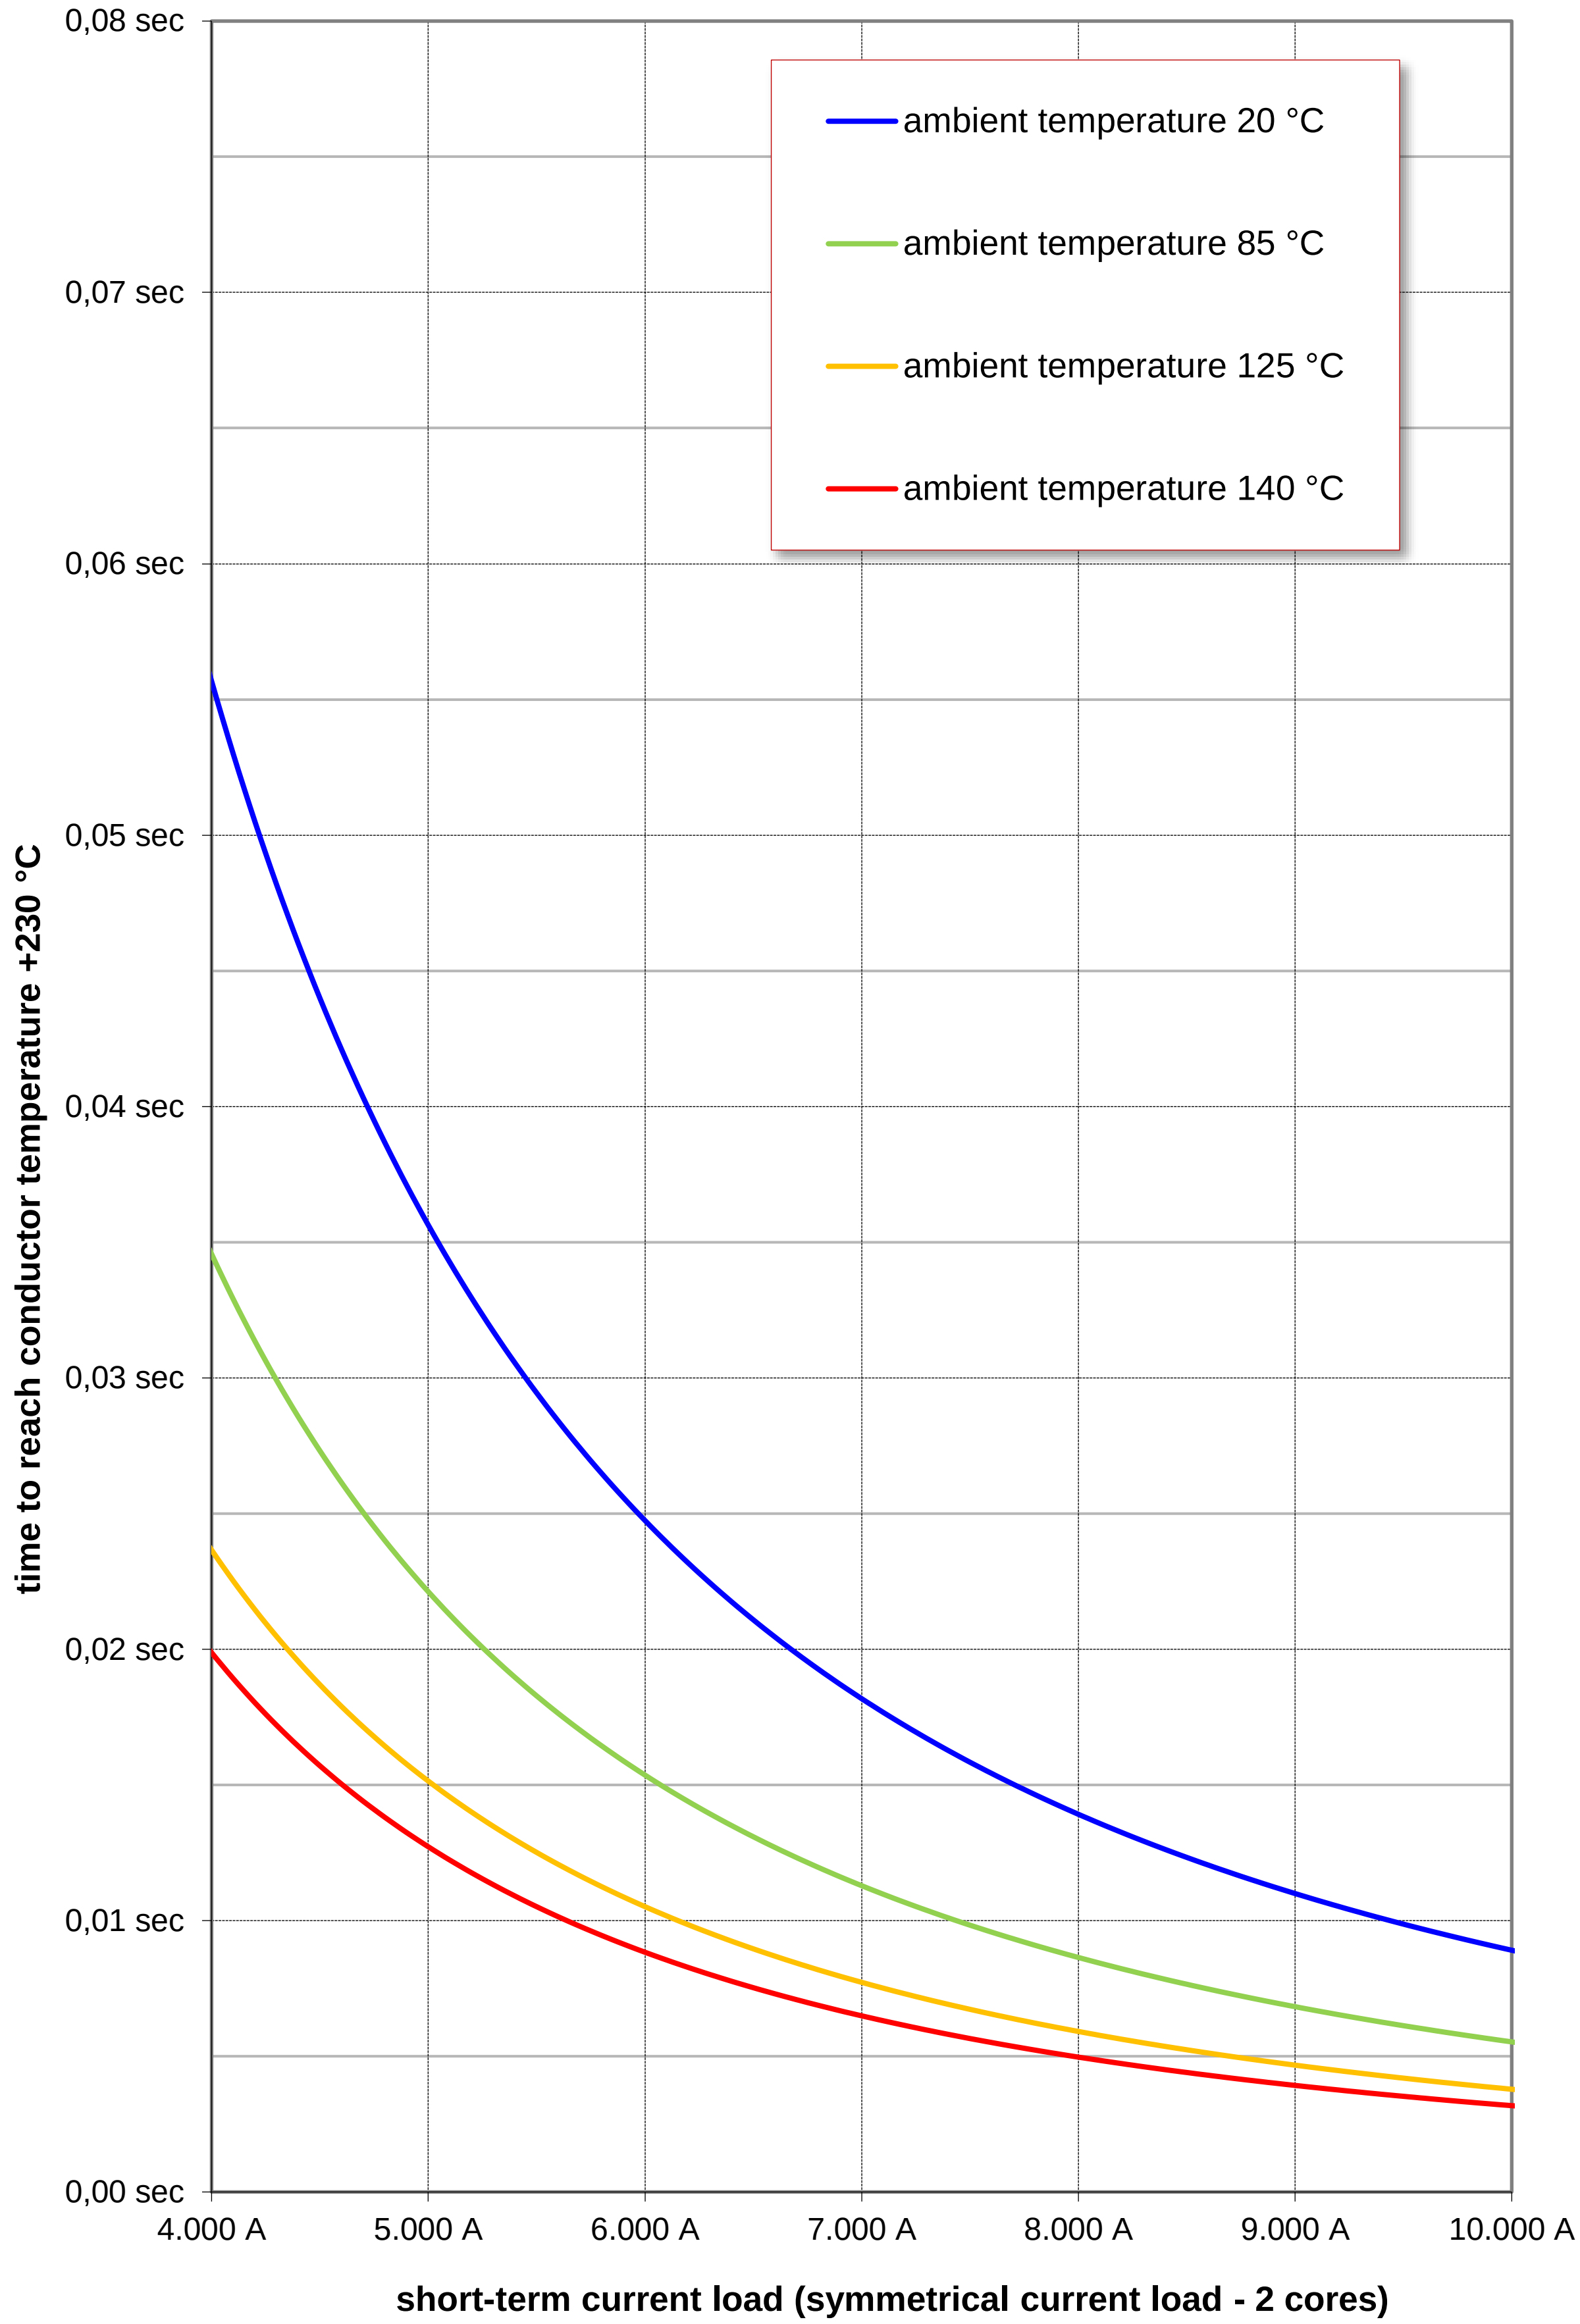

Annex: Short-term current load as a function of ambient temperature
calculated simulation according to LV112-3