


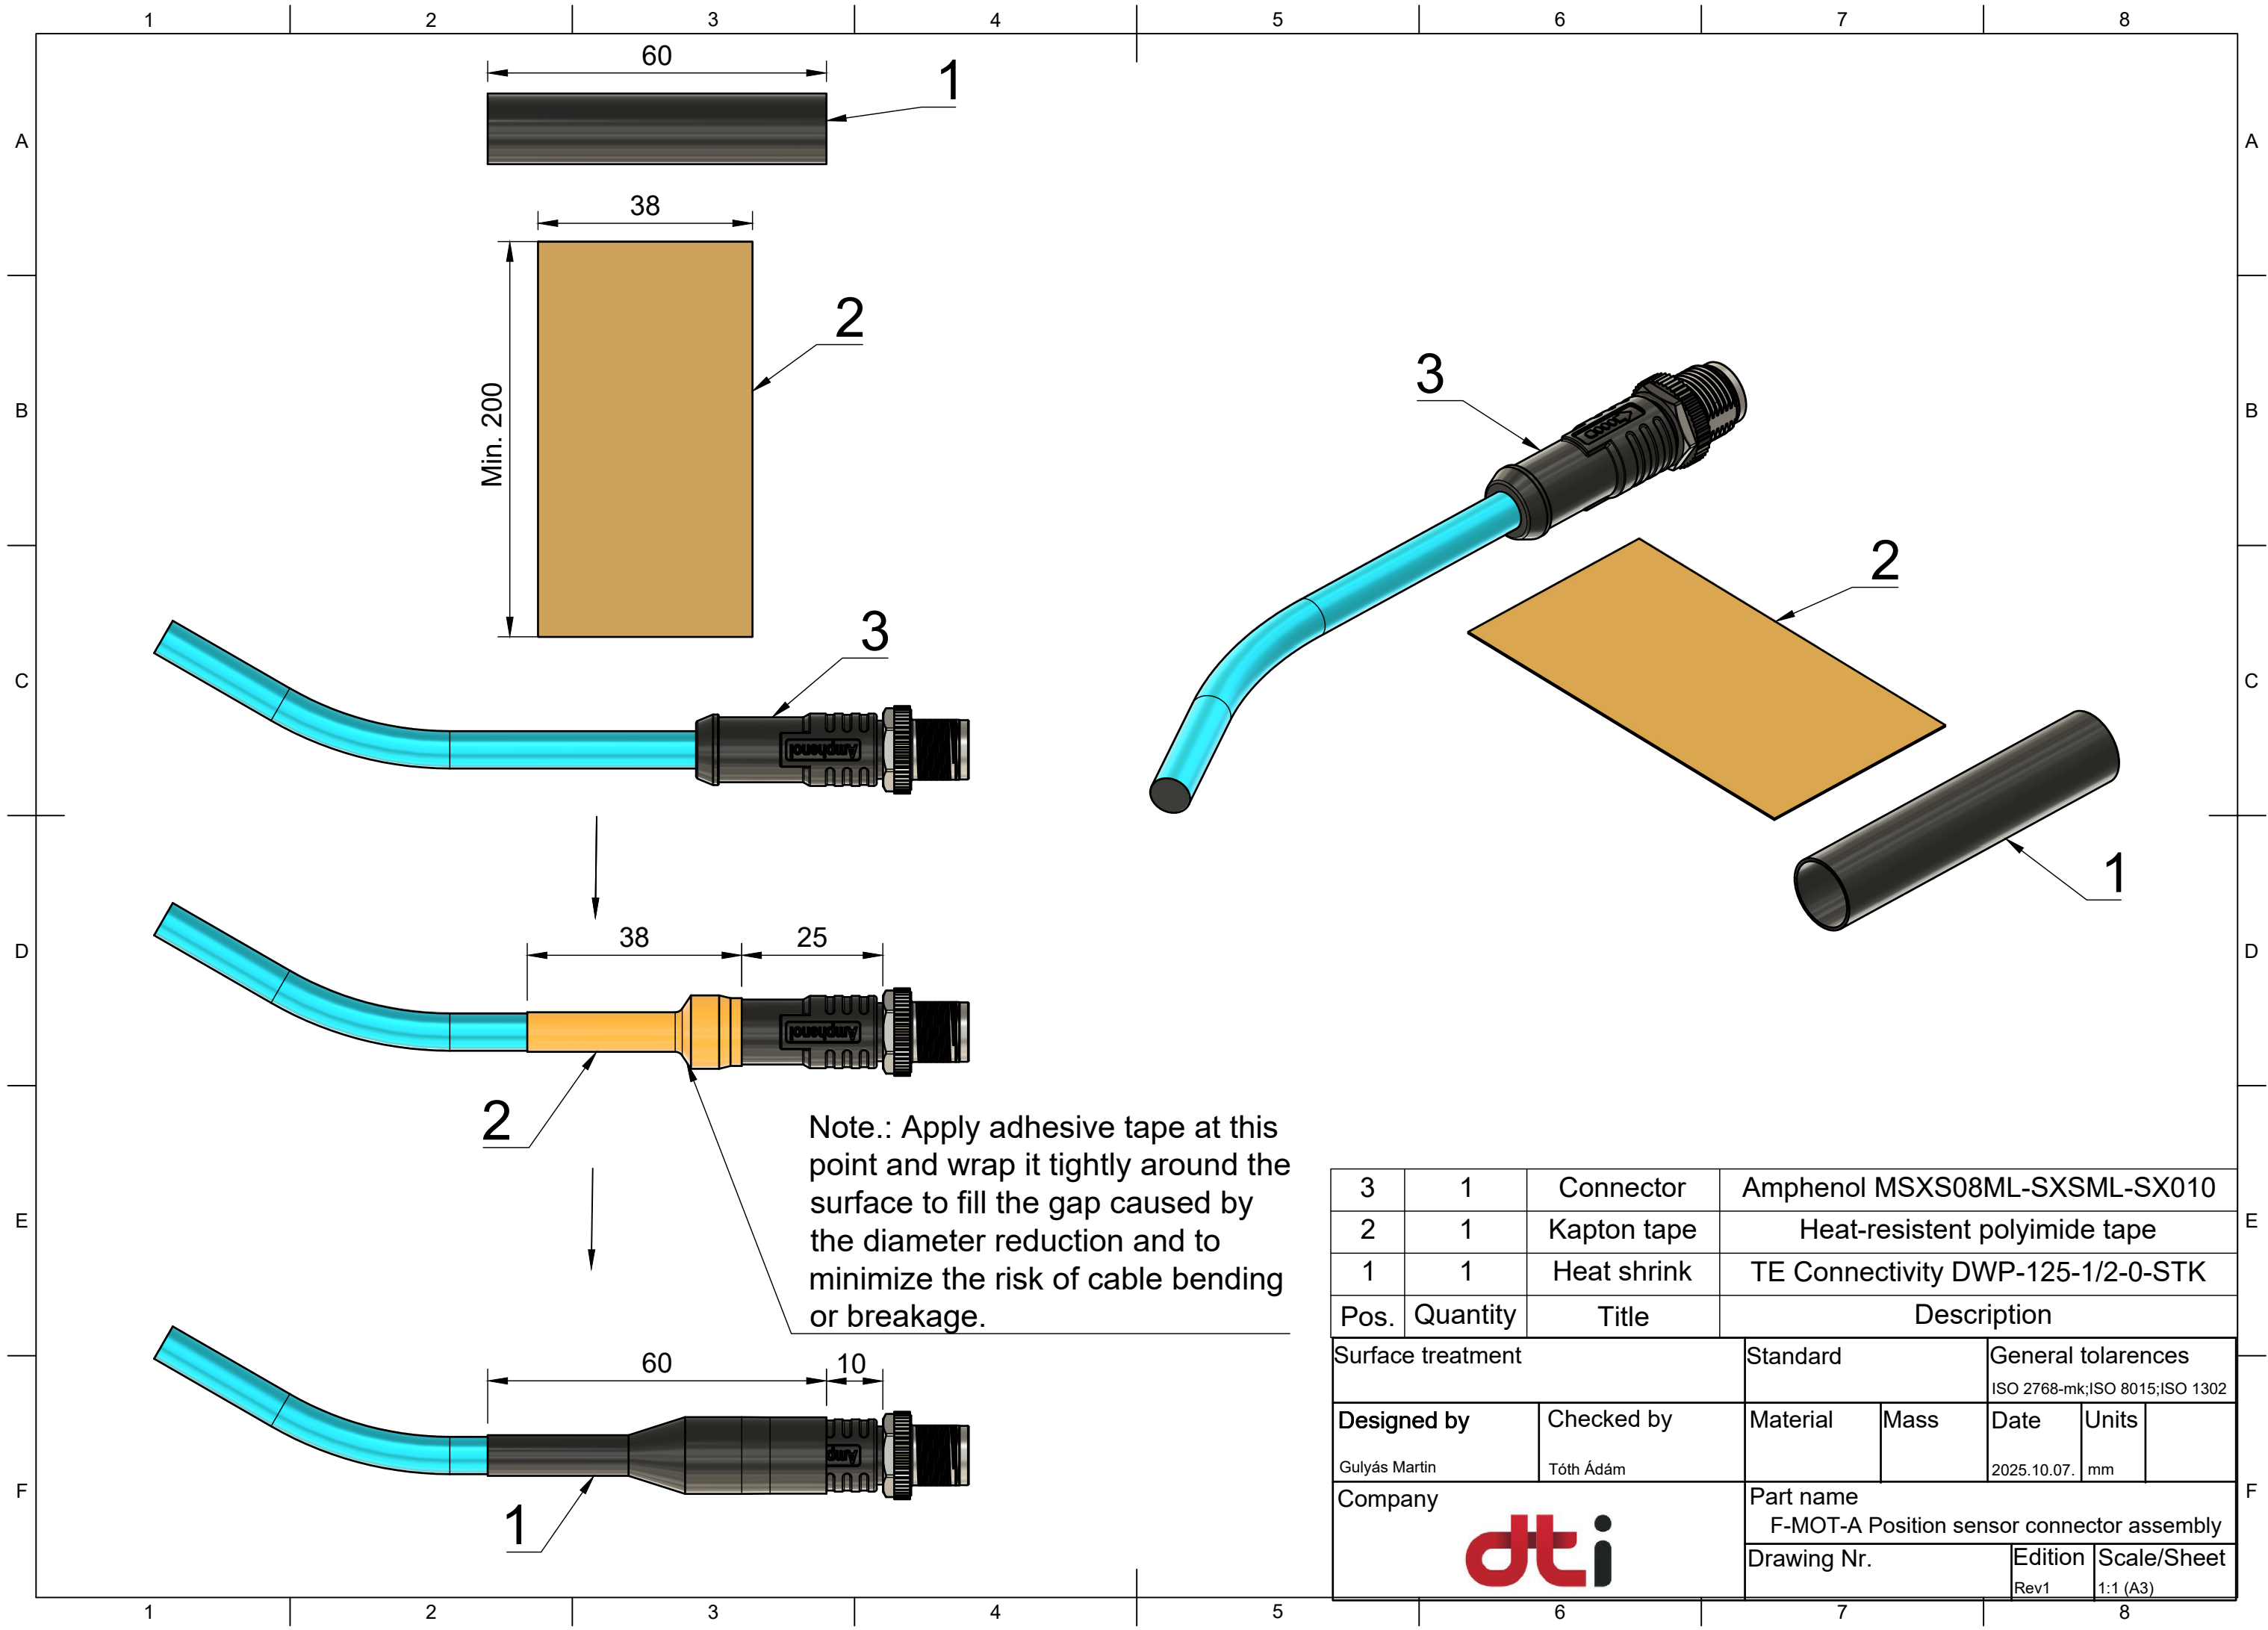

Note.: Apply adhesive tape at this point and wrap it tightly around the surface to fill the gap caused by the diameter reduction and to minimize the risk of cable bending or breakage.

3	1	Connector	Amphenol MSXS08ML-SXSML-SX010			
2	1	Kapton tape	Heat-resistant polyimide tape			
1	1	Heat shrink	TE Connectivity DWP-125-1/2-0-STK			
Pos.	Quantity	Title	Description			
Surface treatment			Standard		General tolarences	
					ISO 2768-mk;ISO 8015;ISO 1302	
Designed by		Checked by	Material	Mass	Date	Units
Gulyás Martin		Tóth Ádám			2025.10.07.	mm
Company			Part name			
			F-MOT-A Position sensor connector assembly			
			Drawing Nr.		Edition	Scale/Sheet
					Rev1	1:1 (A3)