FCU Chiller RM 406

The **Magic Aire Model HBB20ABAAAAAB6CB5BAABBM** is a highly configured commercial-grade, **Horizontal Belt-Drive Fan Coil / Air Handling Unit** manufactured by Magic Aire.

HBB: Identifies the core product line. It is a **Horizontal Belt-Drive Blower Coil Unit** designed for ceiling or crawlspace mounting.

20: Specifies the nominal capacity or size of the unit. In the HBB series nomenclature, **20 represents a 2.0-Ton (24,000 BTU/hr)** capacity unit.

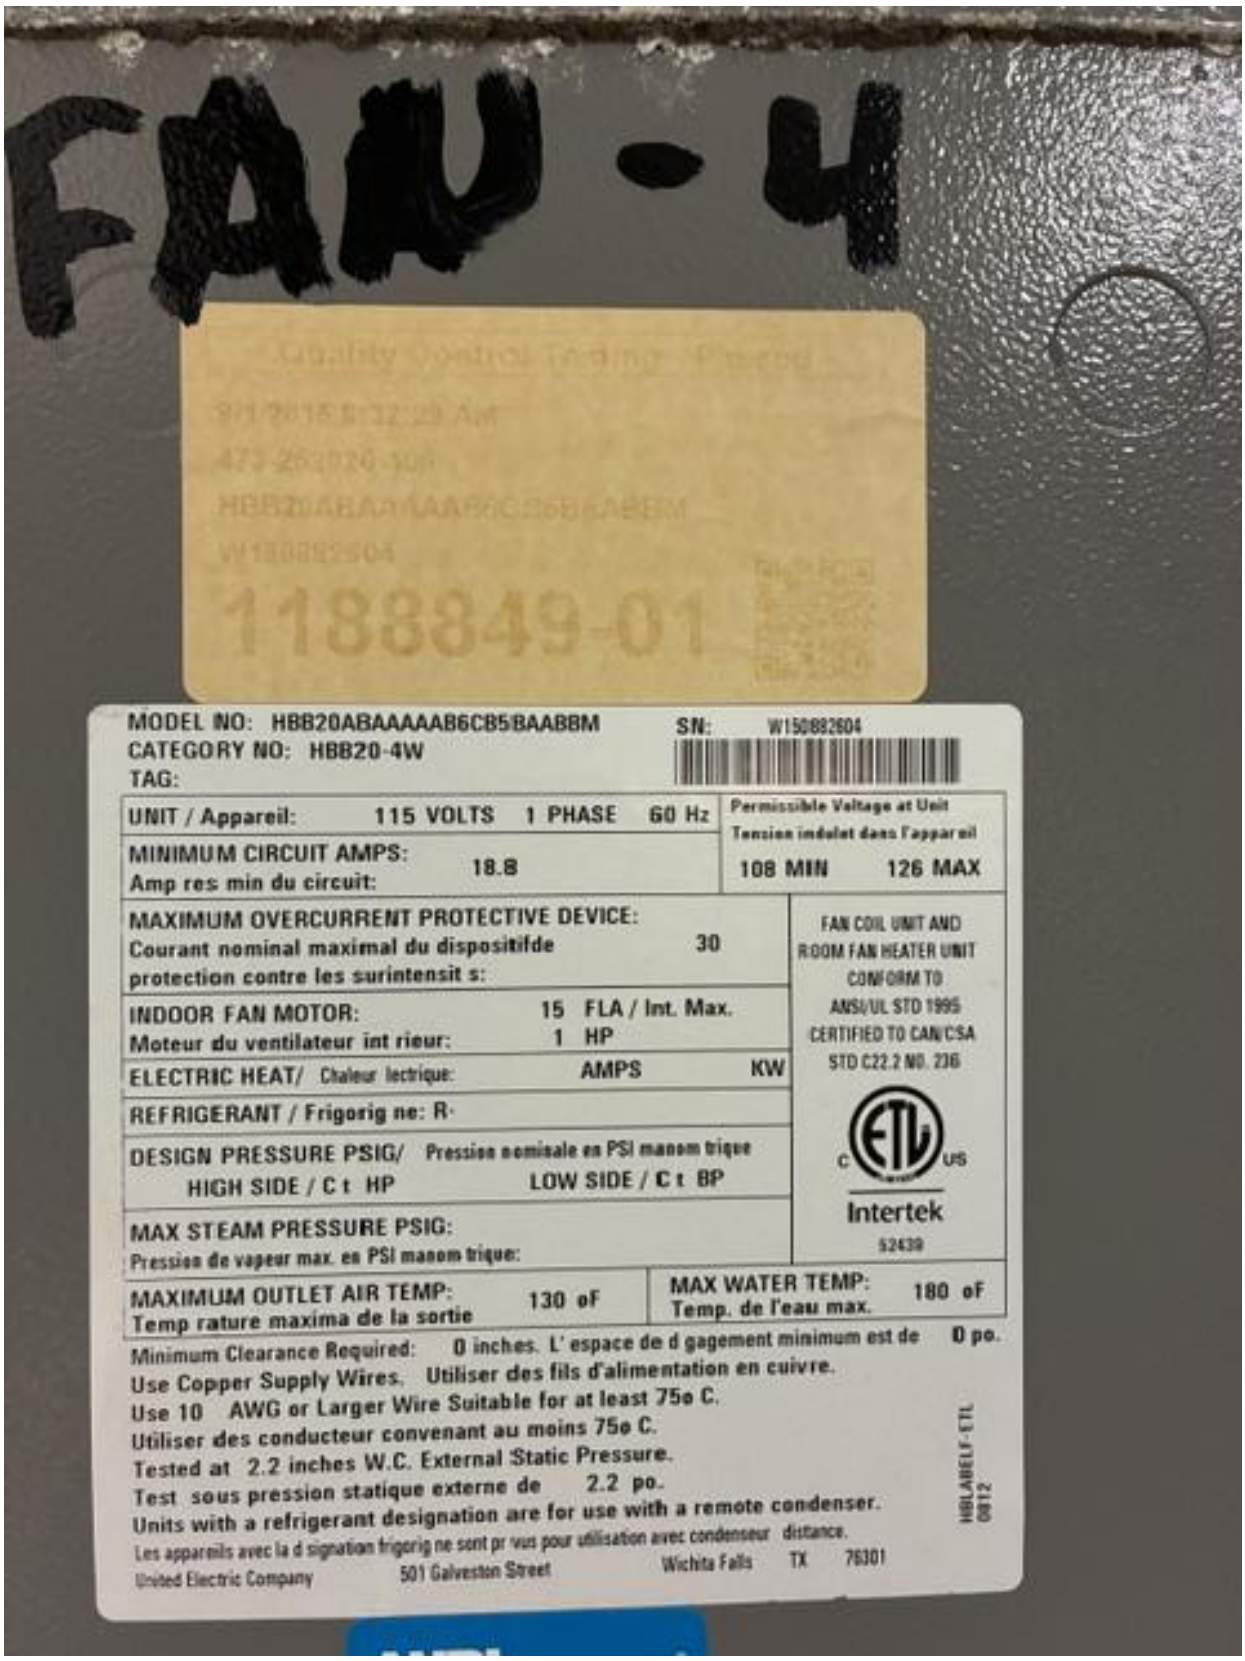
Remaining Alphanumeric String (ABAAAAAB6CB5BAABBM): This is a long configuration string that dictates the precise factory options built into this specific unit. It defines internal configurations such as the exact type of chilled water or DX cooling coils, optional hot water heating coils, single or double-wall cabinet configuration, the specific motor horsepower/voltage, and drive package requirements.

Key Specifications of the HBB Series:

Airflow Configuration:
Pulls air horizontally and discharges it horizontally, engineered to handle 400 to 8,000 CFM depending on unit size.

Drive Type: Utilizes a rugged **belt-driven fan system** rather than direct-drive, which allows field adjustments to the fan speed and static pressure via variable pitch motor sheaves.

Cabinet Customization: Features a robust cabinet shell that accommodates modular options like MERV 8 or MERV 13 filter boxes, mixing boxes, and low-leak dampers.


FAU - 4
118849-01
MODEL NO: HBB20ABAAAAAB6CB5BAABBM
SN: W150882604
CATEGORY NO: HBB20-4W
TAG:
UNIT / Appareil: 115 VOLTS 1 PHASE 60 Hz
Permissible Voltage at Unit
Tension imdolat dans l'appar eil
108 MIN 126 MAX
MINIMUM CIRCUIT AMPS:
Amp res min du circuit: 18.8
MAXIMUM OVERCURRENT PROTECTIVE DEVICE:
Courant nominal maximal du dispositifde protection contre les surintensit s: 30
FAN COIL UNIT AND ROOM FAN HEATER UNIT CONFORM TO ANSI/UL STD 1995 CERTIFIED TO CAN/CSA STD C22.2 NO. 236
INDOOR FAN MOTOR:
Moteur du ventilateur int rieur: 15 FLA / Int. Max. 1 HP
ELECTRIC HEAT/ Chaleur lectrique: AMPS KW
REFRIGERANT / Frigorig ne: R-
DESIGN PRESSURE PSIG/ Pression nominale en PSI manom trique
HIGH SIDE / C t HP LOW SIDE / C t BP
MAX STEAM PRESSURE PSIG:
Pression de vapeur max. en PSI manom trique:
Intertek
5243
MAXIMUM OUTLET AIR TEMP:
Temp rature maxima de la sortie 130 oF
MAX WATER TEMP:
Temp. de l'eau max. 180 oF
Minimum Clearance Required: 0 inches. L' espace de d gagement minimum est de 0 po.
Use Copper Supply Wires. Utiliser des fils d'alimentation en cuivre.
Use 10 AWG or Larger Wire Suitable for at least 75o C.
Utiliser des conducteur convenant au moins 75o C.
Tested at 2.2 inches W.C. External Static Pressure.
Test sous pression statique externe de 2.2 po.
Units with a refrigerant designation are for use with a remote condenser.
Les appareils avec la d signation frigorig ne sont pr vus pour utilisation avec condenseur distance.
United Electric Company 501 Galveston Street Wichita Falls TX 76301
HBLABELF-ETL 0812


FAU-4
1 A46 BELT




FAU-4
0496 BELT




RETURN


EXIT