

Project:	<i>OpenDRIVE<sup>®</sup></i>	Document No.	Issue:
Title:	Format Specification, Rev. 1.4	VI2014.106	H
Date:	November 04, 2015	no. of pages:	103
Issuing Party:	VIRES Simulationstechnologie GmbH		
Author:	Marius Dupuis e.a.		
Distribution List:	public		

**issued by**  
VIRES Simulationstechnologie GmbH  
Grassinger Strasse 8  
83043 Bad Aibling  
Germany  
phone +49.8061.939093-0  
fax +49.8061.939093-13  
e-mail [opendrive@vires.com](mailto:opendrive@vires.com)  
web [www.vires.com](http://www.vires.com)

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	1 of 103

## OpenDRIVE<sup>®</sup> Format Specification, Rev. 1.4

©2006-2015 VIRES Simulationstechnologie GmbH. All trade-marks, trade names, service marks and logos referenced herein belong to their respective companies. All rights reserved.

VIRES Simulationstechnologie GmbH (VIRES) PROVIDES THIS MATERIAL AS IS, WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

VIRES may make improvements and changes to the format described in this manual at any time with no more notice than a statement on the OpenDRIVE website ([www.opendrive.org](http://www.opendrive.org)). VIRES assumes no responsibility for the use of the product or this document except as expressly set forth in the applicable VIRES agreement or agreements and subject to terms and conditions set forth therein and applicable VIRES policies and procedures. This document may contain technical inaccuracies or typographical errors. Periodic changes may be made to the information contained herein. If necessary, these changes will be incorporated in new editions of the document.

VIRES is the owner of all intellectual property rights in and to this document and any proprietary software that accompanies this documentation, including but not limited to, copyrights in and to this document and any derivative works therefrom. Use of this document is subject to the terms and conditions of the VIRES Software License Statement included with this product.

No part of this publication may be stored in a retrieval system, transmitted, distributed or reproduced, in whole or in part, in any way, including, but not limited to, photocopy, photograph, magnetic, or other record, without the prior written permission of VIRES.

Printed in Germany  
November 2015

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	2 of 103

PUBLIC LICENSE STATEMENT  
FOR  
OpenDRIVE<sup>®</sup> Format Specification

OpenDRIVE is the property of VIRES Simulationstechnologie GmbH (VIRES) and is protected under the copyright and trademark laws of the Federal Republic of Germany. VIRES hereby grants to User a non-exclusive, non-transferable limited right to use OpenDRIVE as follows:

- a. For reading OpenDRIVE into a computer program or database for in-house use, or as a feature of a commercial product.
- b. For writing data from a computer program or database into OpenDRIVE for in-house use or as a feature of a commercial product.

Any attempt to sub-license, assign, or transfer all or any part of the OpenDRIVE specification is prohibited without the prior written consent of VIRES.

OpenDRIVE is a registered trademark of VIRES. User is not obliged but kindly asked to indicate that VIRES is owner of OpenDRIVE in any of User's published references to the trademark. User is not obliged but kindly asked to refer to [www.opendrive.org](http://www.opendrive.org) in any of User's published references to OpenDRIVE.

OPENDRIVE IS OFFERED FOR USE BY USER "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. ALL SUCH WARRANTIES ARE EXPRESSLY AND SPECIFICALLY DISCLAIMED. IN NO EVENT SHALL VIRES BE RESPONSIBLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES ARISING OUT OF USE OF OPENDRIVE.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	3 of 103

## Table of Contents

1	Preface.....	7
1.1	Scope.....	7
1.2	XML Syntax.....	7
1.3	Developers.....	7
1.4	Point of Contact.....	7
1.5	Example for a Quick Start.....	8
2	Conventions.....	12
2.1	Naming Conventions.....	12
2.2	Units.....	12
2.3	Co-ordinate Systems.....	13
2.3.1	Overview.....	13
2.3.2	Inertial System.....	14
2.3.3	Track System.....	15
2.3.4	Local System.....	16
2.3.5	Geo-Referencing.....	17
2.3.6	Curvature.....	17
3	Road Layout.....	18
3.1	General.....	18
3.2	Reference Line (Track).....	19
3.3	Lanes.....	20
3.3.1	General.....	20
3.3.2	Lane Offset.....	20
3.3.3	Lane Sections.....	21
3.3.4	Lane Properties.....	22
3.4	Superelevation and Crossfall.....	23
3.5	Lateral Profile.....	24
3.6	Road Linkage.....	25
3.6.1	Overview.....	25
3.6.2	Junctions.....	26
3.6.2.1	Basics.....	26
3.6.2.2	Junction Groups.....	27
3.6.3	Neighbors.....	28
3.7	Surface.....	29
3.8	Alternative Layouts.....	30
3.9	Railroad Elements.....	31
3.9.1	Railroad Tracks.....	31
3.9.2	Railroad Switches.....	31
3.9.3	Railroad Stations.....	32
4	File.....	33
4.1	Format.....	33
4.2	Extension.....	33
4.3	Structure.....	33
4.4	Notation.....	33
4.5	Schema.....	33
4.6	Combining Files.....	33
4.7	Overview of Beads.....	34
5	File Entries.....	36
5.1	Enclosing Tag.....	36
5.2	Header.....	36
5.2.1	Geo Reference.....	37
5.3	Road Records.....	38
5.3.1	Road Header Record.....	38
5.3.2	Road Link Record.....	38
5.3.2.1	Road Predecessor.....	39
5.3.2.2	Road Successor.....	39
5.3.2.3	Road Neighbor.....	40
5.3.3	Road Type Record.....	41
5.3.3.1	Speed Record.....	41
5.3.4	Road Plan View Record.....	42
5.3.4.1	Road Geometry Header Record.....	42
5.3.4.1.1	Geometry, Line Record.....	43
5.3.4.1.2	Geometry, Spiral Record (Clothoids).....	43
5.3.4.1.3	Geometry, Arc Record.....	44
5.3.4.1.4	Geometry, Cubic Polynomial Record.....	45
5.3.4.1.5	Geometry, Parametric Cubic Curve Record.....	46
5.3.5	Road Elevation Profile Record.....	47
5.3.5.1	Road Elevation Record.....	47
5.3.6	Road Lateral Profile Record.....	48
5.3.6.1	Road Superelevation Record.....	48

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	4 of 103

5.3.6.2	Crossfall Record .....	49
5.3.6.3	Road Shape Record.....	50
5.3.7	Road Lanes Record .....	51
5.3.7.1	Road Lane Offset Record.....	51
5.3.7.2	Road Lane Section Record .....	52
5.3.7.2.1	Left / Center / Right Records.....	53
5.3.7.2.1.1	Lane Record .....	53
5.3.7.2.1.1.1	Lane Link Record .....	54
5.3.7.2.1.1.1.1	Lane Predecessor .....	54
5.3.7.2.1.1.1.2	Lane Successor .....	54
5.3.7.2.1.1.2	Lane Width Record.....	55
5.3.7.2.1.1.3	Lane Border Record .....	57
5.3.7.2.1.1.4	Road Mark Record .....	59
5.3.7.2.1.1.4.1	Road Mark Type .....	60
5.3.7.2.1.1.4.1.1	Road Mark Type – Line Definition.....	60
5.3.7.2.1.1.5	Lane Material Record .....	61
5.3.7.2.1.1.6	Lane Visibility Record .....	61
5.3.7.2.1.1.7	Lane Speed Record.....	62
5.3.7.2.1.1.8	Lane Access Record.....	62
5.3.7.2.1.1.9	Lane Height Record.....	63
5.3.7.2.1.1.10	Lane Rule Record .....	64
5.3.8	Road Objects Record.....	65
5.3.8.1	Object Record .....	65
5.3.8.1.1	Object Repeat Record .....	67
5.3.8.1.2	Object Outline Record.....	68
5.3.8.1.2.1	CornerRoad.....	68
5.3.8.1.2.2	CornerLocal.....	69
5.3.8.1.3	Object Material Record .....	70
5.3.8.1.4	Lane Validity Record.....	70
5.3.8.1.5	Parking Space Record.....	71
5.3.8.1.6	Parking Space Marking Record .....	71
5.3.8.2	Object Reference Record.....	72
5.3.8.2.1	Lane Validity Record.....	72
5.3.8.3	Tunnel Record .....	73
5.3.8.3.1	Lane Validity Record.....	73
5.3.8.4	Bridge Record.....	74
5.3.8.4.1	Lane Validity Record.....	74
5.3.9	Road Signals Record .....	75
5.3.9.1	Signal Record .....	75
5.3.9.1.1	Lane Validity Record.....	76
5.3.9.1.2	Signal Dependency Record .....	76
5.3.9.2	Signal Reference Record .....	77
5.3.9.2.1	Lane Validity Record.....	77
5.3.10	Surface .....	78
5.3.10.1	Curved Regular Grid Record .....	78
5.3.11	Railroad Elements .....	81
5.3.11.1	Railroad Switches .....	81
5.3.11.1.1	Main Track .....	82
5.3.11.1.2	Side Track.....	82
5.3.11.1.3	Partner Switch.....	82
5.4	Controller Record .....	83
5.4.1	Control Entry Record .....	83
5.5	Junction Record.....	84
5.5.1	Connection Record .....	85
5.5.1.1	Junction Lane Link Record.....	85
5.5.2	Junction Priority Record .....	86
5.5.3	Junction Controller Record.....	86
5.6	Junction Group Record.....	87
5.6.1	Junction Reference Record.....	87
5.7	Stations .....	88
5.7.1	Platform Record.....	89
5.7.1.1	Segment Record .....	89
5.8	Ancillary Data .....	90
5.9	Include Tag.....	90
5.10	Alternative Layouts (Sets) .....	91
5.10.1	Layout Instance .....	91
6	Constants .....	92
6.1	Road Type Information .....	92
6.2	Road Mark Type Information .....	92
6.3	Road Mark Weight Information .....	92
6.4	Road Mark Color Information .....	92

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	5 of 103

6.5	Lane Type Information .....	93
6.6	Object Types .....	93
6.7	Tunnel Types .....	94
6.8	Bridge Types .....	94
6.9	Access Restriction Types .....	94
6.10	Signal Country Codes .....	94
6.11	Signal Types .....	95
7	Further Explanations and Examples .....	96
7.1	Road and Lane Linkage .....	96
7.1.1	Direct Link of Roads and Lanes .....	96
7.1.2	Links using Junctions .....	98
7.2	Junction Control .....	101
7.3	Roundabouts .....	103

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	6 of 103

## 1 Preface

### 1.1 Scope

The OpenDRIVE<sup>®</sup> format provides a common base for describing track-based road networks using Extensible Markup Language (XML) syntax. The data stored in an OpenDRIVE<sup>®</sup> file describes – in an analytical way – the geometry of roads as well as features along the roads that influence the logics (e.g. lanes, signs, signals).

The format is organized in nodes which can be extended with user-defined data. By this, a high degree of specialization for individual applications is feasible while maintaining the commonality required for the exchange of data between different applications.

### 1.2 XML Syntax

OpenDRIVE<sup>®</sup> adheres to the XML definition 1.0 (see <http://www.w3.org/TR/2008/REC-xml-20081126/>). With OpenDRIVE<sup>®</sup> 1.4, an individual namespace has been introduced which will allow users to combine contents of various XML namespaces within a single context.

### 1.3 Developers

The initial OpenDRIVE<sup>®</sup> format was developed by VIRES Simulationstechnologie GmbH, Germany, in close co-operation with Daimler Driving Simulator, Sindelfingen, Germany.

The contents of the file format are reviewed by a core team before publication. For the current members of the core team, please visit the OpenDRIVE<sup>®</sup> website ([www.opendrive.org](http://www.opendrive.org)).

This standard has been created for its users. So, if you feel anything is missing, should be clarified or modified, please don't hesitate to contact us.

*Special thanks to the colleagues of German Aerospace Center (DLR) in Braunschweig, Germany, who have provided exceptionally good and detailed feedback during the specification and revision process leading to the current version 1.4*

### 1.4 Point of Contact

Further assistance on OpenDRIVE<sup>®</sup> is provided

via the OpenDRIVE<sup>®</sup> website <http://www.opendrive.org>

via email [opendrive@opendrive.org](mailto:opendrive@opendrive.org)

and via the "classic style" of direct contact with human beings:



**VIRES Simulationstechnologie GmbH**  
Grassinger Strasse 8  
83043 Bad Aibling  
Germany  
phone +49.8061.939093-0  
fax +49.8061.939093-13


A bug- and feature-tracking system has been introduced for OpenDRIVE which you may use for reporting and monitoring issues (i.e. tickets). For the former operation, a registration is mandatory. The system may be accessed via

<http://tracking.vires.com>


Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	7 of 103

### 1.5 Example for a Quick Start

The following example shall guide through this specification. It does not contain all available nodes of the format but illustrates very well the key principles. It's an endless two-lane country road with a four-way crossing in the center. This example is also available as free download on the OpenDRIVE website.

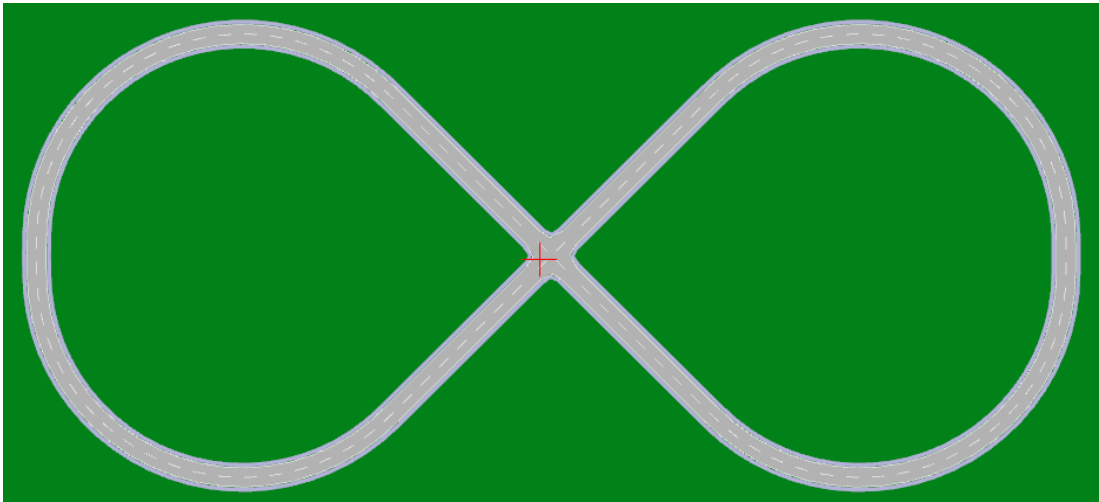

The example also contains traffic signs and traffic lights at the intersection:

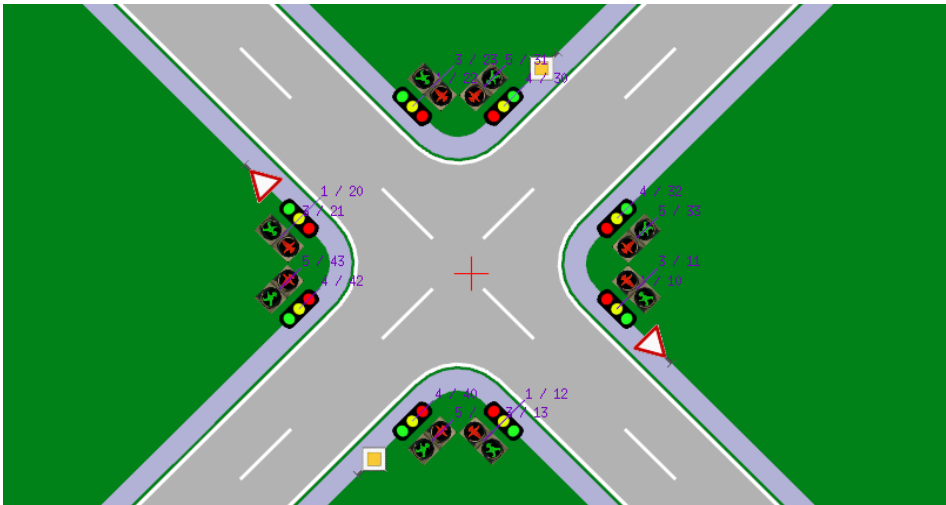

The structure of the OpenDRIVE file of this small road network shall be explained in excerpts on the following pages. For the complete example file, please see the download section on the OpenDRIVE website.

All tags are enclosed by the OpenDRIVE declaration:

```
<?xml version="1.0" standalone="yes"?>
<OpenDRIVE xmlns="http://www.opendrive.org">
:
</OpenDRIVE>
```

The header contains basic information about the road network:

```
<header revMajor="1" revMinor="1" name="" version="1.00" date="Thu Dec 10 10:35:57 2009" north="0.0000000000000000e+00"
south="0.0000000000000000e+00" east="0.0000000000000000e+00" west="0.0000000000000000e+00">
</header>
```

Date:	November 04, 2015	Title: OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4			
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	Issue:		Page:
		VI2014.107	H		8 of 103



Each road is described independently in type, plan view, elevation, cross section etc. with the respective link information to other roads in the same network:

```
<road name="" length="1.6517824248160636e+01" id="500" junction="2">
  <link>
    <predecessor elementType="road" elementId="502" contactPoint="start" />
    <successor elementType="road" elementId="514" contactPoint="start" />
  </link>
  <type s="0.0000000000000000e+00" type="town"/>
  <planView>
    <geometry s="0.0000000000000000e+00" x="-7.0710678117841717e+00" y="7.0710678119660715e+00"
      hdg="5.4977871437752235e+00" length="4.8660000002386400e-01"/>
    <line/>
    </geometry>
    <geometry s="4.8660000002386400e-01" x="-6.7269896520425938e+00" y="6.7269896522231525e+00"
      hdg="5.4977871437736381e+00" length="3.1746031746031744e+00"/>
    <spiral curvStart="-0.0000000000000000e+00" curvEnd="-1.2698412698412698e-01"/>
    </geometry>
    <geometry s="3.6612031746270386e+00" x="-4.6416930098385274e+00" y="4.3409250448366459e+00"
      hdg="5.2962250374496271e+00" length="9.1954178989066371e+00"/>
    <arc curvature="-1.2698412698412698e-01"/>
    </geometry>
    <geometry s="1.2856621073533674e+01" x="-4.6416930098799849e+00" y="-4.3409256447923106e+00"
      hdg="4.1285529233027525e+00" length="3.1746031746031744e+00"/>
    <spiral curvStart="-1.2698412698412698e-01" curvEnd="-0.0000000000000000e+00"/>
    </geometry>
    <geometry s="1.6031224248136848e+01" x="-6.7269896521209764e+00" y="-6.7269902521517775e+00"
      hdg="3.9269908169787415e+00" length="4.8660000002378989e-01"/>
    <line/>
    </geometry>
  </planView>
  <elevationProfile>
    <elevation s="0.0000000000000000e+00" a="0.0000000000000000e+00" b="0.0000000000000000e+00"
      c="0.0000000000000000e+00" d="0.0000000000000000e+00"/>
  </elevationProfile>
  <lanes>
    <laneSection s="0.0000000000000000e+00">
      <center>
        <lane id="0" type="driving" level="0">
          <link>
            </link>
            <roadMark sOffset="0.0000000000000000e+00" type="none" weight="standard" color="standard"
              width="1.3000000000000000e-01"/>
          </lane>
        </center>
        <right>
          <lane id="-1" type="driving" level="0">
            <link>
              <predecessor id="1"/>
              <successor id="-1"/>
            </link>
            <width sOffset="0.0000000000000000e+00" a="3.7500000000000000e+00" b="0.0000000000000000e+00"
              c="0.0000000000000000e+00" d="0.0000000000000000e+00"/>
            <roadMark sOffset="0.0000000000000000e+00" type="solid" weight="standard" color="standard"
              width="1.3000000000000000e-01"/>
          </lane>
          <lane id="-2" type="border" level="0">
            <link>
              <predecessor id="2"/>
              <successor id="-2"/>
            </link>
            <width sOffset="0.0000000000000000e+00" a="3.4999999999999998e-01" b="0.0000000000000000e+00"
              c="0.0000000000000000e+00" d="0.0000000000000000e+00"/>
            <roadMark sOffset="0.0000000000000000e+00" type="none" weight="standard" color="standard"
              width="1.3000000000000000e-01"/>
          </lane>
          <lane id="-3" type="sidewalk" level="0">
            <link>
              <predecessor id="3"/>
              <successor id="-3"/>
            </link>
            <width sOffset="0.0000000000000000e+00" a="1.5000000000000000e+00" b="0.0000000000000000e+00"
              c="0.0000000000000000e+00" d="0.0000000000000000e+00"/>
            <height sOffset="0.0000000000000000e+00" heightInner="1.2000000000000000e-01"
              heightOuter="1.2000000000000000e-01"/>
          </lane>
          <lane id="-4" type="none" level="0">
            <link>
              </link>
              <width sOffset="0.0000000000000000e+00" a="2.0000000000000000e+00" b="0.0000000000000000e+00"
                c="0.0000000000000000e+00" d="0.0000000000000000e+00"/>
            <roadMark sOffset="0.0000000000000000e+00" type="none" weight="standard" color="standard"
              width="1.3000000000000000e-01"/>
          </lane>
        </right>
      </laneSection>
    </lanes>
  </road>
```

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	9 of 103

## Signals and signs are defined per road:

```
<road name="" length="3.9999995757174296e+00" id="514" junction="-1">
  <link>
    :
  </link>
  <type s="0.0000000000000000e+00" type="town"/>
  <planView>
    :
  </planView>
  <elevationProfile>
    :
  </elevationProfile>
  <lateralProfile>
    :
  </lateralProfile>
  <lanes>
    :
  </lanes>
  <objects>
    <objects>
  </objects>
  <signals>
    <signal s="1.0000000000000001e-01" t="5.5999999999999996e+00" id="40" name="_Sg40" dynamic="yes" orientation="-"
      zOffset="0.0000000000000000e+00" type="1000001" country="OpenDRIVE" subtype="-1"
      value="-1.0000000000000000e+00"/>
    <signal s="1.0000000000000001e-01" t="5.5999999999999996e+00" id="41" name="_Sg41" dynamic="yes" orientation="-"
      zOffset="0.0000000000000000e+00" type="1000002" country="OpenDRIVE" subtype="-1"
      value="-1.0000000000000000e+00"/>
    <signal s="1.0000000000000001e-01" t="5.5999999999999996e+00" id="42" name="_Sg42" dynamic="yes" orientation="-"
      zOffset="0.0000000000000000e+00" type="1000001" country="OpenDRIVE" subtype="-1"
      value="-1.0000000000000000e+00"/>
    <signal s="1.0000000000000001e-01" t="5.5999999999999996e+00" id="43" name="_Sg43" dynamic="yes" orientation="-"
      zOffset="0.0000000000000000e+00" type="1000002" country="OpenDRIVE" subtype="-1"
      value="-1.0000000000000000e+00"/>
    <signal s="3.8999999999999999e+00" t="5.5999999999999996e+00" id="0" name="" dynamic="no" orientation="-"
      zOffset="0.0000000000000000e+00" type="306" country="OpenDRIVE" subtype="-1"
      value="-1.0000000000000000e+00"/>
  </signals>
</road>
```

## Junctions help resolving otherwise ambiguous predecessor-successor relationships:

```
<OpenDRIVE>
  :
  <junction name="" id="2">
    <connection id="0" incomingRoad="502" connectingRoad="500" contactPoint="start">
      <laneLink from="1" to="-1"/>
      <laneLink from="2" to="-2"/>
      <laneLink from="3" to="-3"/>
    </connection>
    <connection id="1" incomingRoad="502" connectingRoad="510" contactPoint="start">
      <laneLink from="1" to="-1"/>
    </connection>
    <connection id="2" incomingRoad="502" connectingRoad="506" contactPoint="start">
      <laneLink from="1" to="-1"/>
    </connection>
    <connection id="3" incomingRoad="514" connectingRoad="511" contactPoint="start">
      <laneLink from="1" to="-1"/>
    </connection>
    <connection id="4" incomingRoad="514" connectingRoad="515" contactPoint="start">
      <laneLink from="1" to="-1"/>
      <laneLink from="2" to="-2"/>
      <laneLink from="3" to="-3"/>
    </connection>
    <connection id="5" incomingRoad="514" connectingRoad="507" contactPoint="start">
      <laneLink from="1" to="-1"/>
    </connection>
    <connection id="6" incomingRoad="516" connectingRoad="512" contactPoint="start">
      <laneLink from="1" to="-1"/>
    </connection>
    <connection id="7" incomingRoad="516" connectingRoad="517" contactPoint="start">
      <laneLink from="1" to="-1"/>
      <laneLink from="2" to="-2"/>
      <laneLink from="3" to="-3"/>
    </connection>
    <connection id="8" incomingRoad="516" connectingRoad="505" contactPoint="start">
      <laneLink from="1" to="-1"/>
    </connection>
    <connection id="9" incomingRoad="501" connectingRoad="513" contactPoint="start">
      <laneLink from="1" to="-1"/>
    </connection>
    <connection id="10" incomingRoad="501" connectingRoad="503" contactPoint="start">
      <laneLink from="1" to="-1"/>
      <laneLink from="2" to="-2"/>
      <laneLink from="3" to="-3"/>
    </connection>
    <connection id="11" incomingRoad="501" connectingRoad="504" contactPoint="start">
      <laneLink from="1" to="-1"/>
    </connection>
    <controller id="1" type="0"/>
    <controller id="3" type="0"/>
    <controller id="4" type="0"/>
    <controller id="5" type="0"/>
  </junction>
</OpenDRIVE>
```

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	10 of 103

Finally, controllers provide a means for groupin dynamic signals:

```
<OpenDRIVE>
:
<controller name="ctrl001" id="1">
  <control signalId="10" type="0" />
  <control signalId="12" type="0" />
  <control signalId="20" type="0" />
  <control signalId="22" type="0" />
</controller>
<controller name="ctrl003" id="3">
  <control signalId="11" type="0" />
  <control signalId="13" type="0" />
  <control signalId="21" type="0" />
  <control signalId="23" type="0" />
</controller>
<controller name="ctrl004" id="4">
  <control signalId="40" type="0" />
  <control signalId="42" type="0" />
  <control signalId="30" type="0" />
  <control signalId="32" type="0" />
</controller>
<controller name="ctrl005" id="5">
  <control signalId="41" type="0" />
  <control signalId="43" type="0" />
  <control signalId="31" type="0" />
  <control signalId="33" type="0" />
</controller>
:
</OpenDRIVE>
```

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREs GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	11 of 103

## 2 Conventions

### 2.1 Naming Conventions

In this document, the following conventions apply:

data types are given according to IEEE standard  
track signifies the reference line of a road

### 2.2 Units

All numeric values within this specification are in SI units (unless explicitly indicated otherwise), e.g.:

position/distance in [m]  
angles in [rad]  
time in [s]  
speed in [m/s]

Geographic positions will be given in the unit defined by the spatial coordinate system (e.g. [deg] for WGS 84 – EPSG 4326). See sections 2.3.5 and 5.2.1.

Some data tags provide you with a means to explicitly state the unit of a given value. If the unit is not given or if there is no means to state the unit, then the SI units (see above) apply. Units that may be used in explicit assignments are:

category	description	identifier
distance	meter	m
	kilometer	km
	feet	ft
	land mile	mile
speed	meters per second	m/s
	miles per hour	mph
	kilometers per hour	km/h
mass	kilogram	kg
	metric tons	t
slope	percent	%


**Important note:** these optional units shall only be used for purposes of signage and speed indication, NOT as general units for, e.g. the definition of road geometry etc.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	12 of 103

## 2.3 Co-ordinate Systems

### 2.3.1 Overview

The following figure gives an overview of the two co-ordinate systems most frequently used in this specification – track co-ordinates and inertial co-ordinates (for details, see the following chapters).

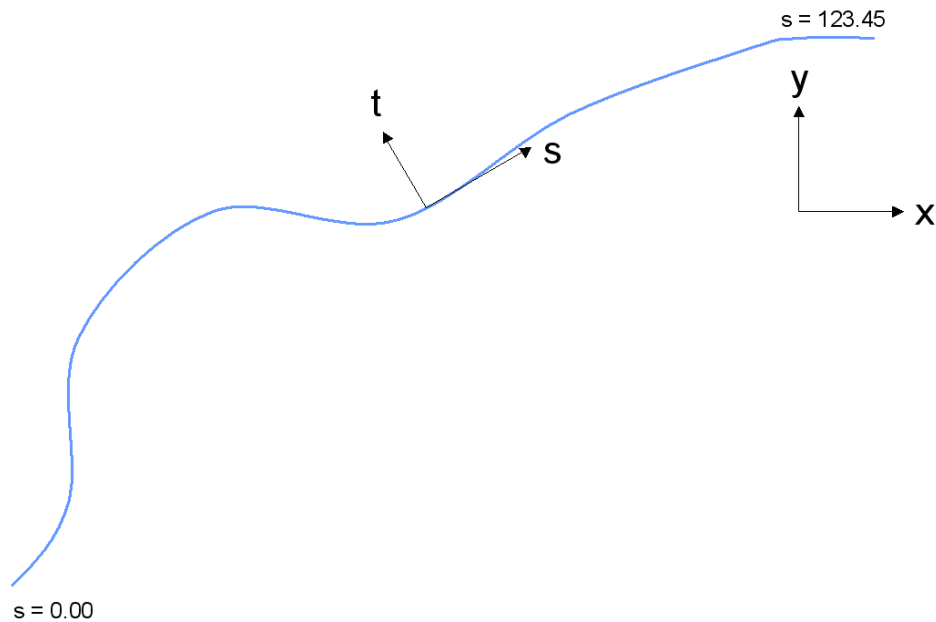

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4			
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H	Page: 13 of 103

### 2.3.2 Inertial System

The inertial system is a right-handed co-ordinate system according to ISO 8855 with the axes pointing to the following directions:

x	forward
y	left
z	up


For geographic reference, the following convention applies:

x	east
y	north
z	up

Within the inertial system, the following angles are defined:

heading	around z-axis, 0.0 = east
pitch	around y-axis, 0.0 = level
roll	around x-axis, 0.0 = level

The following image shows the positive axes and positive directions of the corresponding angles.

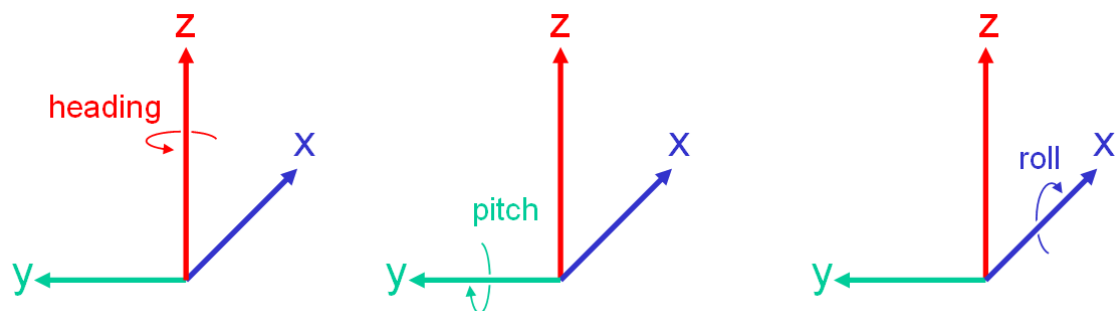

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4			
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H	Page: 14 of 103

### 2.3.3 Track System

The track co-ordinate system applies along the reference line of a road. It is a right-handed co-ordinate system. The following degrees of freedom are defined:



- s

position along reference line, measured in [m] from the beginning of the track, calculated in the xy-plane (i.e. not taking into account the elevation profile of the track)
- t

lateral position, positive to the left
- h


up
- heading

around h-axis, 0 = forward
- pitch

around t-axis, 0 = level
- roll

around s-axis, 0 = level

The following image shows the positive axes and positive directions of the corresponding angles.

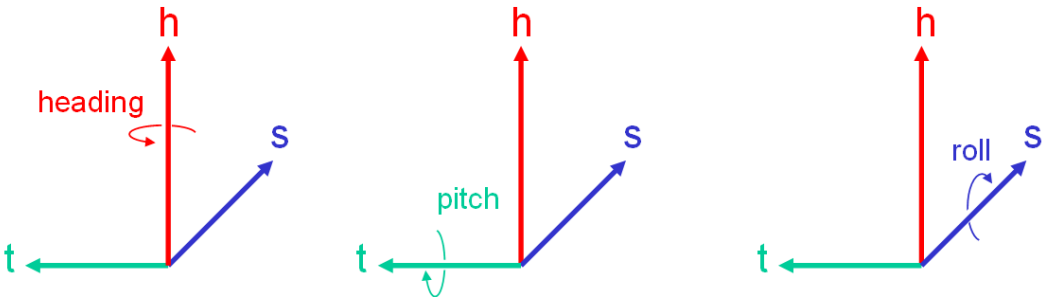

### 2.3.4 Local System


The local system is a right-handed co-ordinate system according to ISO 8855 with the axes pointing to the following directions:

u	forward
v	left
z	up

Within the local system, the following angles are defined:

heading	around z-axis, 0.0 = east
pitch	around v-axis, 0.0 = level
roll	around u-axis, 0.0 = level

The following image shows the positive axes and positive directions of the corresponding angles.

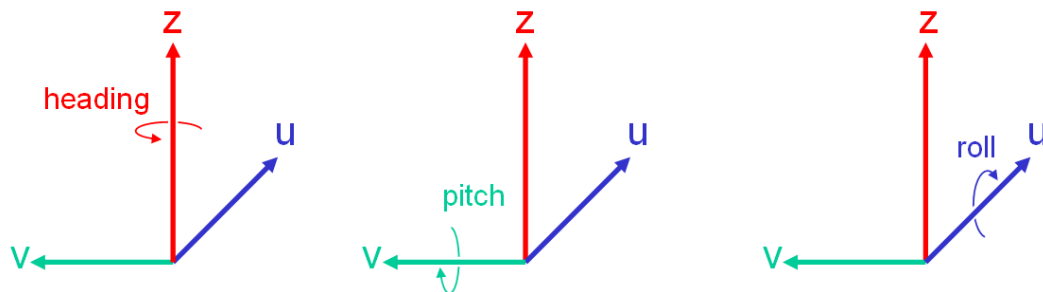

The local system can only be positioned in track space by providing the full track co-ordinates and orientation of its origin.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4			
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H	Page: 16 of 103



### 2.3.5 Geo-Referencing

Starting with OpenDRIVE 1.4, road networks may be geo-referenced using a projection definition formatted as "proj4"-string (see: <https://github.com/OSGeo/proj.4> )

### 2.3.6 Curvature

For curvature indications, the following convention applies:


- Positive curvature      left curve (counter-clockwise motion)
- Negative curvature      right curve (clockwise motion)

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	17 of 103

### 3 Road Layout

#### 3.1 General

The following figure depicts the principles of road layout covered by this specification:

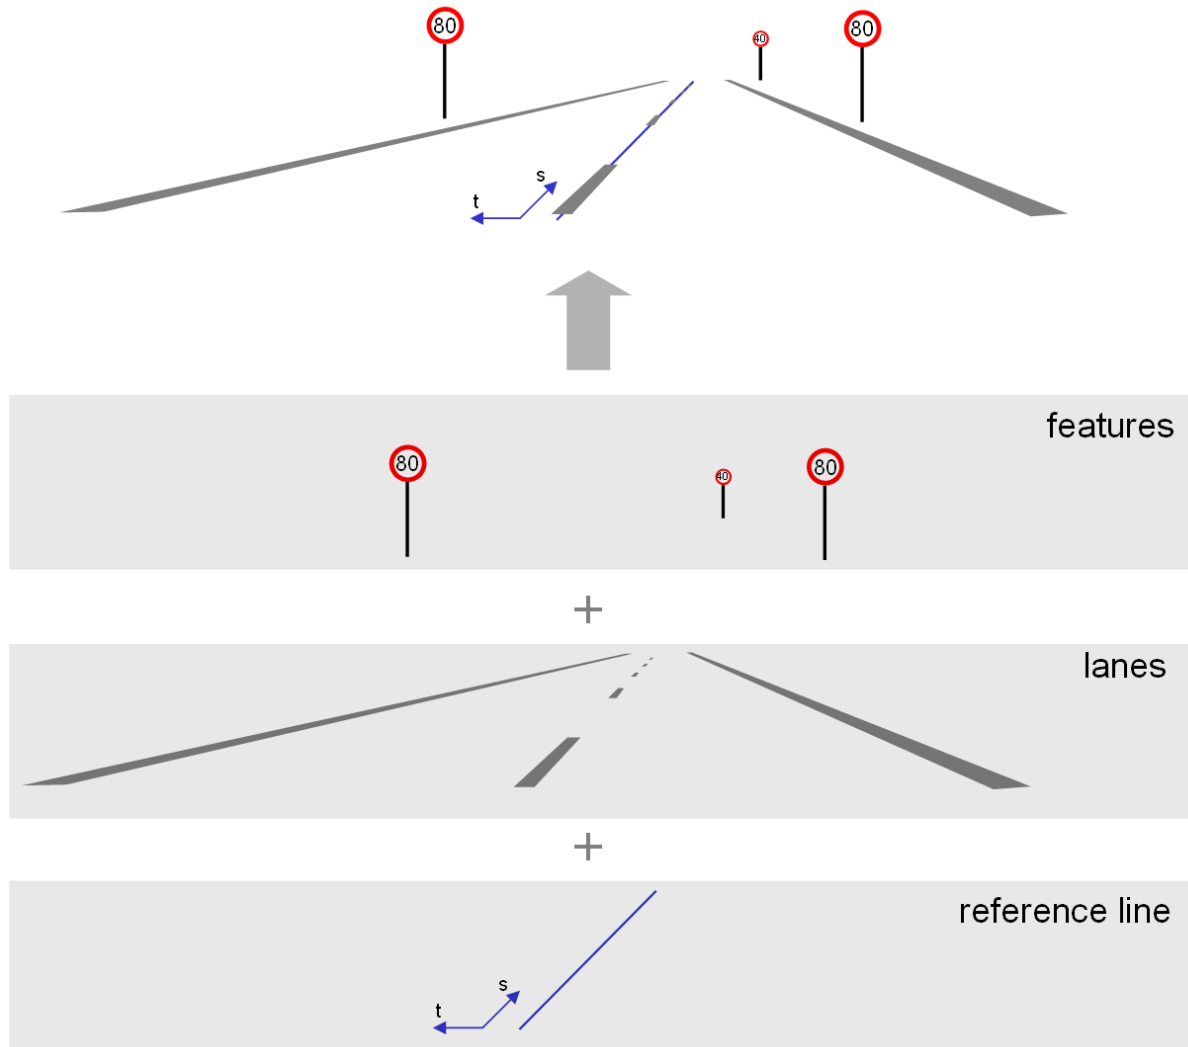

All roads consist of a reference line which defines the basic geometry (arcs, straight lines etc.). Along the reference line, various properties of the road can be defined. These are, e.g. elevation profile, lanes, traffic signs etc. Roads can be linked to each other either directly (when there is only one connection possible between two given roads) or via junctions (when more than one connection is possible from a given road to other roads).

All properties may be parameterized according to the standards laid out in this specification and, optionally, by user-defined data.

The convention applies that properties of the same type defined along a single reference line must be listed in ascending order. This means that the start co-ordinate (parameter  $s$ , see above) of a property must either be the same or greater than the start co-ordinate of the preceding property of same type on the same track.


Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	18 of 103

### 3.2 Reference Line (Track)

The geometry of the reference line is described as a sequence of primitives of various types. The available primitives are:

- straight line (constant zero curvature)
- spiral (linear change of curvature)
- curve (constant non-zero curvature along run-length)
- cubic polynom
- parametric cubic curves

The following figure illustrates the composition of a reference line from some of the above mentioned elements.

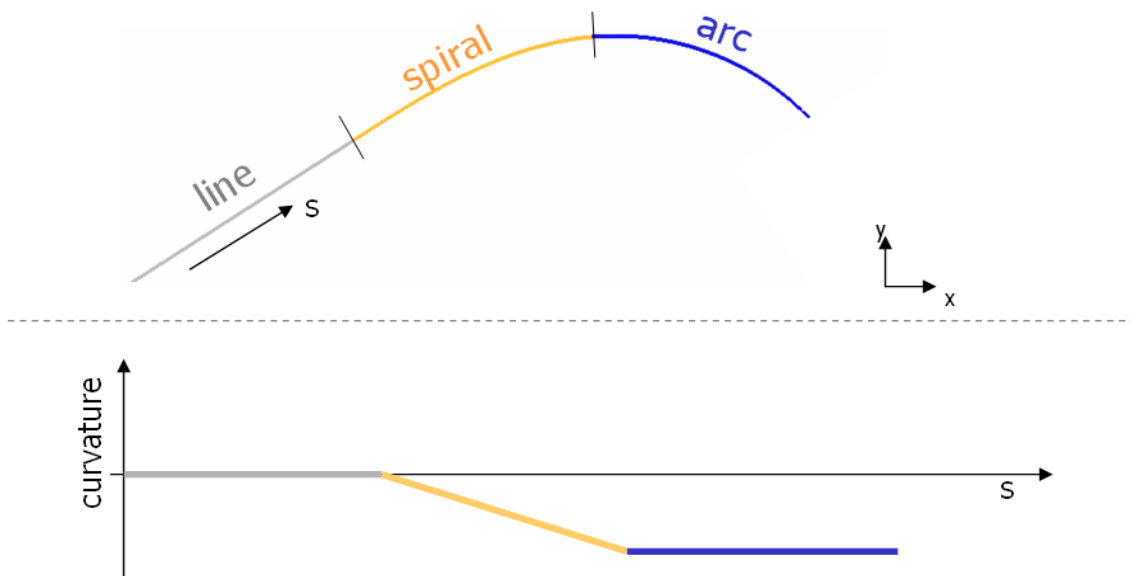

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	19 of 103


### 3.3 Lanes

#### 3.3.1 General

Lanes are identified by numbers which are


- unique (per lane section, see below)
- in sequence (i.e. without gaps),
- starting from 0 on the reference line
- ascending to the left (positive t-direction)
- descending to the right (negative t-direction)

The total number of lanes is not limited. The reference line itself is defined as lane zero and must not have a width entry (i.e. its width must always be 0.0).

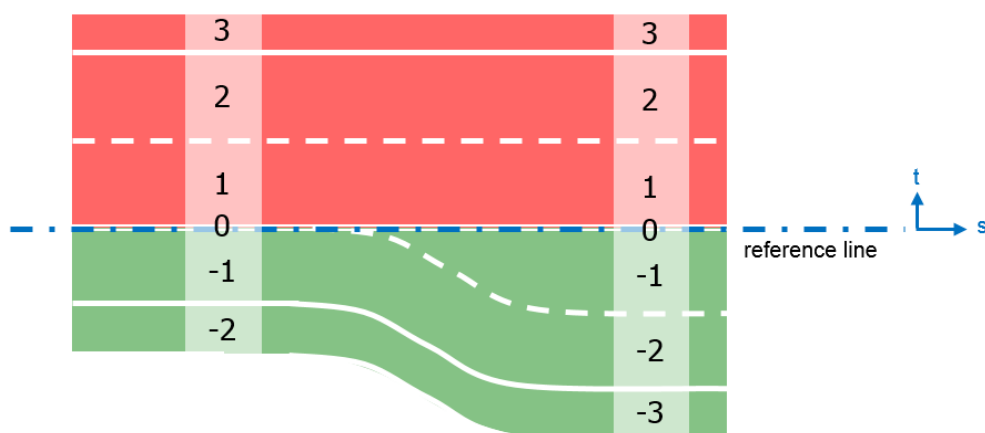

#### 3.3.2 Lane Offset


In certain situations (e.g. a left-turn lane inserted as inner-most lane) it may be more convenient to shift the lane profile instead of shifting the reference line. For this purpose, lane 0 may be offset using a cubic polynomial:

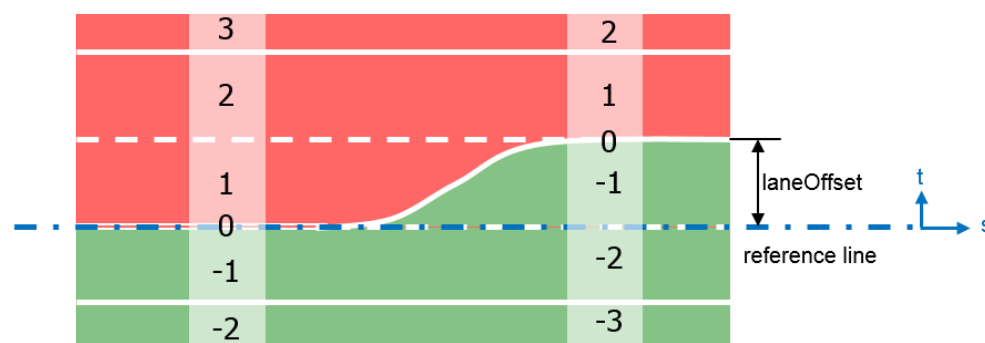

### 3.3.3 Lane Sections

The lanes appearing in a given cross-section along the road are defined in so-called lane sections. Multiple lane sections may be defined in ascending order along a reference line. Each lane section is valid until the next lane section is defined. Therefore, in order to be usable, each road must at least be equipped with one lane section starting at  $s = 0.0\text{m}$ .


The following figure depicts the principles of lane sections:

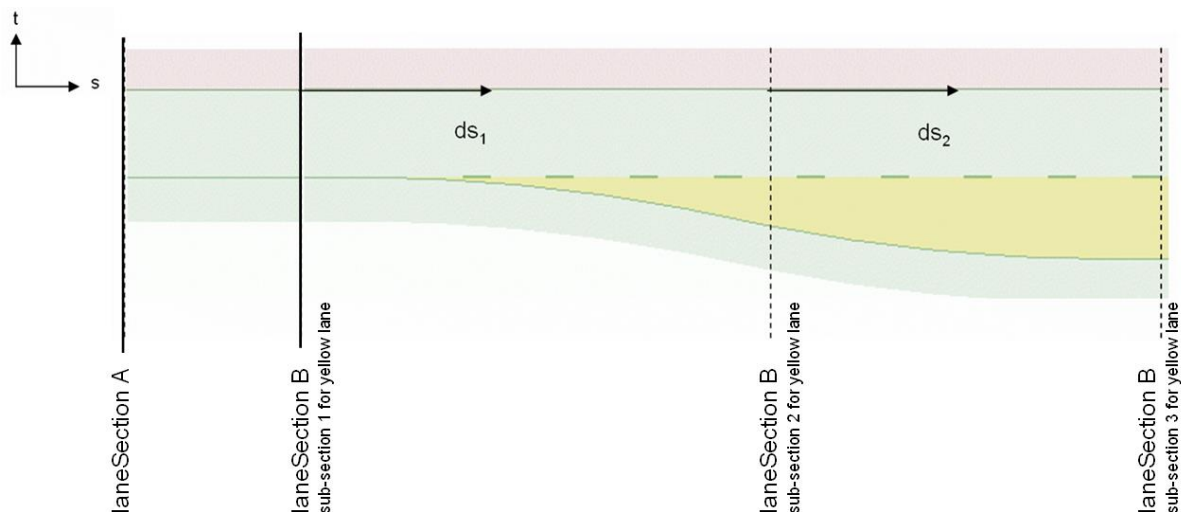

Per lane section, the number of lanes is constant. However, the properties of each lane (e.g. width, road marks, friction etc.) may change.


Before OpenDRIVE 1.4 it was mandatory that lane sections be defined, for both directions of a road, at identical locations. In certain cases (e.g. where an addition or subtraction of lanes happens on one side of a road only or where the number of lanes changes on both sides but with a slight longitudinal offset), this could lead to restrictions or increased effort for the definition of complex road layouts.

The following figure illustrates the classical definition of a typical motorway entry/exit with longitudinal offset of the respective entry / exit lanes:

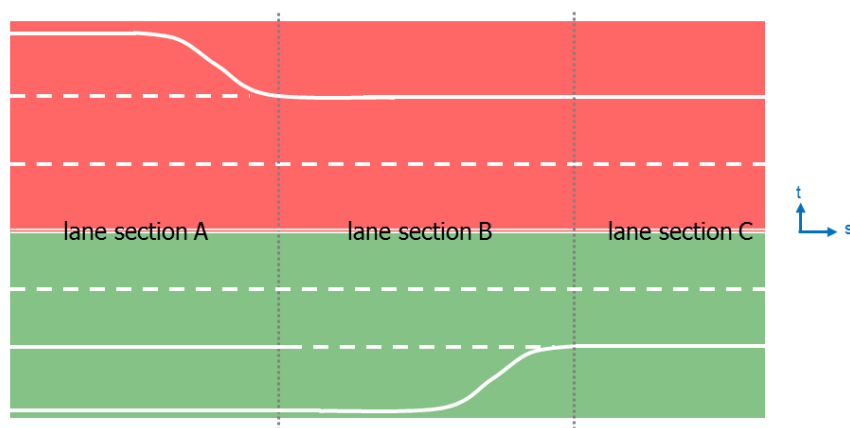

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	21 of 103

Starting from OpenDRIVE 1.4, lane sections may be valid for one side only. Therefore, the above example may be simplified as follows:

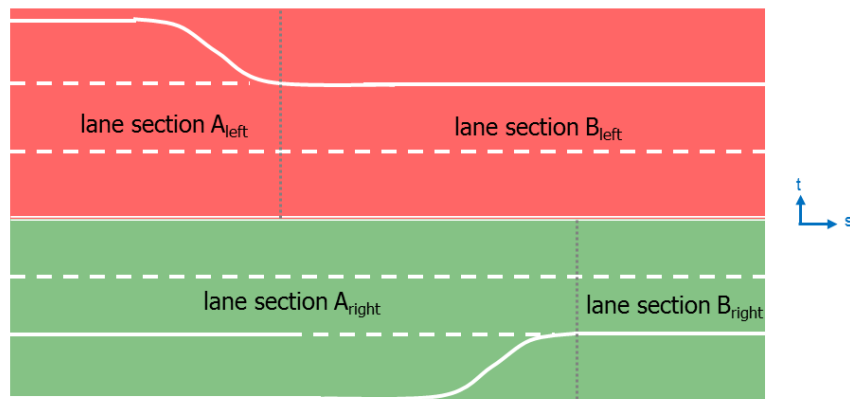

### 3.3.4 Lane Properties


Lane properties are defined relative to the start of the corresponding lane section. Offsets start at 0.0 for the beginning of the lane section and increase corresponding to the road co-ordinate  $s$ . Lane properties are valid until a new property of the same type is defined or the lane section ends. Lane properties of identical types must be defined in ascending order. Lane properties may be point or range properties, i.e. they are valid at a given point only or over a given range, respectively.

If a property is not defined within a given lane section or not covering the entire section, the application may assume default values.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	22 of 103

### 3.4 Superelevation and Crossfall


In many cases, a road's cross section will not be parallel to the underlying terrain. Instead, it will be elevated to one side (e.g. in curves) or to the center (for drainage). Both properties are covered by the OpenDRIVE format with the former being called "*superelevation*" and the latter "*crossfall*". The following figure illustrates both properties:

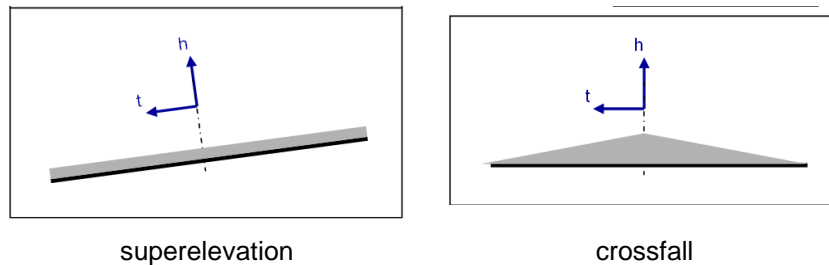

*Superelevation* and *crossfall* can be superimposed in order to provide smooth transitions between e.g. straight sections with *crossfall* and curves with *superelevation*.

As can be seen from the above figures, the *superelevation* is defined per entire road cross section whereas the *crossfall* is defined per side of the road.

Single lanes can be excluded from the application of the *superelevation* and *crossfall* properties. Pedestrian walkways, for example, will always run on level planes (see following figure)

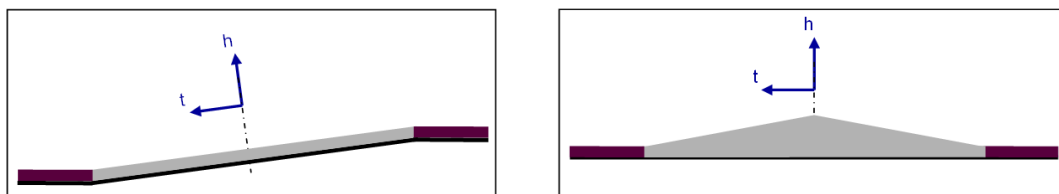

The definition of *superelevation* entries will not alter the actual width of a lane but its projected width whereas for a *crossfall* definition, the behavior is vice versa.


With the introduction of the "*lateral profile*" (see next chapter), the *crossfall* property might be treated as a special case or become completely obsolete. It is recommended to prefer the definition of a *lateral profile* instead of the *crossfall* property in new databases.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	23 of 103

### 3.5 Lateral Profile

Some lateral road shapes may be more complex than they can be described by superelevation and crossfall alone. One way of describing these complex shapes is the use of explicit surface data (see below). An analytical method for describing lateral profiles is added to the format specification with OpenDRIVE 1.4. This allows, for example, for the description of curved road surfaces as they can be found on high-speed test tracks. Note that the "superelevation" property acts on the reference plane of the road, not on the lateral profile itself.

The lateral profile must not be combined with the "crossfall" property.

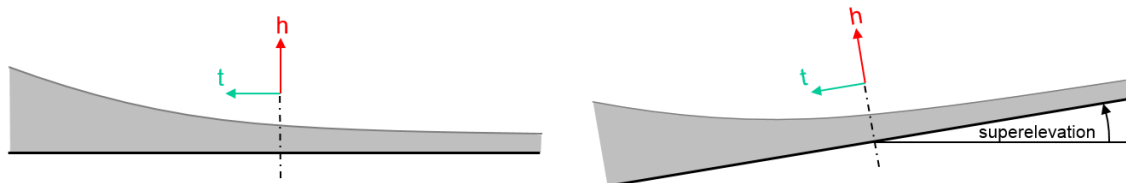

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	24 of 103



## 3.6 Road Linkage


### 3.6.1 Overview

In order to navigate through a road network, the application must know about the linkage between different roads. Two types of linkage are possible:

- successor/predecessor linkage (*standard linkage*)
- junctions

Whenever the linkage between two roads is clear, a standard linkage information is sufficient. A junction is required when the successor or predecessor relationship of a road is ambiguous. Here, the application needs to select one of several possibilities.

The following figure and table illustrate the different cases:

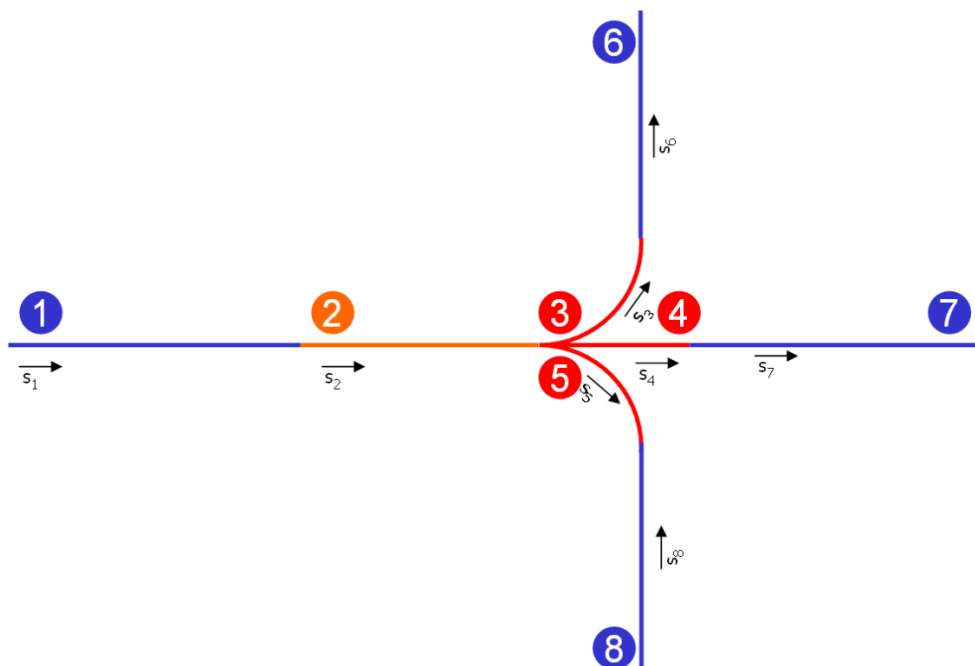

Road	Predecessor	Successor
1	-	2
2	1	ambiguous
3	2	6
4	2	7
5	2	8
6	3	-
7	4	-
8	-	5

**Clarification:** The above table and figure illustrate some of the possible connections within a junction. The roads no. 3, 4 and 5 are called "connecting roads". For them, road no. 2 acts as the so-called "incoming road". Roads 6, 7 and 8 are "outgoing roads" (they may also act as "incoming" roads for other connections not shown in the figure).

In order to facilitate navigation through a road network on a per-lane basis, additional linkage information can be provided on the lane level.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	25 of 103


## 3.6.2 Junctions

### 3.6.2.1 Basics

The basic principle is very simple:

Junctions link *in-coming roads* via paths (*connecting roads*) to *out-going roads*.

The following figure shows a complex junction scenario:

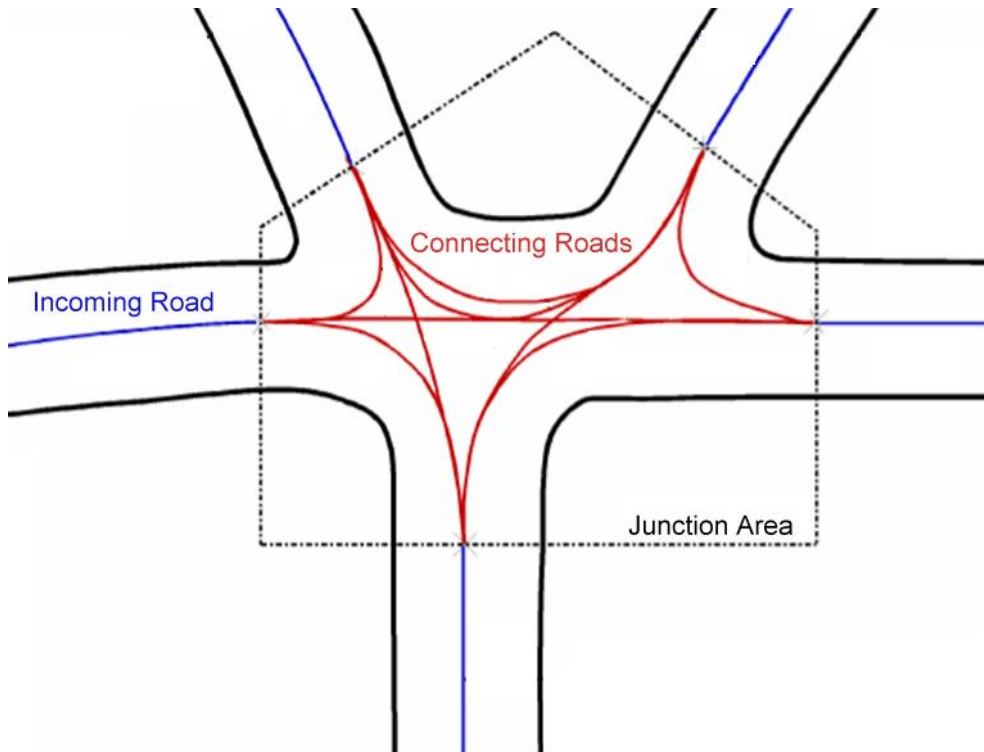

Connecting Roads are also modeled as roads according to the rules laid out here for all other roads. They consist of reference lines with lane sections etc. Usually, in-coming roads also serve as out-going roads, with the actual usage of a road being determined by its lanes.


Junctions consist of a connection matrix which indicates all possibilities to enter a connecting road from a given in-coming road. These connections are listed on a per-lane basis in order to facilitate navigation. Once a connecting road is entered, the following connection to the corresponding out-going road can be retrieved from the general successor/predecessor information that is stored with each road. Within the junctions, priorities of roads relative to each other may be stored but they may also be retrieved by evaluating the signs/signals and geometry.

U-turns as part of a junction must be modeled as individual connecting roads, thus adding one more possibility to the connection matrix.


Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	26 of 103

### 3.6.2.2 Junction Groups

In certain situations (e.g. roundabouts), junctions have to know about the existence of each other, so that traffic rules (right-of-way) can be implemented more efficiently. According to the OpenDRIVE style guide, a roundabout shall be composed of individual junctions:

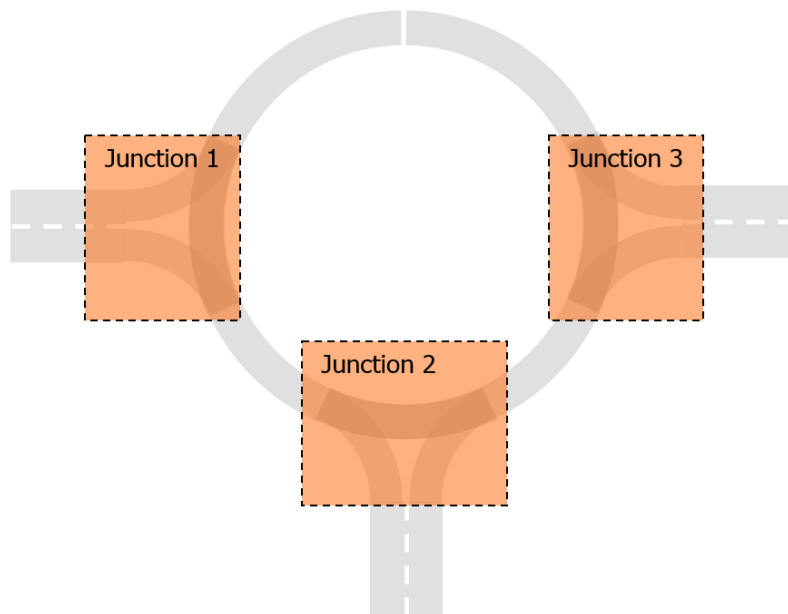

Putting all of these junctions into a single group might help the traffic simulation software:

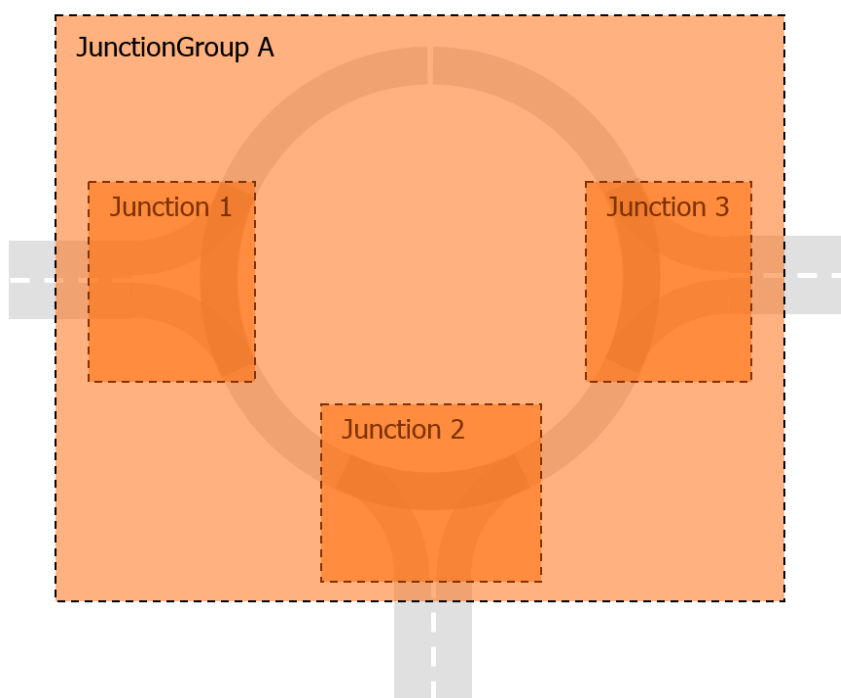


Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	27 of 103


### 3.6.3 Neighbors

Roads may not only be linked to predecessors and successors but also to neighbors. This type of link information may be required when only one driving direction is defined per reference line (i.e. only left or only right lanes), or when only a fraction of the total number of lanes is defined per reference line. Each road may have up to two neighbors.

Example 1 (two roads being each other's neighbor):

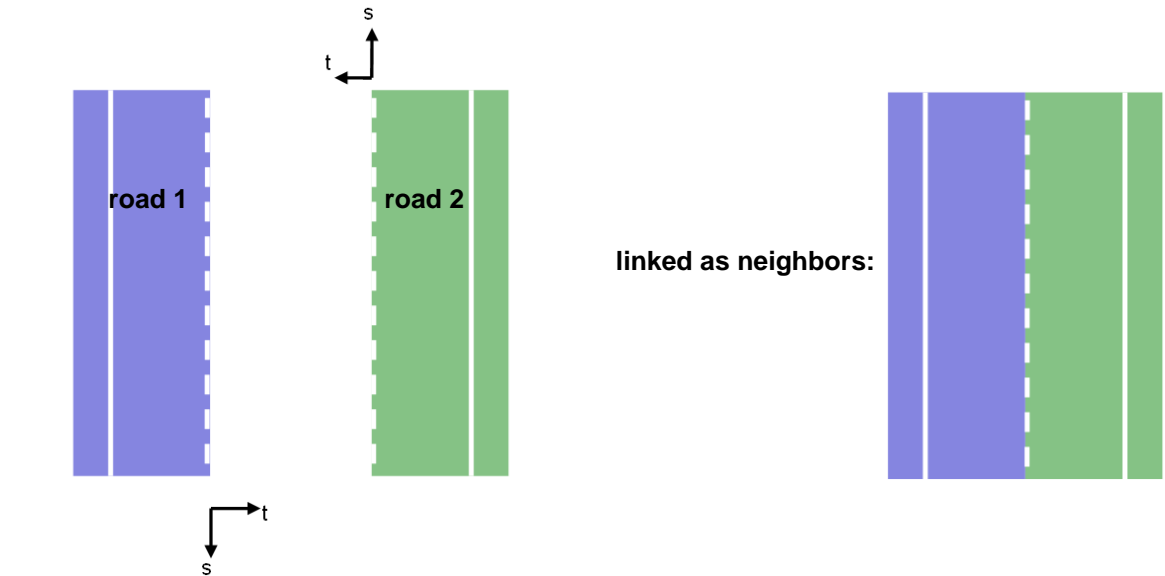

Example 2 (three roads):

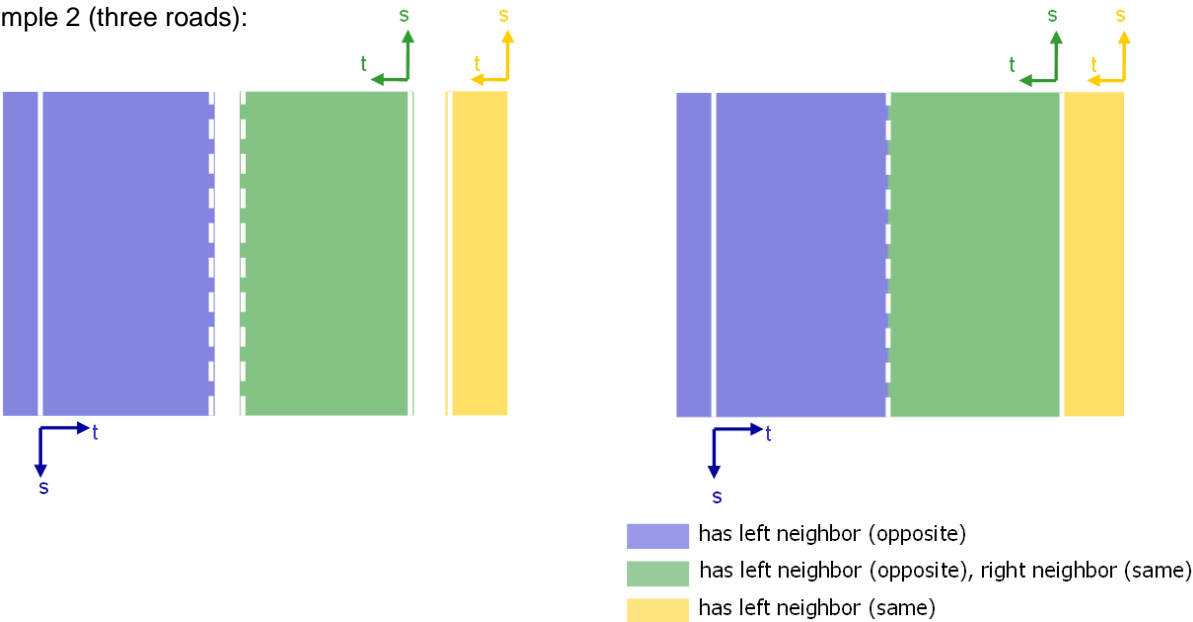

**Note:**  
The neighbor entry has been introduced mainly for legacy purposes. For the design of new road networks, it is recommended to define both driving directions of a road along a single reference line and to avoid using the neighbor entry (this recommendation applies outside junctions only; within junctions, single reference lines may and should be used for each driving direction, however).

### 3.7 Surface

OpenDRIVE provides two approaches for describing surface properties:

- Standard description:

In the standard case, a `<material>` record may be defined per lane of the road, providing parameters for

- surface material code
- roughness
- friction

- Extended description:

A more detailed description of road surface data (e.g. from measurements), which is not limited to the definition of material properties within lane boundaries, may be provided within the newly introduced `<surface>` record. This data may be applied to an entire cross section or parts thereof.

Due to the potentially very large amount of data that is contained in detailed surface information and due to the fact that publicly available data formats already exist for surface data, OpenDRIVE does not define its own XML implementation of surface descriptions but provides references to the respective data files instead.

Formats officially supported as surface import formats to OpenDRIVE are listed below. This list may be extended in future revisions of OpenDRIVE depending on the purposes served by additional formats.

In order to guarantee the portability of an OpenDRIVE description, this standard recommends using the OpenCRG format as preferred extended road surface description.

List of supported surface data formats:

no.	name	revision	description
1	Open Curved Regular Grid (OpenCRG)	June 2010	data format by TÜV Süd in co-operation with Daimler AG. Tools available by Daimler and VIRES  Detailed information: <a href="http://www.opencrg.org">http://www.opencrg.org</a>

For the application of this data to the OpenDRIVE road see chapter 5.3.10.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	29 of 103

### 3.8 Alternative Layouts

Depending on the individual application, it might be necessary to describe various possible setups of a road network's properties, so that the OpenDRIVE file does not only contain one description of these properties but provides access to all pre-defined setups.

For this purpose, the `<set>` record is being introduced (see 5.10). It allows the user to define alternative instances of a property within its level.

The `<set>` record may be used at any level without restrictions, however users should take into account that the portability of an OpenDRIVE road description may suffer with sets being defined at levels where another user might not expect them. In the future, this document shall contain hints where sets have been used successfully in applications, in order to give an indication where sets are encouraged and where they should be avoided.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	30 of 103


### 3.9 Railroad Elements

**DISCLAIMER:** OpenDRIVE has not been designed to describe complex railroad networks including signaling, safety systems (e.g. European Rail Traffic Management System - ERTMS) etc. For this purpose, other formats exist (e.g. <http://www.railml.org>). Just in cases where rails and roads meet, shall OpenDRIVE provide a means to describe both features in a single file and format.

Road networks in urban areas sometimes have to include railroad elements. This is especially true for trams (i.e. streetcars) which either share space with other vehicles or are operated in designated areas. In many cases, shared / exclusive space usage varies continuously within a network.

#### 3.9.1 Railroad Tracks


For rail-based vehicles, the freedom of lateral motion is quite restricted (except for the case of de-railing). Therefore, it is sufficient to provide one lane for a railroad which is of type "tram" or – more general – "rail" and which is centered around the reference line (this can be achieved by applying an offset to lane 0, see figure):

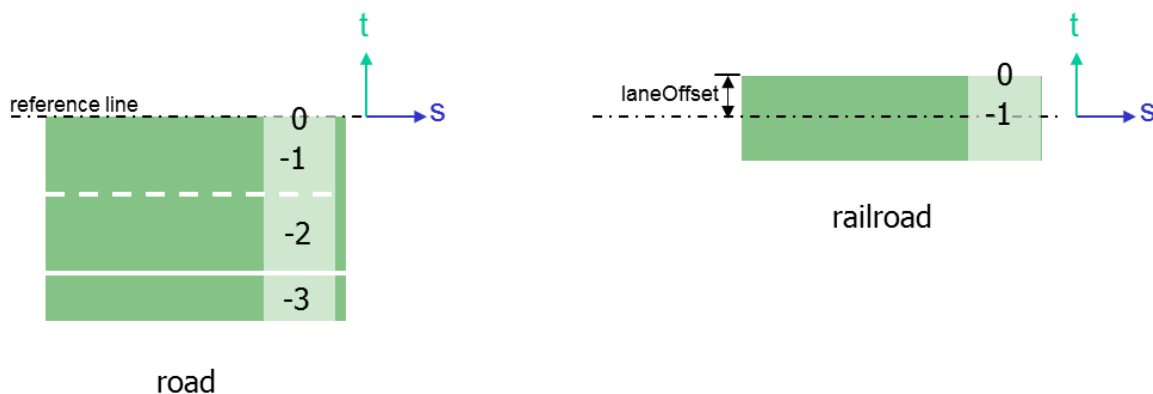

**NOTE:** For railroad lines with multiple parallel tracks (typically dual-track layout), it is mandatory to use one discrete track per direction instead of adding railroad lanes to an existing track. It is also recommended to provide individual reference lines (each bearing exactly one lane) for rail-based vehicles even in areas of shared use with road vehicles.

#### 3.9.2 Railroad Switches

Where junctions for road vehicles can get quite complex, switches in rails always provide a clear path depending on their position. Therefore, no connection matrix is required and switches may be placed even within tracks (i.e. the main track's reference line may continue), see the following figure:

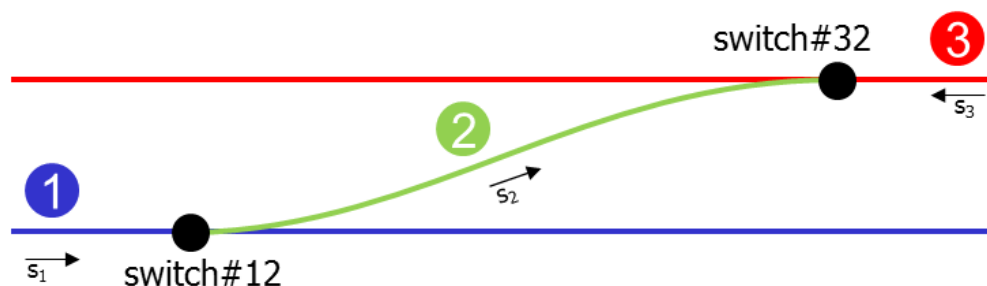


Tracks 1 and 3 are the main tracks whereas track 2 links track 1 and 3. The path driven by a rail-based vehicle only depends on the logical states of switches #12 and #32. Therefore, directional control is executed by the network on the vehicle (quite the opposite of what can be done with road-based vehicles).

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	31 of 103

### 3.9.3 Railroad Stations

Railroad lines may contain stations and these may contain platforms. In order to define the spatial extent of a station, at least one platform entry is required.

Platform IDs have to be unique but several tracks may reference the same platform. See also the following figure. In the situation on top, tracks 1 and 3 will have a reference to the same platform, in the bottom situation, tracks 1 and 2 will refer to platform 2 whereas track 3 will refer to platform 1 only.

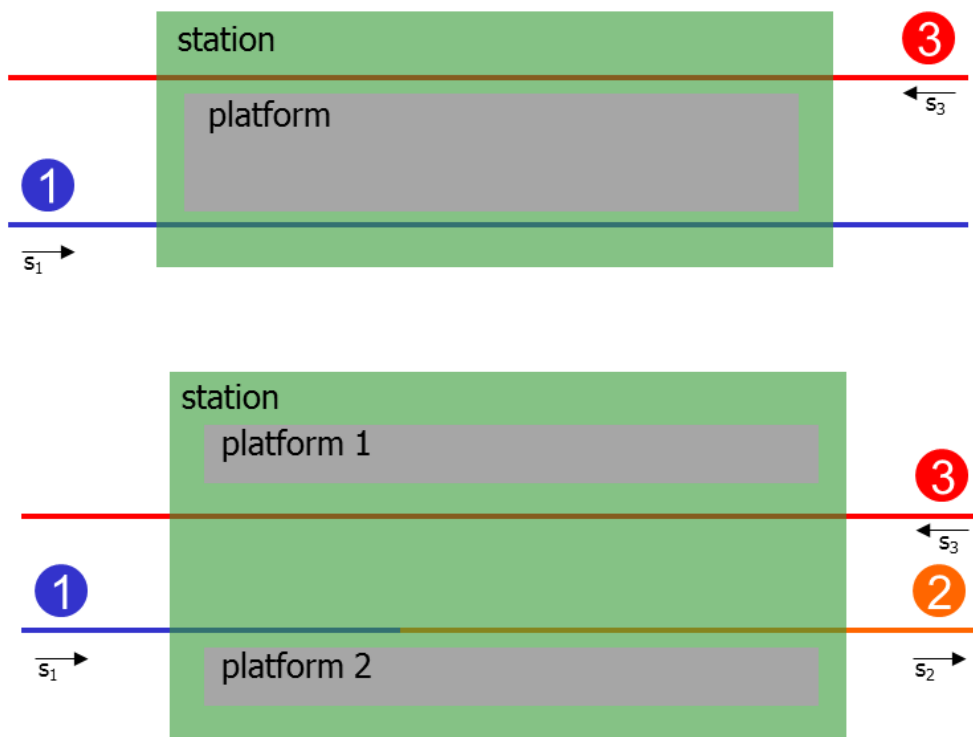

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	32 of 103



## 4 File

### 4.1 Format

OpenDRIVE<sup>®</sup> data is stored in an XML file.

### 4.2 Extension

OpenDRIVE<sup>®</sup> files have the extension “.xodr”.

Compressed OpenDRIVE<sup>®</sup> files have the extension “.xodr.z” (compression format: gzip)

### 4.3 Structure

The OpenDRIVE<sup>®</sup> file structure is laid out according to XML rules and with reference to the respective schema file.

Beads are organized in levels. Beads with a level greater than zero (0) are children of the preceding level. Beads with a level of one (1) are called primary beads.

Each bead can be extended with user-defined data. This data is stored in so-called ancillary beads.

### 4.4 Notation

All floating point numbers are “double” precision by default. It is highly recommended to use a 16 digit scientific representation for floating point numbers.

### 4.5 Schema

The schema file for the OpenDRIVE<sup>®</sup> format can be retrieved from [www.opendrive.org](http://www.opendrive.org)

### 4.6 Combining Files

Multiple files can be combined by means of an `include` tag at the appropriate locations. Upon parsing this tag, OpenDRIVE readers shall immediately start reading the file specified as attribute of the tag. It is the user's responsibility to make sure that contents read from an include file are consistent with the context from which the inclusion starts.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	33 of 103

## 4.7 Overview of Beads

The following table provides a simplified overview of all beads that may occur within an OpenDRIVE® file. It also indicates the maximum number of instances of a given bead type below a single parent.

The naming convention is as follows:

- 1 exactly one instance, required
- 0..n maximum n instances (typically n=1), optional
- 0+ unlimited number of instances, optional
- 1+ minimum one instance, required

Children of optional beads must not be present if their respective parent is omitted. The levels of the beads are indicated by indentation and by the appropriate numbers.

bead name	level	instances per parent	parent	chapter
OpenDRIVE	0	1	-	5.1
-header	1	1	OpenDRIVE	5.2
-geoReference	2	0..1	header	5.2.1
-road	1	1+	OpenDRIVE	5.3.1
-link	2	0..1	road	5.3.2
-predecessor	3	0..1	link	5.3.2.1
-successor	3	0..1	link	5.3.2.2
-neighbor	3	0..2	link	5.3.2.3
-type	2	0+	road	5.3.3
-speed	3	0+	type	5.3.3.1
-planView	2	1	road	5.3.4
-geometry	3	1+	planview	5.3.4.1
-line	4	1	geometry	5.3.4.1.1
-spiral	4	1	geometry	5.3.4.1.2
-arc	4	1	geometry	5.3.4.1.3
-poly3	4	1	geometry	5.3.4.1.4
-paramPoly3	4	1	geometry	5.3.4.1.5
-elevationProfile	2	0..1	road	5.3.5
-elevation	3	0+	elevationProfile	5.3.5.1
-lateralProfile	2	0..1	road	5.3.6
-superelevation	3	0+	lateralProfile	5.3.6.1
-crossfall	3	0+	lateralProfile	5.3.6.2
-shape	3	0+	lateralProfile	5.3.6.3
-lanes	2	1	road	5.3.7
-laneOffset	3	0+	lanes	5.3.7.1
-laneSection	3	1+	lanes	5.3.7.2
-left	4	0..1	lane section	5.3.7.2.1
-lane	5	1+	left	5.3.7.2.1.1
-link	6	0..1	lane	5.3.7.2.1.1.1
- -predecessor	7	0..1	link	5.3.7.2.1.1.1.1
- -successor	7	0..1	link	5.3.7.2.1.1.1.2
- -width	6	1+	lane	5.3.7.2.1.1.2
- -border	6	0+	lane	5.3.7.2.1.1.3
- -roadMark	6	0+	lane	5.3.7.2.1.1.4
- - -type	7	0..1	roadMark	5.3.7.2.1.1.4.1
- - -line	8	1+	type	5.3.7.2.1.1.4.1.1
- - -material	6	0+	lane	5.3.7.2.1.1.5
- - -visibility	6	0+	lane	5.3.7.2.1.1.6
- - -speed	6	0+	lane	5.3.7.2.1.1.7
- - -access	6	0+	lane	5.3.7.2.1.1.8
- - -height	6	0+	lane	5.3.7.2.1.1.9
-center	4	0..1	lane section	5.3.7.2.1
-lane	5	1	center	5.3.7.2.1.1
-link	6	0..1	lane	5.3.7.2.1.1.1
- -predecessor	7	0..1	link	5.3.7.2.1.1.1.1
- -successor	7	0..1	link	5.3.7.2.1.1.1.2
- -roadMark	6	0+	lane	5.3.7.2.1.1.4
- - -type	7	0..1	roadMark	5.3.7.2.1.1.4.1
- - -line	8	1+	type	5.3.7.2.1.1.4.1.1

Date:	November 04, 2015	Title:	OpenDRIVE® Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	34 of 103

bead name	level	instances per parent	parent	chapter
-right	4	0..1	lane section	5.3.7.2.1
-lane	5	1+	right	5.3.7.2.1.1
-link	6	0..1	lane	5.3.7.2.1.1.1
-predecessor	7	0..1	link	5.3.7.2.1.1.1.1
-successor	7	0..1	link	5.3.7.2.1.1.1.2
-width	6	1+	lane	5.3.7.2.1.1.2
-border	6	0+	lane	5.3.7.2.1.1.3
-roadMark	6	0+	lane	5.3.7.2.1.1.4
-type	7	0..1	roadMark	5.3.7.2.1.1.4.1
-line	8	1+	type	5.3.7.2.1.1.4.1.1
-material	6	0+	lane	5.3.7.2.1.1.5
-visibility	6	0+	lane	5.3.7.2.1.1.6
-speed	6	0+	lane	5.3.7.2.1.1.7
-access	6	0+	lane	5.3.7.2.1.1.8
-height	6	0+	lane	5.3.7.2.1.1.9
-objects	2	0..1	road	5.3.8
-object	3	0+	objects	5.3.8.1
-repeat	4	0..1	object	5.3.8.1.1
-outline	4	0..1	object	5.3.8.1.2
-cornerRoad	5	0+	outline	5.3.8.1.2.1
-cornerLocal	5	0+	outline	5.3.8.1.2.2
-material	4	0..1	object	5.3.8.1.3
-validity	4	0+	object	5.3.8.1.4
-parkingSpace	4	0..1	object	5.3.8.1.5
-marking	5	0..4	parkingSpace	5.3.8.1.6
-objectReference	3	0+	objects	5.3.8.2
-validity	4	0+	objectReference	5.3.8.2.1
-tunnel	3	0+	objects	5.3.8.3
-validity	4	0+	tunnel	5.3.8.3.1
-bridge	3	0+	objects	5.3.8.4
-validity	4	0+	bridge	5.3.8.4.1
-signals	2	0..1	road	5.3.9
-signal	3	1+	signals	5.3.9.1
-validity	4	0+	signal	5.3.9.1.1
-dependency	4	0+	signal	5.3.9.1.2
-signalReference	3	0+	signals	5.3.9.2
-validity	4	0+	signalReference	5.3.9.2.1
-surface	2	0..1	road	5.3.10
-CRG	3	0+	surface	5.3.10.1
-railroad	2	0..1	road	5.3.11
-switch	3	0+	railroad	5.3.11.1
-mainTrack	4	1	switch	5.3.11.1.1
-sideTrack	4	1	switch	5.3.11.1.2
-partner	4	0..1	switch	5.3.11.1.3
-controller	1	0+	OpenDRIVE	5.4
-control	2	1+	controller	5.4.1
-junction	1	0+	OpenDRIVE	5.5
-connection	2	1+	junction	5.5.1
-laneLink	3	0+	connection	5.5.1.1
-priority	2	0+	junction	5.5.2
-controller	2	0+	junction	5.5.3
-junctionGroup	1	0+	OpenDRIVE	5.6
-junctionReference	2	1+	junctionGroup	5.6.1
-station	1	0+	OpenDRIVE	5.7
-platform	2	1+	station	5.7.1
-segment	3	1+	platform	5.7.1.1

At any level, there may be the following beads:

bead name	level	instances per parent	parent	chapter
userData	any	0+	any	5.8
include	any	0+	any	5.9
set	any	0+	any	5.10
-instance	set+1	1+	set	5.10.1

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	35 of 103

## 5 File Entries

### 5.1 Enclosing Tag

The overall enclosing tag of the file is:

*delimiters* <OpenDRIVE >...</OpenDRIVE>  
*instances* 1  
*attributes* xmlns="http://www.opendrive.org"

### 5.2 Header

The header record is the very first record within the OpenDRIVE tag.

*delimiters* <header>...</header>  
*parent* <OpenDRIVE>  
*instances* 1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
revMajor	ushort	-	1	major revision number of OpenDRIVE <sup>®</sup> format
revMinor	ushort	-	4	minor revision number of OpenDRIVE <sup>®</sup> format
name	string	-	-	database name
version	float	-	-	version number of this database (format: a.bb)
date	string	-	-	time/date of database creation according to ISO 8601 (preference: YYYY-MM-DDThh:mm:ss)
north	double	m	-	maximum inertial y value
south	double	m	-	minimum inertial y value
east	double	m	-	maximum inertial x value
west	double	m	-	minimum inertial x value
vendor	string	-	-	vendor name

### 5.2.1 Geo Reference

The information for geographic reference of a database may be provided as child node to the OpenDRIVE *header* node. It will provide all information necessary to convert OpenDRIVE's cartesian x/y/z co-ordinates into a corresponding geographic reference system. There must be no more than one definition of the geographic projection.

If the definition is missing, the cartesian co-ordinates will be the only ones useable within the database.

*delimiters*      <geoReference>...</geoReference>  
*parent*            <header>  
*instances*        0..1  
*attributes*        none

The projection string according to proj4 (see also <https://github.com/OSGeo/proj.4> ) shall be given as *CDATA* child node of the <geoReference> node since it may contain characters which interfere with the XML syntax of a node's attribute.

Example (see also <http://spatialreference.org/ref/epsg/32632/proj4/>):

```
<geoReference>
  <![CDATA[+proj=utm +zone=32 +ellps=WGS84 +datum=WGS84 +units=m
    +no_defs]]>
</geoReference>
```

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	37 of 103

## 5.3 Road Records

Roads are the principal containers of information within a database. For an overview of records which can be stored within a road, see chapter 4.7.

### 5.3.1 Road Header Record

The road header record defines the basic parameters of an individual road. It is followed immediately by other records defining geometry and logical properties of the road.

*delimiters* <road>...</road>  
*parent* <OpenDRIVE>  
*instances* 1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
name	string	-	-	name of the road
length	double	m	-	total length of the reference line in the xy-plane
id	string	-	- [0,∞[	unique ID within database (if it represents an integer number, it should preferably comply to uint32_t and stay within the given range)
junction	string	-	- -1	ID of the junction to which the road belongs as a connecting road (= -1 for none)

### 5.3.2 Road Link Record

This record follows the Road Header Record if the road is (as usual) linked to a successor, a predecessor, or a neighbor (see children of the link record). Isolated roads may omit this record.

*delimiters* <link>...</link>  
*parent* <road>  
*instances* 0..1  
*attributes* none

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	38 of 103

### 5.3.2.1 Road Predecessor

This record provides detailed information about the predecessor of a road. The predecessor may be of type road or junction.

*delimiters* <predecessor.../>  
*parent* <link>  
*instances* 0..1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
elementType	string	-	road junction	type of the linked element
elementId	string	-	-	ID of the linked element
contactPoint	string	-	start end	contact point of link on the linked element

### 5.3.2.2 Road Successor

This record provides detailed information about the successor of a road. The successor may be of type road or junction.

*delimiters* <successor.../>  
*parent* <link>  
*instances* 0..1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
elementType	string	-	road junction	type of the linked element
elementId	string	-	-	ID of the linked element
contactPoint	string	-	start end	contact point of link on the linked element

### 5.3.2.3 Road Neighbor


This record provides detailed information about the neighbor of a road. The neighbor must be of type road.

**Note:** The neighbor entry has been introduced mainly for legacy purposes. For the design of new road networks, it is recommended to define both driving directions of a road along a single reference line and to avoid using the neighbor entry (this recommendation applies outside junctions only; within junctions, single reference lines may and should be used for each driving direction, however).

*delimiters* <neighbor.../>  
*parent* <link>  
*instances* 0..2  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
side	string	-	left right	information which neighbor is being configured
elementId	string	-	-	ID of the linked road
direction	string	-	same opposite	direction of the neighbor relative to own direction

Illustration:

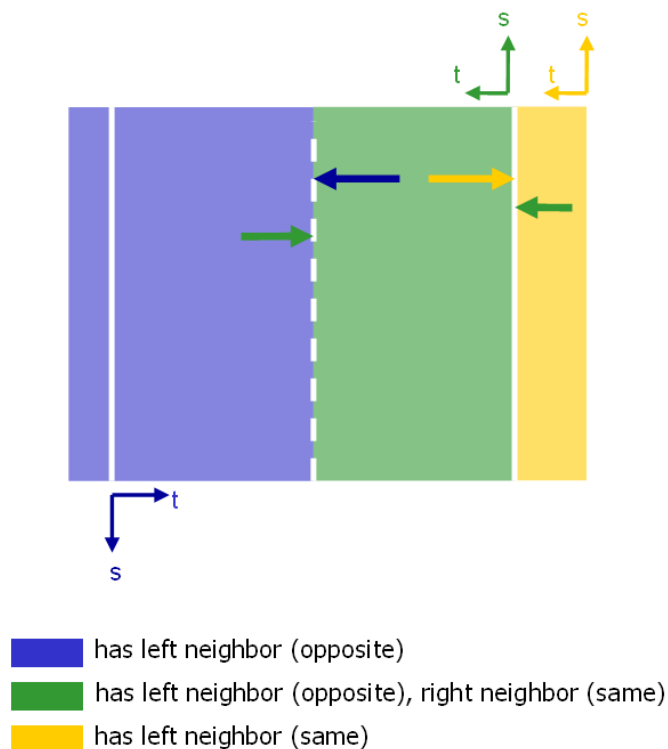

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	40 of 103



### 5.3.3 Road Type Record

The type of a road may change over its entire length. Therefore, a separate record is provided for the definition of the road type with respect to a certain section of the road. A road type entry is valid for the entire cross section of the road. It is also valid until a new road type record is provided or the road ends.

*delimiters* <type.../>  
*parent* <road>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	[0,∞[	start position (s-coordinate)
type	string	-	see 6.1	for supported types, see chapter 6.1

#### 5.3.3.1 Speed Record

This record defines the default maximum speed allowed in conjunction with the specified road type.

*delimiters* <speed.../>  
*parent* <type>  
*instances* 0..1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
max	string	m/s	<i>no limit</i> <i>undefined</i> [0,∞[	maximum allowed speed, given as string (only "no limit" / "undefined") or numerical value in the respective unit (see next attribute)
unit	string	-	see 2.2	unit of the attribute <code>max</code> (optional)

### 5.3.4 Road Plan View Record

The plan view record contains a series of geometry records which define the layout of the road's reference line in the x/y-plane (plan view).

*delimiters*      <planView>...</planView>  
*parent*            <road>  
*instances*        1  
*attributes*        none

#### 5.3.4.1 Road Geometry Header Record

A sequence of road geometry records defines the layout of the road's reference line in the x/y-plane (plan view). The geometry records must occur in ascending order (i.e. increasing s-position). The geometry information is split into a header which is common to all geometric elements and a subsequent bead containing the actual geometric element's data (depending on the type of geometric element).

Currently, four types of geometric elements are supported:

- straight lines
- spirals
- arcs
- cubic polynomials

*delimiters*      <geometry>...</geometry>  
*parent*            <planView>  
*instances*        1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	[0,∞[	start position (s-coordinate)
x	double	m	]-∞,∞[	start position (x inertial)
y	double	m	]-∞,∞[	start position (y inertial)
hdg	double	rad	]-∞,∞[	start orientation (inertial heading)
length	double	m	[0,∞[	length of the element's reference line

This record is followed immediately by a record with more information about the actual geometry element.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	42 of 103

#### 5.3.4.1.1 Geometry, Line Record

This record describes a straight line as part of the road's reference line.

*delimiters* <line.../>  
*parent* <geometry>  
*instances* 1  
*attributes* none

#### 5.3.4.1.2 Geometry, Spiral Record (Clothoids)

This record describes a spiral as part of the road's reference line. For this type of spiral, the curvature change between start and end of the element is linear.


In order to provide consistency between spiral evaluations of various implementations, users are highly recommended to use identical algorithms, or, at least, algorithms with reasonable accuracy within the applicable range (i.e. curvature, length of spiral etc.).

The theory of clothoids is described (for example) at

[http://en.wikipedia.org/wiki/Euler\\_spiral](http://en.wikipedia.org/wiki/Euler_spiral)

A library for computing clothoids can be downloaded at

<http://www.opendrive.org/downloads/spiral.zip>

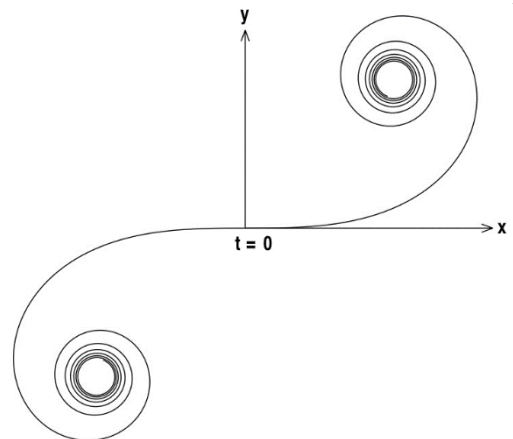

*delimiters* <spiral.../>  
*parent* <geometry>  
*instances* 1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
curvStart	double	1/m	$]-\infty, \infty[$	curvature at the start of the element
curvEnd	double	1/m	$]-\infty, \infty[$	curvature at the end of the element

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	43 of 103

#### 5.3.4.1.3 Geometry, Arc Record

This record describes an arc as part of the road's reference line.

*delimiters* <arc.../>  
*parent* <geometry>  
*instances* 1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
curvature	double	1/m	$]-\infty, \infty[$	constant curvature throughout the element

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	44 of 103

#### 5.3.4.1.4 Geometry, Cubic Polynomial Record

This record describes a cubic polynomial as part of the road's reference line. The polynomial is described in the local u/v co-ordinate system of the starting point (with u pointing in the local s direction and v pointing in the local t direction). Each local co-ordinate is calculated by:


$$v_{local} = a + b \cdot du + c \cdot du^2 + d \cdot du^3$$

The conversion of u/v co-ordinates into x/y co-ordinates can be performed easily by simple geometric transformations (i.e. one translation and one rotation) relative to the starting point


*delimiters* <poly3.../>  
*parent* <geometry>  
*instances* 1  
*attributes*

name	type	unit	value	description
a	double	m	$]-\infty, \infty[$	parameter A
b	double	1	$]-\infty, \infty[$	parameter B
c	double	1/m	$]-\infty, \infty[$	parameter C
d	double	1/m <sup>2</sup>	$]-\infty, \infty[$	parameter D

Illustration:

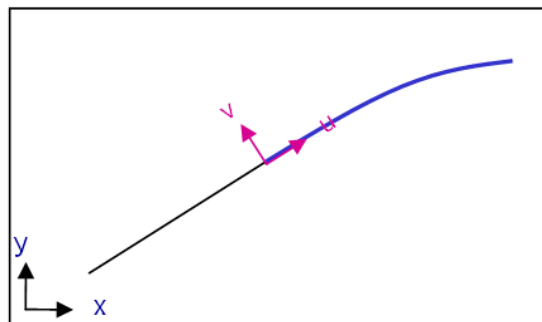

**NOTE:** In order to stick to the start point and orientation according to the <geometry> node, the parameters a and b will have to be zero. Providing non-zero values for these parameters will lead to a shift and rotation of the s/t co-ordinates according to the following figure:

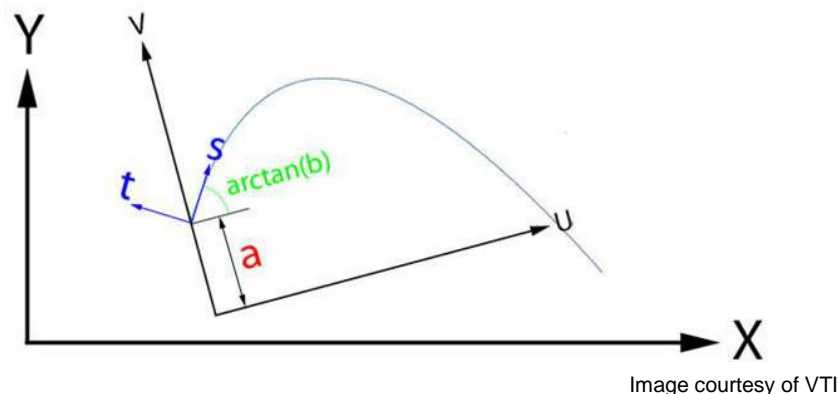

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	45 of 103

#### 5.3.4.1.5 Geometry, Parametric Cubic Curve Record

This record describes a parametric cubic curve as part of the road's reference line **in a local u/v co-ordinate system**. The curve is composed of two polynomials of third order, describing local u- and v-coordinates in reference to a common parameter (p). Unless otherwise stated, the parameter p is in the range [0;1]. Alternatively, it may be given in the range [0;arc length]. Any deviation from the default rule has to be stated with the attribute "pRange" and the parameters of the polynomials have to be adapted accordingly.

Each co-ordinate is calculated by:

$$\begin{aligned} u_{\text{local}} &= a_u + b_u \cdot p + c_u \cdot p^2 + d_u \cdot p^3 \\ v_{\text{local}} &= a_v + b_v \cdot p + c_v \cdot p^2 + d_v \cdot p^3 \end{aligned}$$

The conversion from the local u/v co-ordinates into the inertial x/y co-ordinates is performed as described in the previous chapter (cubic polynomial record).

*delimiters* <paramPoly3.../>  
*parent* <geometry>  
*instances* 1  
*attributes*

name	type	unit	value	description
aU	double	m	]-∞,∞[	parameter A for u
bU	double	1	]-∞,∞[	parameter B for u
cU	double	1/m	]-∞,∞[	parameter C for u
dU	double	1/m <sup>2</sup>	]-∞,∞[	parameter D for u
aV	double	m	]-∞,∞[	parameter A for v
bV	double	1	]-∞,∞[	parameter B for v
cV	double	1/m	]-∞,∞[	parameter C for v
dV	double	1/m <sup>2</sup>	]-∞,∞[	parameter D for v
pRange	string	-	arcLength normalized	range / scope of parameter p

### 5.3.5 Road Elevation Profile Record

The elevation profile record contains a series of elevation records which define the characteristics of the road's elevation along the reference line.

*delimiters* <elevationProfile>...</elevationProfile>  
*parent* <road>  
*instances* 0..1  
*attributes* none

#### 5.3.5.1 Road Elevation Record

The elevation record defines an elevation entry at a given reference line position. Entries must be defined in increasing order along the reference line. The parameters of an entry are valid until the next entry starts or the road's reference line ends. Per default, the elevation of a road is zero.

The elevation is stored in a polynomial function of third order. It looks like:

$$\text{elev} = a + b \cdot ds + c \cdot ds^2 + d \cdot ds^3$$

with

*elev* being the elevation (inertial z) at a given position  
*a, b, c, d* being the coefficients and  
*ds* being the distance along the reference line between the start of the entry and the actual position.

Therefore, *ds* starts at zero for each entry. The absolute position of an elevation value is calculated by

$$s = s_{\text{start}} + ds$$

with

*s* being the absolute position (track co-ordinate system)  
*s<sub>start</sub>* being the start position of the entry in the track co-ordinate system  
*ds* being the delta between the start position and the requested position

*delimiters* <elevation.../>  
*parent* <elevationProfile>  
*instances* 1+  
*attributes*

name	type	unit	value	description
s	double	m	[0,∞[	start position (s-coordinate)
a	double	m	]-∞,∞[	parameter A, elevation at s=0
b	double	1	]-∞,∞[	parameter B
c	double	1/m	]-∞,∞[	parameter C
d	double	1/m <sup>2</sup>	]-∞,∞[	parameter D

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	47 of 103


### 5.3.6 Road Lateral Profile Record

The lateral profile record contains a series of superelevation and crossfall records which define the characteristics of the road surface's banking along the reference line.

*delimiters* <lateralProfile>...</lateralProfile>  
*parent* <road>  
*instances* 0..1  
*attributes* none

#### 5.3.6.1 Road Superelevation Record

The superelevation of the road is defined as the road section's roll angle around the s-axis (superelevation is positive for road surfaces "falling" to the right side, i.e. the following figure shows a negative superelevation).



Each superelevation record defines an entry at a given reference line position. Entries must be defined in increasing order along the reference line. The parameters of an entry are valid until the next entry starts or the road's reference line ends. Per default, the superelevation of a road is zero.

The superelevation is stored in a polynomial function of third order. It looks like:

$$sElev = a + b \cdot ds + c \cdot ds^2 + d \cdot ds^3$$

with

*sElev* being the superelevation at a given position, default: *sElev* = 0  
*a, b, c, d* being the coefficients and  
*ds* being the distance along the reference line between the start of the entry and the actual position.

Therefore, *ds* starts at zero for each entry. The absolute position of a superelevation value is calculated by

$$s = s_{start} + ds$$

with

*s* being the absolute position (track co-ordinate system)  
*s<sub>start</sub>* being the start position of the entry in the track co-ordinate system  
*ds* being the delta between the start position and the requested position

*delimiters* <superelevation.../>  
*parent* <lateralProfile>  
*instances* 0+  
*attributes*


name	type	unit	value	description
s	double	m	[0,∞[	start position (s-coordinate)
a	double	rad	]-∞,∞[	parameter A, superelevation at s=0
b	double	rad/m	]-∞,∞[	parameter B
c	double	rad/m <sup>2</sup>	]-∞,∞[	parameter C
d	double	rad/m <sup>3</sup>	]-∞,∞[	parameter D

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	48 of 103



### 5.3.6.2 Crossfall Record

The crossfall of the road is defined as the road surface's angle relative to the t-axis. Positive crossfall results in a road surface "falling" from the reference line to the outer boundary.



The crossfall can be defined per side of the road. It will be applied to each lane of the respective side which is not being explicitly excluded from its application.

The crossfall is stored in a polynomial function of third order. It looks like:

$$\text{crfall} = a + b \cdot ds + c \cdot ds^2 + d \cdot ds^3$$

with

`crfall` being the crossfall at a given position, default: `crfall = 0`  
`a, b, c, d` being the coefficients and  
`ds` being the distance along the reference line between the start of the entry and the actual position.

Therefore, `ds` starts at zero for each entry. The absolute position of a crossfall value is calculated by

$$s = s_{\text{start}} + ds$$

with


`s` being the absolute position (track co-ordinate system)  
`sstart` being the start position of the entry in the track co-ordinate system  
`ds` being the delta between the start position and the requested position

*delimiters* <crossfall.../>  
*parent* <lateralProfile>  
*instances* 0+  
*attributes*

name	type	type	value	description
side	string	string	left right both	applicable side of the road
s	double	m	[0,∞[	start position (s-coordinate)
a	double	rad	]-∞,∞[	parameter A, crossfall at s=0
b	double	rad/m	]-∞,∞[	parameter B
c	double	rad/m <sup>2</sup>	]-∞,∞[	parameter C
d	double	rad/m <sup>3</sup>	]-∞,∞[	parameter D

### 5.3.6.3 Road Shape Record

The shape of the road is defined as the road section's surface relative to the reference plane (which may itself be tilted around the s-axis due to an existing super-elevation). This shape may be described as a series of 3<sup>rd</sup> order polynomials for a given "s" station. Multiple shapes may be defined along a road at consecutive "s" stations. Between the shapes at these stations, there shall be a linear interpolation along s.

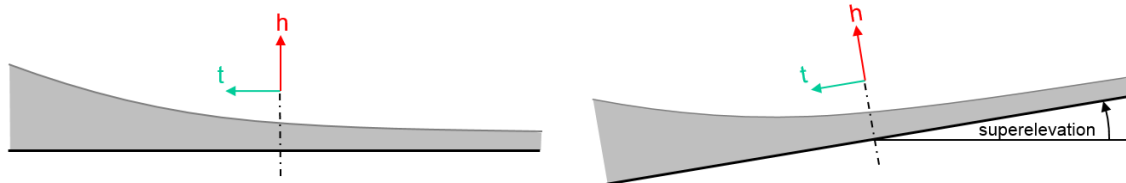

The shape polynomial looks like:

$$h_{\text{Shape}} = a + b \cdot dt + c \cdot dt^2 + d \cdot dt^3$$

with

$h_{\text{Shape}}$  being the height above the reference plane at a given position, default:  
 $h_{\text{Shape}} = 0$   
 $a, b, c, d$  being the coefficients and  
 $dt$  being the distance perpendicular to the reference line between the start of the entry and the actual position.

Therefore,  $dt$  starts at zero for each entry. The absolute position of a shape value is calculated by

$$t = t_{\text{start}} + dt$$

with

$t$  being the absolute position (track co-ordinate system)  
 $t_{\text{start}}$  being the start position of the entry in the track co-ordinate system  
 $dt$  being the delta between the start position and the requested position

**delimiters** <shape.../>  
**parent** <lateralProfile>  
**instances** 0+  
**attributes**

name	type	unit	value	description
s	double	m	[0,∞[	start position (s-coordinate)
t	double	m	]-∞,∞[	start position (t-coordinate)
a	double	m	]-∞,∞[	parameter A, relative height at t=0
b	double	1	]-∞,∞[	parameter B
c	double	1/m	]-∞,∞[	parameter C
d	double	1/m <sup>2</sup>	]-∞,∞[	parameter D

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	50 of 103

### 5.3.7 Road Lanes Record


The lanes record contains a series of lane section records which define the characteristics of the road cross sections with respect to the lanes along the reference line.

*delimiters* <lanes>...</lanes>  
*parent* <road>  
*instances* 1  
*attributes* none

#### 5.3.7.1 Road Lane Offset Record

The lane offset record defines a lateral shift of the lane reference line (which is usually identical to the road reference line). This may be used for an easy implementation of a (local) lateral shift of the lanes relative to the road's reference line. Especially the modeling of inner-city layouts or "2+1" cross-country road layouts can be facilitated considerably by this feature.

The following figure illustrates the modeling of additional "inner" lanes along a straight reference line:

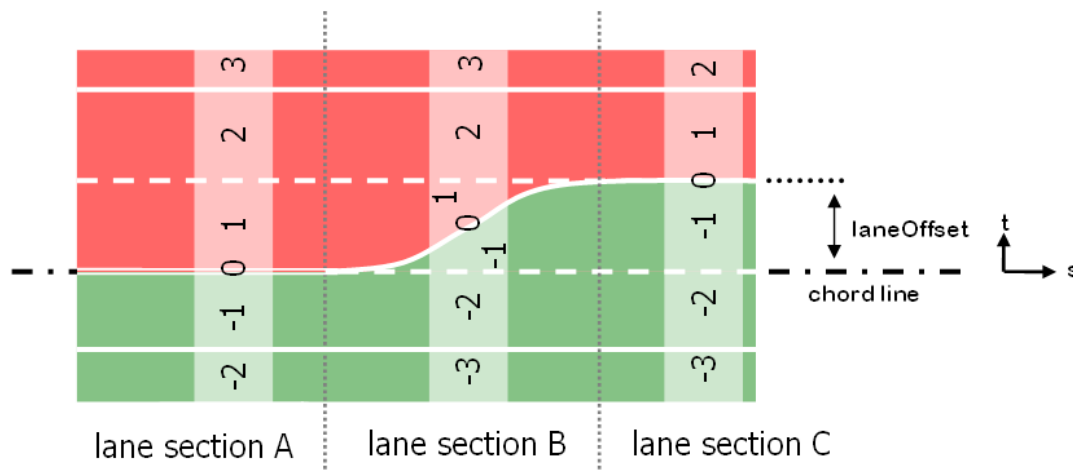

The actual offset at a given point is computed with a polynomial function of third order. It looks like:

$$\text{offset} = a + b \cdot ds + c \cdot ds^2 + d \cdot ds^3$$

with

offset being the lateral offset at a given position  
a, b, c, d being the coefficients and  
ds being the distance along the reference line between the start of the entry and the actual position.

Therefore, ds starts at zero for each entry. The absolute position of a width value is calculated by

$$s = s_{\text{start}} + ds$$

with

s being the absolute position (track co-ordinate system)  
s<sub>start</sub> being the start position of the lateral offset entry in the track co-ordinate system

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	51 of 103

ds being the delta between the start position ( $s_{\text{start}}$ ) and the requested position

A new lane offset entry is required each time the polynomial function changes.

*delimiters* <laneOffset.../>  
*parent* <lanes>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	$[0, \infty[$	start position (s-coordinate)
a	double	m	$] -\infty, \infty[$	parameter A, offset at s=0
b	double	1	$] -\infty, \infty[$	parameter B
c	double	1/m	$] -\infty, \infty[$	parameter C
d	double	1/m <sup>2</sup>	$] -\infty, \infty[$	parameter D

### 5.3.7.2 Road Lane Section Record

The lane section record defines the characteristics of a road cross-section. It specifies the numbers and types of lanes and further features of the lanes. At least one record must be defined in order to use a road. A lane section record is valid until a new lane section record is defined. If multiple lane section records are defined, they must be listed in ascending order.

The actual lanes and their properties are children of the lane section record and the lane records, respectively.

*delimiters* <laneSection>...</laneSection>  
*parent* <lanes>  
*instances* 1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	-	start position (s-coordinate)
singleSide	string	-	true false	lane section entry is valid for one side only (left or right, depending on the child entries)

For the naming convention of lanes, see chapter 3.2.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	52 of 103

### 5.3.7.2.1 Left / Center / Right Records

For easier navigation through a road description, the lanes under a lane section are grouped into left, center and right lanes. At least one entry (left, center or right) must be present.

<i>delimiters</i>	<code>&lt;left&gt;...&lt;/left&gt;</code> <code>&lt;center&gt;...&lt;/center&gt;</code> <code>&lt;right&gt;...&lt;/right&gt;</code>
<i>parent</i>	<code>&lt;laneSection&gt;</code>
<i>instances</i>	1
<i>attributes</i>	none

**Important Note:** the actual distinction of lanes according to their meaning for the traffic is performed by looking at each lane's id (see next chapter; left lanes: positive, right lanes: negative, center lane: zero). The delimiters `<left>` / `<center>` / `<right>` merely serve a better navigation within the road database.

#### 5.3.7.2.1.1 Lane Record

Lane records are found within the left/center/right records. They define the IDs of the actual lanes (and, therefore, their position on the road, see conventions in 3). In order to prevent confusion, lane records should represent the lanes from left to right (i.e. with descending ID). All properties of the lanes are defined as children of the lane records.

<i>delimiters</i>	<code>&lt;lane&gt;...&lt;/lane&gt;</code>
<i>parent</i>	<code>&lt;left&gt;</code> / <code>&lt;center&gt;</code> / <code>&lt;right&gt;</code>
<i>instances</i>	1+
<i>attributes</i>	

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	int	-	$]-\infty, \infty[$	id of the lane (according to convention)
type	string	-	see 6.5	type of the lane
level	string	string	true false	"true" = keep lane on level, i.e. do not apply superelevation or crossfall "false" = apply superelevation and crossfall to this lane (default, also used if argument <code>level</code> is missing)  lanes are also kept on level if the argument <code>level</code> is present but no superelevation or crossfall have been defined.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	53 of 103

#### 5.3.7.2.1.1.1 Lane Link Record

In order to facilitate navigation through a road network on a per-lane basis, lanes should be provided with predecessor/successor information. Only when lanes end at a junction or have no physical link, this record should be omitted.

For links between lanes on the same physical road (i.e. identical reference line), the lane predecessor/successor information provides the ids of lanes on the preceding or following lane section. For links between lanes on different roads, i.e. roads directly connecting to each other without a junction, the complete link information must be composed from the corresponding road link record and the lane link record.

*delimiters* <link>...</link>  
*parent* <lane>  
*instances* 0..1  
*attributes* none

##### 5.3.7.2.1.1.1.1 Lane Predecessor

This record provides detailed information about the predecessor of a lane.

*delimiters* <predecessor.../>  
*parent* <link>  
*instances* 0..1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	int	-	]-∞,∞[	ID of the linked lane

##### 5.3.7.2.1.1.1.2 Lane Successor

This record provides detailed information about the successor of a lane.

*delimiters* <successor.../>  
*parent* <link>  
*instances* 0..1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	int	-	]-∞,∞[	ID of the linked lane

#### 5.3.7.2.1.1.2 Lane Width Record

Each lane within a road's cross section can be provided with several width entries. At least one entry must be defined for each lane, except for the center lane which is, per convention, of zero width (see 3.2). Each entry is valid until a new entry is defined. If multiple entries are defined for a lane, they must be listed in ascending order.

The actual width at a given point is computed with a polynomial function of third order. It looks like:

$$\text{width} = a + b \cdot ds + c \cdot ds^2 + d \cdot ds^3$$

with

width being the width at a given position  
a, b, c, d being the coefficients and  
ds being the distance along the reference line between the start of the entry and the actual position.


Therefore, ds starts at zero for each entry. The absolute position of a width value is calculated by

$$s = s_{\text{section}} + \text{offset}_{\text{start}} + ds$$

with

s being the absolute position (track co-ordinate system)  
s<sub>section</sub> being the start position of the preceding lane section record (see 5.3.7.2) in the track co-ordinate system  
offset<sub>start</sub> being the offset of the entry relative to the preceding lane section record  
ds being the delta between the offset (s<sub>start</sub>) and the requested position

The following figure illustrates this convention for a lane with varying width over a given range:

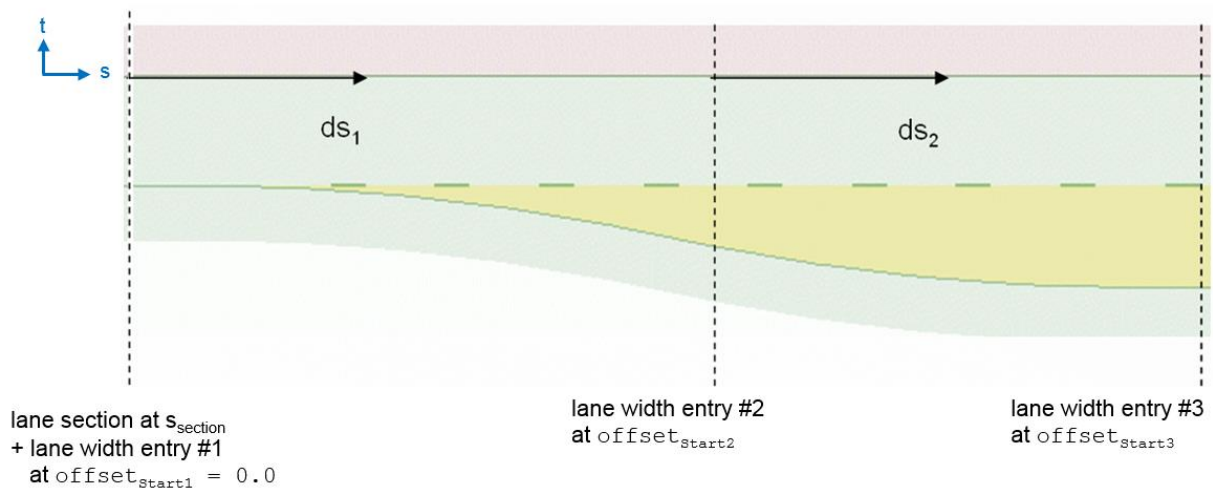

A new width entry is required each time the polynomial function changes.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	55 of 103

**delimiters** <width.../>  
**parent** <lane>  
**instances** 1+ (if no <border> entry is present)  
**restrictions** not allowed for center lane (laneId=0)  
**attributes**

<i><b>name</b></i>	<i><b>type</b></i>	<i><b>unit</b></i>	<i><b>value</b></i>	<i><b>description</b></i>
sOffset	double	m	[0,∞[	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
a	double	m	]-∞,∞[	parameter A, width at s=0
b	double	1	]-∞,∞[	parameter B
c	double	1/m	]-∞,∞[	parameter C
d	double	1/m <sup>2</sup>	]-∞,∞[	parameter D



#### 5.3.7.2.1.1.3 Lane Border Record

Instead of describing lanes by their width entries and, thus, invariably depending on influences of inner lanes on outer lanes, it might be more convenient to just describe the outer border of each lane independent of any inner lanes' parameters. Especially in cases where road data is derived from measurements, this type of definition will provide a more convenient method without the need to tessellate road sections into too many parts.

Width and border records are, of course, mutually exclusive for identical areas of a lane. If for a lane both entries (width and border) are defined, only the width entry shall prevail. If you are using border definitions, then also the definition of an offset record (see "Road Lane Offset Record") becomes obsolete.

The actual width at a given point is computed with a polynomial function of third order. It looks like:

$$t_{\text{border}} = a + b \cdot ds + c \cdot ds^2 + d \cdot ds^3$$

with

$t_{\text{border}}$  being the t-position of the border at a given ds position  
 $a, b, c, d$  being the coefficients and  
 $ds$  being the distance along the reference line between the start of the entry and the actual position.


Therefore, ds starts at zero for each entry. The absolute position of a width value is calculated by

$$s = s_{\text{section}} + \text{offset}_{\text{start}} + ds$$

with

$s$  being the absolute position (track co-ordinate system)  
 $s_{\text{section}}$  being the start position of the preceding lane section record (see 5.3.7.2) in the track co-ordinate system  
 $\text{offset}_{\text{start}}$  being the offset of the entry relative to the preceding lane section record  
 $ds$  being the delta between the offset ( $s_{\text{start}}$ ) and the requested position

The following figure illustrates this convention for a lane with varying border shape over a given range:

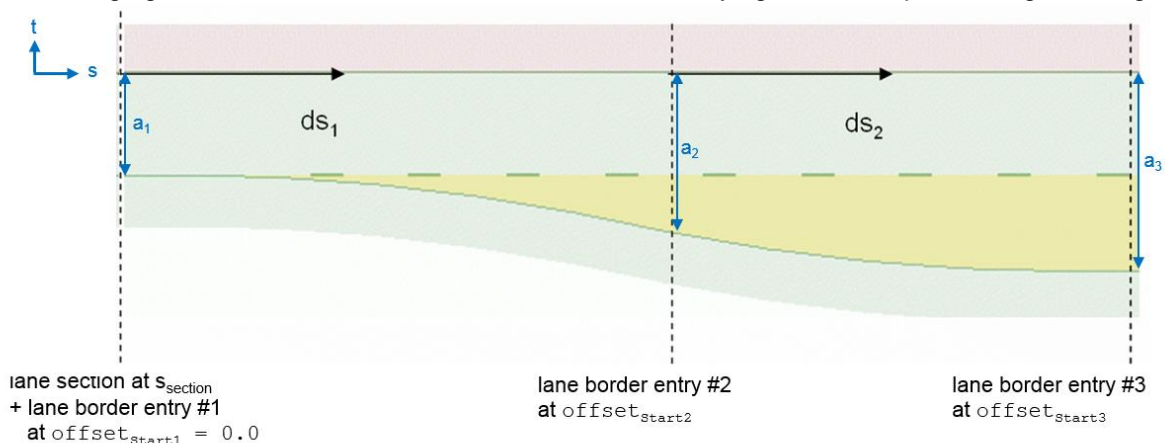

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	57 of 103

A new border entry is required each time the polynomial function changes.

**delimiters** <border.../>  
**parent** <lane>  
**instances** 1+ (if no <width> entry is present)  
**attributes**

<i><b>name</b></i>	<i><b>type</b></i>	<i><b>unit</b></i>	<i><b>value</b></i>	<i><b>description</b></i>
sOffset	double	m	[0,∞[	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
a	double	m	]-∞,∞[	parameter A, border position at s=0
b	double	1	]-∞,∞[	parameter B
c	double	1/m	]-∞,∞[	parameter C
d	double	1/m <sup>2</sup>	]-∞,∞[	parameter D

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	58 of 103

#### 5.3.7.2.1.1.4 Road Mark Record

Each lane within a road cross section can be provided with several road mark entries. The road mark information defines the style of the line at the lane's outer border. For left lanes, this is the left border, for right lanes the right one. The style of the line separating left and right lanes is determined by the road mark entry for lane zero (i.e. the center lane)


**delimiters** <roadMark>...</roadMark>  
**parent** <lane>  
**instances** 0+  
**attributes**

name	type	unit	value	description
sOffset	double	m	[0,∞[	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
type	string	-	see 6.2	type of the road mark
weight	string	-	see 6.3	weight of the road mark
color	string	-	see 6.4	color of the road mark
material	string	-	string	material of the road mark (identifiers to be defined, use "standard" for the moment.
width	double	m	[0, ∞[	width of the road mark – optional
laneChange	string	-	increase decrease both none	allow a lane change in the indicated direction taking into account that lanes are numbered in ascending order from right to left. If the attribute is missing, "both" is assumed to be valid.
height	double	m	] -∞, ∞[	physical distance of top edge of road mark from reference plane of the lane

The parameter `weight` may be used for a categorized definition of the width of a road mark (e.g. "standard" and "bold" according to the corresponding country's design rules) whereas the optional parameter `width` may be used for an exact definition of an individual road mark's width. This may be required e.g. in cases which deviate from a common design rule.

For an exact evaluation of a road mark's borders including the width of the mark, the convention shall apply that a road mark's centerline is always positioned on the respective lane's outer border line (so that the outer half of the road mark is physically placed on the next lane).

Illustration:

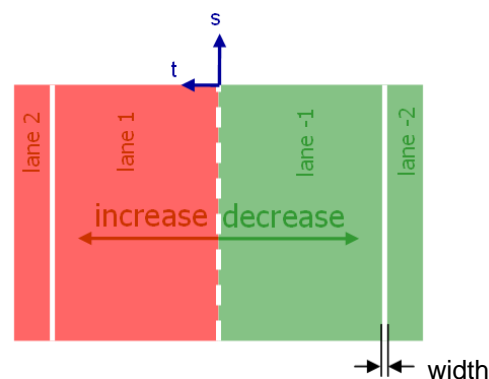

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	59 of 103

#### 5.3.7.2.1.1.4.1 Road Mark Type

Road marks may be further described in terms of their type. Instead of providing additional parameters to the `roadMark` tag, type definitions shall be defined as children to the `roadMark` tag. Each `type` definition must contain one or more `line` definitions with additional information about the lines the road mark is composed of.


*delimiters*      `<type>...</type>`  
*parent*            `<roadMark>`  
*instances*        `0..1`  
*attributes*

name	type	unit	value	description
name	string	-	-	name of the road mark type
width	double	m	[0,∞[	line width

##### 5.3.7.2.1.1.4.1.1 Road Mark Type – Line Definition

A road mark may consist of one or more elements. Multiple elements will usually be positioned side by side.

Currently, the elements can only be lines. Each line can be defined by its line/space setup and by a lateral offset to the road mark's reference position (i.e. the border between two lanes). A line definition is valid for a given length (i.e. the total of visible line and invisible space) and will be repeated automatically.

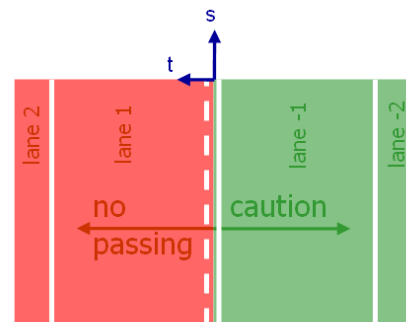

*delimiters*      `<line.../>`  
*parent*            `<type>`  
*instances*        `1+`  
*attributes*

name	type	unit	value	description
length	double	m	[0,∞[	length of the visible part
space	double	m	[0,∞[	length of the space following the visible part
tOffset	double	m	]-∞,∞[	lateral offset from the lane border
sOffset	double	m	[0,∞[	initial longitudinal offset of the line definition from the start of the road mark definition
rule	string	-	no passing caution none	rule which is to be observed when passing the line from inside
width	double	m	[0,∞[	line width; if given, supersedes the definition in the parent tag

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	60 of 103

#### 5.3.7.2.1.1.5 Lane Material Record

Each lane within a road cross section may be provided with several entries defining its material. Each entry is valid until a new entry is defined. If multiple entries are defined, they must be listed in increasing order.

*delimiters* <material.../>  
*parent* <lane>  
*instances* 0+  
*restrictions* not allowed for center lane (laneId=0)  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
sOffset	double	m	[0,∞[	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
surface	string	-	-	surface material code, depending on application
friction	double	-	[0,∞[	friction value
roughness	double	-	[0,∞[	roughness (e.g. for sound and motion systems)

#### 5.3.7.2.1.1.6 Lane Visibility Record

Each lane within a road cross section may be provided with several entries defining the visibility in four directions relative to the lane's direction. Each entry is valid until a new entry is defined. If multiple entries are defined, they must be listed in increasing order.

For left lanes (positive ID), the forward direction is oriented opposite to the track's direction, for right lanes, the forward direction and the track's direction are identical.

*delimiters* <visibility.../>  
*parent* <lane>  
*instances* 0+  
*restrictions* not allowed for center lane (laneId=0)  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
sOffset	double	m	[0,∞[	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
forward	double	m	[0,∞[	visibility in forward direction
back	double	m	[0,∞[	visibility in reverse direction
left	double	m	[0,∞[	visibility to the left
right	double	m	[0,∞[	visibility to the right

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	61 of 103

#### 5.3.7.2.1.1.7 Lane Speed Record

This record defines the maximum allowed speed on a given lane. Each entry is valid in direction of the increasing s co-ordinate until a new entry is defined. If multiple entries are defined, they must be listed in increasing order.

*delimiters* <speed.../>  
*parent* <lane>  
*instances* 0+  
*restrictions* not allowed for center lane (laneId=0)  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
sOffset	double	m	[0,∞[	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
max	double	m/s	[0,∞[	maximum allowed speed
unit	string	-	see 2.2	unit of the attribute max (optional)

#### 5.3.7.2.1.1.8 Lane Access Record

This record defines access restrictions for certain types of road users. The record can be used to complement restrictions resulting from signs or signals in order to control the traffic flow in a scenario. Each entry is valid in direction of the increasing s co-ordinate until a new entry is defined. If multiple entries are defined, they must be listed in increasing order.

*delimiters* <access.../>  
*parent* <lane>  
*instances* 0+  
*restrictions* not allowed for center lane (laneId=0)  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
sOffset	double	m	[0,∞[	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
restriction	string	-	see 6.9	identifier of the participant to which the restriction applies


#### 5.3.7.2.1.1.9 Lane Height Record

The surface of a lane may be offset from the plane defined by the reference line and the corresponding elevation and crossfall entries (e.g. pedestrian walkways are typically a few centimeters above road level). The height record provides a simplified method to describe this offset by setting an inner and outer offset from road level at discrete positions along the lane profile.

<i>delimiters</i>	<code>&lt;height.../&gt;</code>
<i>parent</i>	<code>&lt;lane&gt;</code>
<i>instances</i>	0+
<i>restrictions</i>	not allowed for center lane ( <code>laneId=0</code> )
<i>attributes</i>	

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
sOffset	double	m	$[0, \infty[$	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
inner	double	m	$] -\infty, \infty[$	inner offset from road level
outer	double	m	$] -\infty, \infty[$	outer offset from road level

Illustration:

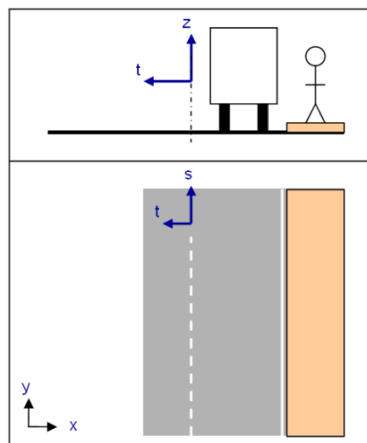

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	63 of 103

#### 5.3.7.2.1.1.10 Lane Rule Record

Lane properties may be further described by additional rules which are not covered by any of the other lane attributes defined within this format specification. For example, the rules "no parking at any time", "disabled parking" etc. may apply to entire lanes (in the USA, curb stones will show corresponding colors) and may not be derived implicitly from colors, signs etc. For the time being, the description of the rules is up to the users. Formal standardization within OpenDRIVE will be performed on the basis of user feedback.

*delimiters* <rule.../>  
*parent* <lane>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
sOffset	double	m	[0,∞[	start position (s-coordinate) relative to the position of the preceding <i>laneSection</i> record
value	string	-	-	free text; currently recommended values are "no stopping at any time" "disabled parking" "car pool"

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREs GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	64 of 103



### 5.3.8 Road Objects Record

The objects record is the container for all objects along a road.

*delimiters* <objects>...</objects>  
*parent* <road>  
*instances* 0..1  
*attributes* none

#### 5.3.8.1 Object Record

The object record has been introduced for application-dependent elements. It is very flexible due to several parameters that can be used to provide the application with additional information. The most frequently used types of objects may become part of the OpenDRIVE<sup>®</sup> specification in future releases.

*delimiters* <object>...</object>  
*parent* <objects>  
*instances* 1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
type	string	-	-	type of the object (for a parking space, use the identifier "parkingSpace")
name	string	-	-	name of the object
id	string	n/a	-	unique ID within database
s	double	m	[0,∞[	track position of object's origin (s-position)
t	double	m	]-∞,∞[	track position of object's origin (t-position)
zOffset	double	m	]-∞,∞[	z offset of object's origin from track level
validLength	double	m	[0,∞[	extent of object's validity along s-axis (0.0 for point object)
orientation	string	-	+ - none	"+" = valid in positive track direction "-" = valid in negative track direction "none" = valid in both directions
length	double	m	[0,∞[	length of the object (local dx)
width	double	m	[0,∞[	width of the object (local dy)
radius	double	m	[0,∞[	radius of the object; alternative to width and length
height	double	m	]-∞,∞[	height of the object (local dz)
hdg	double	rad	]-∞,∞[	heading angle of the object relative to road direction
pitch	double	rad	]-∞,∞[	pitch angle of the object relative to road pitch
roll	double	rad	]-∞,∞[	roll angle of the object relative to road roll

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	65 of 103

Illustration for circular (or cylindric) objects:


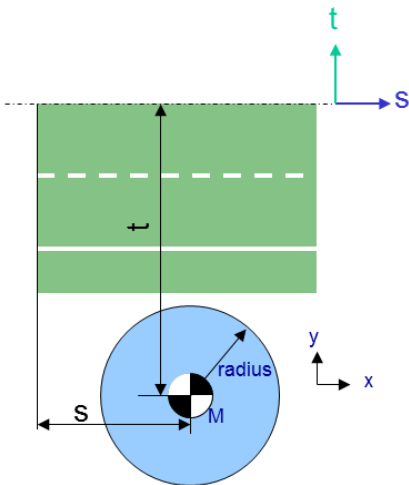


Illustration for parking spaces (aligned with road and with offset angle):

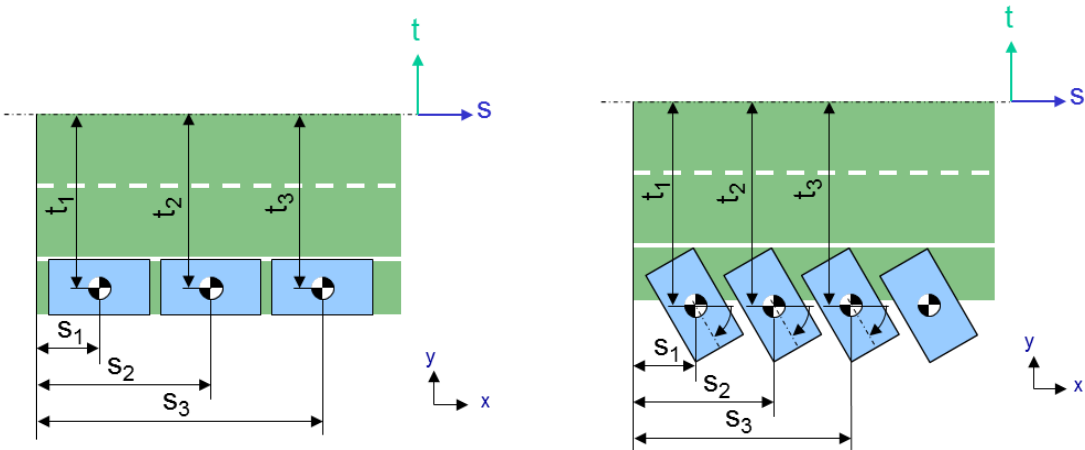

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	66 of 103


### 5.3.8.1.1 Object Repeat Record

In order to avoid multiple definitions for multiple instances of the same object, repeat parameters may be defined for the original object. Some of the parameters in the object node may be overwritten in order to specify linear transitions of e.g. the lateral offset of an object. For attributes which are not specified in the object repeat record, the attributes of the respective object record shall prevail.

*delimiters* <repeat.../>  
*parent* <object>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	[0,∞[	start position (s-coordinate), overrides the corresponding argument in the original <object> record
length	double	m	[0,∞[	length of the repeat area
distance	double	m	[0,∞[	distance between two instances of the object; If this value is zero, then the object is considered to be a continuous feature like a guard rail, a wall etc.
tStart	double	m	]-∞,∞[	lateral offset of object's reference point at s
tEnd	double	m	]-∞,∞[	lateral offset of object's reference point at s + length
widthStart	double	m	[0,∞[	width of the object at s
widthEnd	double	m	[0,∞[	width of the object at s + length
heightStart	double	m	]-∞,∞[	height of the object at s
heightEnd	double	m	]-∞,∞[	height of the object at s + length
zOffsetStart	double	m	]-∞,∞[	z offset of the object at s
zOffsetEnd	double	m	]-∞,∞[	z offset of the object at s + length

Illustration:

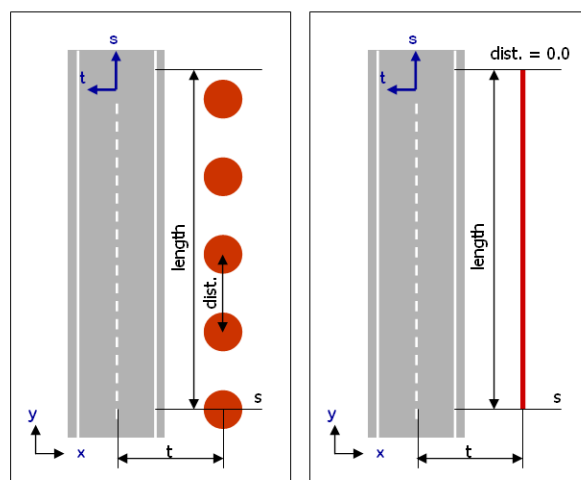

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	67 of 103

### 5.3.8.1.2 Object Outline Record

The default parameters of the object record allow for objects with rectangular and circular footprint to be placed within the database. However, users may need to describe linear features as well as polygonal areas of non-rectangular shape along roads. For this purpose, the outline record may be used. It defines a sequence of corners including height information on the object's extent either in object co-ordinates or relative to the road's reference line (~~mixed definitions may also be used~~). For areas, the points should – preferably – be listed in CCW order.

The outline record must be followed by at least one corner record.

**delimiters** <outline>...</outline>  
**parent** <object>  
**instances** 0..1  
**attributes** none


#### 5.3.8.1.2.1 CornerRoad

Defines a corner point on the object's outline in road co-ordinates..

**delimiters** <cornerRoad.../>  
**parent** <outline>  
**instances** 0+  
**attributes**

name	type	unit	value	description
s	double	m	[0,∞[	s co-ordinate of the corner
t	double	m	]−∞,∞[	t co-ordinate of the corner
dz	double	m	]−∞,∞[	delta z of the corner relative to road's reference line
height	double	m	]−∞,∞[	height of the object at this corner

Illustration:

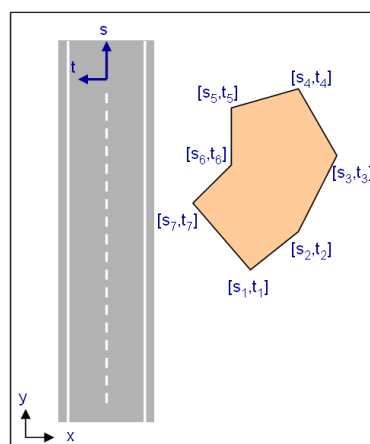

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	68 of 103

### 5.3.8.1.2.2 CornerLocal

Defines a corner point on the object's outline relative to the object's pivot point in local u/v co-ordinates. The pivot point and the orientation of the object are given by the *s/t/heading* arguments of the <object> entry.

*delimiters* <cornerLocal.../>


*parent* <outline>

*instances* 0+

*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
u	double	m	$]-\infty, \infty[$	local u co-ordinate of the corner
v	double	m	$]-\infty, \infty[$	local v co-ordinate of the corner
z	double	m	$]-\infty, \infty[$	local z co-ordinate of the corner
height	double	m	$]-\infty, \infty[$	height of the object at this corner

Illustration:

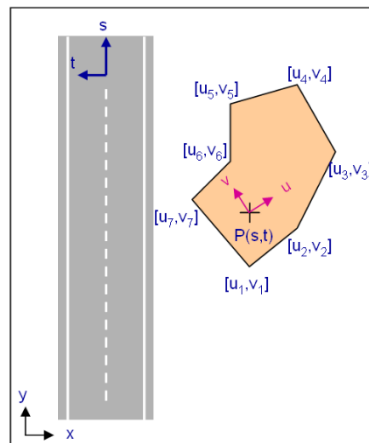

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	69 of 103

#### 5.3.8.1.3 Object Material Record

For objects like patches which are within the road surface (and, typically, coplanar to the surface) and which represent a local deviation from the standard road material, a description of the material properties is required. This description supercedes the one provided by the Road Material record and, again, is valid only within the outline of the parent road object.

*delimiters* <material.../>  
*parent* <object>  
*instances* 0..1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
surface	string	-	-	surface material code, depending on application
friction	double	-	[0,∞[	friction value
roughness	double	-	[0,∞[	roughness (e.g. for sound and motion systems)

#### 5.3.8.1.4 Lane Validity Record

Per default, objects are valid for all lanes pointing into the object's direction. This default validity may be replaced with explicit validity information for an object. The validity record is an optional child record of the object record. Multiple validity records may be defined per object.

*delimiters* <validity.../>  
*parent* <object>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
fromLane	int	-	]-∞,∞[	minimum ID of the lanes for which the object is valid
toLane	int	-	]-∞,∞[	maximum ID of the lanes for which the object is valid

NOTE: For single-lane-validity of the object, provide identical values for `fromLane` and `toLane`.

### 5.3.8.1.5 Parking Space Record

A parking space is a special type of a rectangular object which may carry further information than just its spatial extent. Therefore, details may optionally be added to the object entry in order to define more complex parking space situations.

*delimiters* <parkingSpace>...</parkingSpace>  
*parent* <object>  
*instances* 0..1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
access	string	-	all car women handicapped bus truck electric residents	access definitions for the parking space (assuming that "women" and "handicapped" will drive vehicles of type "car" only)
restrictions	string	-	-	further restrictions as user-defined test (optional), e.g. "2hr limit", "residents with permit B only"

### 5.3.8.1.6 Parking Space Marking Record

With the marking record, it is possible to define details about the marking on each side of a parking space. In addition, the marking type "curb" is introduced to indicate a hard edge which must not be crossed.

*delimiters* <marking>...</marking>  
*parent* <parkingSpace>  
*instances* 0..4  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
side	string	-	front rear left right	side for which the marking is defined
type	string	-	see 6.2 curb	type of the marking, additionally "curb" is allowed
width	double	m	[0, ∞[	width of the marking
color	string	-	see 6.4	color of the marking

### 5.3.8.2 Object Reference Record

Since the same object may be referred to from several roads, a corresponding record is being provided. This requires, however, that objects which are to be referred to be provided with a unique ID. The object reference record consists of a main record and an optional lane validity record.

*delimiters* <objectReference.../>  
*parent* <objects>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>type</i>	<i>type</i>	<i>description</i>
s	double	m	[0,∞[	track position (s-position)
t	double	m	]−∞,∞[	lateral position (t-position)
id	string	-	-	unique ID of the referred object within the database
zOffset	double	m	]−∞,∞[	z offset from track level
validLength	double	m	[0,∞[	extent of object's validity along s-axis in (0.0 for point object)
orientation	string	-	+ − none	"+" = valid in positive track direction "−" = valid in negative track direction "none" = valid in both directions

#### 5.3.8.2.1 Lane Validity Record

see 5.3.8.1.4

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	72 of 103




### 5.3.8.3 Tunnel Record

The tunnel record is – like an object record – applied to the entire cross section of the road within the given range unless a lane validity record with further restrictions is provided as child record.

*delimiters* <tunnel.../>  
*parent* <objects>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	[0,∞[	track position (s co-ordinate)
length	double	m	[0,∞[	length of the tunnel (s direction)
name	string	-	-	name of the tunnel
id	string	-	-	unique ID within database
type	string	-	see 0	type of the tunnel
lighting	double	-	[0,1]	degree of artificial tunnel lighting
daylight	double	-	[0,1]	degree of daylight intruding the tunnel

Illustration:

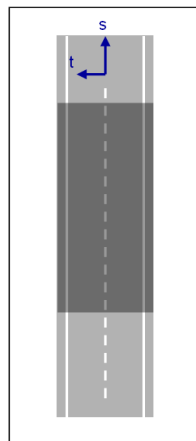

#### 5.3.8.3.1 Lane Validity Record

see 5.3.8.1.4.

*delimiters* <validity.../>  
*parent* <tunnel>

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	73 of 103


#### 5.3.8.4 Bridge Record

The bridge record is – like an object record – applied to the entire cross section of the road within the given range unless a lane validity record with further restrictions is provided as child record.

*delimiters* <bridge.../>  
*parent* <objects>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	[0,∞[	track position (s co-ordinate)
length	double	m	[0,∞[	length of the bridge (s direction)
name	string	-	-	name of the bridge
id	string	-	-	unique ID within database
type	string	-	see 6.8	type of the bridge

Illustration:

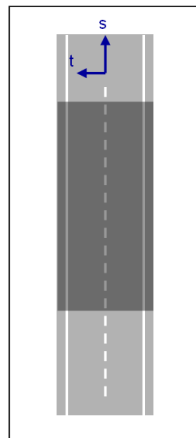

##### 5.3.8.4.1 Lane Validity Record

see 5.3.8.1.4.

*delimiters* <validity.../>  
*parent* <bridge>

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	74 of 103

### 5.3.9 Road Signals Record

The signals record is the container for all signals along a road.

*delimiters* <signals>...</signals>  
*parent* <road>  
*instances* 0..1  
*attributes* none

#### 5.3.9.1 Signal Record

The signal record is used to provide information about signs and signals along a road. Signals are signs that can change their state dynamically (e.g. traffic lights). The signal record consists of a main record and an optional lane validity record.

*delimiters* <signal.../>  
*parent* <signals>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	[0,∞[	track position (s-position)
t	double	m	]−∞,∞[	track position (t-position)
id	string	-	-	unique ID of the signal within the database
name	string	-	-	name of the signal (e.g. gfx bead name)
dynamic	string	-	yes no	boolean identification whether signal is a dynamic signal (e.g. traffic light)
orientation	string	-	+ − none	"+" = valid in positive track direction "−" = valid in negative track direction "none" = valid in both directions
zOffset	double	m	]−∞,∞[	z offset from track level
country	string	-	see 6.10	country code of the signal
type	string	-	-1 see 6.11	type identifier according to country code or "-1" / "none"
subtype	string	-	-	subtype identifier according to country code or "-1" / "none"
value	double	-	-	value of the signal (e.g. speed, mass – depending on type)
unit	string	-	see 2.2	unit of the attribute <i>value</i> (optional)
height	double	m	[0,∞[	height of the signal
width	double	m	[0,∞[	width of the signal
text	string	-	string	additional text associated with the signal (e.g. text on city limit "Stadt\nBadAibling")
hOffset	double	rad	]−∞,∞[	heading offset of the signal (relative to orientation)
pitch	double	rad	]−∞,∞[	pitch angle of the signal

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	75 of 103

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
roll	double	rad	]-∞,∞[	roll angle of the signal

#### 5.3.9.1.1 Lane Validity Record

Per default, signals are valid for all lanes pointing into the signal's direction. This default validity may be replaced with explicit validity information for a signal. The validity record is an optional child record of the signal record. Multiple validity records may be defined per signal.

*delimiters* <validity.../>

*parent* <signal>

*instances* 0+

*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
fromLane	int	-	]-∞,∞[	minimum ID of the lanes for which the object is valid
toLane	int	-	]-∞,∞[	maximum ID of the lanes for which the object is valid

NOTE: For single-lane-validity of the signal, provide identical values for `fromLane` and `toLane`.

#### 5.3.9.1.2 Signal Dependency Record

The signal dependency record provides signals with a means to control other signals. Signs can e.g. restrict other signs for various types of vehicles, warning lights can be turned on when a traffic light goes red etc. The signal dependency record is an optional child record of the signal record. A signal may have multiple dependency records.

*delimiters* <dependency.../>

*parent* <signal>

*instances* 0+

*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	string	-	-	ID of the controlled signal
type	string	-	-	type of the dependency, depending on the application

### 5.3.9.2 Signal Reference Record

Depending on the way roads (especially in junctions) are laid out for different applications, it may be necessary to refer to the same (i.e. the identical) sign from multiple roads. In order to prevent inconsistencies by multiply defining an entire signal entry, the user only needs to define the complete signal entry once and can refer to this complete record by means of the signal reference record.

This requires, however, that signals which are to be referred to be provided with a unique ID. The signal reference record consists of a main record and an optional lane validity record.

*delimiters* <signalReference.../>  
*parent* <signals>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
s	double	m	[0,∞[	track position [m] (s-position)
t	double	m	]−∞,∞[	track position [m] (t-position)
id	string	-	-	unique ID of the referenced signal within the database
orientation	string	-	+ − none	"+" = valid in positive track direction "−" = valid in negative track direction "none" = valid in both directions

#### 5.3.9.2.1 Lane Validity Record

see 5.3.9.1.1.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	77 of 103

### 5.3.10 Surface

The surface record is the container for all surface descriptions which shall be applied along a road.

*delimiters* <surface>...</surface>  
*parent* <road>  
*instances* 0..1  
*attributes* none

#### 5.3.10.1 Curved Regular Grid Record

The interface to a Curved Regular Grid (CRG) surface description file is defined as arguments to the <CRG> tag and as an include operation between the opening and closing <CRG> tags.

*delimiters* <CRG>...</CRG>  
*parent* <surface>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
file	string	-	-	name of the file containing the CRG data
sStart	double	m	[0,∞[	start of the application of CRG data (s-position)
sEnd	double	m	[0,∞[	end of the application of CRG (s-position)
orientation	string	-	same opposite	orientation of the CRG data set relative to the underlying road
mode	string	-	attached attached0 genuine	application mode for the surface data
purpose	string	-	elevation friction	optional, physical purpose of the data contained in the CRG file; if the attribute is missing, data will be interpreted as elevation data.
sOffset	double	m	]-∞,∞[	s-offset between CRG center line and reference line of the road (optional, default = 0.0)
tOffset	double	m	]-∞,∞[	t-offset between CRG center line and reference line of the road (optional, default = 0.0)
zOffset	double	m	]-∞,∞[	z offset between CRG center line and reference line of the road (optional, default = 0.0)
zScale	double	-	]-∞,∞[	z scale factor for the surface description (optional, default = 1.0)
hOffset	double	rad	]-∞,∞[	heading offset between CRG center line and reference line of the road (required for mode <i>genuine</i> only, optional, default = 0.0)

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	78 of 103

As the name indicates, CRG data is organized in a regular grid which is laid out along a reference line (comparable to an OpenDRIVE road's reference line). At each grid position, it contains the absolute elevation measured along a real road and some additional data which allows for the computation of the delta elevation relative to the reference line.

The key to combining OpenDRIVE and CRG data is to define a correlation between the two reference lines and a rule for using the elevation data of both descriptions.

CRG data may be offset from the OpenDRIVE road's reference line (see `tOffset`) and it may be oriented in the same or opposite direction as the layout direction of the road (see `orientation`).

The CRG data may be applied to a given OpenDRIVE road in two modes:

Mode `attached`:

The reference line of the CRG data set is replaced with the OpenDRIVE road's reference line, taking into account the `tOffset` and the `sOffset` parameters

The CRG local elevation values (calculated by evaluating the CRG grid and applying `zOffset` and `zScale`) will be added to the surface elevation data of the OpenDRIVE road (as derived from the combination of elevation, super-elevation and crossfall).

With this mode, the surface information relative to the original CRG data's reference line is transferred from an arbitrary CRG road to an OpenDRIVE road without having to make sure that the overall geometries of the road match. The original position, heading, curvature, elevation and superelevation of the CRG road are disregarded. The CRG grid is evaluated along the OpenDRIVE reference line instead of the CRG reference line.

$$\begin{pmatrix} u \\ v \end{pmatrix}_{CRG} = \begin{pmatrix} s - s_{Offset} \\ t - t_{Offset} \end{pmatrix}_{OpenDrive}$$

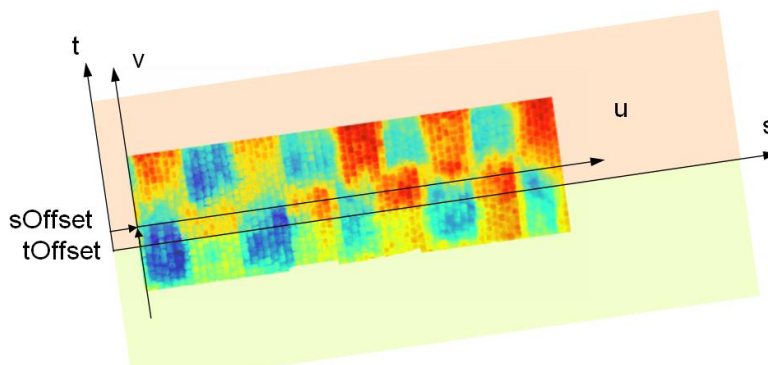


Image courtesy of Daimler AG

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	79 of 103

#### Mode `attached0`:

This mode is basically the same as the `attached` mode, with the only exception that only the CRG data's elevation value is taken into account (i.e. the OpenDRIVE elevation is set to zero)


#### Mode `genuine`:

The start point of the CRG data set's reference line is positioned relative to the point on the OpenDRIVE road's reference line at the position defined by `sStart`, `sOffset` and `tOffset`.

By providing offset values for the longitudinal (`sOffset`) and lateral (`tOffset`) displacement, the heading (`hOffset`) and the elevation (`zOffset`), the correlation between the two description's reference lines is clear.

In genuine mode, the CRG data will completely replace the OpenDRIVE elevation data, i.e. the absolute elevation of a given point of the road surface is directly computed from the CRG data (think of it as combining CRG and OpenDRIVE data with the OpenDRIVE elevation, super-elevation and crossfall all being zero).

When using this method, it must of course be made sure that the geometry of the CRG data matches - within certain tolerance - the geometry of the underlying OpenDRIVE road.

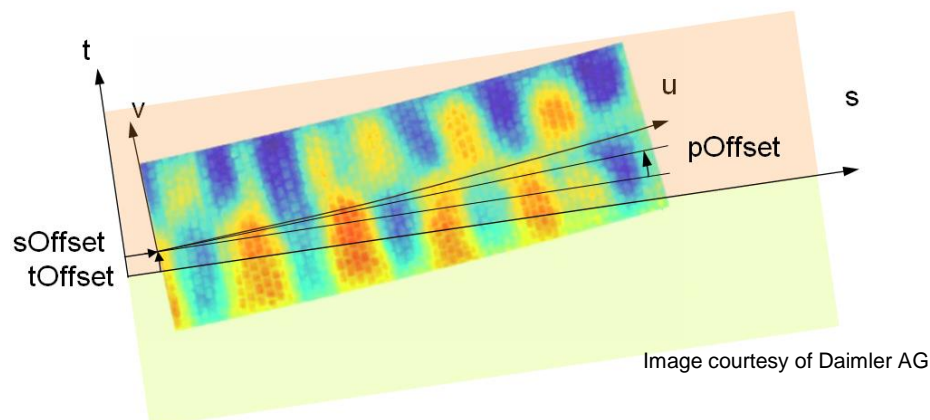

Since CRG data may only cover parts of a road's surface, it must be made sure that outside the valid CRG area, the elevation information derived from OpenDRIVE data can still be used.

#### Example:

```
<surface>
  <CRG file="fancyData.crg" sStart="0.0" sEnd="100.0"
    orientation="same" mode="relative"
    tOffset="0.0">
  </CRG>
</surface>
```

Date:	November 04, 2015	Title: OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	Issue:	Page:
		VI2014.107	H	80 of 103



### 5.3.11 Railroad Elements

The available set of railroad records below the road level is currently limited to the definition of switches. All other entries shall, for the moment, be covered with the existing records (e.g. track definition by `<road>`, signal definition by `<signal>` etc.). It shall be noted again, that railroad specific elements are defined on the background of streetcar applications.

The railroad record is the container for all railroad definitions which shall be applied along a road.


**delimiters**      `<railroad>...</railroad>`  
**parent**            `<road>`  
**instances**        `0..1`  
**attributes**        none

#### 5.3.11.1 Railroad Switches

**delimiters**      `<switch>...</switch>`  
**parent**            `<railroad>`  
**instances**        `0+`  
**attributes**

name	type	unit	value	description
name	string	-	-	unique name of the switch
id	string	-	-	unique id of the switch (preferably an integer number, uint32_t)
position	string	-	dynamic straight turn	either a switch can be operated (dynamic) or it is in a static position

Illustration:

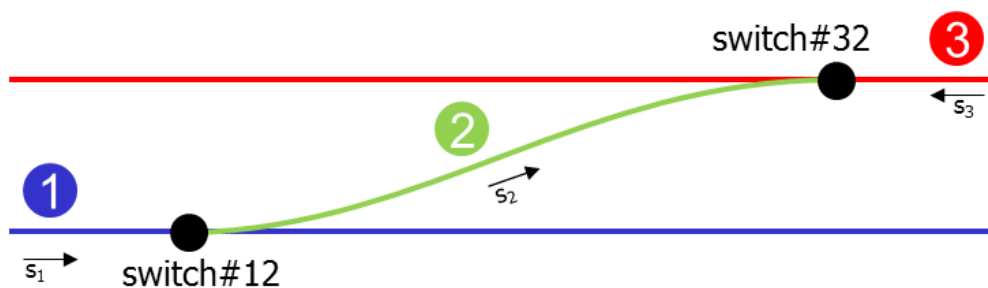

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	81 of 103

### 5.3.11.1.1 Main Track

*delimiters* <mainTrack>...</mainTrack>  
*parent* <switch>  
*instances* 1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	string	-	-	unique ID of the main track (i.e. <road> entry); must be consistent with parent holding this <railroad> entry.
s	double	m	[0,∞[	s position of the switch (i.e. the point where main track and side track meet)
dir	string	-	+ -	driving direction on the main track for entering the side track via the switch

### 5.3.11.1.2 Side Track

*delimiters* <sideTrack>...</sideTrack>  
*parent* <switch>  
*instances* 1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	string	-	-	unique ID of the side track (i.e. <road> entry)
s	double	m	[0,∞[	s position of the switch on the side track
dir	string	-	+ -	driving direction on the side track for after entering it via the switch

### 5.3.11.1.3 Partner Switch

This entry may be used to indicate which switch will lead out of a side track after it has been entered. This entry is optional and may be used for easier navigation through railroad networks. In the example above, the switches 12 and 32 would be considered partners.

*delimiters* <partner>...</partner>  
*parent* <switch>  
*instances* 0..1  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
name	string	-	-	unique name of the partner switch
id	string	-	-	unique id of the partner switch

## 5.4 Controller Record

A controller provides consistent states for a group of signals. This may be a set of signals within a junction or a set of dynamic speed restrictions on a motorway. The entire record consists of a header followed by a number of dependency records.

*delimiters* <controller.../>  
*parent* <OpenDRIVE>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	string	-	-	unique ID within database
name	string	-	-	name of the controller
sequence	uint32_t	-	[0,∞[	sequence number (priority) of this controller with respect to other controllers of same logical level

### 5.4.1 Control Entry Record

The control entry record provides information about a single signal controlled by the corresponding controller. This record is a child record of the controller record.

*delimiters* <control.../>  
*parent* <controller>  
*instances* 1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
signalId	string	-	-	ID of the controlled signal
type	string	-	-	type of control

## 5.5 Junction Record

When a road can be linked to more than one successor (or predecessor, depending on the orientation), a junction record is required. It contains the information about all possible connections between roads meeting at a physical junction.

For junctions, two types of roads must be distinguished:

- standard roads
- paths

**Standard roads** are in-coming and out-going roads of the junction. Usually, they don't require any special treatment except for the fact that they end or begin at a junction.

**Paths** are roads within a junction. For each connection leading from one standard road to another, a path is defined. Paths may link only single lanes or a set of lanes at once. Paths must only contain lanes of one side (left or right). However, within the database, paths having only left lanes and paths having only right lanes may both be contained. The geometric and logic description of paths complies with the rules defined for standard roads (i.e. they contain lanes, elevation entries etc.).

Due to the fact that paths cannot have lanes of both directions, junctions only provide information linking incoming roads to paths. This is the only ambiguous part of a connection. The link between a path and the corresponding outgoing road is clear from the ROAD LINK record of the path (see 5.3.2).

The junction record is split into a header record and a series of link records.

*delimiters*      <junction>...</junction>  
*parent*            <OpenDRIVE>  
*instances*        0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
name	string	-	-	name of the junction
id	string	-	-	unique ID within database

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	84 of 103

### 5.5.1 Connection Record

The connection record provides information about a single connection within a junction. It is a child of the junction header record.

*delimiters* <connection>...</connection>  
*parent* <junction>  
*instances* 1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	string	-	-	unique ID within the junction
incomingRoad	string	-	-	ID of the incoming road
connectingRoad	string	-	-	ID of the connecting path
contactPoint	string	-	start end	contact point on the connecting road

#### 5.5.1.1 Junction Lane Link Record

The junction lane link record provides information about the lanes which are linked between incoming road and connecting road. This record may be omitted if all incoming lanes are linked to lanes with identical IDs on the connecting road. However, it is strongly recommended to provide this record.

*delimiters* <laneLink.../>  
*parent* <connection>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
from	int	-	]-∞,∞[	ID of the incoming lane
to	int	-	]-∞,∞[	ID of the connecting lane

### 5.5.2 Junction Priority Record

The junction priority record provides information about the priority of a connecting road over another connecting road. It is only required if priorities cannot be derived from signs or signals in a junction or on tracks leading to a junction.

*delimiters* <priority.../>  
*parent* <junction>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
high	string	-	-	ID of the prioritized connecting road
low	string	-	-	ID of the connecting road with lower priority

### 5.5.3 Junction Controller Record


Junction controller records list the controllers which are used for the management of a junction.

*delimiters* <controller.../>  
*parent* <junction>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	string	-	-	ID of the controller
type	string	-	-	type of control for this junction
sequence	uint32_t	-	[0,∞[	sequence number (priority) of this controller with respect to other controllers in the same junction

## 5.6 Junction Group Record

In some cases (e.g. roundabout) it might be good to group junctions so that the traffic simulation software can execute calculations more efficiently.

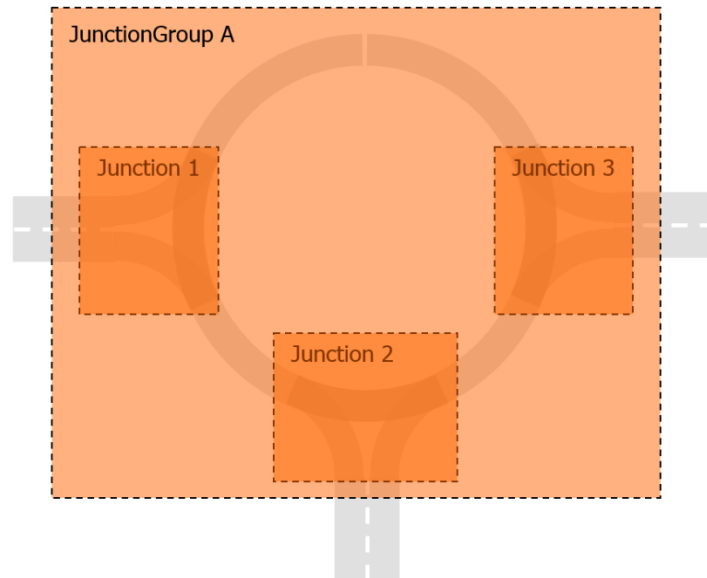

The junction group record is split into a header record and a series of member records.

**delimiters** <junctionGroup>...</junctionGroup>  
**parent** <OpenDRIVE>  
**instances** 0+  
**attributes**

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
name	string	-	-	name of the junction group
id	string	-	-	unique ID within database
type	string	-	roundabout unknown	type of this grouping

### 5.6.1 Junction Reference Record

Junction group members are nothing but references to existing junction records.


**delimiters** <junctionReference.../>  
**parent** <junctionGroup>  
**instances** 1+  
**attributes**

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
junction	string	-	-	ID of the junction

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	87 of 103

## 5.7 Stations

For tram and railroad applications, the definition of stations must be feasible. Stations may refer to multiple tracks and are, therefore, defined on the same level as junctions. The physical extent of a station is defined by the combined physical extent of all platforms within the station. For pure automotive environments, also bus stations may be defined using the same elements.

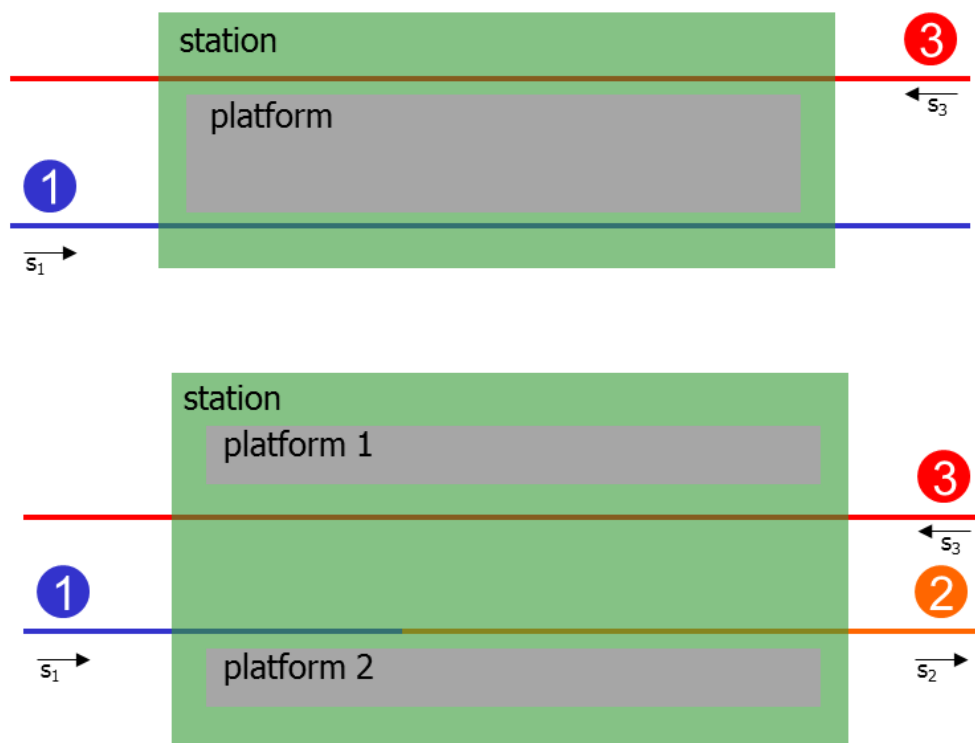

The station record is defined as follows.

*delimiters* <station>...</station>  
*parent* <OpenDRIVE>  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
name	string	-	-	name of the station
id	string	-	-	unique ID within database
type	string	-	small medium large	user-defined with the listed values serving as examples of an actual application

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	88 of 103



### 5.7.1 Platform Record

Each station entry must contain at least one platform entry. Each platform entry must contain at least one reference to a valid track segment.

*delimiters* <platform>...</platform>  
*parent* <station>  
*instances* 1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
name	string	-	-	name of the platform
id	string	-	-	unique ID within database

#### 5.7.1.1 Segment Record

Each platform entry is valid on one or more track segments. These have to be specified using the following record.

*delimiters* <segment.../>  
*parent* <platform>  
*instances* 1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
roadId	string	-	-	unique ID of the road (track) which accompanies the platform
sStart	double	m	[0,∞[	minimum s-value on road where platform is adjacent to it
sEnd	double	m	[0,∞[	maximum s-value on road where platform is adjacent to it
side	string	-	left right	side of track where platform is situated when going from sStart to sEnd.

## 5.8 Ancillary Data

Ancillary data for a bead may be defined by generating an entry that directly follows the corresponding bead. It is designed to contain user-defined data that is required for specific applications or is not yet covered by the OpenDRIVE<sup>®</sup> standard.

*delimiters* <userData.../>  
*parent* any  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
code	string	-	-	code for the user data (application specific)
value	string	-	-	user data as string (e.g. hexdump)

## 5.9 Include Tag

The inclusion of another file can be triggered with an include tag at any location.

*delimiters* <include.../>  
*parent* any  
*instances* 0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
file	string	-	-	location of the file which is to be included

## 5.10 Alternative Layouts (Sets)

Sets indicate that more than one setup of the properties enclosed by the set's opening and closing tags are available and that the application may choose one of these setups (the activation of none or more than one setup at a given time is not supported). Sets may be used e.g. for different road mark setups, different signaling etc.

*delimiters*      <set>...</set>  
*parent*            any  
*instances*        0+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	string	-	-	unique ID within the database

### 5.10.1 Layout Instance

Each set may contain one or more alternative setups of the enclosed property. In order to identify a specific setup, it must be enclosed with instance tags.

*delimiters*      <instance>...</instance>  
*parent*            <set>  
*instances*        1+  
*attributes*

<i>name</i>	<i>type</i>	<i>unit</i>	<i>value</i>	<i>description</i>
id	string	-	-	unique ID within the database

Example:

```
<road ...>
  <set id="roadWorks">
    <instance id="regular">
      <lanes>
        :
      </lanes>
    </instance>
    <instance id="construction">
      <lanes>
        :
      </lanes>
    </instance>
  </set>
</road>
```

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	91 of 103

## 6 Constants

### 6.1 Road Type Information

The known keywords for the road type information are:

```
unknown
rural
motorway
town
lowSpeed
pedestrian
bicycle
```

NOTE: In Germany, lowSpeed is equivalent to a 30km/h zone

### 6.2 Road Mark Type Information

The known keywords for the simplified road mark type information are:

```
none
solid
broken
solid solid (for double solid line)
solid broken (from inside to outside, exception: center lane - from left to right)
broken solid (from inside to outside, exception: center lane - from left to right)
broken broken (from inside to outside, exception: center lane - from left to right)
botts dots
grass (meaning a grass edge)
curb
```

### 6.3 Road Mark Weight Information

The known keywords for the simplified road mark weight information are:

```
standard
bold
```

### 6.4 Road Mark Color Information

The known keywords for the road mark color information are:

```
standard (equivalent to "white")
blue
green
red
white
yellow
```

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	92 of 103

## 6.5 Lane Type Information

The known keywords for the lane type information are:

```

none
driving
stop
shoulder
biking
sidewalk
border
restricted
parking
bidirectional (full name: continuous two-way left turn lane)
median
special1
special2
special3
roadWorks
tram
rail
entry
exit
offRamp
onRamp

```

deprecated (more general versions available):

```

mwyEntry (-> entry)
mwyExit (-> exit)

```

## 6.6 Object Types

The known keywords for the object type information are:

```

none (i.e. unknown)
obstacle (for anything not further categorized)
car
truck
van
bus
trailer
bike
motorbike
tram
train
pedestrian
pole
tree
vegetation
barrier
building
parkingSpace
wind
patch

```

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	93 of 103

## 6.7 Tunnel Types

The known keywords for the tunnel type information are:

standard  
underpass (i.e. sides are open for daylight)

## 6.8 Bridge Types

The known keywords for the bridge type information are:

concrete  
steel  
brick  
wood

## 6.9 Access Restriction Types

The known keywords for the restriction information are:

simulator  
autonomous traffic  
pedestrian  
none

## 6.10 Signal Country Codes

Starting with OpenDRIVE 1.4, country codes shall be given according to the following scheme:

"OpenDRIVE"

all others: see ISO 3166 ALPHA-3

























The previously known keywords for the signal country codes are deprecated. These have been:

Austria  
Brazil  
China  
France  
Germany  
Italy  
Switzerland  
USA

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	94 of 103

## 6.11 Signal Types

For the country codes “DEU” and “OpenDRIVE”, the following signal types shall be defined in addition to the numbers given by the corresponding rule books.

signal	type	subtype	signal	type	subtype	signal	type	subtype
	1.000.001	-		1.000.008	-		1.000.011	10
	1.000.002	-		1.000.008	10		1.000.011	20
	1.000.002	10		1.000.008	20		1.000.011	30
	1.000.007	-		1.000.009	10		1.000.011	40
	1.000.007	10		1.000.009	20		1.000.011	50
	1.000.007	20		1.000.010	10		1.000.012	10
	1.000.007	30		1.000.010	20		1.000.012	20
							1.000.013	-
							1.000.014	-
							1.000.015	-

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4			
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H	Page: 95 of 103

## 7 Further Explanations and Examples

It is commonly understood that the OpenDRIVE format specification itself can only provide a formal framework for the description of road networks. It leaves considerable room for user-specific data arrangements which may be formally correct but may lead to incompatibilities when exchanging them with other users. Therefore, a separate style guide is available on the OpenDRIVE website (currently: <http://www.opendrive.org/docs/OpenDRIVestyleGuideRevC.pdf>). Its purpose is the provision of a common rule set for the application of the OpenDRIVE format in selected cases. It is based on actual design questions and is maintained in parallel to the official format specification (this document).


**Important Note:** All of the following examples do not provide complete OpenDRIVE data sets. Instead, they are reduced to the contents necessary for explaining the respective issues.

### 7.1 Road and Lane Linkage

#### 7.1.1 Direct Link of Roads and Lanes

Two roads which connect directly with each other, can be handled without any junction entries. Instead, the link information will be provided within the road tags.

Let's assume the following situation:

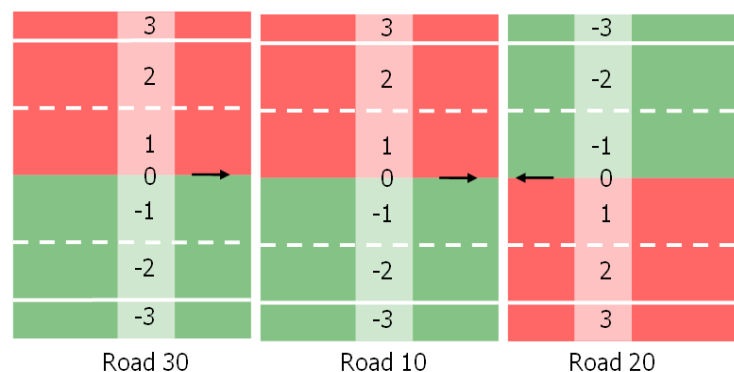

Road 10 is directly linked to road 20 and road 30. The cross sections of all roads are identical, however the directions do not match between road 10 and 20.

The following database fragment provides the link information on two levels. First, the direct link between the roads is indicated in the `<link>`-tag which follows the `<road>`-tag.

```
<road name="" length="1.0000000000000000e+00" id="10" junction="-1">
  <link>
    <predecessor elementType="road" elementId="30" contactPoint="end" />
    <successor elementType="road" elementId="20" contactPoint="end" />
  </link>
</road>
```

Road 30 is the predecessor of road 10 and road 10 connects to the end of road 30  
Road 20 is the successor of road 10 and road 10 connects to the end of road 20

Now that the basic road connections are known, one can provide additional information about the lane links. If a road has multiple lane sections then the first and last lane section are of interest for the transition from one road's lane to another road's lane. Here, let's assume, our roads have only one lane section each.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	96 of 103



So, the entries for road 10 look like the following:

```
<lanes>
  <laneSection s="0.0000000000000000e+00">
    <left>
      <lane id="3" type="border" level= "0">
        <link>
          <predecessor id="3"/>
          <successor id="-3"/>
        </link>
      </lane>
      <lane id="2" type="driving" level= "0">
        <link>
          <predecessor id="2"/>
          <successor id="-2"/>
        </link>
      </lane>
      <lane id="1" type="driving" level= "0">
        <link>
          <predecessor id="1"/>
          <successor id="-1"/>
        </link>
      </lane>
    </left>
    <center>
      <lane id="0" type="border" level= "0">
        <link>
          </link>
        </lane>
      </center>
    <right>
      <lane id="-1" type="driving" level= "0">
        <link>
          <predecessor id="-1"/>
          <successor id="1"/>
        </link>
      </lane>
      <lane id="-2" type="driving" level= "0">
        <link>
          <predecessor id="-2"/>
          <successor id="2"/>
        </link>
      </lane>
      <lane id="-3" type="border" level= "0">
        <link>
          <predecessor id="-3"/>
          <successor id="3"/>
        </link>
      </lane>
    </right>
  </laneSection>
</lanes>
```

The predecessor of lane 3 on road 10 is lane 3 on road 30.


The successor of lane 3 on road 10 is lane -3 on road 20.

The same scheme applies to all other lanes of the cross section.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4			
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H	Page: 97 of 103

### 7.1.2 Links using Junctions

If the successor or predecessor of a road becomes ambiguous, then a junction is required. Let's take a look at the following example:

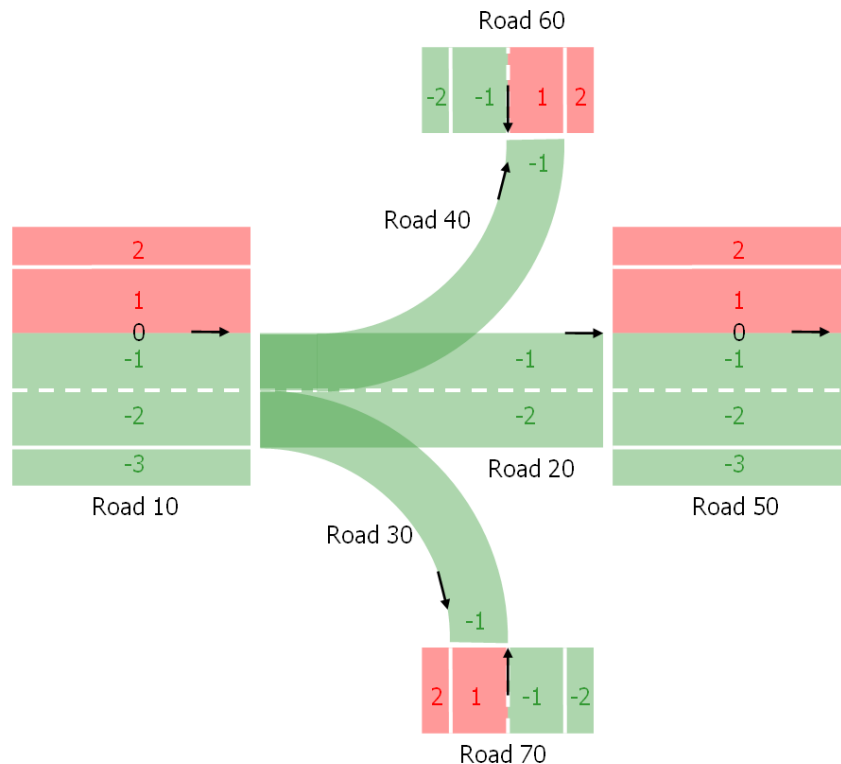

Start on the left side: Road 10 links to a junction. The depicted connections (which do not represent the entire connection matrix) allow for the following ways to navigate the junction:

Road 10, lane -1	via	road 20, lane -1	to	road 50, lane -1
	or via	road 40, lane -1	to	road 60, lane 1
Road 10, lane -2	via	road 20, lane -2	to	road 50, lane -2
	or via	road 30, lane -1	to	road 70, lane 1

So, we have two incoming lanes and four possible destinations.

The links between the connecting roads 20, 30, and 40 and their respective successors and predecessors (note that all connecting roads in the example only have right lanes) are clear and can be handled like the standard linking described in the previous chapter.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	98 of 103

Thus, for road 30, the link information can be provided in the following way:

```
<road name="" length="1.0000000000000000e+00" id="30" junction="1">
  <link>
    <predecessor elementType="road" elementId="10" contactPoint="end" />
    <successor elementType="road" elementId="70" contactPoint="end" />
  </link>
  <lanes>
    <laneSection s="0.0000000000000000e+00">
      <left>
        </left>
      </center>
      <center>
        <lane id="0" type="border" level="0">
          <link>
            </link>
          </lane>
        </center>
        <right>
          <lane id="-1" type="driving" level="0">
            <link>
              <predecessor id="-2"/>
              <successor id="1"/>
            </link>
          </lane>
        </right>
      </laneSection>
    </lanes>
```

For road 10, the successor is now a junction instead of a road. This is indicated in the link information following the <road> tag:

```
<road name="" length="2.0000000000001661e+00" id="10" junction="-1">
  <link>
    <predecessor elementType="road" elementId="99" contactPoint="end" />
    <successor elementType="junction" elementId="25" />
  </link>
```

```
<lanes>
  <laneSection s="0.0000000000000000e+00">
    <left>
      <lane id="2" type="driving" level="0">
        <link>
          <predecessor id="2"/>
        </link>
      </lane>
      <lane id="1" type="driving" level="0">
        <link>
          <predecessor id="1"/>
        </link>
      </lane>
    </left>
    <center>
      <lane id="0" type="border" level="0">
        <link>
          </link>
        </lane>
      </center>
      <right>
        <lane id="-1" type="driving" level="0">
          <link>
            <predecessor id="-1"/>
          </link>
        </lane>
        <lane id="-2" type="driving" level="0">
          <link>
            <predecessor id="-2"/>
          </link>
        </lane>
        <lane id="-3" type="border" level="0">
          <link>
            <predecessor id="-3"/>
          </link>
        </lane>
      </right>
    </laneSection>
  </lanes>
```

The sample above assumes road 10 has a predecessor no. 99 (not depicted above, so let's assume it is of the same cross-section as road 10) and a successor which is junction no. 25. The junction itself is not shown since it is just a logical container for further connection information (see below)

The presence of the junction is also considered in the lane links of road 10. Only the links to the predecessor are clear. The links to the successors are omitted. This can also be seen in the code sample on the left.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	99 of 103

Now for the corresponding junction matrix which closes the gap between the incoming road 10 and all possible destinations (roads 50, 60 and 70). Again, the information is provided on two levels, first the road level, then the lane level. Look at the following code fragment:

```
<junction name="" id="25">
  <connection id="0" incomingRoad="10" connectingRoad="20" contactPoint="start">
    <laneLink from="-1" to="-1"/>
    <laneLink from="-2" to="-2"/>
  </connection>
  <connection id="1" incomingRoad="10" connectingRoad="30" contactPoint="start">
    <laneLink from="-2" to="-1"/>
  </connection>
  <connection id="2" incomingRoad="10" connectingRoad="40" contactPoint="start">
    <laneLink from="-1" to="-1"/>
  </connection>
</junction>
```

As can be seen, the connection from road 10 to road 20 may be entered on two different lanes, whereas the other connections may be entered on one lane only.

As state above, the links between the connecting roads and their successors is, again, clear and can therefore be provided as standard <link> information below the <road> tag and the respective <lane> tags.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	100 of 103


## 7.2 Junction Control

The designer of a road network does not only provide lane and road linkage information but also details of the signalization. It is assumed to be his (or her) task to group signals in a fashion that they can be controlled consistently from the scenario simulation which reads and interprets the OpenDRIVE file.

Signal control is split into two levels which allow for the grouping of

- various signals under a single controller and for
- various controllers within one junction

The following example shall provide a control scheme of a "standard" crossing. It represents one possible solution only which is, of course, non-binding.

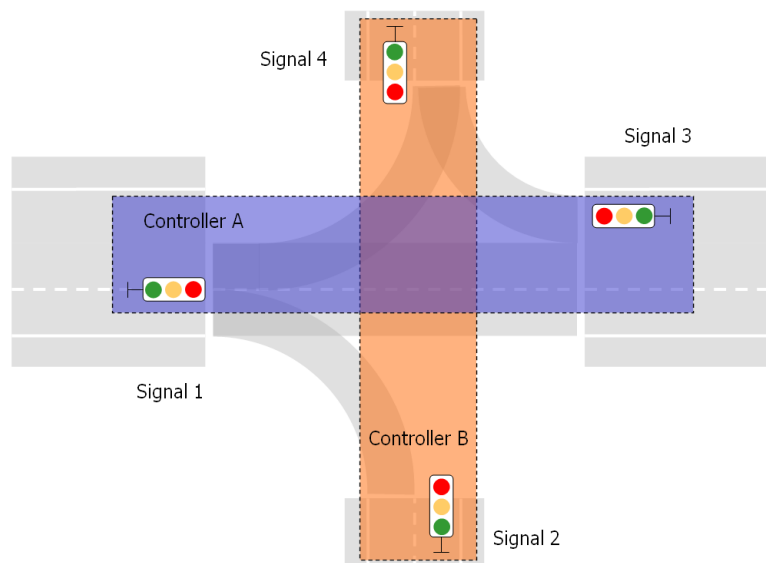

It is recommended to assign synchronous signals of same type to identical controllers instead of having one controller for each signal. So, in the example above, both through-directions will be controlled by individual controllers.


In the OpenDRIVE file, the controllers would be defined in the following way:

```
<OpenDRIVE>
  <controller id="Controller A" type="">
    <control signalId="Signal 1" type=""/>
    <control signalId="Signal 3" type=""/>
  </controller>
  <controller id="Controller B" type="">
    <control signalId="Signal 2" type=""/>
    <control signalId="Signal 4" type=""/>
  </controller>
</OpenDRIVE>
```

Please note that the type of control is not yet actually used for controller or control entry.

Date:	November 04, 2015	Title:	OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4		
Name:	Marius Dupuis e.a. VIRES GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	101 of 103

If, for example, pedestrian lights should be added to the above junction, it is recommended to group them under additional controllers. The following image illustrates this situation:

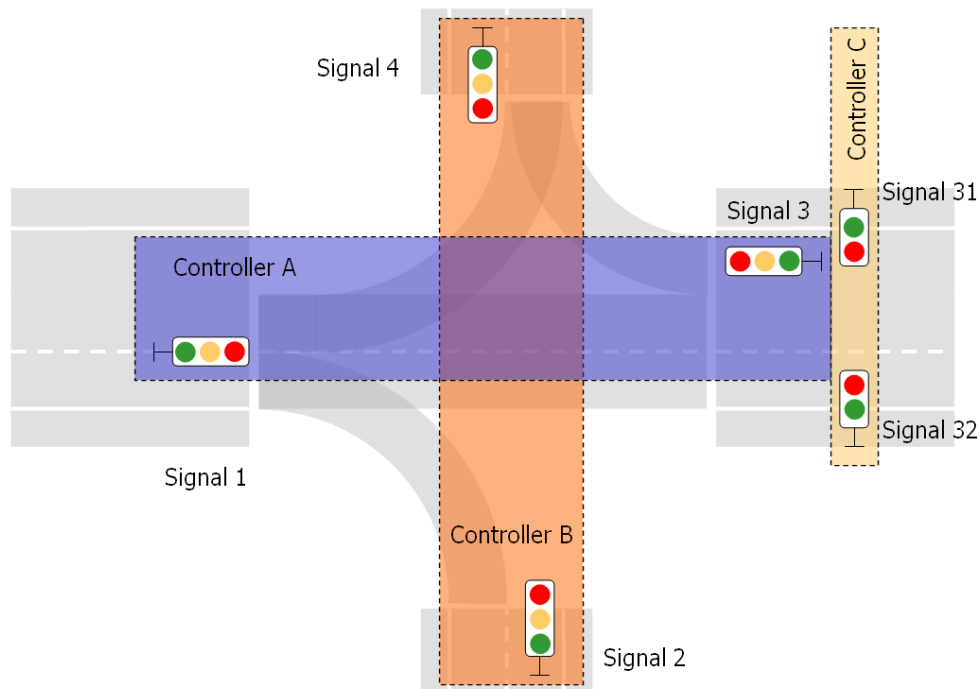

In this example, the signals 31 and 32 are controlled by an additional controller "Controller C". If corresponding pedestrian signals existed at the location of "Signal 1", they could also be controlled by "Controller C".

Finally, all controllers responsible for a junction may be grouped within the <junction> tag. Again, let's assume, we are talking about junction no. 25 in the example above.


The junction entry would look similar to the following one (not all connections and controls are given):

```
<OpenDRIVE>
  <junction name="" id="25">
    <connection id="0" incomingRoad="10" connectingRoad="20" contactPoint="start">
      <laneLink from="-1" to="-1"/>
      <laneLink from="-2" to="-2"/>
    </connection>
    <connection id="1" incomingRoad="10" connectingRoad="30" contactPoint="start">
      <laneLink from="-2" to="-1"/>
    </connection>
    <connection id="2" incomingRoad="10" connectingRoad="40" contactPoint="start">
      <laneLink from="-1" to="-1"/>
    </connection>
    <controller id="Controller A" type=""/>
    <controller id="Controller B" type=""/>
    <controller id="Controller C" type=""/>
  </junction>
</OpenDRIVE>
```

Date:	November 04, 2015	Title: OpenDRIVE <sup>®</sup> Format Specification, Rev. 1.4			
Name:	Marius Dupuis e.a. VIREG GmbH	Document No.:	VI2014.107	Issue:	H
				Page:	102 of 103

### 7.3 Roundabouts

Roundabouts are to be considered as collections of junctions with each junction being constructed according to the rules explained above. Also for the signaling, the rules laid out before apply.

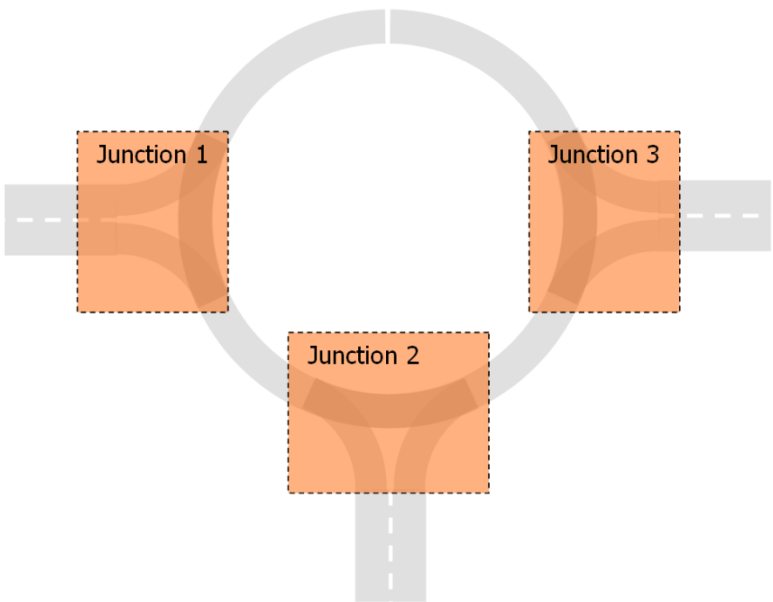

All junctions belonging to a single roundabout shall be referenced under a junction group:

