

MINIMALIST GLASS DOOR

Transparent glass design, breathing strong, make the mood open; extremely narrow frame design, increase the area of white space, the more simple the atmosphere.

 Foshan Prime Home Co., Ltd.

 angelia@foshanprimehome.com

 +86 158 1699 4965





Narrow-Frame Glass Door

Casing: 32mm Casing

Glass : Euro Gray Sandblasted Glass

Profile : Matte Black

Hareware: Silent Magnetic Lock,Top & Bottom Pivot Hinges

MINIMALIST FRAME GLASS DOOR

Frame Face Width: 2.3mm / 3.2mm
Door Leaf Thickness: 4cm
Door Leaf Face Width: 1cm
Profile Thickness: 2.0mm

PROFILE COLOR



Black




White



Grey




Silent Magnetic Lock
Securer, smoother and quieter closing mechanism.

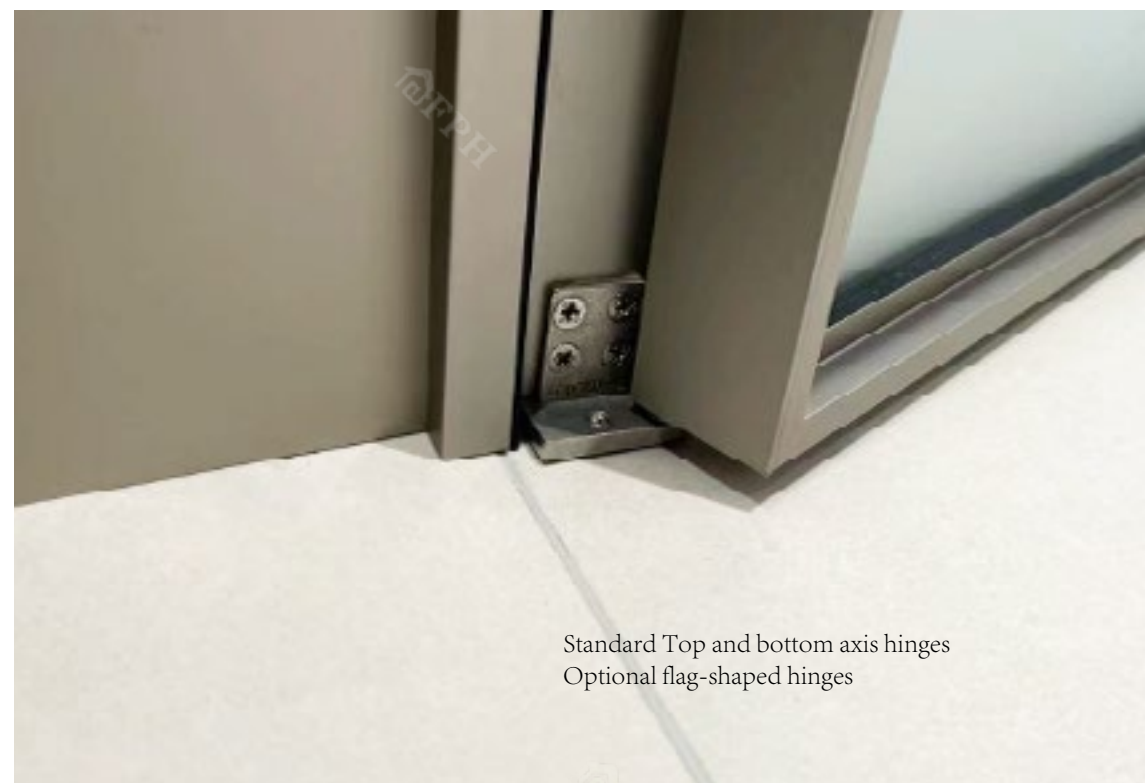


Standard Top and bottom axis hinges
Optional flag-shaped hinges


VARIOUS PARAMETERS

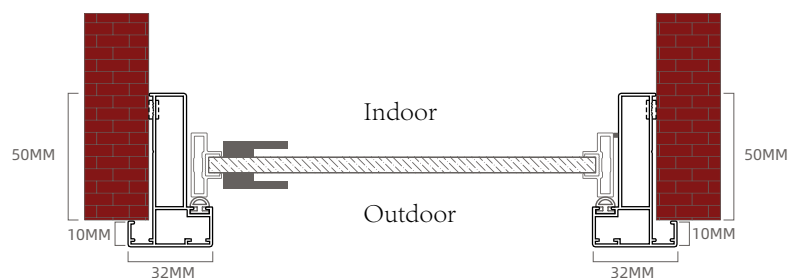

Single/Double Casing | Outward Flush, Inward Opening
Wall Coverage: 50mm | Molding: 32mm (8mm Overlap)

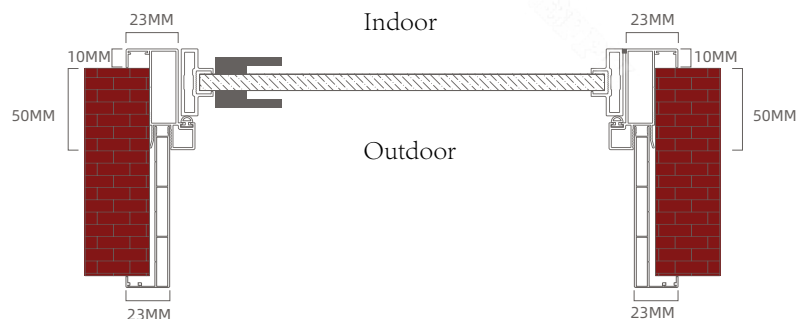

Single/Double Casing | Inward Flush Inward / Outward Flush Outward
Wall Coverage: 50mm | Molding: 32mm (8mm Overlap)

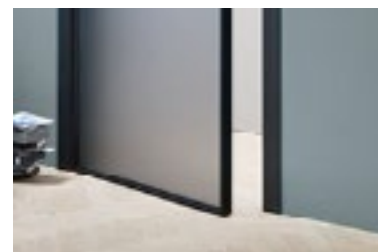

Out Flat-In Open: 90°
Out Flat-Out Open: 135°
In Flat-In Open: 135°

MINIMALIST FRAME GLASS DOOR

Calculation method of visible light size

Out Flat-In Open:

Width +24+24, Height +24



Narrow-Frame Glass Door

Casing: 32mm Casing
Glass : Euro Gray Sandblasted Glass
Profile : Mixed Glaze White
Hareware: Silent Magnetic Lock
Top & Bottom Pivot Hinges

FOLLOW THE ULTIMATE MINIMALISM

INVISIBLE GLASS DOOR

Frame Face Width: 2.3mm / 3.2mm
Door Leaf Thickness: 4cm
Door Leaf Face Width: 0.5cm
Profile Thickness: 3.0mm

PROFILE COLOR



Black



White



Grey




Silent Magnetic Lock
Securer, Smoother and Quieter Closing Mechanism.




Standard Top And Bottom Axis Hinges
Optional Flag-Shaped Hinges

VARIOUS PARAMETERS

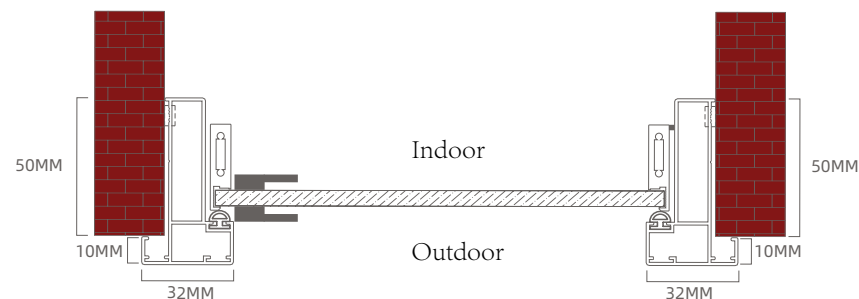

Single/Double Casing | Outward Flush, Inward Opening
Wall Coverage: 50mm | Molding: 32mm (8mm Overlap)

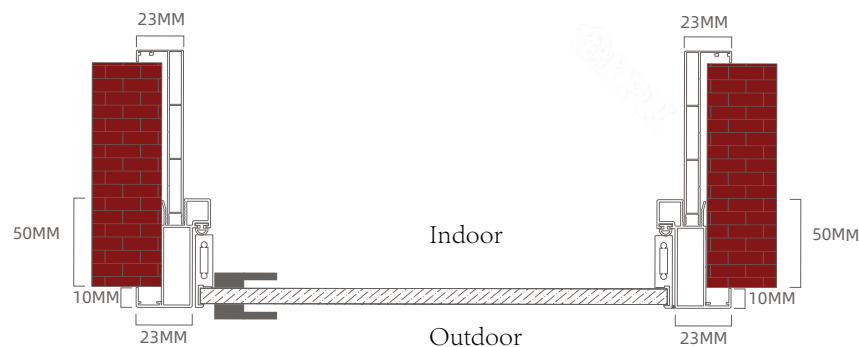

Single/Double Casing | Inward Flush Inward / Outward Flush Outward
Wall Coverage: 50mm | Molding: 32mm (8mm Overlap)



Out Flat-In Open: 90°
Out Flat-Out Open: 135°
In Flat-In Open: 135°

MICRO EDGE DREAM GLASS DOOR

Calculation method of visible light size

Out Flat-In Open:

Width +24+24, Height +24
(including floor clearance)





Invisible Glass Door

- Casing : 0mm Casing
- Glass : Euro Gray Sandblasted Glass
- Profile : Mixed Glaze White
- Hareware : Silent Magnetic Lock
Top & Bottom Pivot Hinges

FOLLOW THE ULTIMATE MINIMALISM

INVISIBLE GLASS DOOR

The thickness of the door cover is 0MM, the thickness of the door fan is 5.5 cm, the thickness of the door fan 0.2 cm is 2.0 mm

PROFILE COLOR



Black



White




Silent Magnetic Lock
Securer, smoother and quieter closing mechanism.




Standard Top and bottom axis hinges
Optional flag-shaped hinges

VARIOUS PARAMETERS

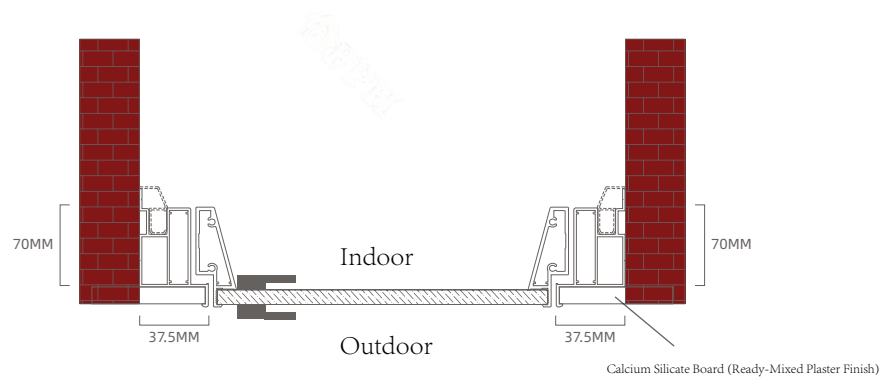

Single/Double Casing | Outward Flush, Inward Opening
Wall Coverage: 70mm | Molding: 55mm

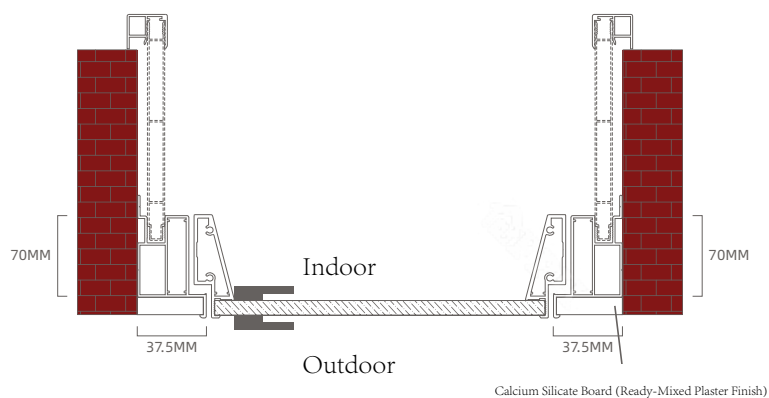

Single/Double Casing | Inward Flush Inward / Outward Flush Outward
Wall Coverage: 70mm | Molding: 55mm

- Maximum size 950 × 2800,
- Maximum width size limit: 950 cm
- Less than 1.4 square according to 1.4 square calculation



Out Flat-In Open: 90°

INVISIBLE GLASS DOOR

Calculation method of visible light size

Out Flat-In Open:

Width +24+24, Height +24


(including floor clearance)

View from Exterior

View from Interior

View from Exterior


View from Interior

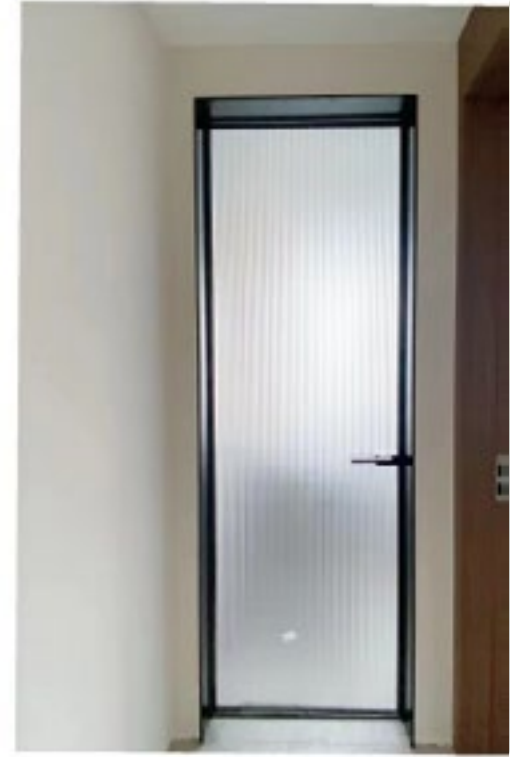


Single-Casing Ultra-Slim Door

Double-Casing Ultra-Slim Door


SINGLE-CASING PROFILE STRUCTURE DIAGRAM

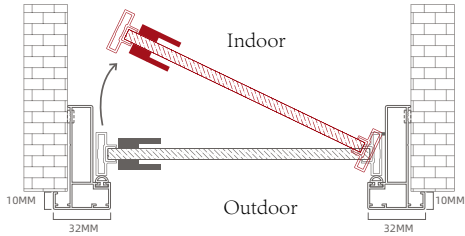


Single Casing / Outward Flush Inward / LH Lock

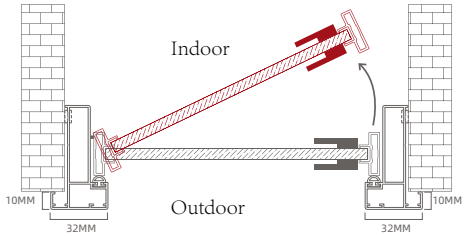


Single Casing / Outward Flush Inward / RH Lock

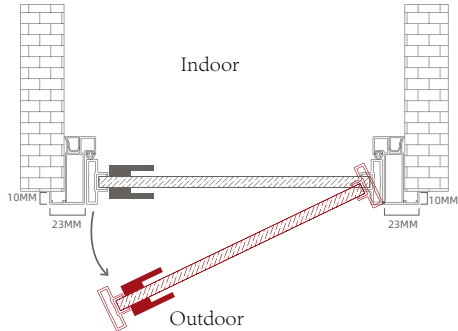


Single Casing / Outward Flush Outward / LH Lock

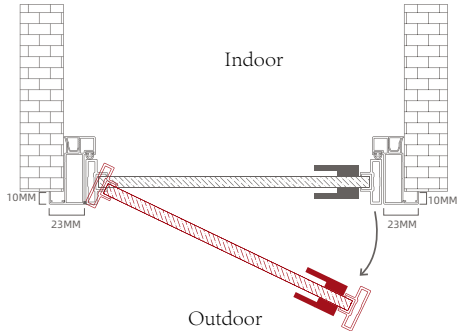


Single Casing / Outward Flush Outward / RH

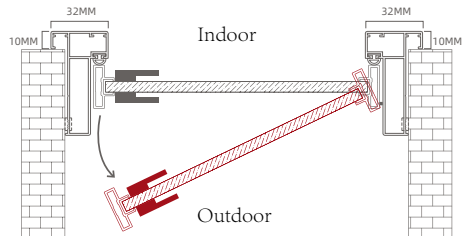


Single Casing / Inward Flush Outward / LH Lock

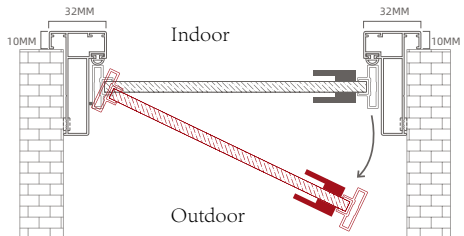

Double Casing / Inward Flush Outward /RH Lock

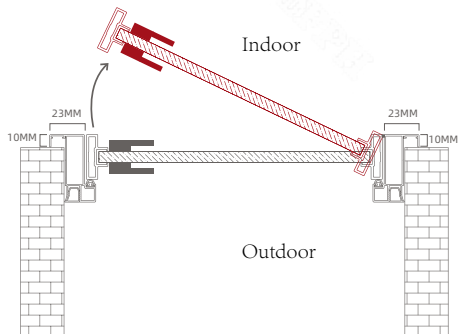


Single Casing /Inward Flush Inward / LH Lock

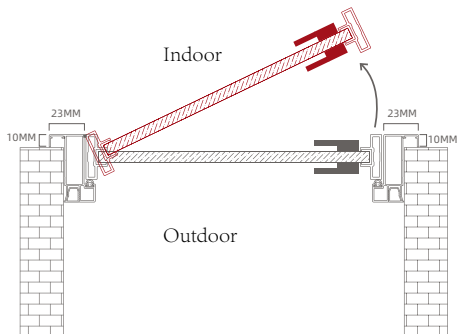


Single Casing / Inward Flush Inward / RH Lock


DOUBLE-CASING PROFILE STRUCTURE DIAGRAM

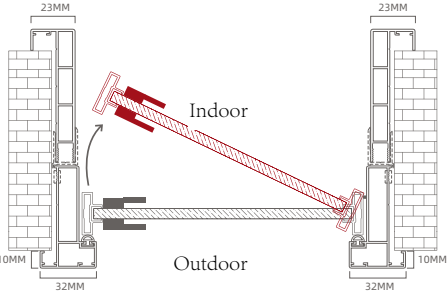


Double Casing / Outward Flush Inward / LH Lock

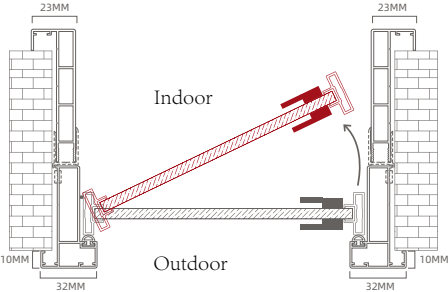


Double Casing / Outward Flush Inward / RH Lock

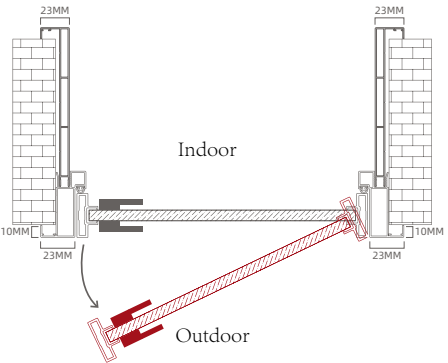


Double Casing / Outward Flush Outward / LH Lock

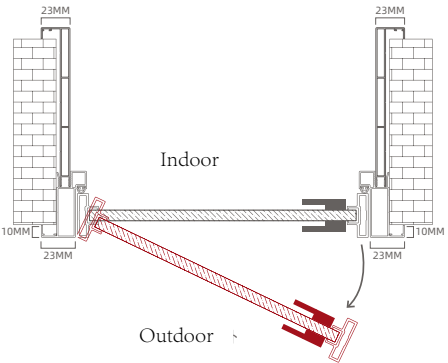


Double Casing / Outward Flush Outward / RH Lock

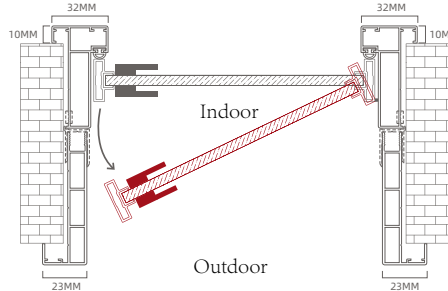


Double Casing / Inward Flush Outward / LH Lock

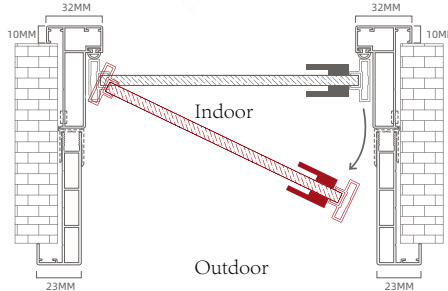

Double Casing / Inward Flush Outward / RH Lock

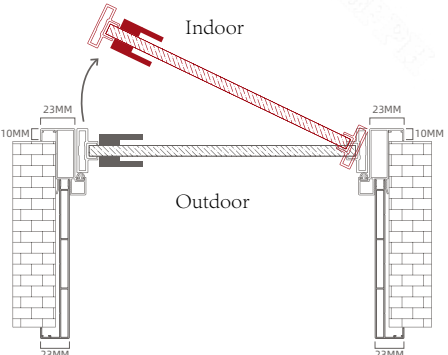

Double Casing / Inward Flush Intward / LH Lock

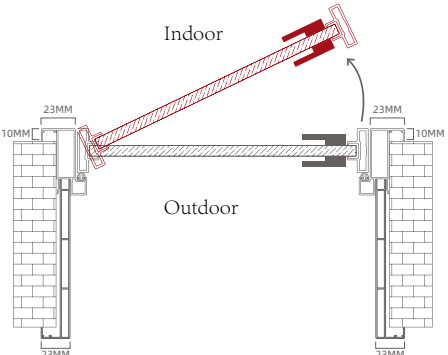

Double Casing / Intward Flush Intward / RH Lock



Clear, expansive glass.
Ultra-slim frames that
breathe. Our design
embraces negative space to
create a feeling of boundless
openness. Because
simplicity is the ultimate
sophistication.



Perfect System Sliding Door

Track : Top-Hung

Glass : Ultra-Clear Silver

Finish : Moonlight Gray

Hardware : Self-Adhesive Bar Handle

FOLLOW THE ULTIMATE MINIMALISM

MINIMALIST FRAME GLASS DOOR

The sliding door can be used as the ground rail/hanging rail, 2.3 mm/3.2 mm view surface of the door cover, 4CM thickness of the door fan, 1CM view surface of the door fan, 2.5 mm thickness of the profile

PROFILE COLOR



Black




White




Grey





Light Grey

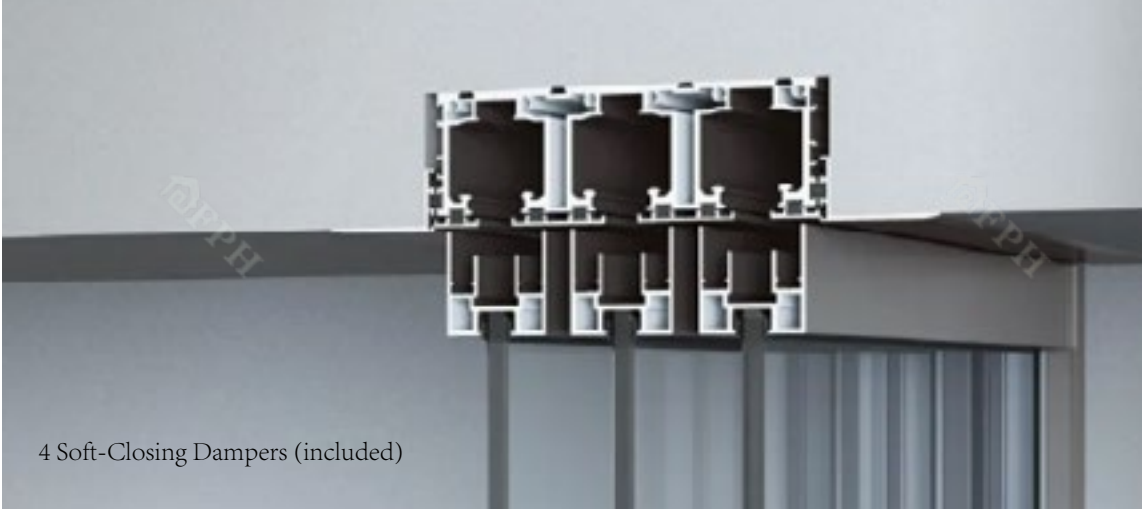

Connecting Accessories

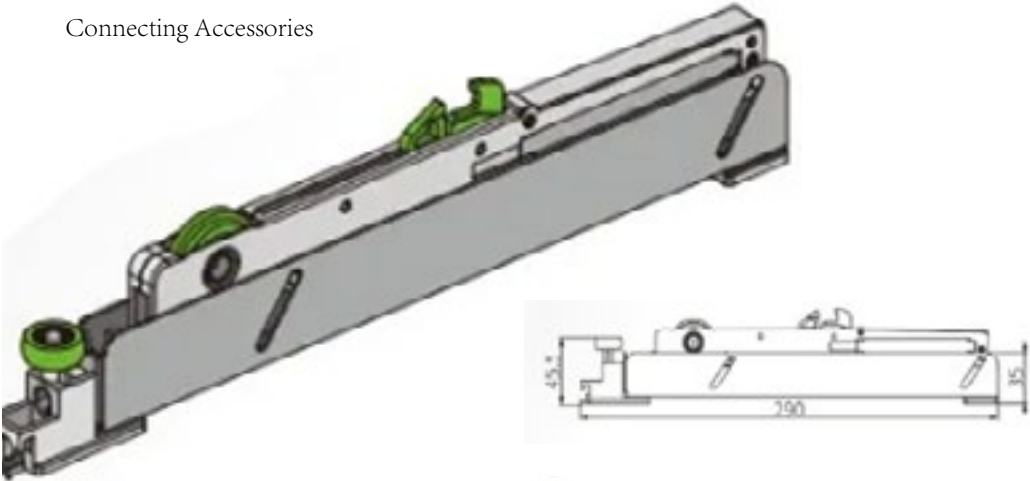

SLIDING DOOR PROFILE STRUCTURE SPECIFICATIONS

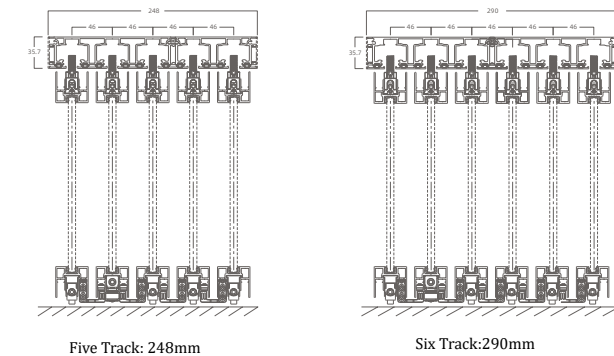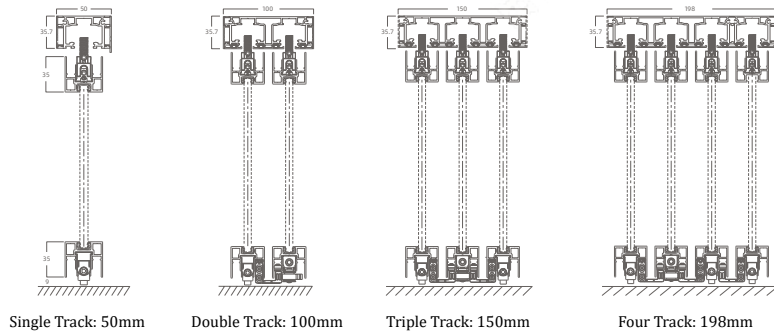

★ Track Installation Allowance: +5mm (varies by track)

Clear Opening Calculation Method:

- With Casing: Width -40mm, Height -37mm
- Without Casing: Width unchanged, Height -37mm
- With Vertical Frame/Mullion: Width -40mm, Height -37mm

★ Minimum Single Door Size: 400mm (600mm with soft-closing)

Maximum Single Door Size: 1200mm

Minimum Chargeable Area: 1 panel 1.5m²; 2 panels 3m²; 3 doors 4.5m²; 4 doors 6m²


Overage billed at actual size.ww



Suspended Track



No Track

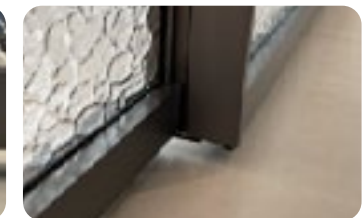

No Track



Two Panel Sliding Door

Track : Top-Hung

Glass : Euro Gray Glass

Finish : Black

Hareware: Self-Adhesive Bar Handle

FOLLOW THE ULTIMATE MINIMALISM



MINIMALIST SLIDING DOORS

The sliding door can be used as the ground rail/hanging rail,
Door Trim : 2.3 mm/3.2 mm
Panel Thickness : 40mm
Profile Thickness : 2.0 mm

PROFILE COLOR



Black



White



Grey



Suspended Track



No Track



Curved Handle




Curved Handle

Connecting Accessories



SLIDING DOOR PROFILE STRUCTURE SPECIFICATIONS

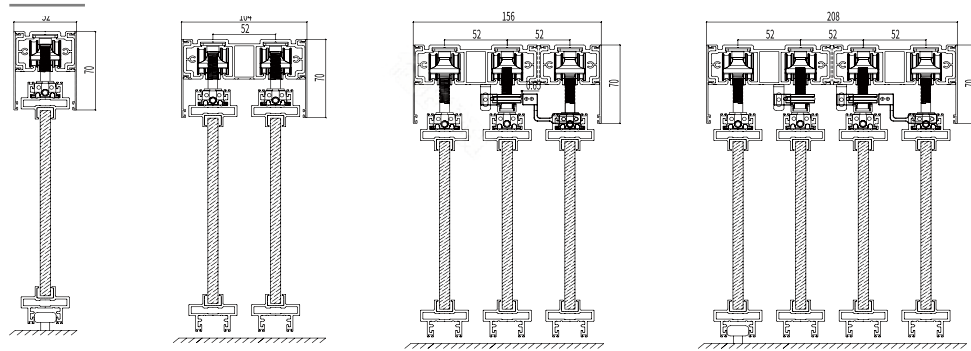


Single Track: 52mm

Double Track: 52mm

Triple Track: 156mm

Four Track: 206mm

Track Installation Allowance: +3mm

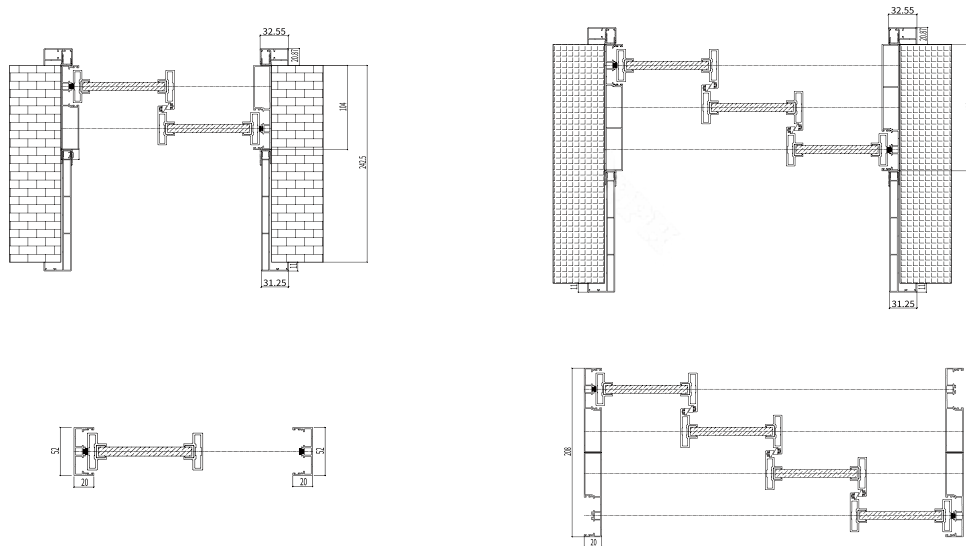

Sliding Door Parameters

★ Minimum Single Door Size: 400mm (600mm with soft-closing)

Maximum Single Door Size: 1200mm

Minimum Chargeable Area: 1 panel 1.5m²; 2 panels 3m²; 3 doors 4.5m²; 4 doors 6m²

Overage billed at actual size.ww



3-Panel Sliding Door

Track : Top-Hung

Glass : Ultra-Clear Silver

Finish : Moonlight Gray

Hareware: Rectangular Ring Pull




Pocket Door

Track : Top-Hung

Glass : Ultra-Clear Glass

Finish : Moonlight Gray

Hareware: Rectangular Ring Pull

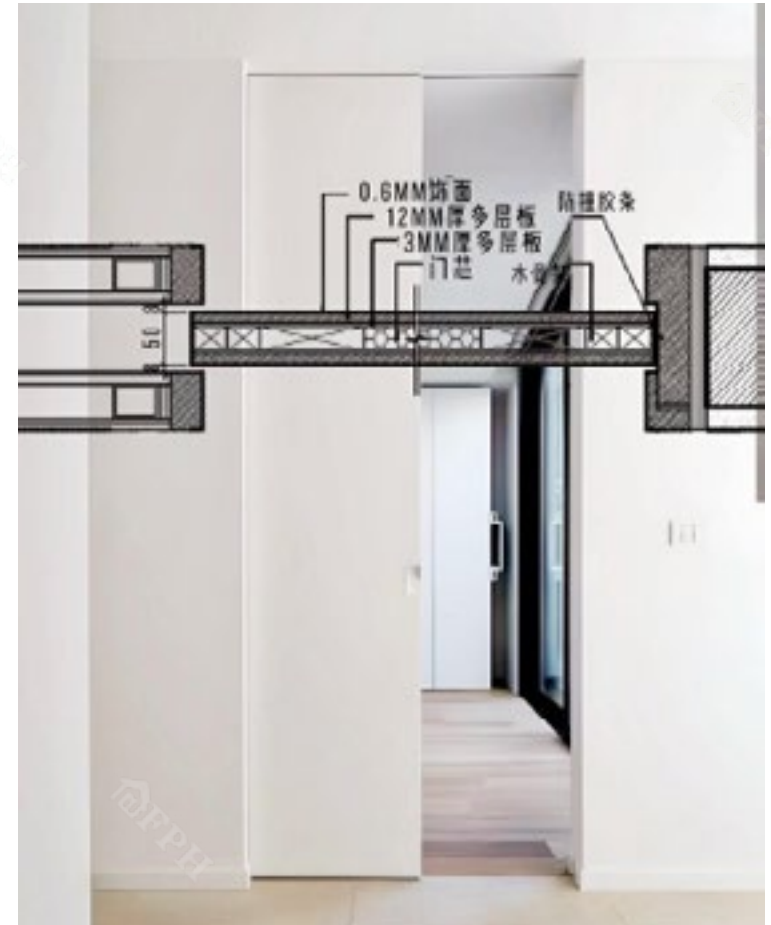

MONORAIL SLIDING DOOR

POCKET DOOR

The pocket door slides into the wall when opened, making it an excellent choice for smaller spaces where traditional swinging doors might be cumbersome.



Pocket Door

Track : Top-Hung

Glass : Euro Gray Glass

Finish : Moonlight Gray

Hareware: Rectangular Ring Pull



TWO LINKAGE SLIDING DOORS

Two-panel linkage design for effortless opening and extended interior space. Smooth operation connects indoor and outdoor living seamlessly.



SLIDING DOOR·TWO LINKAGE OPPOSITE

—
Both doors glide together smoothly
— less effort, more beauty.



PUSH AND PULL GLASS DOOR

The right-angle corner sliding door creates a transparent space.



3-Panel Sliding Door

Track : Top-Hung

Glass : Ultra-Clear Silver

Finish : Black

Hardware : Rectangular Ring Pull

Push-pull glass door touch to simulate open kitchen



Ghost Door

Glass : Ultra-Clear Fluted Glass
Finish : Moonlight Gray



Ghost Door

Glass : Ultra-Clear Glass
Finish : Black



Lock Optional

MINIMALIST GHOST DOOR

GHOST GATE DOOR

Door Cover : 2.3 mm/3.2 mm

Door Fan Thickness : 4.5 cm

Door Fan : 1.6 cm

Profile Thickness : 2.0 mm

can be made of glass ghost door/wooden ghost door

PROFILE COLOR



Black



White

Door Opening Calculation Method:

Door Leaf Width = Rough Opening Width + 115mm

Door Leaf Height = Rough Opening Height + 35mm

★ Maximum size 950 × 2800,

· Minimum width size limit: 300 × 1000

· Less than 1.4 square according to 1.4 square calculation



Standard with (2) Dampers





Pivot Door

Glass : Ultra-Clear Glass

Finish : Black

MINIMALIST GHOST DOOR

OFF-AXIS DOOR

Door Trim : 2.3 mm/3.2 mm

Panel Thickness : 4.5 cm

Profile Thickness : 2.0 mm

PROFILE COLOR



Black



White



Grey



Light Grey

★ Max. Available Size: 1500mm × 2800mm
Max. Opening Width: 720mm



FOLLOW THE ULTIMATE MINIMALISM

FIXED SCREEN

Wall-mounted: 40mm

Profile Thickness : 2.0 mm

Fixing Method: Drill and screw (first drill 8mm holes, then 5mm inner holes)
with matching color plastic plugs

PROFILE COLOR



Black



White



Grey



Light Grey



SHAFT DOOR FIXED SCREEN

Transparent space, spacious atmosphere, high-profile luxury style



Axle door fixed glass, transparent space simple atmosphere

FOLLOW THE ULTIMATE MINIMALISM

FOLDING DOOR

Panel Thickness : 4.5 cm

Profile Thickness : 2.0 mm

Folding doors typically open by folding into sections, much like an accordion, allowing them to slide and fold neatly to one side. This mechanism is perfect for dividing spaces while saving floor space.

PROFILE COLOR



Black



White



Grey



Light Grey

The number of open fans can be :H1, 2+1, 2+2, 3+0, 3+1, 3+3, 5+0, 5+1, 5+3



Latch Bolt



Handle

FOLLOW THE ULTIMATE MINIMALISM

The pass

Visual surface 23MM/32MM, the maximum can be made of 300MM wall thickness

PROFILE COLOR



Black



White



Grey



ALUMINUM WOODEN INTERIOR DOORS

Interior aluminum wooden doors are a popular choice in modern interior design because they combine the strength and durability of aluminum with the warmth and aesthetic appeal of wood. These doors offer a unique blend of materials that cater to both functional and design needs, making them a great option for homes and commercial spaces.



LAYERED DESIGN FOR PEACE OF MIND

Aluminum Honeycomb Core Eco-friendly Panel Layered peace of mind



FOLLOW THE ULTIMATE MINIMALISM

MINIMALIST FRAME ALUMINUM WOODEN DOOR

Invisible Casing: 23mm-35 mm

Panel Thickness : 45 mm

Profile Thickness : 2.0mm

Aluminum Honeycomb Filling + Aluminum Keel (Optional Door Core)

PROFILE COLOR



Black



White



Grey


PRODUCT CONFIGURATION

25mm wide flat main frame

35mm wide flat secondary frame

40mm/80mm thick aluminum battens

5mm/6mm/9mm thick panel



Optional Soundproof Door Core






Out Flat-In Open: 90°
 Out Flat-Out Open: 135°
 In Flat-In Open: 135°

Standard flag-shaped hinges

Bar handle

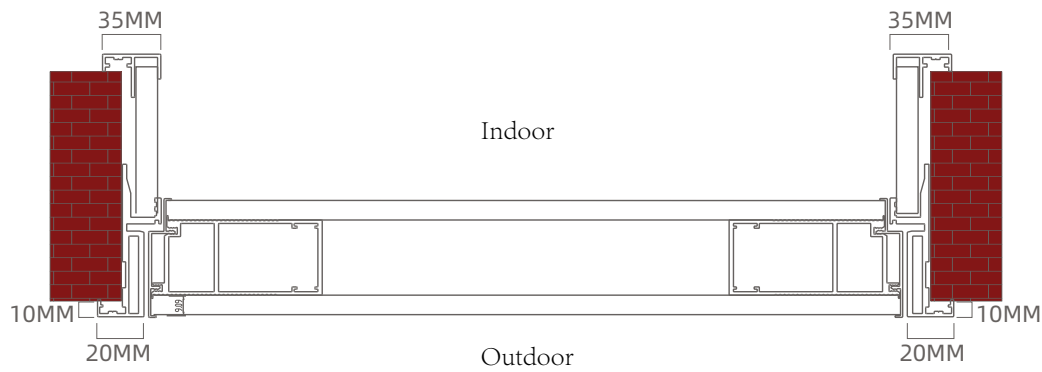

ALUMINUM WOODEN DOOR

Calculation method of visible light size

Standard Size: 90W × 210H × 180 Wall Thickness



Minimalist Aluminum Wood Door

Door Casing : 20mm Matte Black

Finish : Gray



Minimalist Aluminum Wood Door

Door Casing : 20mm Matte Black

Finish : Oak

FOLLOW THE ULTIMATE MINIMALISM

INVISIBLE ALUMINUM WOODEN DOOR

Invisible Casing: 23mm-35 mm

Panel Thickness : 45 mm

Profile Thickness : 2.0mm

Aluminum Honeycomb Filling + Aluminum Keel (Optional Door Core)

PROFILE COLOR




Black



White



Grey



Optional Soundproof Door Core

FPH

FPH




Out Flat-In Open: 90°
 Out Flat-Out Open: 135°
 In Flat-In Open: 135°



Standard flag-shaped hinges



Bar handle

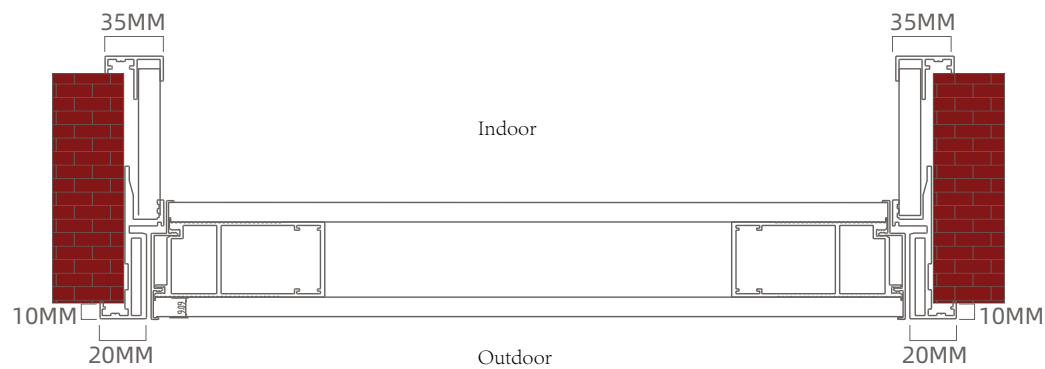

INVISIBLE ALUMINUM WOODEN DOOR

Calculation method of visible light size

Standard Size: 90W × 210H × 180 Wall Thickness



Recessed-Frame Aluminum Wood Door

Door Casing : 30mm Matte Black

Finish : Gray Walnut



PRODUCT DETAILS

Calculation method of visible light size



Recessed-Frame Aluminum Wood Door

Door Casing : 30mm Matte Black

Finish : Ivory White

FOLLOW THE ULTIMATE MINIMALISM

INVISIBLE PAINT DOOR

Invisible Casing: 45 mm

Panel Thickness : 45 mm

Profile Thickness : 2.0mm

Aluminum Honeycomb Filling + Aluminum Keel (Optional Door Core)

PROFILE COLOR



Black



White



Grey

PRODUCT CONFIGURATION

Invisible main frame
35mm Flat subframe
80mm Aluminum keel



Optional Soundproof Door Core






Out Flat-In Open: 90°
 Out Flat-Out Open: 135°
 In Flat-In Open: 135°

Standard Flag-Shaped Hinges

Bar Handle

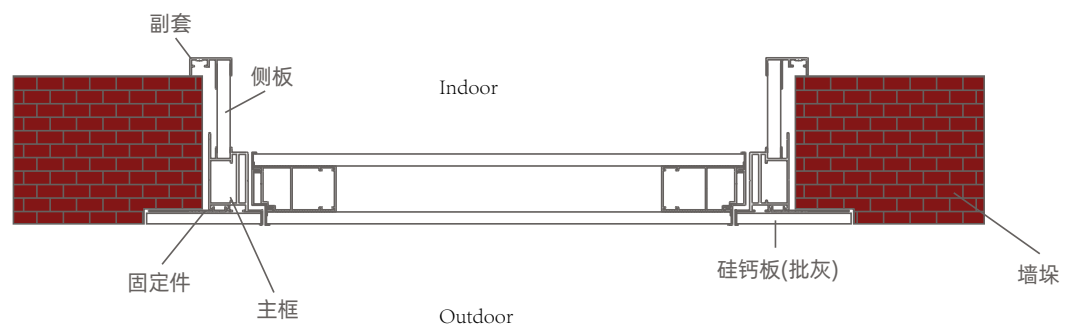

ALUMINUM WOODEN DOOR

Calculation method of visible light size

Standard Size: 90W × 210H × 180 Wall Thickness



Invisible Aluminum Wood Door

Door Casing : 00mm Matte Black

Finish : Brown



Invisible Aluminum Wood Door

Door Casing : 00 mm Matte Black

Finish : Green

FOLLOW THE ULTIMATE MINIMALISM

INVISIBLE PAINT DOOR

Invisible Casing: 45 mm

Panel Thickness : 45 mm

Profile Thickness : 2.0mm

Aluminum Honeycomb Filling + Aluminum Keel (Optional Door Core)

PROFILE COLOR



Black



White



Grey

PRODUCT CONFIGURATION

Invisible main frame
45mm Flat subframe
80mm Aluminum keel
6mm thick panel



Optional Soundproof Door Core






Out Flat-In Open: 90°
 Out Flat-Out Open: 135°
 In Flat-In Open: 135°



Standard Flag-Shaped Hinges



Bar Handle

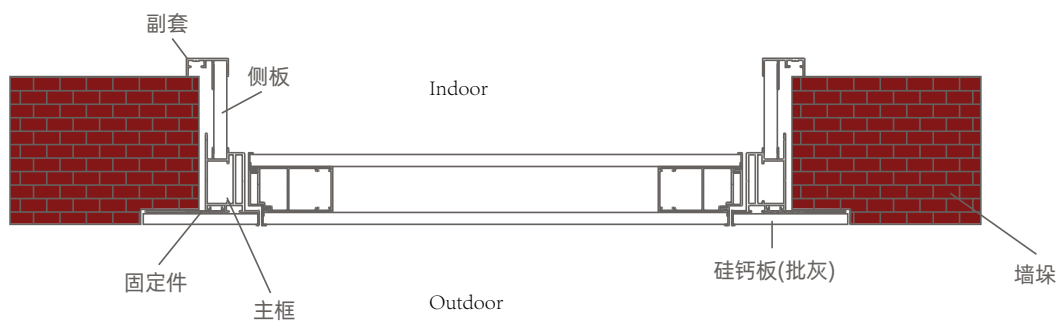

INVISIBLE PAINT DOOR

Calculation method of visible light size

Standard Size: 90W × 210H × 180 Wall Thickness





PAINT THE DOOR

DIY experience customization, create your own home style



Traditional wooden doors, reimagined.

Stylish panels that reduce formaldehyde exposure.

Ultra-slim frames for a minimalist aesthetic.

Where function meets beauty.

The simpler, the more striking.

ECO-FRIENDLY VENEER PANEL SERIES

Different veneer panels have different functions, such as soundproofing, moisture-proofing, fire resistance, etc., making your home more comfortable and safe.

OPTIONAL HARDWARE



FPH-L01



FPH-L02



FPH-L03




FPH-L04

OPTIONAL HARDWARE



Invisible Hinge

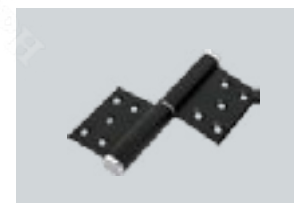

Hydraulic Invisible Hinge



Flag Hinge



Door Bottom Lifting Bar



Invisible Hinge



Invisible Hinge



PROCESS GLASS

Glass thickness: 8MM/5 + 3MM/4 + 4MM

Film thickness: 0.76

PVB Film, original Film size 2440

GLASS SELECTION GUIDE

Choose the appropriate glass thickness
based on your door area:

- ≤ 2.5 m: 5mm glass
- ≤ 3.5 m: 6mm glass
- ≤ 5 m: 8mm glass
- ≤ 7 m: 10mm glass
- ≤ 10 m: 12mm glass

 Foshan Prime Home Co., Ltd.

 angelia@foshanprimehome.com

 +86 158 1699 4965



ODL.COM/CATALOG