



REVISIONS					
REV.	DESCRIPTION	DATE			
D	RELEASED FOR PRODUCTION	12/8/2020			






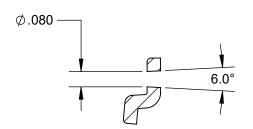


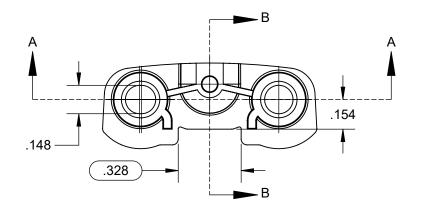


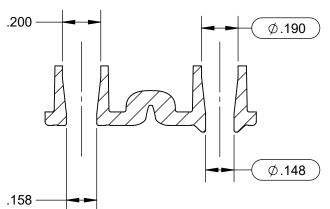


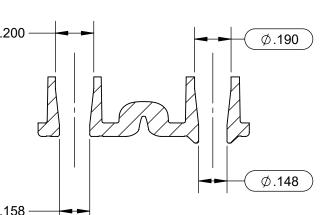

- 3D CAD MODEL SHALL BE THE MASTER REFERENCE.
- REFER TO 3D CAD MODEL FOR ALL UNSPECIFIED GEOMETRY AND DIMENSIONS.
- MATERIAL: ABS, OPAQUE, WHITE
- FINISH: SPI-D2 ON ALL SURFACES
- PART TO BE FREE OF FLASH OR GATE VESTIGE IN EXCESS OF 0.005"
- PARTS TO BE FREE OF SCRATCHES, BUBBLES, VOIDS, BURNS, SCRATCHES, SURFACE BLEMISHES, JETTING MARKS, OR OTHER DEFECTS
- XX DENOTES A CRITICAL INSPECTION DIMENSION
- PARTING LINE(S), EJECTOR PIN(S), AND GATE(S) TO BE APPROVED BY CUSTOMER BEFORE PRODUCTION







PROPRIETARY AND CONFIDENTIAL:			41				
THE INFORMATION CONTAINED IN ANY REPRODUCTION IN PART OR PERMISSION OF FOUNDATION DE	III FOUNDATION						
UNLESS OTHERWISE SPECIFIED:	MATERIAL:	DESCRIPTION	N:				
DIMENSIONS ARE IN INCHES ALL UNTOLERANCED DIMENSIONS ARE BASIC TOLERANCES: ANGULAR ±0.25°	SEE NOTES	BATTE	BATTERY PCB CHASSIS				
LINEAR .X ±0.1 .XX ±0.01	FINISH:	PART NUMBE	R:			REVISION:	
XXX ±0.005	SEE NOTES	184230	8			D	
FINISH V INTERPRET GD&T PER ASME Y14 5M-1994	PROCESS:	DRAWN BY:		DRAWN DAT	E:		
INTERFRET GOAT FER ASME 114.5M-1594	INJECTION MOLD						
● □	SUPPLIER PART NUMBER:	SHEET SIZE:	SCALE:	•	SHEET:		
DO NOT SCALE DRAWING		B	2:1		1 OF 1		