



USB Interface


USB 2.0 Type C Plug

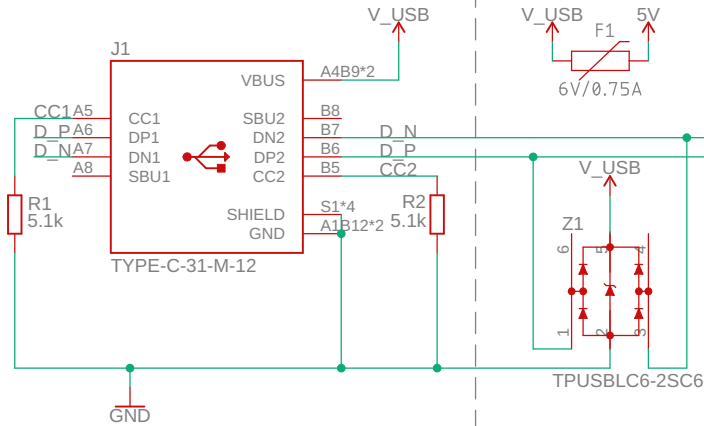


Overcurrent & ESD Protection

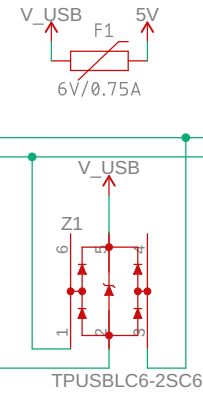


Serial Interface

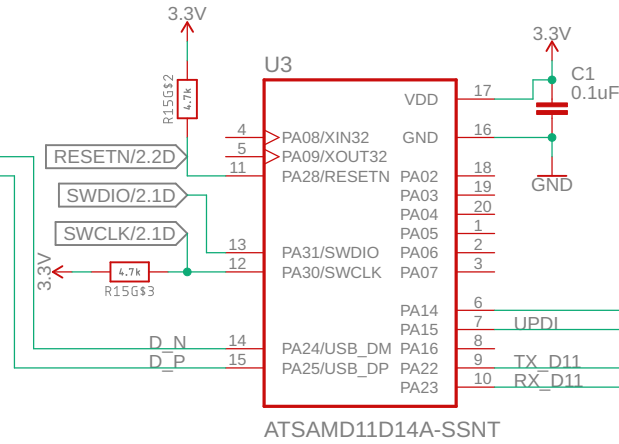


Level Shifting

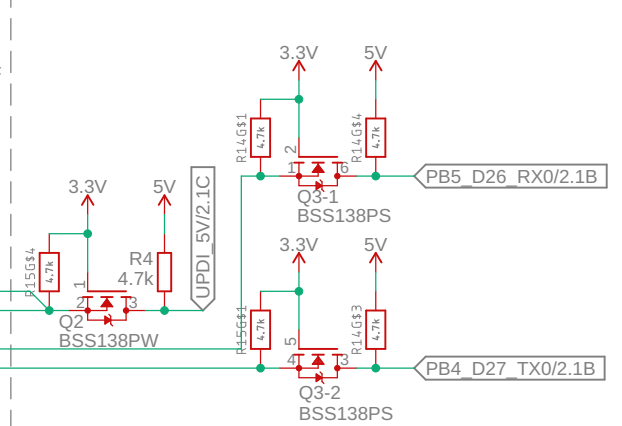

SPI Port (Optional)

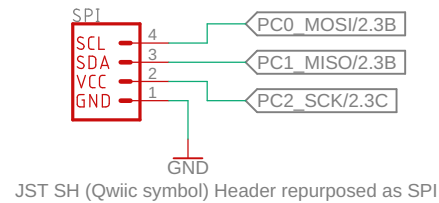

Voltage Regulator (3.3V)

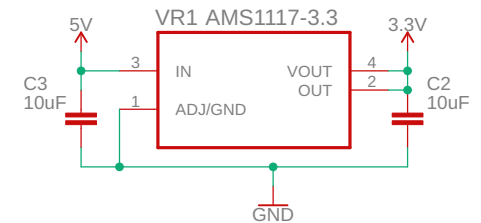

Via diameter of 0.35mm, min 0.2mm, recommend 0.5mm

>CNAME	
SSTuino_II	
26/12/21 23:07	Pan Ziyue
Sheet: 1/3	Rev: >CREVISION

Pinout Validation:
Logic Validation:

