


COMPLETE
PACKAGING

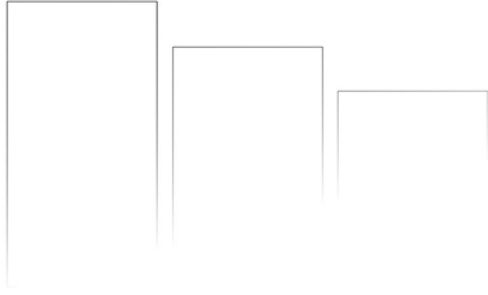


KONNECT

KONNECT
packaging;

Packaging That Connects You to Quality.

KONNECT

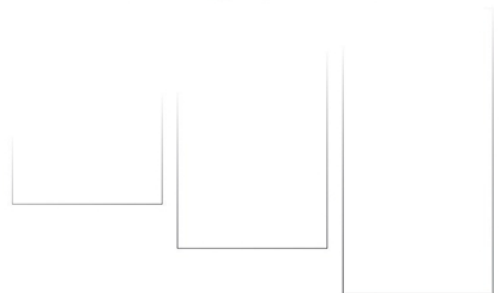

OUR STORY

Established in November 2023 in Borgaon, Madhya Pradesh, Konnect Packaging delivers certified, sustainable VCI packaging solutions using eco-friendly, water-based technologies to protect products and extend shelf life for global industries.

OUR PROGRESS IN NUMBER

1000+

HAPPY CLIENTS

Trusted by 1000+ happy clients worldwide, Our commitment peaks through every successful delivery.

2000+

PROJECTS

With 2000+ projects delivered and counting, Our work reflects excellence, trust, and consistency.

2000+

PROJECTS

With 2000+ projects delivered and counting, Our work reflects excellence, trust, and consistency.

OUR OFFICES WORLDWIDE



INDIA

Headquarter

Parth Chandra

Head of Operations

info@konnnectpackaging.com

contact: +917774031655



FRANCE

Office

Omar Azzam

Head of Operations

contact: +33 7 83 53 35 12



SERBIA

office

Marko Ristovski

Head of Operations

marko@konnnectpackaging.com

contact: +381693226316



(UAB Konnect Packaging Europe)

LITHUANIA

Office

Urtas Polonskis

Head of Operations

Email: sales@konnnectpackaging.com

Mobile: +37069967145



SLOVAKIA

office

Urtas Polonskis

Head of Operations

Email: info.slovakia@konnnectpackaging.com

Mobile: +421 944 350 482



UK

Office

Deepshikha Mittal

Head of Operations

Address: 53, Peel Close, Windsor, SL4 3NW

Mobile: +44 7860 195356

Welcome!

Dear Valued Partner,

It is a pleasure to welcome you to Konnect Packaging International LLP and UAB Konnect Packaging Europe.

We believe packaging is more than protection—it connects quality, sustainability, and trust. Since our establishment in 2023 in Madhya Pradesh, India, we have focused on delivering certified, high-performance, and sustainable packaging solutions globally.

Our expertise spans advanced VCI (Volatile Corrosion Inhibitor) solutions and high-quality food packaging, designed to meet stringent international standards and evolving industry needs.

To strengthen our global presence, we have established UAB Konnect Packaging Europe in Lithuania, supported by warehousing and distribution in Rotterdam. This enables efficient supply, faster turnaround, and localized support across Europe.

Built on consistency, quality, and customer-centricity, we proudly serve a growing global client base, backed by certifications including ISO 9001:2015, CE compliance, and ZED sustainability recognition.

Our philosophy is simple: “Packaging that connects you to quality.”

We look forward to building long-term partnerships and delivering solutions that exceed expectations.

Mr. Parth Chandra, CEO & Director
Konnect Packaging International LLP
UAB Konnect Packaging Europe

KONNECT
packaging.



“At Konnect Packaging International, we don’t just supply packaging— we deliver performance, protection, and profitability.”

“With our European base, UAB Konnect Packaging Europe in Lithuania, we ensure faster access, localized support, and seamless supply across the Baltic and European markets. Our advanced VCI and anti-corrosive packaging solutions are engineered to protect your products in the most demanding conditions—reducing damage, lowering costs, and improving operational efficiency.”

“What sets us apart is simple—consistent quality, competitive pricing, and the ability to scale with your business. Whether you are an OEM, exporter, or industrial supplier, we are built to support high-volume, time-critical requirements without compromise.”

“If you are looking for a packaging partner who understands both manufacturing precision and global logistics—Konnect Packaging is your answer.”

With multilingual expertise across German, Russian, English, Slovakian, and Ukrainian markets, we ensure seamless communication and stronger client relationships across Europe.”

“Let’s connect. Let’s protect. Let’s grow.”



Mr. Pida Juraj
Head of Operations Europe (Slovak)

KONNECT
packaging.



Dear Visitors,

It is my pleasure to welcome you to Konnect Packaging International LLP at this prestigious trade fair.

As the Head of our Serbian Division and a founding member of UAB Konnect Packaging Europe, I take great pride in representing our growing presence across the European market. From our early beginnings, our mission has been clear—to deliver reliable, high-performance packaging solutions backed by innovation and strong partnerships.

At our stand, we are showcasing a comprehensive range of solutions tailored for global industries. Our expertise in VCI (Volatile Corrosion Inhibitor) packaging ensures superior protection for metal components across automotive, engineering, and heavy industries. In addition, we are expanding our portfolio in food-grade packaging, including high-quality sugar paper and sustainable paper-based solutions, designed to meet strict hygiene and safety standards.

Our European operations, supported by our base in Serbia and UAB Konnect Packaging Europe, enable us to provide seamless service, faster delivery, and localized technical support across the region.

This platform is not just an exhibition for us—it is an opportunity to connect, collaborate, and create value together. We are committed to understanding your specific requirements and offering solutions that enhance efficiency, reduce losses, and support sustainability goals.


I warmly invite you to visit us, explore our innovations, and discuss how Konnect Packaging can support your business.

We look forward to building strong and lasting partnerships.



Marko Ristovski, Head – Serbian Division
Founding Member – UAB Konnect Packaging Europe

KONNECT
packaging.

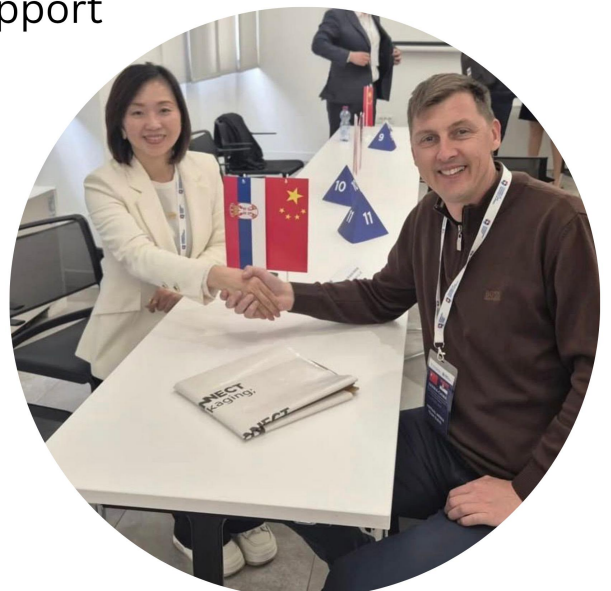

VCI Kraft Paper (K101 A)



Overview

VCI Kraft Paper (K101 A) is a specially formulated volatile corrosion inhibiting kraft paper designed to provide corrosion protection to ferrous and non-ferrous metals. It works by releasing corrosion inhibiting molecules that form a protective layer on the surface of the metal. VCI Kraft Paper is used for packaging and wrapping metal components to prevent rust and corrosion during storage and transportation.



Technical Specifications

Parameter	Specification
Paper Thickness	45 – 85 GSM
Paper Type	Kraft paper (brown or white)
VCI Chemical Type	Nitrate-free; for ferrous & non-ferrous metals
pH Value	Neutral to slightly alkaline (pH 7–9)
Tensile Strength	≥ 25 N/mm ²
Bursting Strength	≥ 2.5 kg/cm ²
Corrosion Protection	Up to 24 months in proper conditions
Moisture Content	≤ 8% (for enhanced resistance)
Temperature Range	-40°C to +80°C
Shelf Life	1.5 years (in cool, dry conditions)

VCI LDPE Film (K101 VCF)



Overview

VCI LDPE Film (K101 VCF) is a corrosion-inhibiting low-density polyethylene (LDPE) film designed to protect metal parts from rust and oxidation during storage and transport. Infused with VCI (Volatile Corrosion Inhibitor) chemicals, the film creates a protective atmosphere around the metal surface. It combines flexibility, moisture resistance, and long-lasting corrosion protection for ferrous and non-ferrous metals.



Technical Specifications

Parameter	Specification
Film Thickness	40 – 200 microns
Material Type	LDPE (Mono or multi-layer)
VCI Chemical Type	Nitrate-free, for ferrous & non-ferrous metals
pH Value	Neutral to slightly alkaline (pH 7–9)
Tensile Strength	≥ 20 N/mm ²
Tear Resistance	High (depends on gauge)
Corrosion Protection	Up to 24 months in proper conditions
Moisture Content	Excellent due to LDPE structure
Temperature Range	-40°C to +85°C
Shelf Life	2 years (sealed in original packaging)

← BACK

VCI 4-Ply Fabric (K104 PF)



Overview

VCI 4-Ply Fabric (K104 PF) is a high-performance industrial packaging material designed to protect metal components from corrosion during storage and transit. Combining four specialized layers, including a VCI (Volatile Corrosion Inhibitor) barrier, it ensures superior strength, tear resistance, and anti-rust protection. Ideal for export packaging, heavy machinery, and automotive parts.



Technical Specifications

Parameter	Specification
Total GSM Range	90–180 GSM
Film Type	VCI-embedded multilayer with HDPE base
Tensile Strength	≥ 40 N/mm ²
Bursting Strength	≥ 4 kg/cm ²
Moisture Resistance	Excellent, due to LDPE & VCI combination
Corrosion Protection	Effective for up to 24 months (sealed use)
Temperature Range	-40°C to +65°C
Shelf Life	2 years (in sealed, dry condition)

VCI PE Laminated Paper (K101 PE)



Overview

VCI PE Laminated Paper (K101 PE) is a specially engineered volatile corrosion inhibiting kraft paper laminated with polyethylene (PE) to provide superior moisture resistance. It is designed to offer double protection — corrosion inhibition for ferrous and non-ferrous metals and an added moisture barrier. Ideal for export packaging, long-term storage, and harsh environmental conditions.



Technical Specifications

Parameter	Specification
Paper Thickness	65 – 90 GSM
Paper Type	Kraft paper (brown or white)
Lamination Film	Polyethylene (PE), moisture-resistant
VCI Chemical Type	Nitrate-free, for ferrous & non-ferrous metals
Tensile Strength	≥ 30 N/mm ²
Bursting Strength	≥ 2.5 kg/cm ²
Corrosion Protection	Up to 24 months in proper conditions
Moisture Content	< 5% (due to PE lamination)
Temperature Range	-40°C to +80°C
Shelf Life	2 years (in cool, dry conditions)

← BACK

VCI Strength Fabric (K101 SF)



Overview

VCI Strength Fabric (K101 SF) is a high-strength, rust-preventive packaging material designed for heavy-duty industrial applications. It combines a reinforced woven fabric base with VCI (Volatile Corrosion Inhibitor) coating technology to protect ferrous and non-ferrous metals. This multi-layer fabric provides superior tear resistance, long-term corrosion protection, and barrier performance for storage and transport in harsh conditions.



Technical Specifications

Parameter	Specification
Fabric Thickness	100 – 150 GSM
VCI Coating Thickness	10 – 15 microns
VCI Chemical Type	Nitrate-free; for ferrous & non-ferrous metals
pH Value	Neutral to slightly alkaline (7–9)
Tear Strength	≥ 45 N/mm ²
Barrier Properties	Moisture, dust, and UV protection
Corrosion Protection	Up to 24 months in sealed packaging
Temperature Range	-40°C to +80°C
Shelf Life	2 years (sealed and dry storage)

VCI Shrink Film (K102 SF)



Overview

VCI Shrink Film (K102 SF) is a premium corrosion-inhibiting shrinkable packaging film specially designed to protect metal components during long-term storage and export. It combines the strength of shrink wrapping with advanced VCI (Volatile Corrosion Inhibitor) technology to deliver a tight, tamper-resistant, and rust-proof seal around industrial goods. Ideal for machinery, automotive parts, and marine equipment.



Technical Specifications

Parameter	Specification
Thickness Range	100 – 250 microns
Film Type	PE-based VCI Shrink Film
Shrink Ratio	60%–80% (varies with heat and material type)
Tensile Strength	≥ 25 N/mm ²
Tear Resistance	Excellent – sealed barrier
Moisture Resistance	Up to 24 months in sealed condition
Corrosion Protection	-40°C to +65°C
Shelf Life	2 years (in sealed, dry condition)

← BACK

VCI 3-Ply Paper (KP 301)



Overview

VCI 3-Ply Paper (KP 301) is a high-strength corrosion inhibiting paper designed for heavy-duty industrial applications. It consists of three layers — a VCI-treated kraft paper layer, a reinforced fiber core for added strength, and a moisture barrier — offering superior protection against rust, moisture, and mechanical stress. Ideal for long-term storage and export of ferrous and non-ferrous metal components.



Technical Specifications

Parameter	Specification
Paper Thickness	85 – 120 GSM
Paper Type	3-Ply kraft paper (brown or white)
VCI Chemical Type	Nitrate-free, for ferrous & non-ferrous metals
pH Value	Neutral to slightly alkaline (pH 7–9)
Tensile Strength	≥ 35 N/mm ²
Bursting Strength	≥ 3 kg/cm ²
Corrosion Protection	Up to 24 months in proper conditions
Moisture Content	< 6%
Temperature Range	-40°C to +80°C
Shelf Life	2 years (in cool, dry conditions)

VCI LDPE Film (K101 VCF)



Overview

VCI MET PET Laminated Paper (K101 AMP) is a high-barrier, rust-preventive packaging material designed for export and long-term storage of metal parts. It combines the strength of kraft paper, the barrier protection of metallized PET film, and the corrosion-inhibiting power of VCI (Volatile Corrosion Inhibitor). This multilayer laminate offers superior moisture resistance, oxygen barrier, and anti-rust performance for ferrous and non-ferrous metals.



Technical Specifications

Parameter	Specification
Absorption Capacity	100 – 250 microns
VCI Effectiveness	PE-based VCI Shrink Film
Packaging Material	60%–80% (varies with heat and material type)
Shelf Life	≥ 25 N/mm ²
Compatible Materials	Excellent – sealed barrier
Working Range	Up to 24 months in sealed condition
Format Options	-40°C to +65°C

← BACK

VCI Desiccant (K103 DC)



Overview

VCI Desiccant (K103 DC) is an advanced moisture and corrosion control solution designed for metal packaging and long-term storage. It combines the power of a traditional desiccant with VCI (Volatile Corrosion Inhibitor) chemistry to actively absorb moisture and release anti-corrosive vapors. This dual-action product protects ferrous and non-ferrous metals from rust, oxidation, and degradation — even in challenging environments.



Technical Specifications

Parameter	Specification
Absorption Capacity	100 – 250 microns
VCI Effectiveness	PE-based VCI Shrink Film
Packaging Material	60%–80% (varies with heat and material type)
Shelf Life	≥ 25 N/mm ²
Compatible Materials	Excellent – sealed barrier
Working Range	Up to 24 months in sealed condition
Format Options	-40°C to +65°C

Industrial Wax Paper (IWP101)



Overview

Industrial Wax Paper (IWP101) is a high-performance moisture-resistant packaging solution widely used in industrial and automotive sectors. It consists of durable kraft paper coated with a specialized wax formulation that acts as a barrier against water, oil, grease, and contaminants. It's ideal for wrapping metal components, machinery parts, bearings, and tools that require clean, dry storage or shipment protection.



Technical Specifications

Parameter	Specification
Paper GSM	40 – 80 GSM (before wax)
Wax Coating	Single or Double-sided (up to 20 GSM)
Roll Width	500 – 1200 mm
Roll Length	100 – 1000 meters
Color Options	Brown (Standard), Custom Printed
VCI Option	Available (optional additive)
Shelf Life	12–18 months (sealed, dry conditions)
Custom Cuts	Sheets, rolls, interleaves

← BACK

VCI Masterbatch (K106 MB)



Overview

VCI Masterbatch (K106 MB) is a highly concentrated additive designed to infuse Volatile Corrosion Inhibitor (VCI) properties into plastic films, bags, sheets, or molded parts during manufacturing. Engineered for industrial use, it offers long-term corrosion protection to metal components by releasing corrosion-inhibiting molecules. It is compatible with standard extrusion and molding processes, making it ideal for in-house production of anti-corrosive packaging materials.



Technical Specifications

Parameter	Specification
Base Polymer	PE or PP (custom on request)
VCI Type	Proprietary blend (ferrous & non-ferrous)
Recommended Dose	5–10% with base polymer
Appearance	Light amber to natural pellets
Melting Point	110°C – 160°C (varies by carrier)
Processing Method	Blown film, cast film, molding, extrusion
Shelf Life	24 months (sealed, cool, dry storage)
Corrosion Protection	Up to 2 years in closed packaging

VCI Power Stretch Film (K107 PSF)



Overview

VCI Power Stretch Film (K107 PSF) is a high-strength stretch wrap film infused with Volatile Corrosion Inhibitor (VCI) technology. Designed for pallet wrapping and industrial metal packaging, this film provides superior load containment while preventing rust and oxidation. Ideal for exporting or storing ferrous and non-ferrous metals, it offers both physical protection and long-term corrosion resistance in a single, efficient solution.



Technical Specifications

Parameter	Specification
Thickness	12 – 35 microns
Stretchability	Up to 300% elongation (depending on grade)
VCI Effectiveness	Up to 2 years in sealed environments
Tensile Strength	≥ 25 N/mm ²
Cling Type	Single / Double sided (optional)
Temperature Resistance	-30°C to +60°C
Roll Width & Roll Length	500 mm & 200 – 1500 meters
Shelf Life	2 years (dry, shaded storage)

Alu Barrier Bags (K108 ABB)



Overview

Alu Barrier Bags (K108 ABB) are high-barrier packaging solutions designed to provide maximum protection against moisture, oxygen, UV rays, and contaminants. These multilayer laminated bags use an aluminum foil core to create an impermeable shield, ideal for long-term storage and export packaging of moisture-sensitive products like electronics, machinery, aerospace components, and food-grade materials.



Technical Specifications

Parameter	Specification
Total Thickness	80 – 180 microns
Barrier Level	<0.01 g/m ² /day (Moisture); <0.05 cc/m ² /day (O ₂)
Sealing Type	Heat seal, vacuum seal
Roll/Pouch Width	100 mm to 1200 mm
Roll Length	100 – 1000 meters
Surface	Matte / Gloss / Printed
Shelf Life	Up to 5 years (sealed)
Operating Temp	-40°C to +85°C

Multiwall Paper Bags



Overview

Multiwall Paper Bags are high-strength industrial packaging bags made by combining multiple layers of kraft paper to provide durability, moisture resistance, and secure containment for a wide range of materials. These bags are designed for bulk packaging of powdered, granulated, or solid products across industries like chemicals, food, agriculture, and construction. They offer excellent tear resistance, breathability, and stackability for storage and transport.



Technical Specifications

Parameter	Specification
Paper Layers	2–5 ply kraft paper (40–80 GSM each)
Bag Capacity	5 kg – 50 kg
Type	Open mouth / Valve / Pinch bottom / Sewn
Dimensions	Customizable (length × width × gusset)
Liner Options	HDPE, PE, Aluminum, or VCI liner
Burst Strength	≥ 3.5 kg/cm ² (varies by ply)
Print Option	Up to 4-color flexo or screen print
Shelf Life	Up to 12–18 months (under proper storage)

SMP Bags



Overview

Skimmed Milk Powder (SMP) is highly sensitive to moisture, oxygen, light, and contamination, so the bags used must provide strong barrier protection, food safety compliance, and mechanical strength for transport and storage.

Eco Paper (K101 G)



Overview

KP Eco Paper is a specially engineered packaging paper designed for food and industrial wrapping applications where oil and grease resistance with heat sealability are required. The paper is manufactured using high-quality base paper combined with a functional barrier coating, providing reliable resistance to oils, fats, and moisture while enabling heat-sealable packaging operations.



Technical Specifications

Parameter	Specification
Base Paper GSM	50 - 100 GSM
Coating Type	Oil & Grease Resistant Functional Coating
Coating Weight	5-8 GSM
Total GSM	55-108 GSM (depending on base paper)
Heat Stability	Yes
Heat Seal Temperature	110°- 150°C (typical range)
Oil Grease Resistance	High
Moisture Resistance	Moderate
Surface Finish	Smooth
Food Contact Suitability	Suitable for food packaging applications
Appearance	White Brown
Printing Compatibility	Flexo/Gravure/Offset

Bulk Tea Packaging Bags



Overview

Bulk Tea Packaging Bags are specifically designed for storing and transporting large quantities of tea while maintaining freshness, aroma, and quality. These bags offer excellent moisture barrier properties and are ideal for bulk exporters, wholesalers, and tea processing units. With options for food-grade linings, sealing methods, and custom prints, they are crafted to protect delicate tea leaves from external contaminants, humidity, and flavor loss.



Technical Specifications

Parameter	Specification
Capacity Range	5 kg – 50 kg
Outer Material	Kraft paper / HDPE woven fabric
Liner Options	LDPE / Foil / Metallized PET / VCI options
Moisture Barrier	Excellent (multi-layer sealed system)
Food Grade	Yes (FDA / FSSAI-compliant liners)
Print Options	Up to 4-color custom branding
Tear & Burst Strength	High (depends on ply and material choice)
Shelf Life	12–24 months (under ideal storage conditions)

Wax-Coated Paper



Overview

Wax-Coated Paper is a moisture-resistant, grease-repellent packaging material created by coating high-quality kraft or MG paper with a food-safe wax layer. It is ideal for wrapping, interleaving, and packaging food items such as confectionery, meat, cheese, and baked goods, as well as industrial applications where moisture protection is critical. The wax layer acts as a barrier, keeping contents fresh and protected from contamination, while offering a natural, rustic appearance.



Technical Specifications

Parameter	Specification
Base Paper GSM	30 – 60 GSM (kraft / MG)
Wax Coating GSM	6 – 12 GSM
Coating Type	Paraffin / Microcrystalline / Food-grade natural wax
Grease Resistance	Medium to High
Moisture Barrier	Excellent
Food Grade	FDA / FSSAI
Print Options	Flexographic / Offset
Shelf Life	12 months (store in dry, ambient conditions)

Standing Pouches



Overview

Standing Pouches (also known as Stand-Up Pouches) are versatile, space-saving, and attractive packaging solutions used across various industries such as food, personal care, pet food, pharmaceuticals, and more. Designed with a bottom gusset, these pouches stand upright on shelves, enhancing product visibility and branding. They offer excellent barrier properties, resealability, and customization options to meet specific packaging needs.



Technical Specifications

Parameter	Specification
Outer Material	PET / Kraft / BOPP
Barrier Layer	Optional: Aluminum Foil / MET PET
Inner Material	LDPE / CPP
Total Thickness	80 – 150 microns (customizable)
Closure Options	Heat Seal, Zip Lock, Spout
Printing	Flexo, Rotogravure, or Digital (up to 8 colors)
Food Contact	FDA / FSSAI Approved
Shelf Life	12 – 24 months (based on barrier layer and content)

HDPE Laminated Paper Bags (F107 LPB)



Overview

HDPE Laminated Paper Bags (F107 LPB) are durable, moisture-resistant packaging bags made by laminating high-density polyethylene (HDPE) film onto kraft paper. These bags are ideal for storing and transporting powdered or granular products such as chemicals, seeds, minerals, cement, and fertilizers. The lamination adds strength, tear resistance, and water repellency, making them suitable for both manual and automated filling operations.



Technical Specifications

Parameter	Specification
Bag Size	Customizable (5 kg – 50 kg capacity)
Paper GSM	70 – 120 GSM
HDPE Film Thickness	15 – 40 microns
Lamination Type	Single side or both sides
Printing	Flexo / Gravure (up to 6 colors)
Closure Type	Heat seal / Stitching / Fold & glue
Surface Finish	Matte / Glossy
Shelf Life	12–24 months (dry storage)
Shelf Life	2 years (in sealed, dry conditions)

[← BACK](#)

Paper Aluminum Pouches



Overview

Paper Aluminum Pouches are high-barrier, multi-layer packaging solutions designed to preserve the freshness, aroma, and shelf life of sensitive products. Combining the natural look of kraft paper with the superior barrier properties of aluminum foil, these pouches provide excellent protection against moisture, oxygen, light, and contaminants. Ideal for food, pharmaceuticals, tea, coffee, spices, and health supplements, they offer premium product safety with an eco-conscious appearance.



Technical Specifications

Parameter	Specification
Outer Paper GSM	40 – 80 GSM Kraft Paper
Aluminum Foil Thickness	7 – 20 microns (depending on barrier needs)
Inner Layer Type	LDPE / PET (Food Grade)
Barrier Properties	Excellent (moisture, oxygen, UV)
Food Contact	FDA / FSSAI Approved
Heat Sealable	Yes (inner layer compatible with sealing machines)
Print Compatibility	Flexo / Rotogravure / Digital
Shelf Life	Up to 24 months (depending on contents & storage)

Sugar Paper (F105 SP)



Overview

Sugar Paper (F105 SP) is a specially engineered food-grade paper designed for packaging sugar and other fine powdered or granular food products. It offers excellent printability, strength, and controlled porosity to maintain product freshness and prevent leakage. Often used in the food and beverage industry, it is ideal for both retail and bulk sugar packaging.



Technical Specifications

Parameter	Specification
GSM	40 – 80 GSM
Coating Type	Uncoated / PE Coated / Waxed
Color Options	White / Brown / Printed
Bag Formats	Sachets, Pouches, Block Bottom Bags
Print Options	Up to 6-color food-grade printing
Shelf Life	Up to 12 months in dry storage



सूक्ष्म, लघु और मध्यम उद्यम मंत्रालय
MINISTRY OF
MICRO, SMALL &
MEDIUM ENTERPRISES



CERTIFICATE

ZED BRONZE

under MSME Sustainable (ZED) Certification Scheme
awarded to

KONNECTPACKAGING INTERNATIONAL LLP

UNIT NAME

Flat No:- J-60 BORGAON, Building:- J-60, Road/Street:- J-60 IGC BORGAON,
Village/Town:- Sausar, Block:- BLOCK J, City:- Sausar, Pandhurna, MADHYA PRADESH-
480106

UNIT ADDRESS

17-Manufacture of paper and paper products

CODE (AS PER NIC-2008)

UDYAM-MP-55-0000953

UDYAM REGISTRATION NUMBER

Issued on :
February 17, 2026

Certificate Validity :
Three years from the date of issue



Certificate No. 17022026_479459

This Certificate has been awarded after fulfilling all relevant requirements as laid down in the
MSME Sustainable (ZED) Certification Scheme Guidelines for this Certification Level.
Award of this Certificate does not substitute any legal requirement needed for setting up or operating an MSME Unit.



Certificate

This is to Certify that
**KONNECT PACKAGING
INTERNATIONAL LLP**
J-60, Sector J, Village Jamalpani, Near Raymond Borgaon,
Sausar, Chhindwara, Madhya Pradesh - 480106, India

has been found in Compliance with requirements of
Quality Management System
ISO 9001:2015

for the following scope:

**Manufacturer of Paper Specialised Coating, Paper Lamination,
Paper VCI Coating, Barrier Coating, HDPE Laminated Paper Bags**

Certificate No. : QCC/3DE9/0924
Issue Date : 12-September-2024
1st Surveillance Due : 11-August-2025
2nd Surveillance Due : 11-August-2026
Expiry Date : 11-September-2027

To check this certificate status visit:
"<https://qccertification.com/Client.aspx>"


Authorised Signature

Quality Control Certification

2nd Floor, Aman Market,
Narela Mandi, Delhi - 110 040, India
Website: <https://qccertification.com>



EAS is member of International Accreditation Forum (IAF)

"Quality Control Certification (QCC)" accredited by "Ethiopian Accredited Service (EAS)".
This certificate remains the property of "QCC" to whom it must be returned on request.



Certificate of Compliance

Application for
General Product Safety Directive (GPSD) 2001/95/EC.

This is to certify that the product(s):

**VCI Coating, Barrier Coating, Paper Lamination,
Specialised Water Resistant Coating & Laminated Paper Bags.**

Manufactured by
**KONNECT PACKAGING INTERNATIONAL
LLP**

**J-60, Sector J, Village Jamalpani, Near Raymond Borgaon,
Sausar, Chhindwara, Madhya Pradesh - 480106, India**

has been assessed & found in accordance with the requirements of
General Product Safety Directive (GPSD) 2001/95/EC.

QCC is non-notified certification body, issue this
'compliance certificate' after audit of manufacturer product(s) & technical file(s).

This certificate applies to the tested sample only not for whole production.

It's manufacturer sole responsibility to meet all the necessary conformity
assessment activities according to **GPSD 2001/95/EC** and related standards
before placing them on the market & CE mark on the product(s).

Certificate No. : CE/4ABB/0924
Original Certificate Date : 21-September-2024
Issue Date : 21-September-2024
Expiry Date : 20-September-2027

To check this certificate status visit:
"<http://uasl.uk.com/certifiedorganization>"



Authorised Signature

For Quality Control Certification

**UK Office: 82, Adley Street,
London - E5 0DZ, United Kingdom**

CE



Quality Control Certification accredited by UASL, UK
This certificate doesn't provide the certified organisation with immunity from its legal obligations.
This certificate remains the property of QC Certification to whom it must be returned on request.



Scan this code with your smart phone
to verify the certificate



Certificate of Compliance

This is to certify that the product/s manufactured by:
KONNECT PACKAGING INTERNATIONAL LLP

J-60, SECTOR J, VILLAGE JAMALPANI, NEAR RAYMOND BORGAON,
SAUSAR, CHHINDWARA, MADHYA PRADESH - 480106, INDIA
has been assessed by PQC and found to comply with the
requirements of

ROHS

For the following scope:
VCI COATING, BARRIER COATING, PAPER
LAMINATION, SPECIALISED WATER RESISTANT
COATING & LAMINATED PAPER BAGS.

Certification Calendar:

Client Id: 47438

Certificate No: RM-49442/1224

Initial Registered Date: 09.12.2024

Issuance Date: 09.12.2024

Date of Expiry: 08.12.2027

1st Surv. Due: 08.12.2025

2nd Surv. Due: 08.12.2026



Authorized Signatory

PARAMOUNT QUALITY CERTIFICATIONS

27, Old Gloucester Street, London, WC1N 3AX, United Kingdom. Email: info@pqcert.in

Validity of this certificate is subject to successful completion of surveillance audit on or before of due date.

(In case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal.)

Certification Verification: Please check this validity of the certificate at: <https://pqcert.in/certified-clients/> or www.pqcert.in at Certified Client

This Certificate remains the property of PQC & shall be returned immediately upon request.





Scan this code with your smart phone
to verify the certificate



PARAMOUNT QUALITY CERTIFICATIONS

CERTIFICATE OF COMPLIANCE

This is to certify that the products manufactured by:

KONNECT PACKAGING INTERNATIONAL LLP

J-60, SECTOR J, VILLAGE JAMALPANI, NEAR RAYMOND BORGAON,
SAUSAR, CHHINDWARA, MADHYA PRADESH - 480106, INDIA

has been independently assessed by PQC and found to comply with the
requirements of

(Food and Drug Administration) US- FDA

Certification Scope:

**VCI PAPER, LAMINATED PAPER, WATER RESISTANT COATING,
BARRIER PROPERTIES COATED PRODUCTS AND SUGAR PAPER.**

Certification Calendar:

Client Id: 51418

Certificate No: UM-54578/0725

Initial Registered Date: 04.07.2025

Issuance Date: 04.07.2025

Date of Expiry: 03.07.2028

1st Surv. Due: 03.07.2026

2nd Surv. Due: 03.07.2027



Authorized Signatory

Validity of this certificate is subject to annual surveillance audits to be done successfully on or before 365 days from date of this certificate.

This certificate remains the property of PQC & shall be returned immediately upon request.

27, Old Gloucester Street, London, WC1N 3AX, United Kingdom. Email:- info@pqcert.in, www.pqcert.in



CONTACT US

INDIA

Headquarter

Parth Chandra

Head of Operations

info@konnnectpackaging.com

contact: +917774031655

FRANCE

Office

Omar Azzam

Head of Operations

contact: +33 7 83 53 35 12

SERBIA

office

Marko Ristovski

Head of Operations

marko@konnnectpackaging.com

contact: +381693226316

LITHUANIA

Office

Urtas

Head of Operations

Email: sales@konnnectpackaging.com

Mobile: +37069967145

SLOVAKIA

office

Pida Juraj

Head of Operations

Email: info.slovakia@konnnectpackaging.com

Mobile: +421 944 350 482

UK

Office

Deepshikha Mittal

Head of Operations

Address: 53, Peel Close, Windsor,
SL4 3NW

Mobile: +44 7860 195356

THANK YOU

for taking the time to learn about us.

KONNECT packaging;

 www.konnnectpackaging.com

SCAN FOR
MORE INFO

