


Workshop Electrónica

Documentación

Microcontrolador y placa

Placa -> Arduino UNO

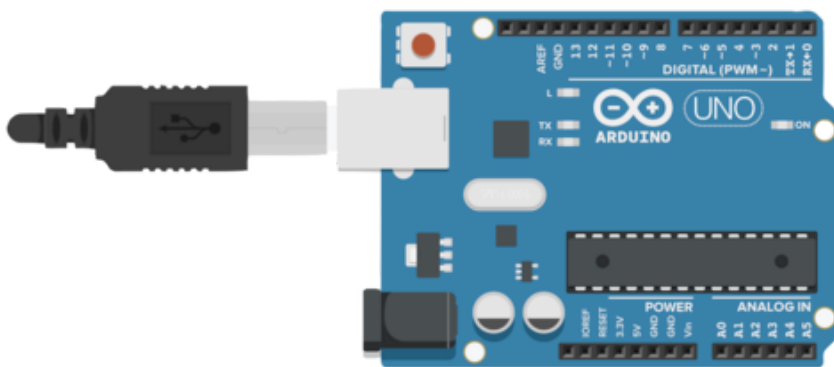




MC → ATMEGA328P



UNO

PINOUT DIAGRAM

- ⚠ Absolute max per pin 40mA recommended 20mA
- ⚡ Absolute max 2000mA for entire package

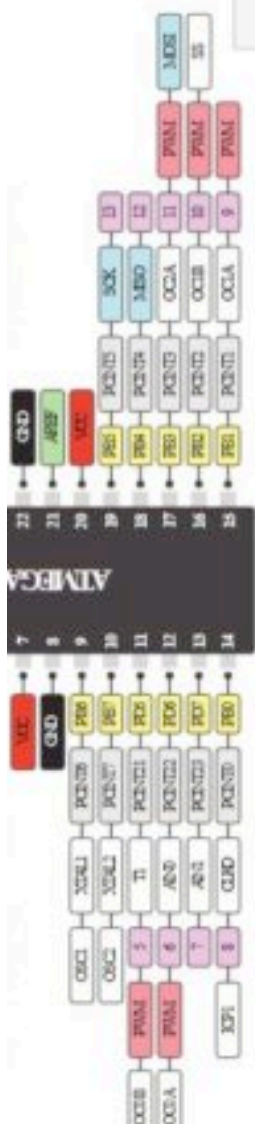

USB JACK



POWER JACK





1 7-12V Depending on current drain

Cut to disable the auto-reset


This provides a logic reference voltage pinlets that use it. It is connected to the 5V bus.

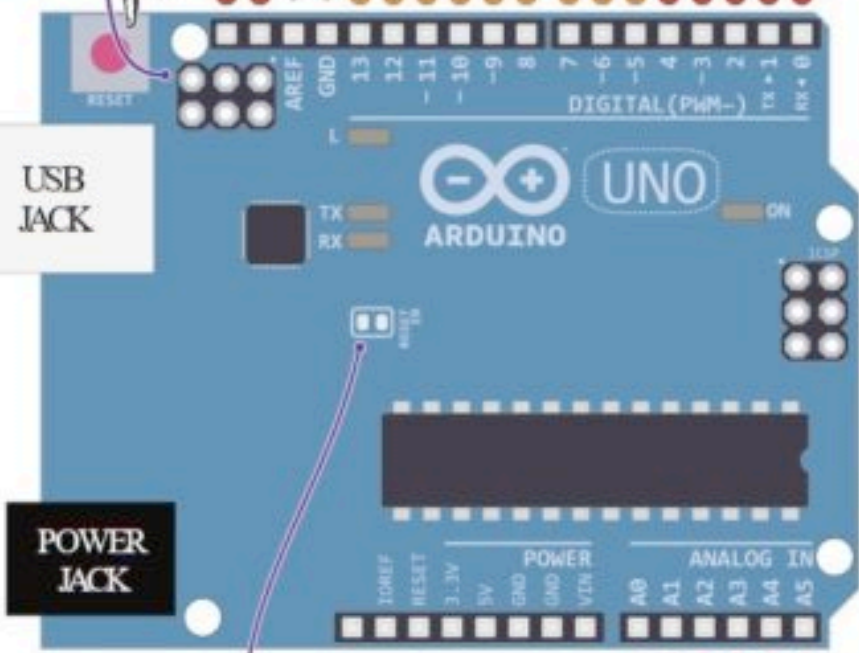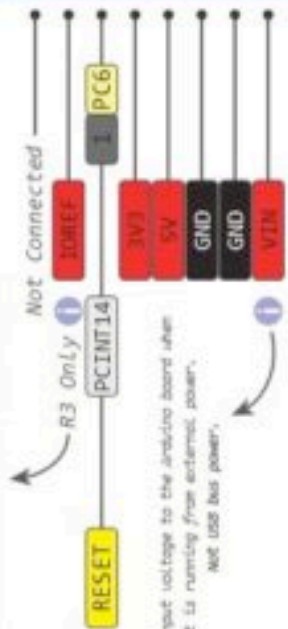

LEDs

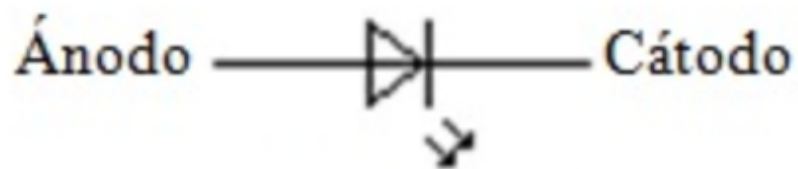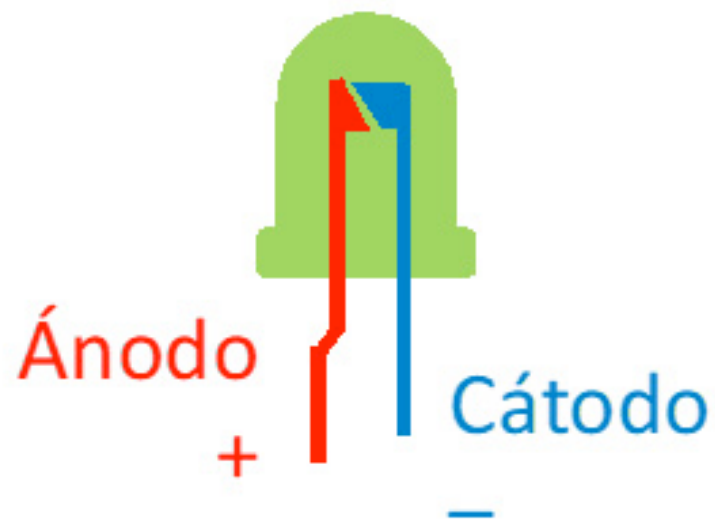

Resistências

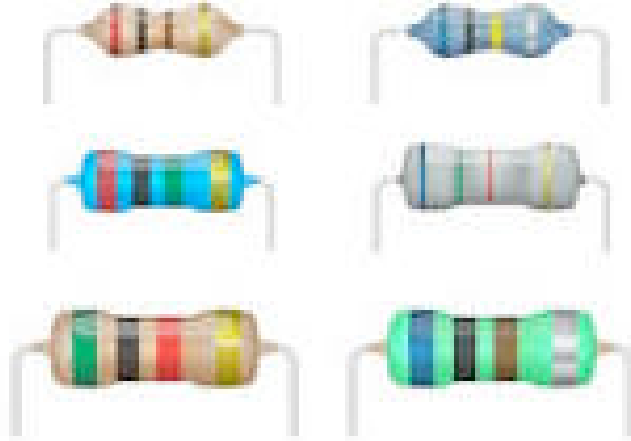


shutterstock.com - 2275703993


**Los colores
definen el valor
de la resistencia**





Botones



Pushbutton, normally open, push-to-make

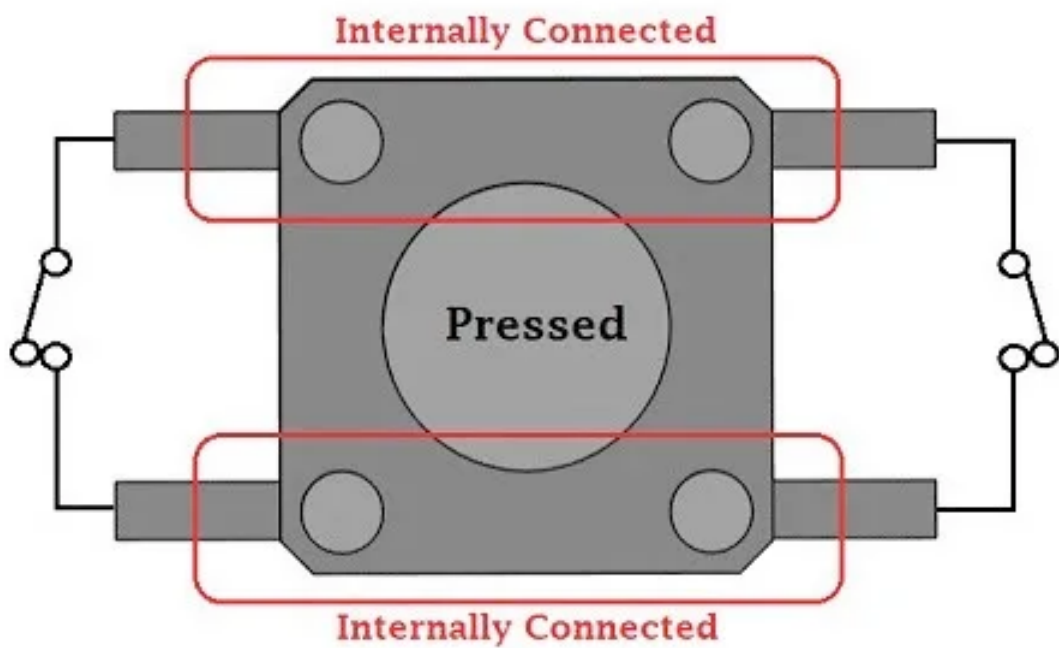

Protoboard

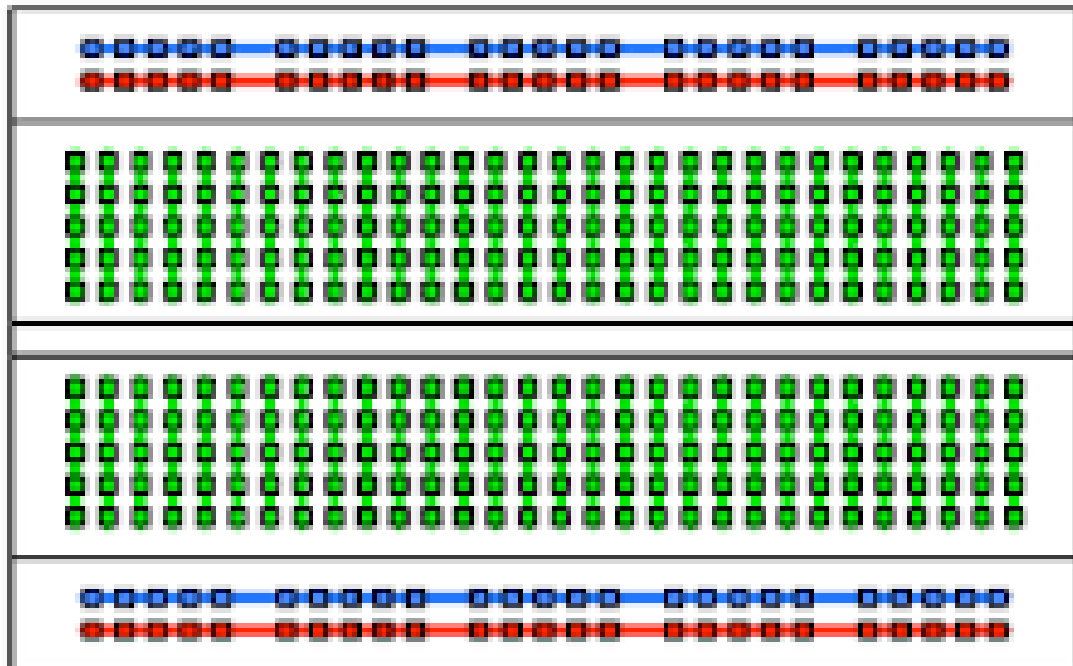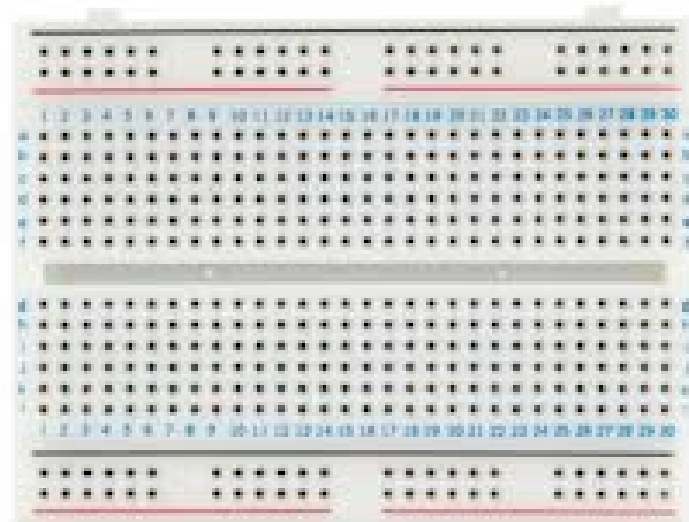

Positivo/Negativo

Positivo → Pines 3.3V/5V

Negativo → Pines GND