L7800 SERIES

POSITIVE VOLTAGE REGULATORS

- OUTPUT CURRENT UP TO 1.5 A
- OUTPUT VOLTAGES OF 5; 5.2; 6; 8; 8.5; 9; 12; 15; 18; 24V
- THERMAL OVERLOAD PROTECTION
- SHORT CIRCUIT PROTECTION
- OUTPUT TRANSITION SOA PROTECTION

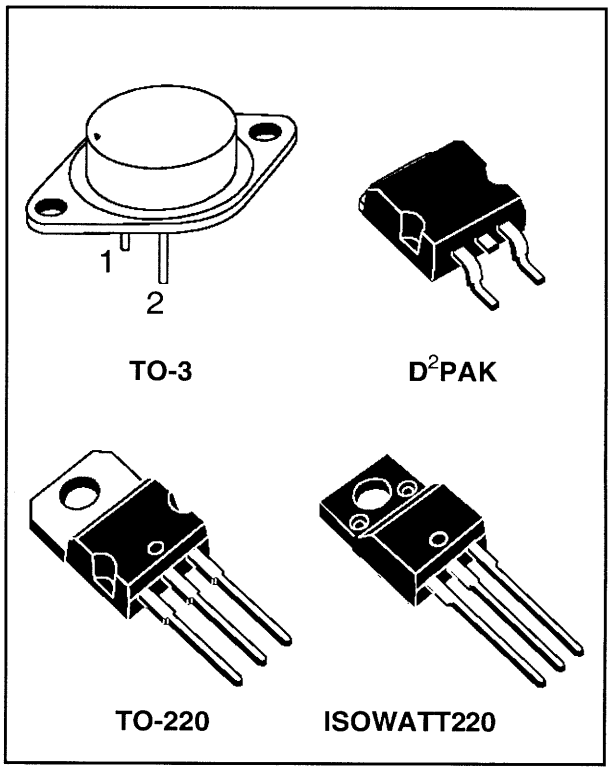

DESCRIPTION

The L7800 series of three-terminal positive regulators is available in TO-220 ISOWATT220 TO-3 and D^2PAK packages and several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

BLOCK DIAGRAM

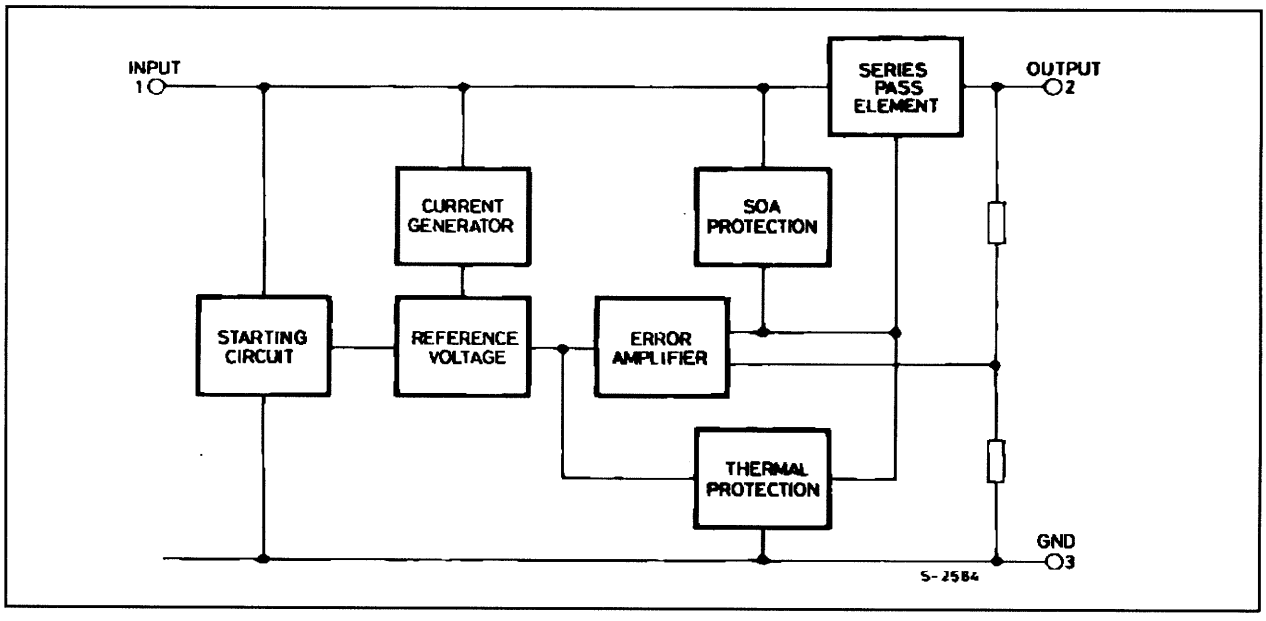

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_i	DC Input Voltage (for V_O = 5 to 18V) (for V_O = 20, 24V)	35 40	V V
I_o	Output Current	Internally limited	
P_{tot}	Power Dissipation	Internally limited	
T_{op}	Operating Junction Temperature Range (for **L7800**) (for **L7800C**)	-55 to 150 0 to 150	°C °C
T_{stg}	Storage Temperature Range	-65 to 150	°C

THERMAL DATA

Symbol	Parameter		D^2PAK	TO-220	ISOWATT220	TO-3	Unit
$R_{thj\text{-}case}$	Thermal Resistance Junction-case	Max	3	3	4	4	°C/W
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient	Max	62.5	50	60	35	°C/W

CONNECTION DIAGRAM AND ORDERING NUMBERS (top view)

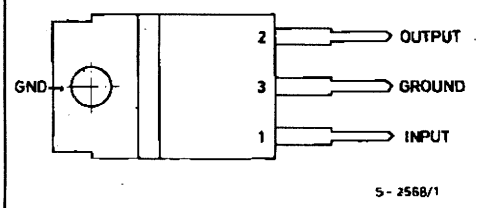

TO-220 & ISOWATT220

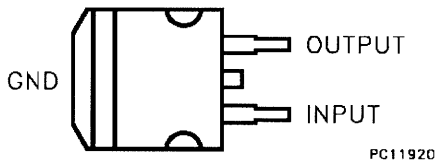

D^2PAK



TO-3

Type	TO-220	D^2PAK (*)	ISOWATT220	TO-3	Output Voltage
L7805				L7805T	5V
L7805C	L7805CV	L7805CD2T	L7805CP	L7805CT	5V
L7852C	L7852CV	L7852CD2T	L7852CP	L7852CT	5.2V
L7806				L7806T	6V
L7806C	L7806CV	L7806CD2T	L7806CP	L7806CT	6V
L7808				L7808T	8V
L7808C	L7808CV	L7808CD2T	L7808CP	L7808CT	8V
L7885C	L7885CV	L7885CD2T	L7885CP	L7885CT	8.5V
L7809C	L7809CV	L7809CD2T	L7809CP	L7809CT	9V
L7812				L7812T	12V
L7812C	L7812CV	L7812CD2T	L7812CP	L7812CT	12V
L7815				L7815T	15V
L7815C	L7815CV	L7815CD2T	L7815CP	L7815CT	15V
L7818				L7818T	18V
L7818C	L7818CV	L7818CD2T	L7818CP	L7818CT	18V
L7820				L7820T	20V
L7820C	L7820CV	L7820CD2T	L7820CP	L7820CT	20V
L7824				L7824T	24V
L7824C	L7824CV	L7824CD2T	L7824CP	L7824CT	24V

(*) AVAILABLE IN TAPE AND REEL WITH "-TR" SUFFIX

APPLICATION CIRCUIT

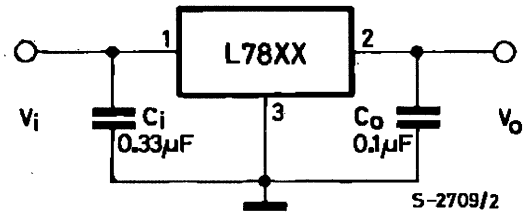

SCHEMATIC DIAGRAM

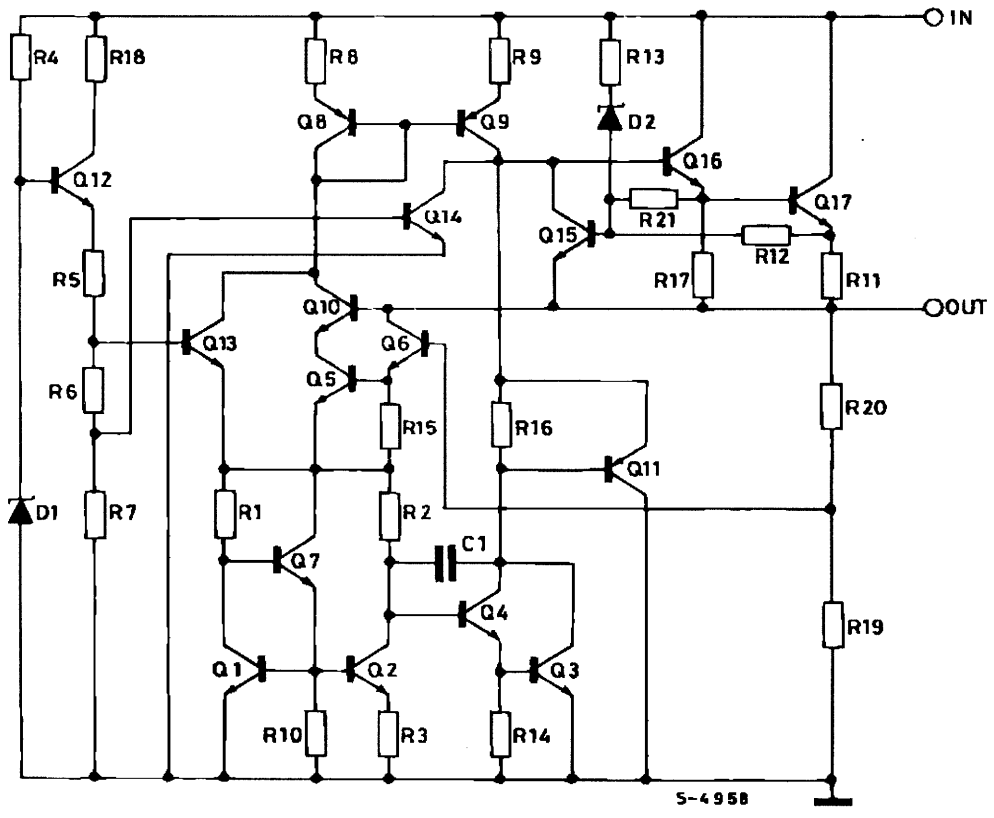

ELECTRICAL CHARACTERISTICS FOR L7805C (refer to the test circuits, T_j = 0 to 125 °C, V_i = 10V, I_o = 500 mA, C_i = 0.33 µF, C_o = 0.1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	4.8	5	5.2	V
V_o	Output Voltage	I_o = 5 mA to 1 A $P_o \leq$ 15 W V_i = 7 to 20 V	4.75	5	5.25	V
ΔV_o*	Line Regulation	V_i = 7 to 25 V T_j = 25 °C V_i = 8 to 12 V T_j = 25 °C		3 1	100 50	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			100 50	mV mV
I_d	Quiescent Current	T_j = 25 °C			8	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = 7 to 25 V			0.8	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-1.1		mV/°C
eN	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		40		µV
SVR	Supply Voltage Rejection	V_i = 8 to 18 V f = 120 Hz	62			dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C		2		V
R_o	Output Resistance	f = 1 KHz		17		mΩ
I_{sc}	Short Circuit Current	V_i = 35 V T_j = 25 °C		750		mA
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.2		A

ELECTRICAL CHARACTERISTICS FOR L7852C (refer to the test circuits, T_j = 0 to 125 °C, V_i = 10V, I_o = 500 mA, C_i = 0.33 µF, C_o = 0.1 µF unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_o	Output Voltage	T_j = 25 °C	5.0	5.2	5.4	V
V_o	Output Voltage	I_o = 5 mA to 1 A $P_o \leq$ 15 W V_i = 8 to 20 V	4.95	5.2	5.45	V
ΔV_o*	Line Regulation	V_i = 7 to 25 V T_j = 25 °C V_i = 8 to 12 V T_j = 25 °C		3 1	105 52	mV mV
ΔV_o*	Load Regulation	I_o = 5 to 1500 mA T_j = 25 °C I_o = 250 to 750 mA T_j = 25 °C			105 52	mV mV
I_d	Quiescent Current	T_j = 25 °C			8	mA
ΔI_d	Quiescent Current Change	I_o = 5 to 1000 mA			0.5	mA
ΔI_d	Quiescent Current Change	V_i = 7 to 25 V			1.3	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	I_o = 5 mA		-1.0		mV/°C
eN	Output Noise Voltage	B = 10Hz to 100KHz T_j = 25 °C		42		µV
SVR	Supply Voltage Rejection	V_i = 8 to 18 V f = 120 Hz	61			dB
V_d	Dropout Voltage	I_o = 1 A T_j = 25 °C		2		V
R_o	Output Resistance	f = 1 KHz		17		mΩ
I_{sc}	Short Circuit Current	V_i = 35 V T_j = 25 °C		750		mA
I_{scp}	Short Circuit Peak Current	T_j = 25 °C		2.2		A

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulce testing with low duty cycle is used.

Figure 4 : Dropout Voltage vs. Junction Temperature.

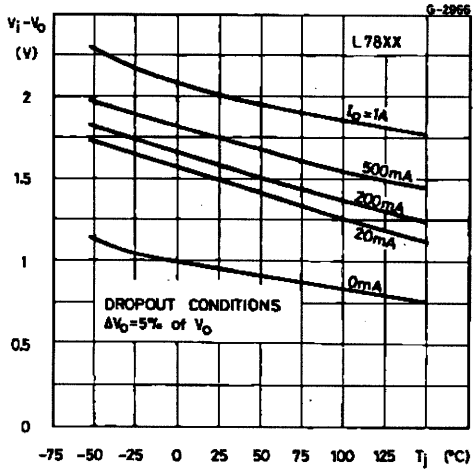

Figure 5 : Peak Output Current vs. Input/output Differential Voltage.

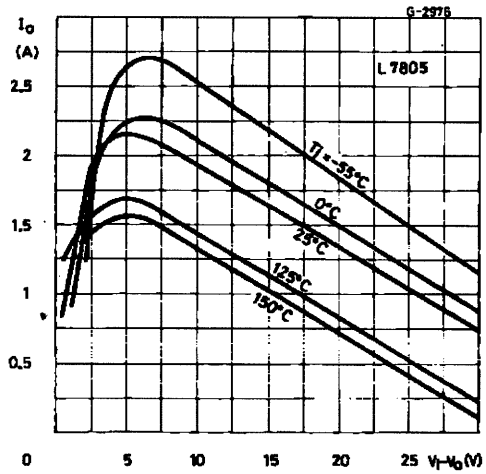

Figure 6 : Supply Voltage Rejection vs. Frequency.

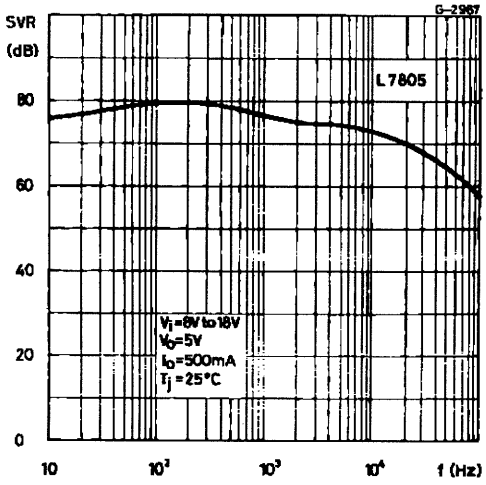

Figure 7 : Output Voltage vs. Junction Temperature.

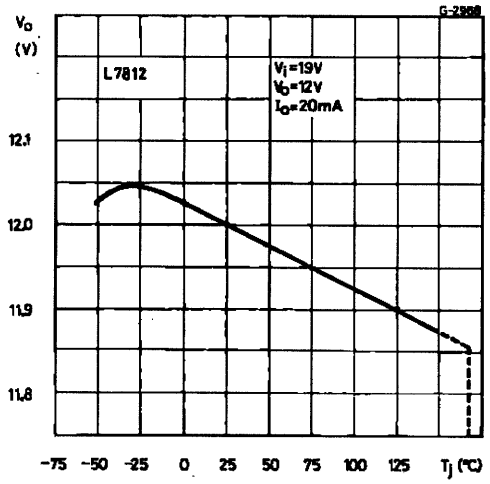

Figure 8 : Output Impedance vs. Frequency.

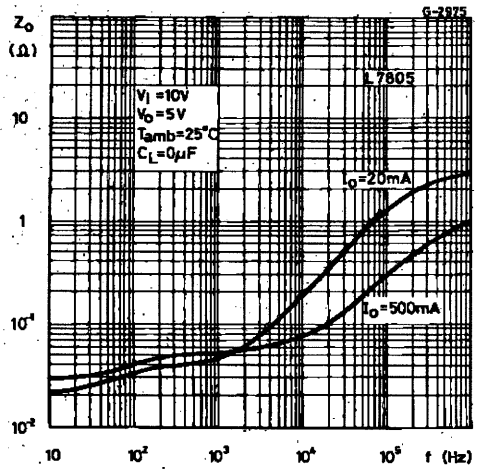

Figure 9 : Quiescent Current vs. Junction Temperature.

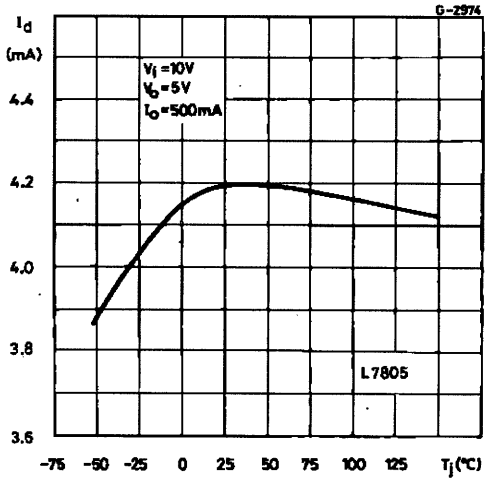

Figure 10 : Load Transient Response.

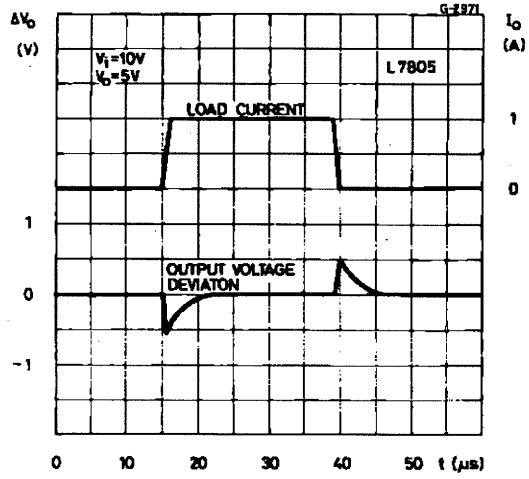

Figure 11 : Line Transient Response.

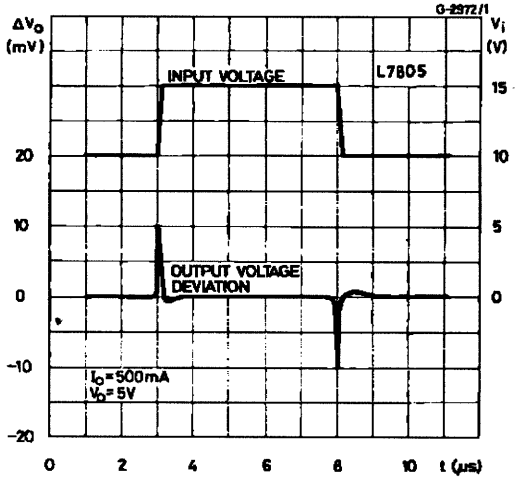

Figure 12 : Quiescent Current vs. Input Voltage.

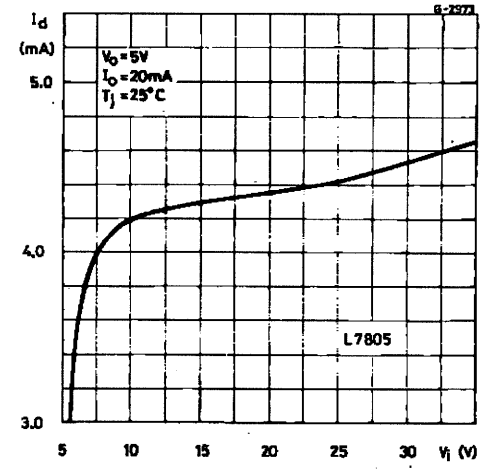

Figure 13 : Fixed Output Regulator.

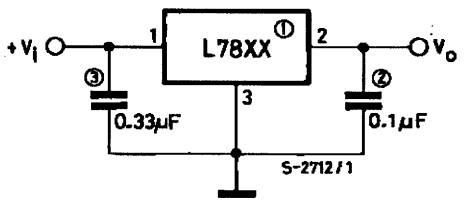

Figure 14 : Current Regulator.

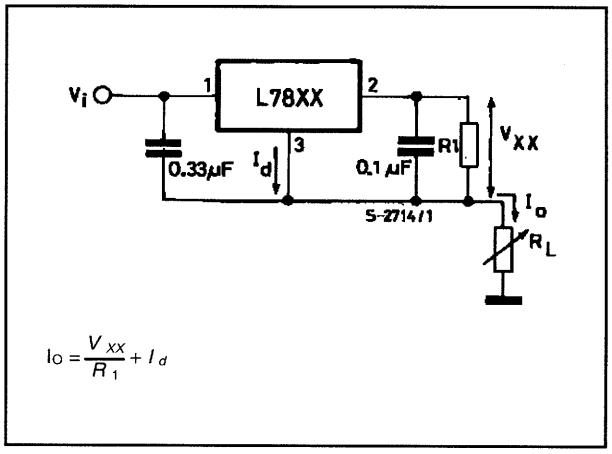

NOTE:
1. To specify an output voltage, substitute voltage value for "XX".
2. Although no output capacitor is need for stability, it does improve transient response.
3. Required if cregulator is locate an appreciable distance from power supply filter.

TO-220 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151