


HRLV-MaxSonar



Always read the datasheet





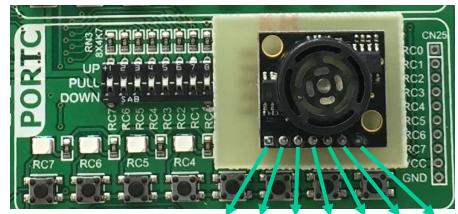

oin 1 – n.c. vin 2 – RC2 vin 3 – RC3 vin 4 – RC6 vin 5 – RC7 vin 5 – RC7 vin 5 – RC7 vin 5 – RC7

- Pin 1 Temperature Sensor Control: Not Connected
- Pin 2 Pulse Width Output: 1µs per mm (300µs 5000µs)
- Pin 3 Analog Voltage Output: Vcc/1024 per 5mm (300mm 5000mm)
- Pin 4 Ranging Start/Stop: Held High for continually measure and output data
- Pin 5 Serial Output: Data in ASCII representation "Rxxxx" (300mm 5000mm)