
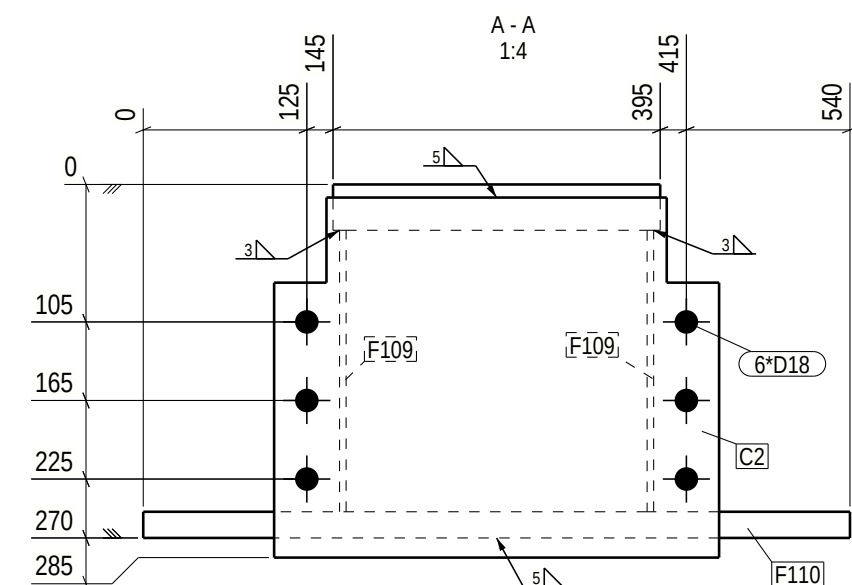
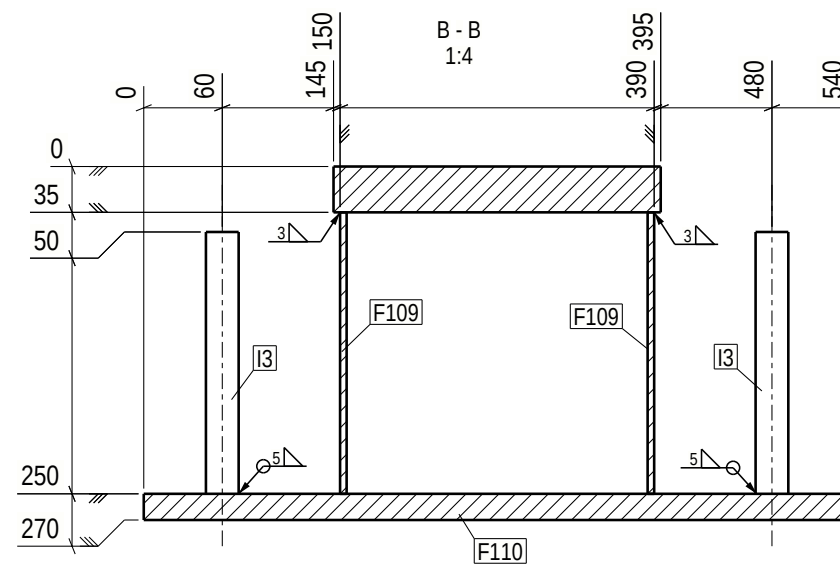


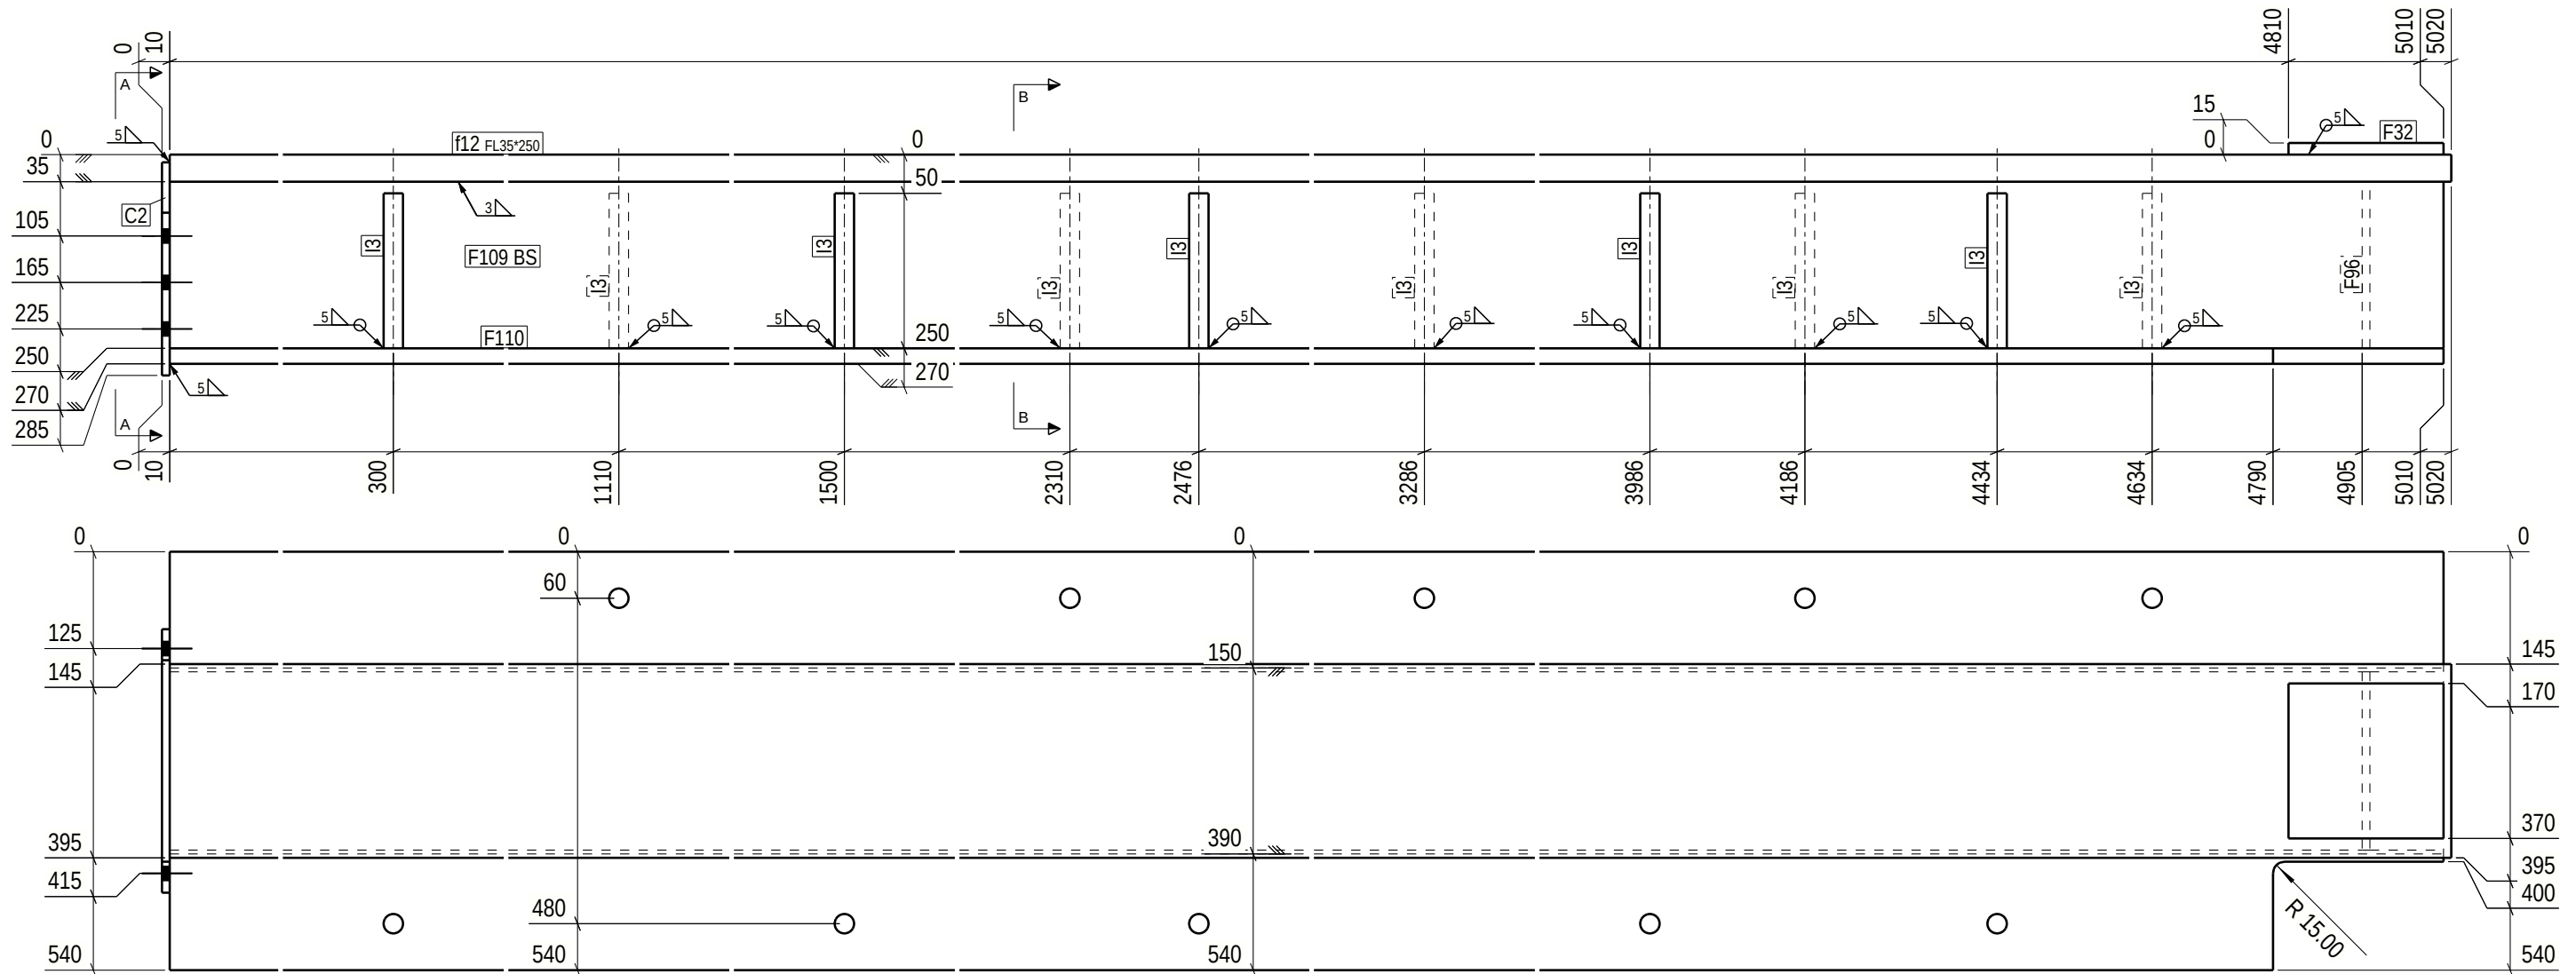

! NDT test:
Part thickness >30mm
f12

GENERAL NOTES: For your safety, check weight before handling:
0-5kg Light 5-15kg Normal 15+kg Heavy

ALL WELDS ARE 4 UNLESS NOTED ON DRAWING

MATERIAL LIST FOR ASSEMBLY MK'D f.12 1 No. Required

Mark	Profile	Material	No.	Length	Area	Weight
f12	FL35*250	S355J2	1	5010	2.9	344.1 !!
C2	PL10*275	S355J2	1	340	0.2	6.9
F32	FL15*200	S355J2	1	200	0.1	4.7
F96	FL10*215	S355J2	1	230	0.1	3.9
F109	FL5*215	S355J2	2	5000	2.2	42.2 !!
F110	FL20*540	S355J2	1	5000	5.6	419.1 !!
I3	REBAR25	B550B	10	200	0.0	0.7
Total					13.4	870.5

Finish Class
Standard

Surface treatment info:

Thickness/start point-> length

No.

Overall Painting

Primerµm whole asse*** 1



Special
surface treatment



weld a = 4mm

OPSVEJST EMNE

* o 3 0 4 8 0 - 1 * DS Skalkonstruktion * A f 1 2 *			
PROJECT	Akkasæter Lager- og vedlikeholdshall	EXEC. CLASS	EXC 2
MEMBER	HSQ	QUANTITY:	1 PROJECT No 30480-1
REVISION	ISSUED: 07.11.2025	DRAFTER: ZLL SST	DRAWING No. f.12