


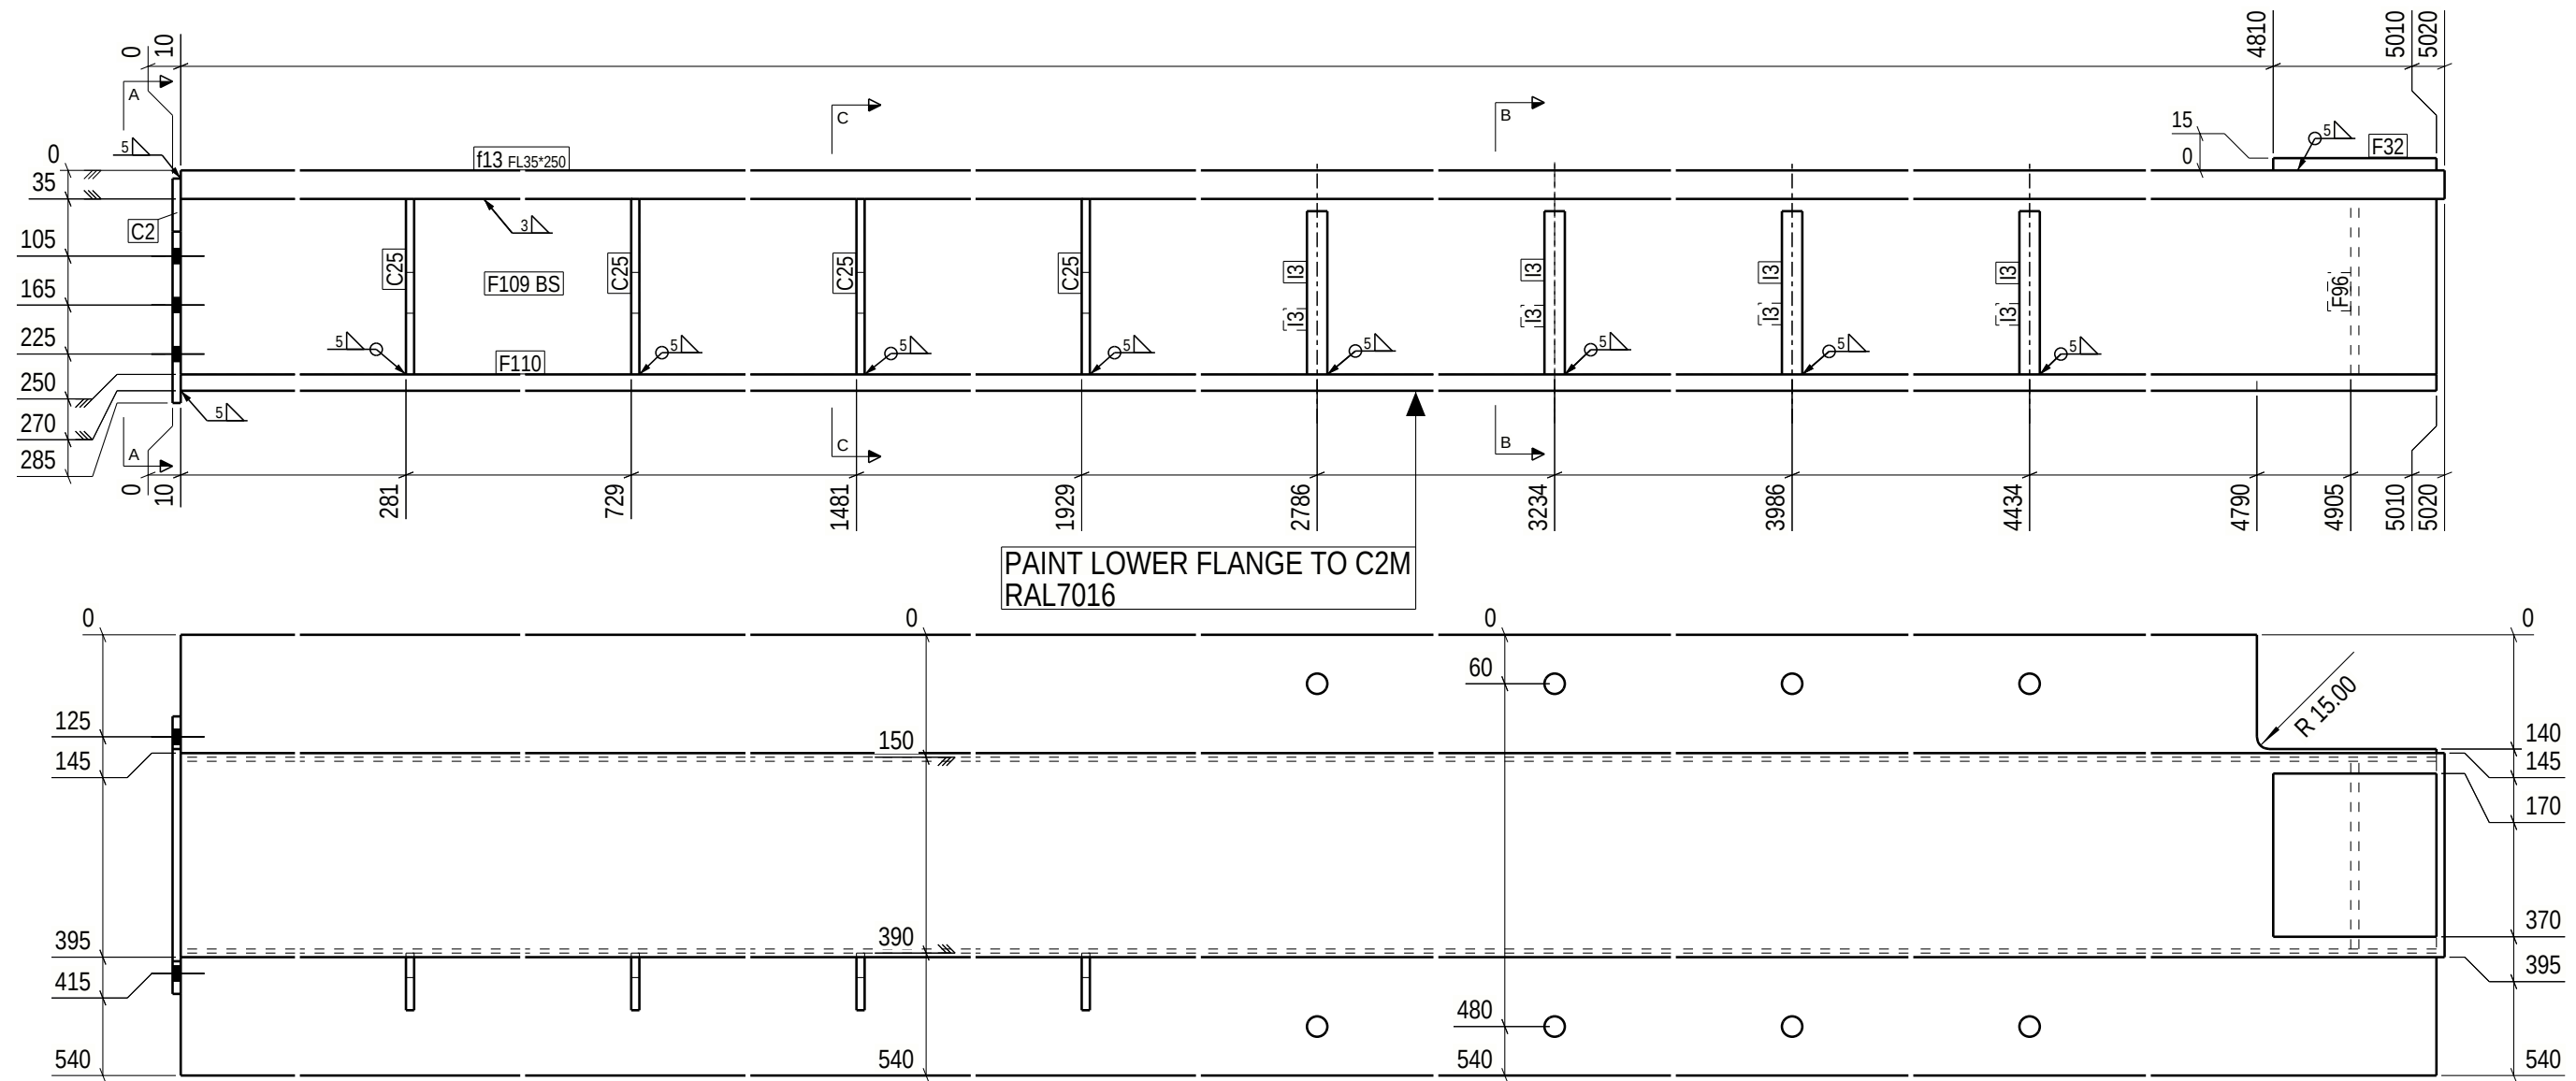

PAINT LOWER FLANGE TO C2M
RAL7016

OPSVEJST EMNE

! NDT test: Part thickness >30mm f13

GENERAL NOTES: For your safety, check weight before handling:
0-5kg Light 5-15kg Normal 15+kg Heavy

ALL WELDS ARE 4 UNLESS NOTED ON DRAWING

Mark	Profile	Material	No.	Length	Area	Weight
f13	FL35*250	S355J2	1	5010	2.9	344.1 !!
C2	PL10*275	S355J2	1	340	0.2	6.9
C25	PL10*70	S355J2	4	215	0.0	1.1
F32	FL15*200	S355J2	1	200	0.1	4.7
F96	FL10*215	S355J2	1	230	0.1	3.9
F109	FL5*215	S355J2	2	5000	2.2	42.2 !!
F110	FL20*540	S355J2	1	5000	5.6	419.1 !!
I3	REBAR25	B550B	8	200	0.0	0.7
Total				13.5	873.3	

Finish Class	Standard	C2M RAL7016 lower flange
Surface treatment info:	Thickness/start point-> length	No.
Overall Painting	Primerµm whole asse***	1

Special surface treatment weld a = 4

PHASE	QUANTITY
1	1

* o 3 0 4 8 0 - 1 * DS Skalkonstruktion * A f 1 3 *			
PROJECT	Akkasæter Lager- og vedlikeholdshall	EXEC. CLASS	EXC 2
MEMBER	HSQ	QUANTITY:	1 PROJECT No 30480-1
REVISION	ISSUED: 07.11.2025	DRAFTER: ZLL SST	DRAWING No. f.13