
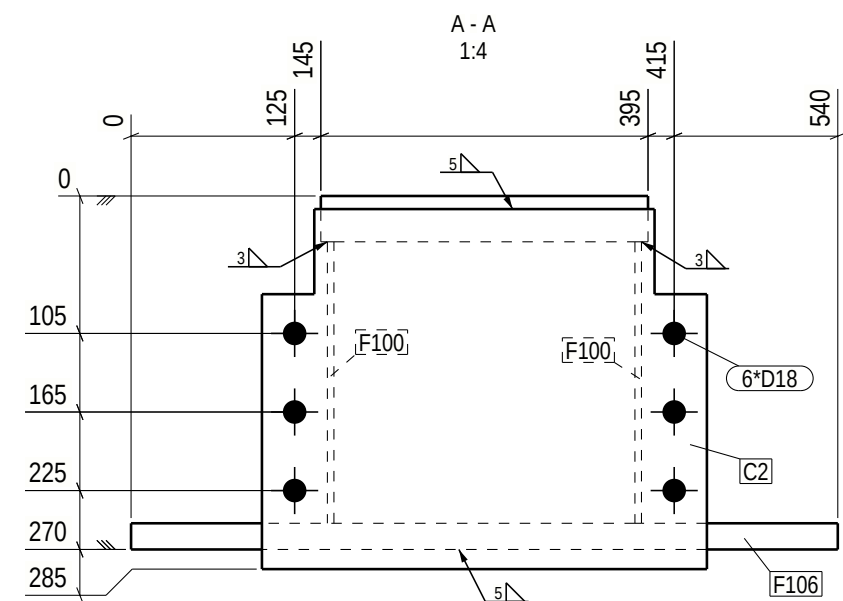
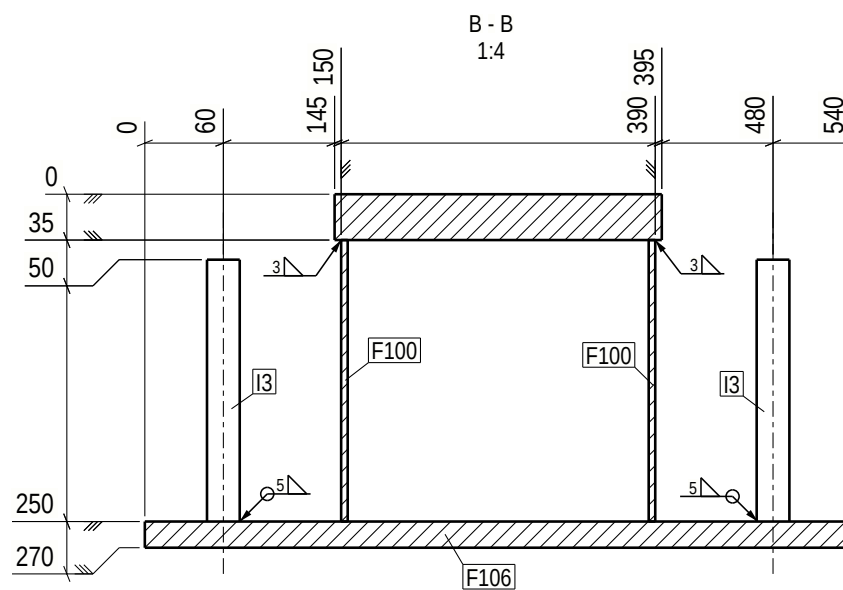
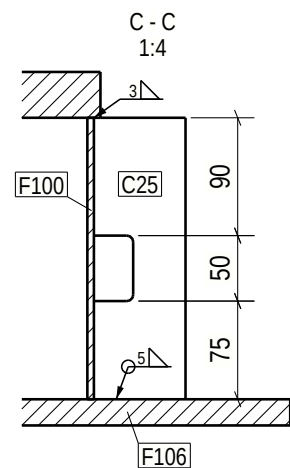
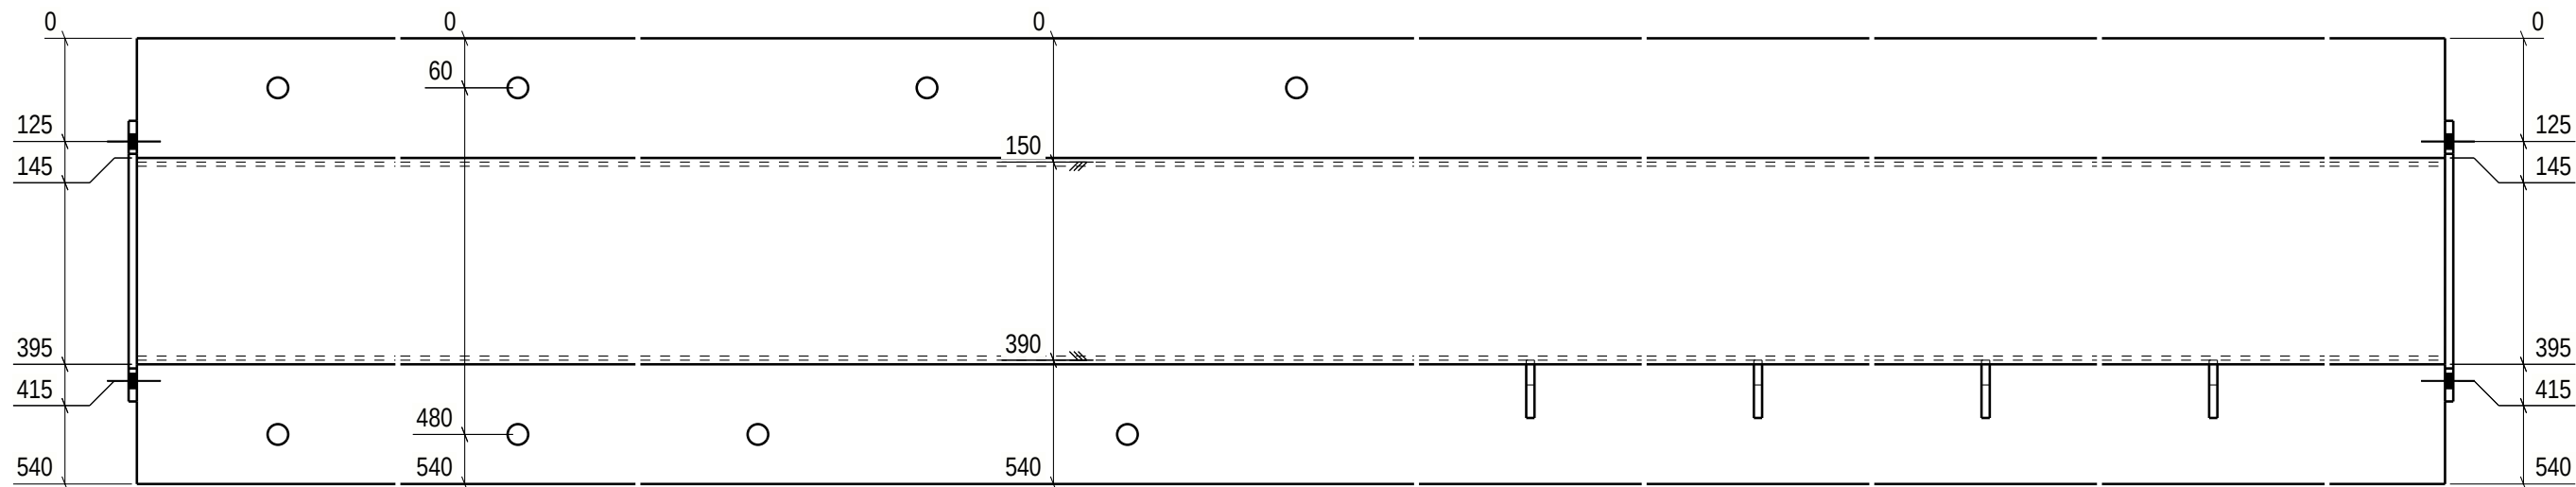


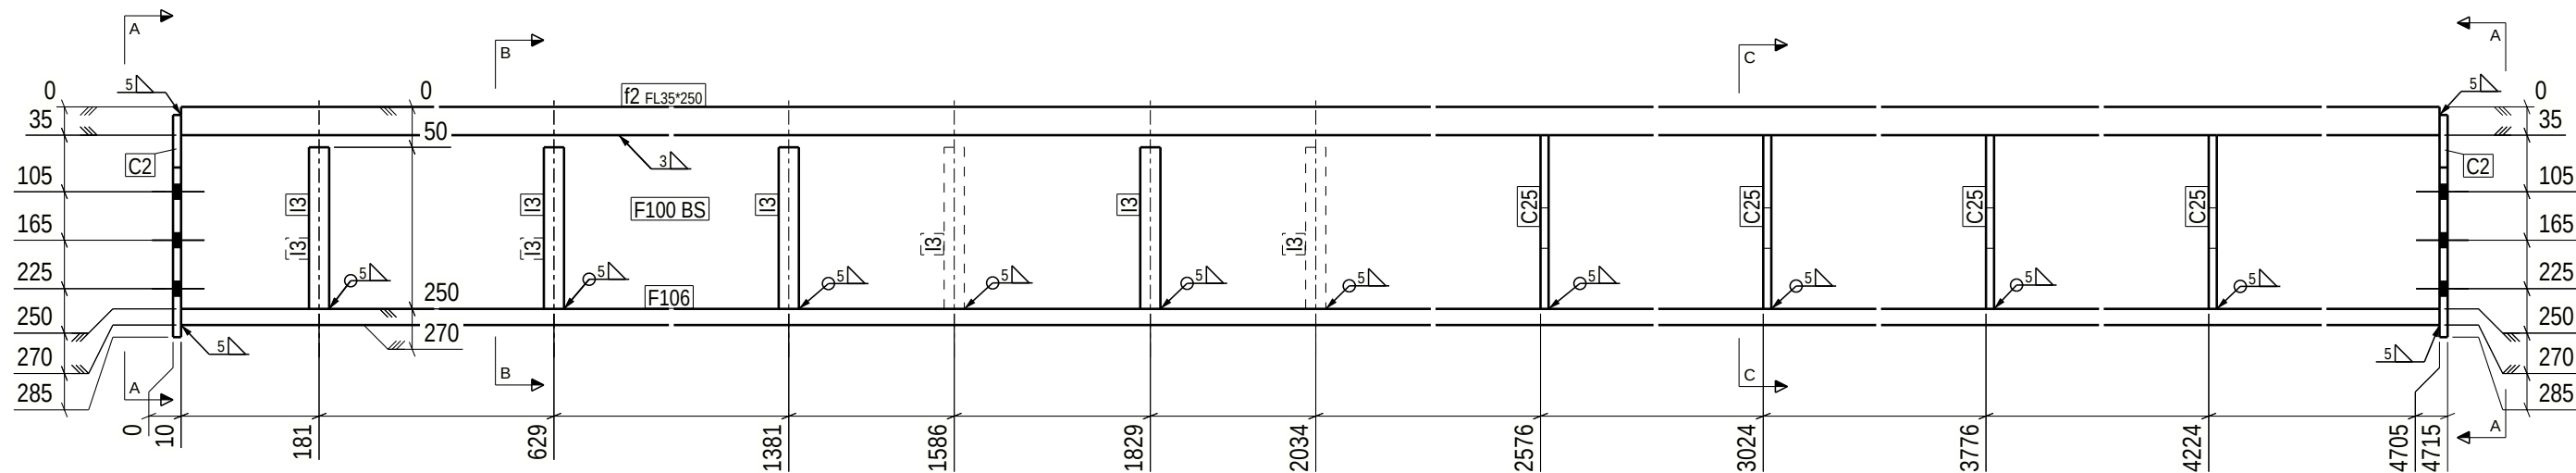

! NDT test:
Part thickness >30mm
f2

GENERAL NOTES: For your safety, check weight before handling:
0-5kg Light 5-15kg Normal 15+kg Heavy

ALL WELDS ARE 4 UNLESS NOTED ON DRAWING

MATERIAL LIST FOR ASSEMBLY MK'D f.2						1	No. Required
Mark	Profile	Material	No.	Length	Area	Weight	
f2	FL35*250	S355J2	1	4695	2.7	322.5 !!	
C2	PL10*275	S355J2	2	340	0.2	6.9	
C25	PL10*70	S355J2	4	215	0.0	1.1	
F100	FL5*215	S355J2	2	4695	2.1	39.6 !!	
F106	FL20*540	S355J2	1	4695	5.3	398.0 !!	
I3	REBAR25	B550B	8	200	0.0	0.7	
Total				12.8		823.8	

Finish Class
Standard

Surface treatment info:	Thickness/start point-> length	No.
Overall Painting	Primerµm whole asse***	1



Special
surface treatment



weld a = 4mm

OPSVEJST EMNE

* o 3 0 4 8 0 - 1 * DS Skalkonstruktion * A f 2 *			
PROJECT	Akkasæter Lager- og vedlikeholdshall	EXEC. CLASS	EXC 2
MEMBER	HSQ	QUANTITY:	1
REVISION	ISSUED: 07.11.2025	DRAFTER: ZLL	PROJECT No 30480-1
	BIM control: SST		DRAWING No. f.2