
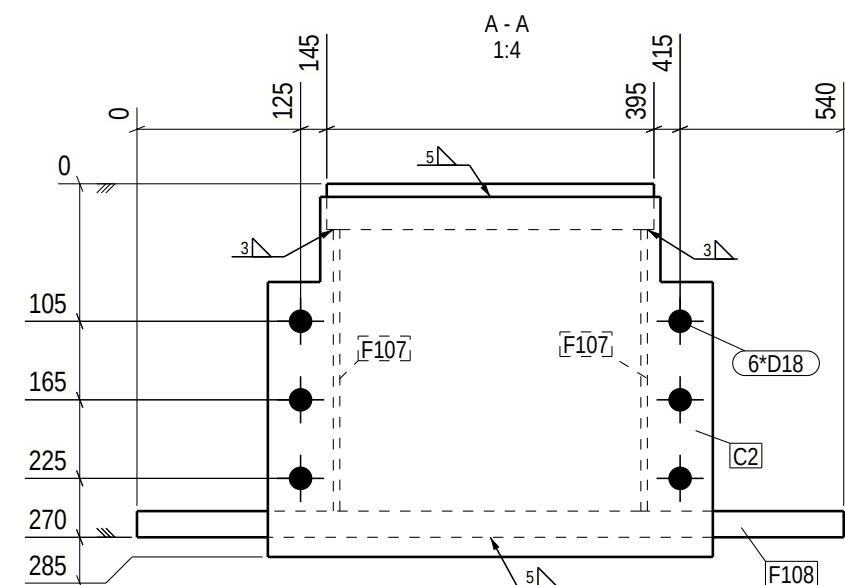
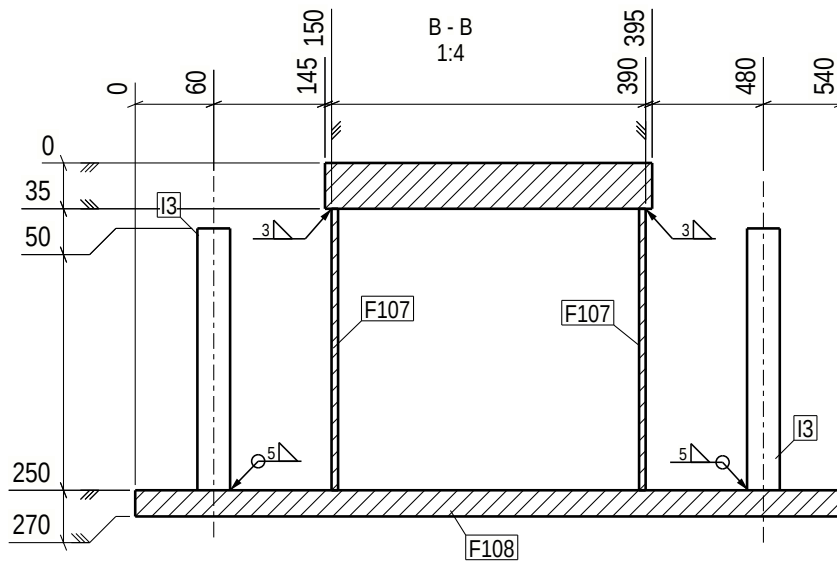
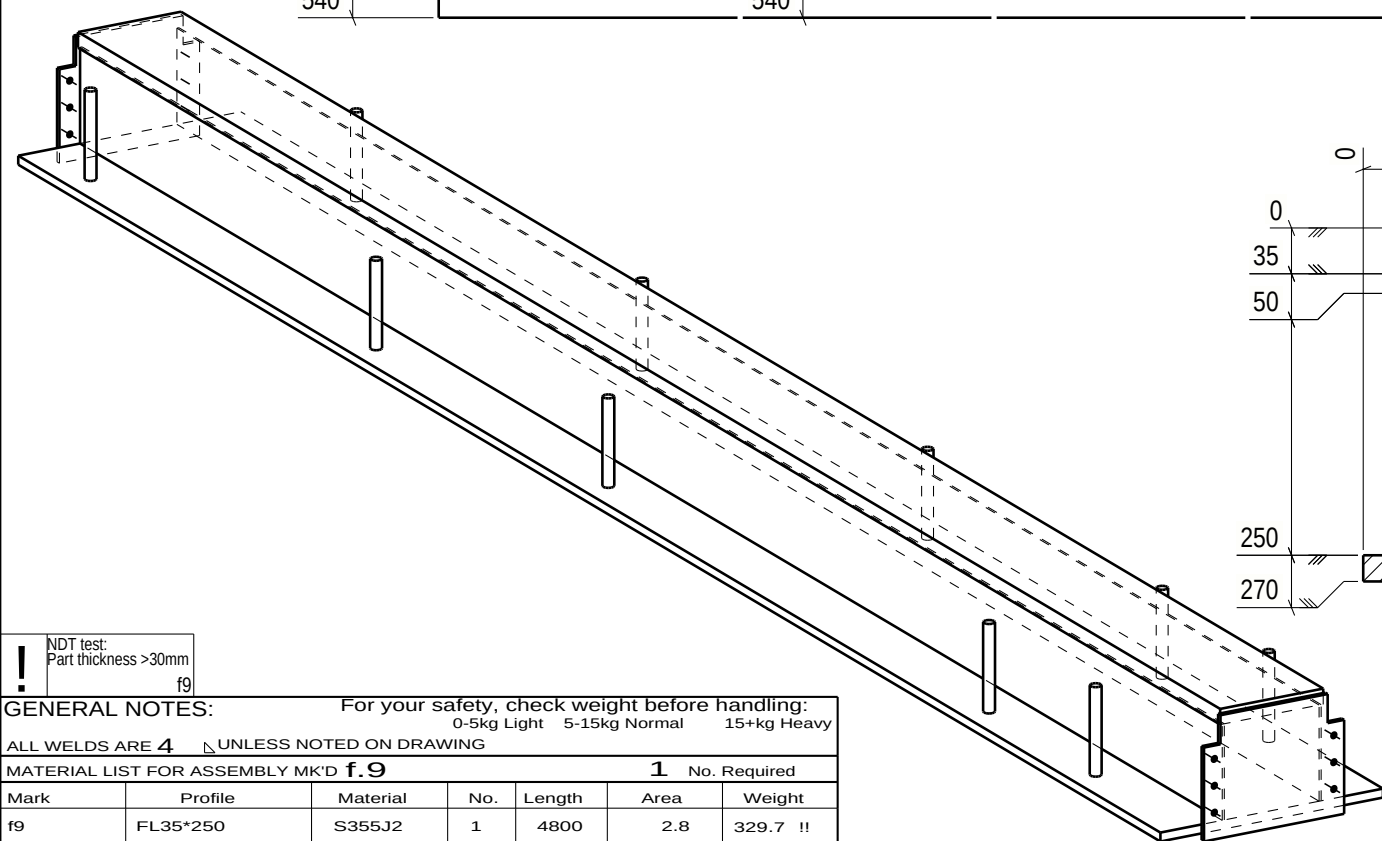


PAINT LOWER FLANGE TO C2M
RAL7016

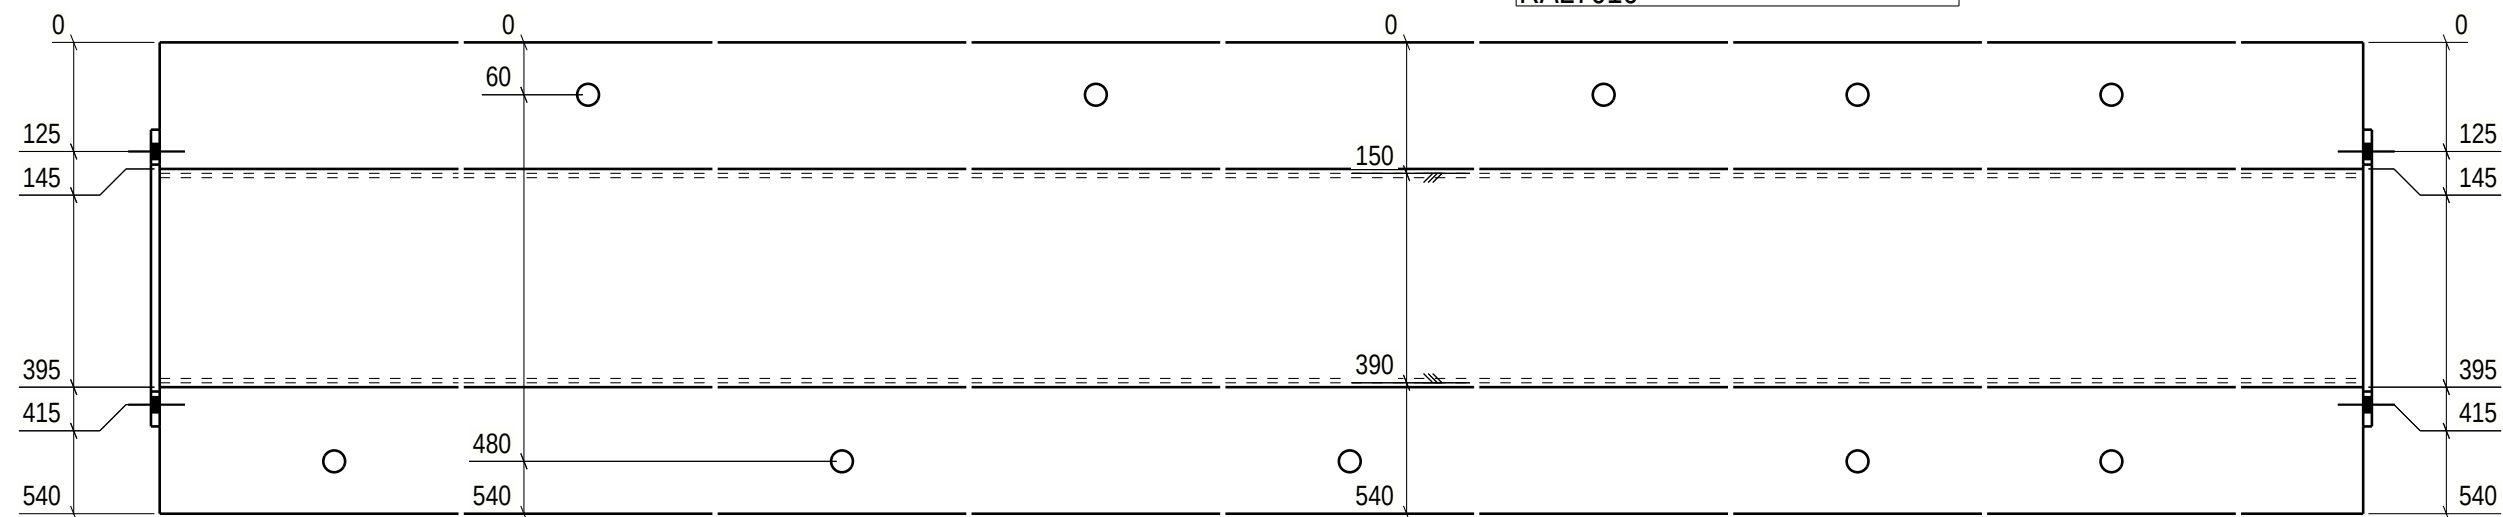

! NDT test:
Part thickness >30mm
f9

GENERAL NOTES: For your safety, check weight before handling:
0-5kg Light 5-15kg Normal 15+kg Heavy

ALL WELDS ARE 4 UNLESS NOTED ON DRAWING

MATERIAL LIST FOR ASSEMBLY MK'D f.9 1 No. Required

Mark	Profile	Material	No.	Length	Area	Weight
f9	FL35*250	S355J2	1	4800	2.8	329.7 !!
C2	PL10*275	S355J2	2	340	0.2	6.9
F107	FL5*215	S355J2	2	4800	2.1	40.5 !!
F108	FL20*540	S355J2	1	4800	5.4	406.9 !!
I3	REBAR25	B550B	10	200	0.0	0.7
Total					12.9	838.9

Finish Class
Standard

C2M RAL7016 lower flange

Surface treatment info:

Thickness/start point-> length

No.

Overall Painting

Primerµm whole asse*** 1



Special
surface treatment



weld a = 4

PHASE	QUANTITY
1	1

* o 3 0 4 8 0 - 1 * DS Skalkonstruktion * A f 9 *			
PROJECT	Akkasæter Lager- og vedlikeholdshall	EXEC. CLASS	EXC 2
MEMBER	HSQ	QUANTITY:	1 PROJECT No 30480-1
REVISION	ISSUED: 07.11.2025	DRAFTER: ZLL	DRAWING No. f.9
		BIM control: SST	