


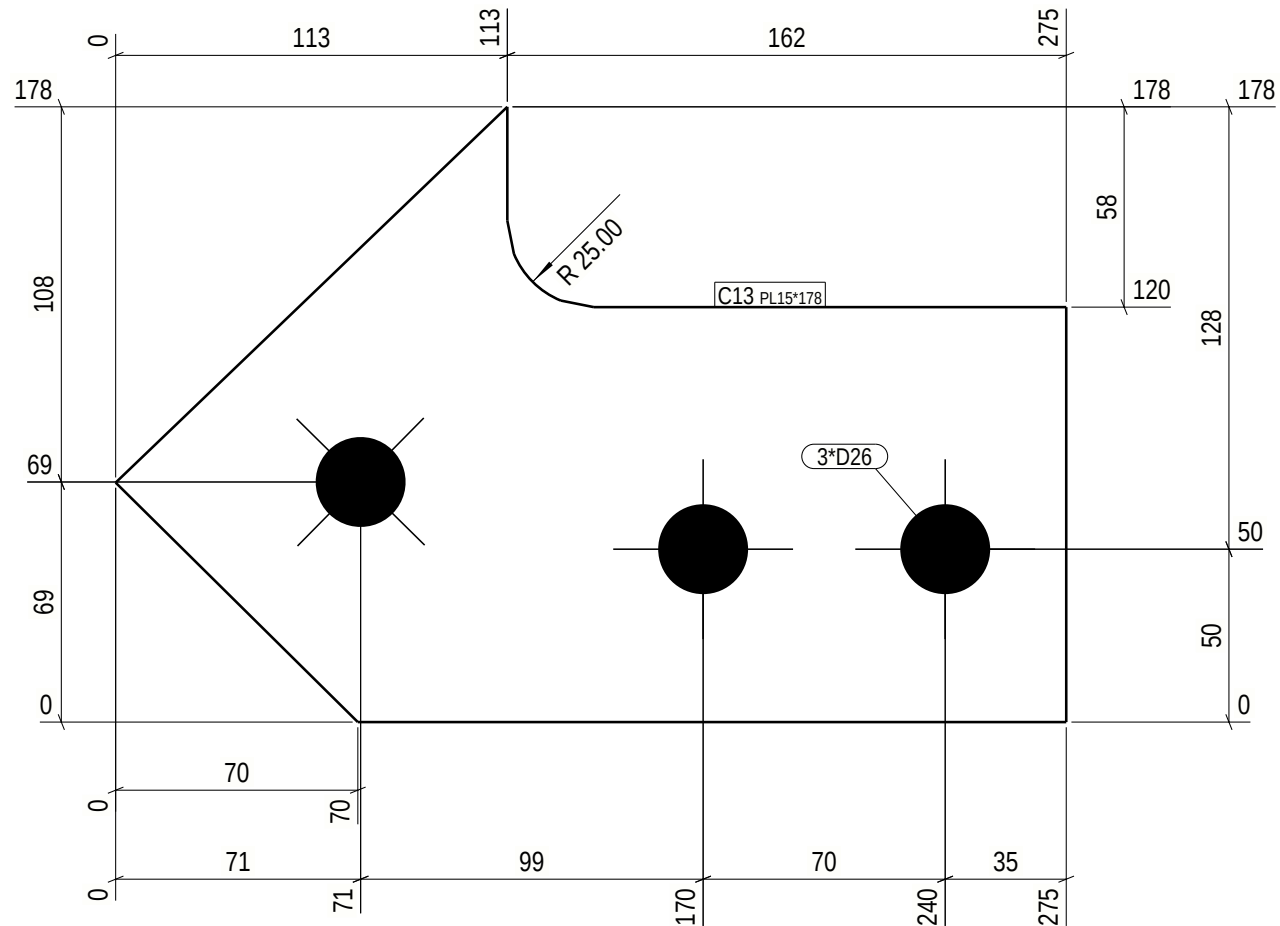

#### GENERAL NOTES:

For your safety, check weight before handling:  
0-5kg Light 5-15kg Normal 15+kg Heavy

#### MATERIAL LIST FOR PART - C13

4 PARTS REQUIRED

| POS. No. | PROFILE  | No. | GRADE  | L (mm) | AREA (m <sup>2</sup> ) | WEIGHT (kg) |
|----------|----------|-----|--------|--------|------------------------|-------------|
| C13      | PL15*178 | 1   | S355J2 | 275    | 0.1                    | 3.7         |

TOTAL WEIGHT FOR 4 PARTS 14.7

| Part list | Qty. |
|-----------|------|
| GS        | 4    |

#### Execution class: EXC 2

No utilization on drawings = over 50%

V-SEAM  
Utilization under 50%  
EXC 2=> Acc. to process control  
EXC 3=> 20% UT  
Utilization over 50%  
EXC 2=> 10% UT  
EXC 3=> 20% UT

\* o 3 0 4 8 0 - 1 \*



DS Steelkonstruktion

\* WC 1 3 \*

|          |                                      |                    |              |                  |                    |
|----------|--------------------------------------|--------------------|--------------|------------------|--------------------|
| PROJECT  | Akkasæter Lager- og vedlikeholdshall |                    | PHASE        | 1 / Phase 1      |                    |
| MEMBER   | Plade                                |                    | QUANTITY:    | 4                | PROJECT No 30480-1 |
| REVISION |                                      | ISSUED: 07.11.2025 | DRAFTER: ZLL | BIM control: SST | DRAWING No. C.13   |