


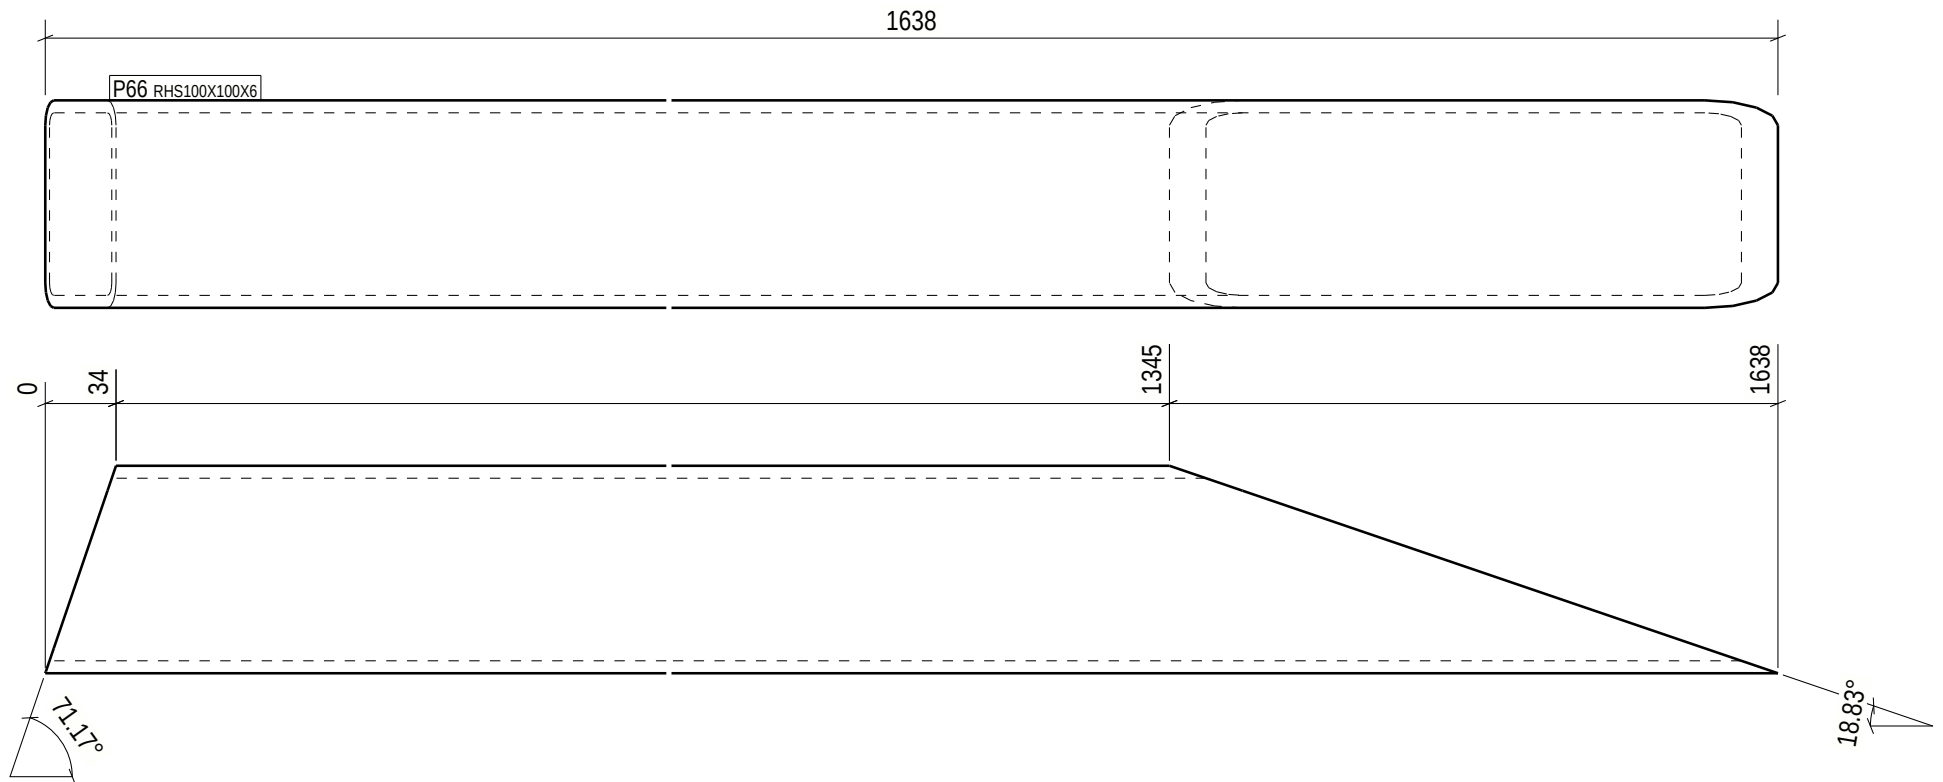

## GENERAL NOTES:

For your safety, check weight before handling:  
0-5kg Light 5-15kg Normal 15+kg Heavy

## MATERIAL LIST FOR PART - P66

4 PARTS REQUIRED

| POS. No. | PROFILE      | No. | GRADE   | L (mm) | AREA (m <sup>2</sup> ) | WEIGHT (kg) |
|----------|--------------|-----|---------|--------|------------------------|-------------|
| P66      | RHS100X100X6 | 1   | S355J2H | 1638   | 0.6                    | 24.9 !!     |

TOTAL WEIGHT FOR 4 PARTS 99.7

| Part list | Qty. |
|-----------|------|
| OP        | 4    |

## Execution class: EXC 2

No utilization on drawings = over 50%

V-SEAM  
Utilization under 50%  
EXC 2=> Acc. to process control  
EXC 3=> 20% UT  
Utilization over 50%  
EXC 2=> 10% UT  
EXC 3=> 20% UT

\* o 3 0 4 8 0 - 1 \*



DS Skalkonstruktion

\* WP 6 6 \*

|          |                                      |                    |                                  |             |                    |
|----------|--------------------------------------|--------------------|----------------------------------|-------------|--------------------|
| PROJECT  | Akkasæter Lager- og vedlikeholdshall |                    | PHASE                            | 1 / Phase 1 |                    |
| MEMBER   | Portomfatning                        |                    | QUANTITY:                        | 4           | PROJECT No 30480-1 |
| REVISION |                                      | ISSUED: 07.11.2025 | DRAFTER: ZLL<br>BIM control: SST |             | DRAWING No. P.66   |