


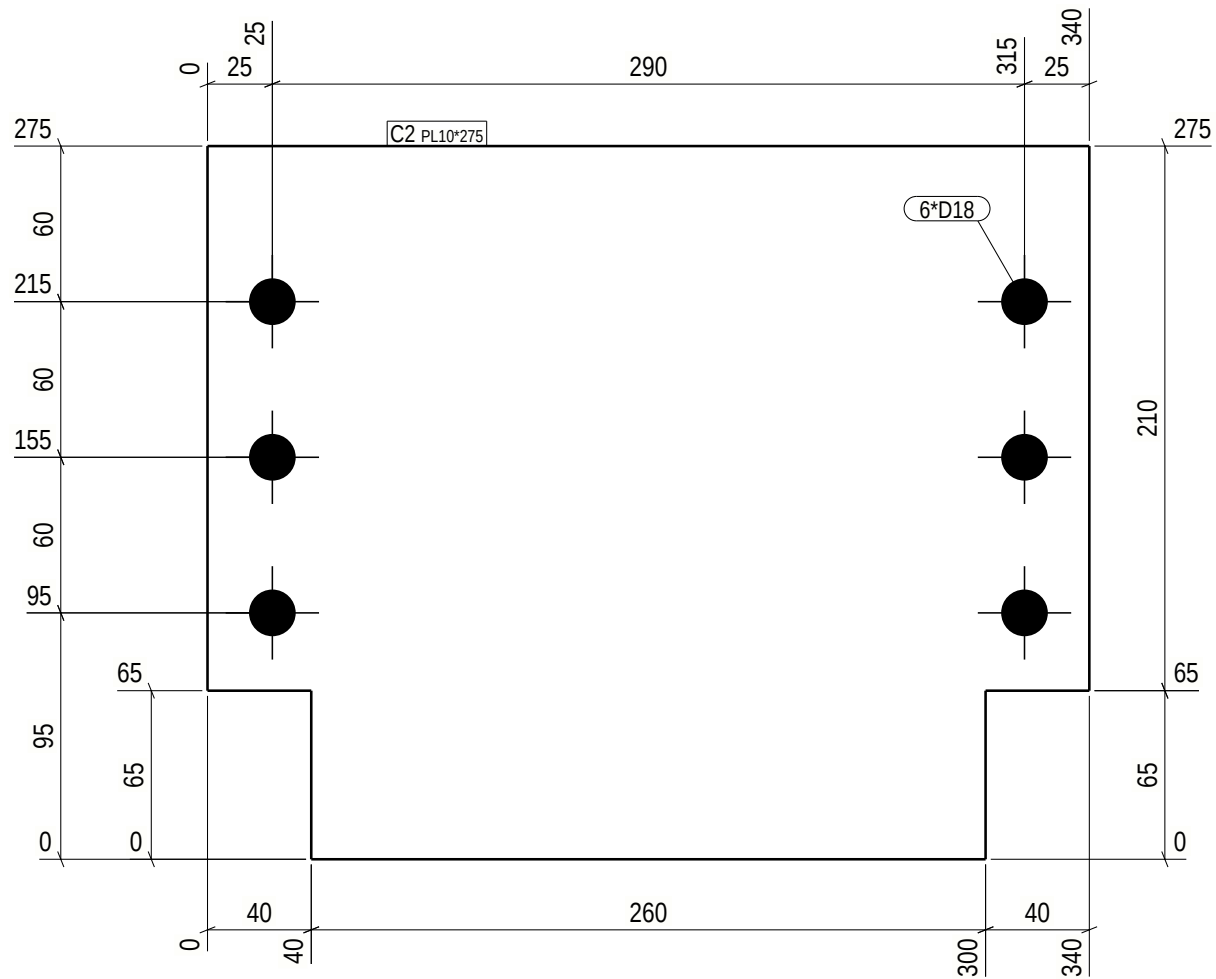

# GENERAL NOTES:

For your safety, check weight before handling:  
0-5kg Light 5-15kg Normal 15+kg Heavy

## MATERIAL LIST FOR PART - C2

24 PARTS REQUIRED

| POS. No. | PROFILE  | No. | GRADE  | L (mm) | AREA (m <sup>2</sup> ) | WEIGHT (kg) |
|----------|----------|-----|--------|--------|------------------------|-------------|
| C2       | PL10*275 | 1   | S355J2 | 340    | 0.2                    | 6.9         |

TOTAL WEIGHT FOR 24 PARTS 166.4

| Part list | Qty. |
|-----------|------|
| OB        | 24   |

## Execution class: EXC 2

No utilization on drawings = over 50%

V-SEAM  
Utilization under 50%  
EXC 2=> Acc. to process control  
EXC 3=> 20% UT  
Utilization over 50%  
EXC 2=> 10% UT  
EXC 3=> 20% UT

\* o 3 0 4 8 0 - 1 \*



DS Skalkonstruktion

\* WC 2 \*

|          |                                      |                    |              |     |             |             |         |
|----------|--------------------------------------|--------------------|--------------|-----|-------------|-------------|---------|
| PROJECT  | Akkasæter Lager- og vedlikeholdshall |                    |              |     | PHASE       | 1 / Phase 1 |         |
| MEMBER   | Plade                                |                    | QUANTITY:    |     | 24          | PROJECT No  | 30480-1 |
| REVISION |                                      | ISSUED: 03.11.2025 | DRAFTER:     | ZLL | DRAWING No. | C.2         |         |
|          |                                      |                    | BIM control: | SST |             |             |         |