






V-SEAM
Utilization under 50%
EXC 2=> Acc. to process control
EXC 3=> 20% UT
Utilization over 50%
EXC 2=> 10% UT
EXC 3=> 20% UT

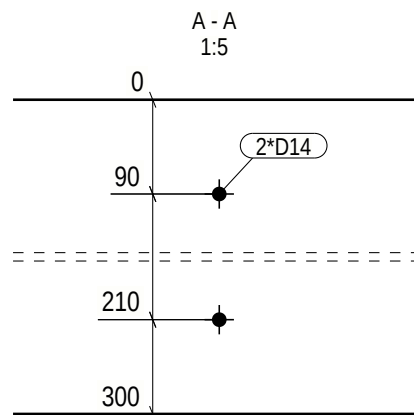

GRUNDTYPE	16 PCS.
UNDERTYPE	
j1 - j1+H2+H1(HAS HOLES)	1 PCS.
j2 - j2+H2+H1(HAS HOLES)	1 PCS.
j3 - j3+H2+H1(HAS HOLES)	1 PCS.
j4 - j4+H2+H1(HAS HOLES)	1 PCS.
j5 - j5+H2+H1(HAS HOLES)	3 PCS.
j6 - j6+H2+H1(HAS HOLES)	4 PCS.
j7 - j7+H2+H1(HAS HOLES)	1 PCS.
j8 - j8+H2+H1(HAS HOLES)	2 PCS.
j9 - j9+H2+H1(HAS HOLES)	2 PCS.
SUM	16 PCS.

GENERAL NOTES:		For your safety, check weight before handling:				
		0-5kg Light 5-15kg Normal 15+kg Heavy				
ALL WELDS ARE 4 UNLESS NOTED ON DRAWING						
MATERIAL LIST FOR ASSEMBLY MK'D j.5 - 1 (See table) No. Required						
Mark	Profile	Material	No.	Length	Area	Weight
j5	PL8*1697	S355J2	1	5758	11.8	367.7 !!
H1	FL25*300	S355J2	1	4416	2.9	260.0 !!
H2	FL25*300	S355J2	1	5758	3.8	339.0 !!
Total					18.5	966.7

Finish Class
Standard

	weld a = 4
--	------------

PHASE	QUANTITY
See Undertype drawings	

* o 3 0 4 8 0 - 2 *				 DS <i>Skalkonstruktion</i>		* A j 5 *	
PROJECT		Akkasæter Lager- og vedlikeholdshall			EXEC. CLASS		EXC 2
MEMBER		Kiletegning		QUANTITY: (See table)	PROJECT No		30480-2
REVISION		ISSUED: 07.11.2025		DRAFTER: ZLL BIM-control: SLL	DRAWING No.		i 5 - 1