


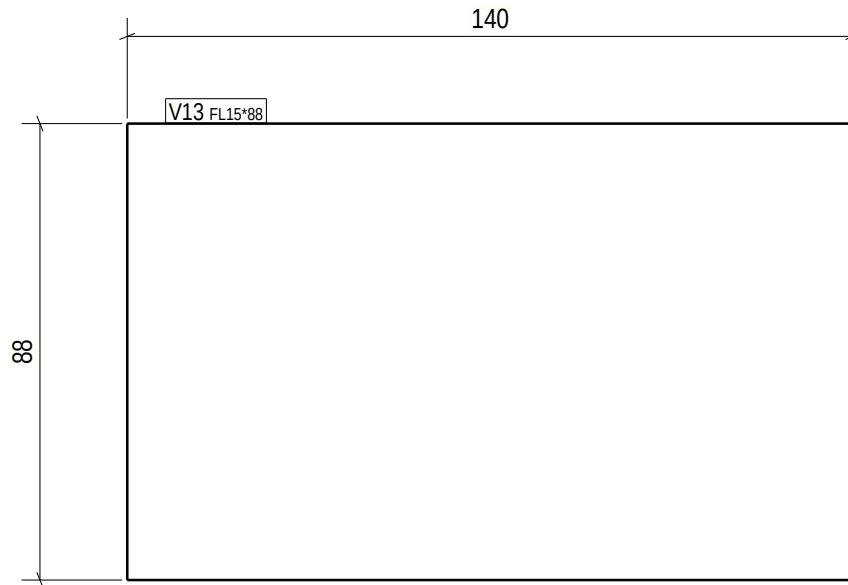

## GENERAL NOTES:

For your safety, check weight before handling:  
0-5kg Light    5-15kg Normal    15+kg Heavy

## MATERIAL LIST FOR PART - V13

32 PARTS REQUIRED

| POS. No.         | PROFILE | No. | GRADE  | L (mm) | AREA (m <sup>2</sup> ) | WEIGHT (kg) |
|------------------|---------|-----|--------|--------|------------------------|-------------|
| V13              | FL15*88 | 1   | S355J2 | 140    | 0.0                    | 1.5         |
| TOTAL WEIGHT FOR |         | 32  | PARTS  | 46.4   |                        |             |

| Part list | Qty. |
|-----------|------|
| VX        | 32   |

## Execution class: EXC 2

No utilization on drawings = over 50%

V-SEAM  
Utilization under 50%  
EXC 2=> Acc. to process control  
EXC 3=> 20% UT  
Utilization over 50%  
EXC 2=> 10% UT  
EXC 3=> 20% UT

\* o 3 0 4 8 0 - 2 \*



DS Steelkonstruktion

\* W V 1 3 \*

|          |                                      |                    |                  |             |                  |
|----------|--------------------------------------|--------------------|------------------|-------------|------------------|
| PROJECT  | Akkasæter Lager- og vedlikeholdshall |                    | PHASE            | 2 / Phase 2 |                  |
| MEMBER   | Vind-X-Plade                         |                    | QUANTITY:        | 32          | PROJECT No       |
| REVISION |                                      | ISSUED: 07.11.2025 | DRAFTER: ZLL     |             | 30480-2          |
|          |                                      |                    | BIM control: SST |             | DRAWING No. V.13 |