



A - A
1:3

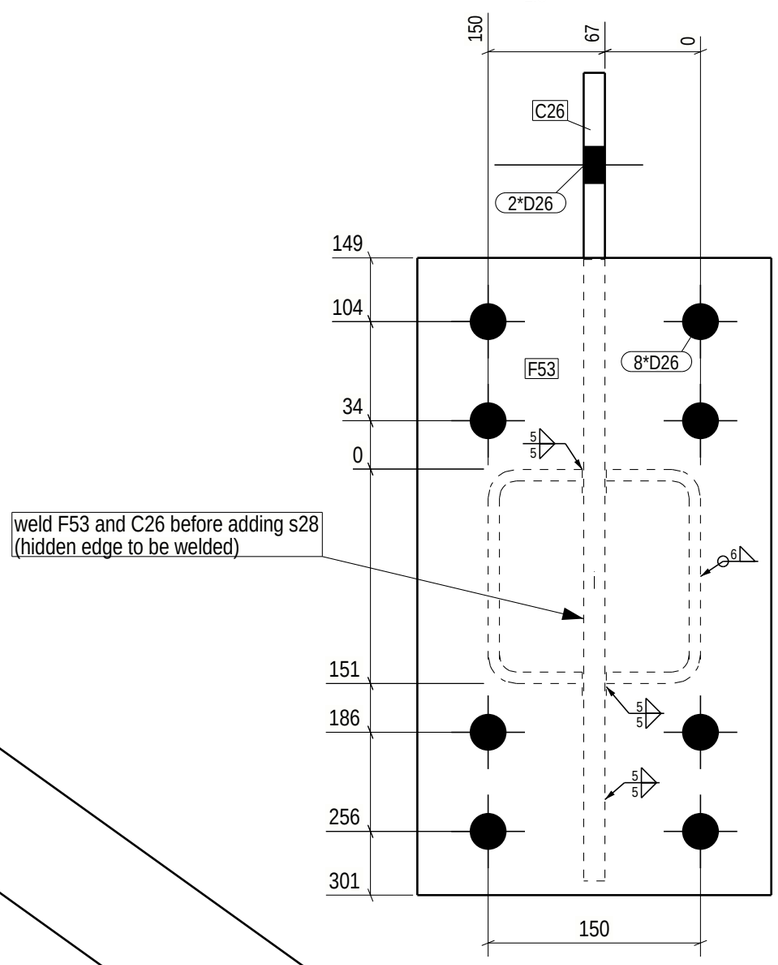

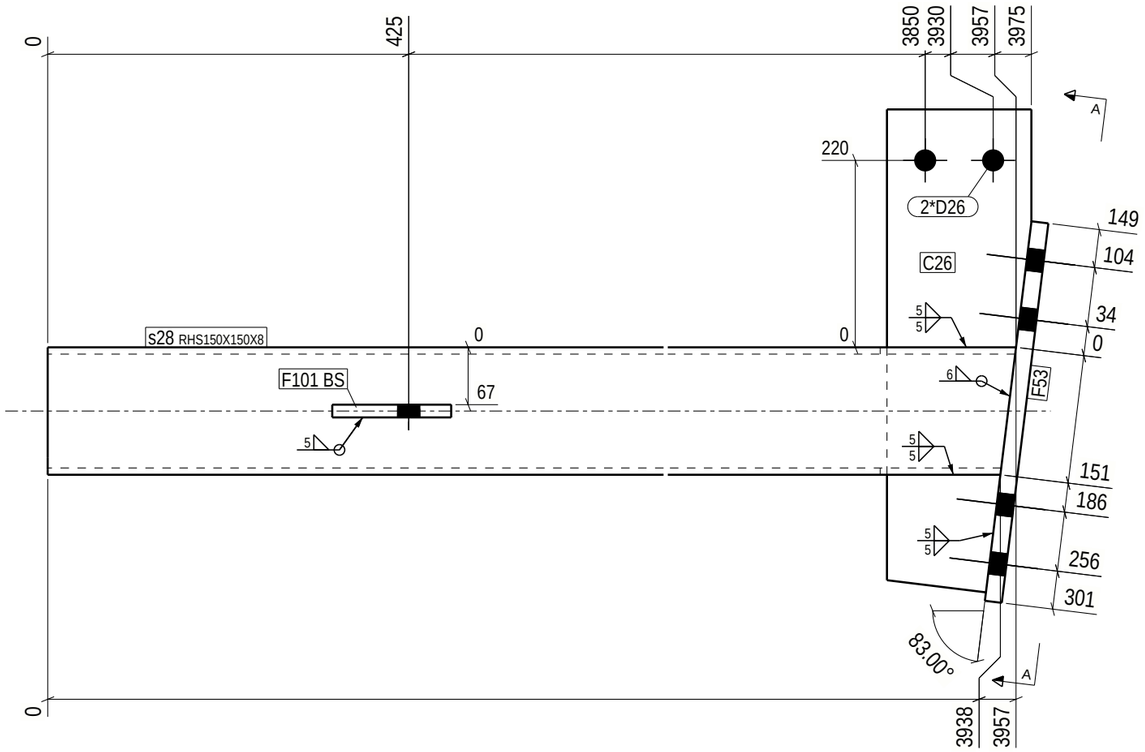

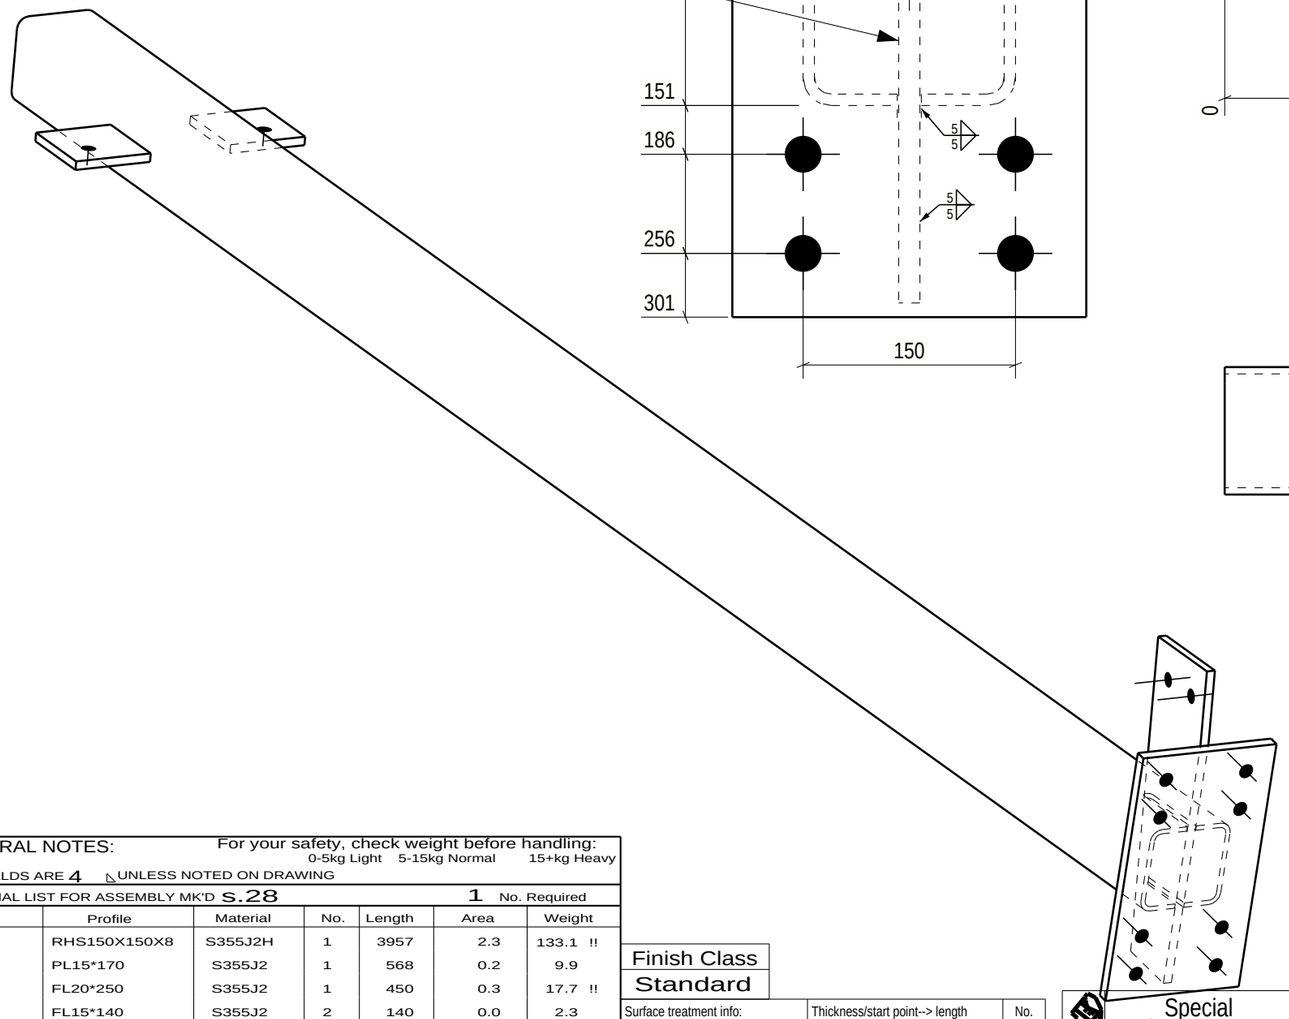

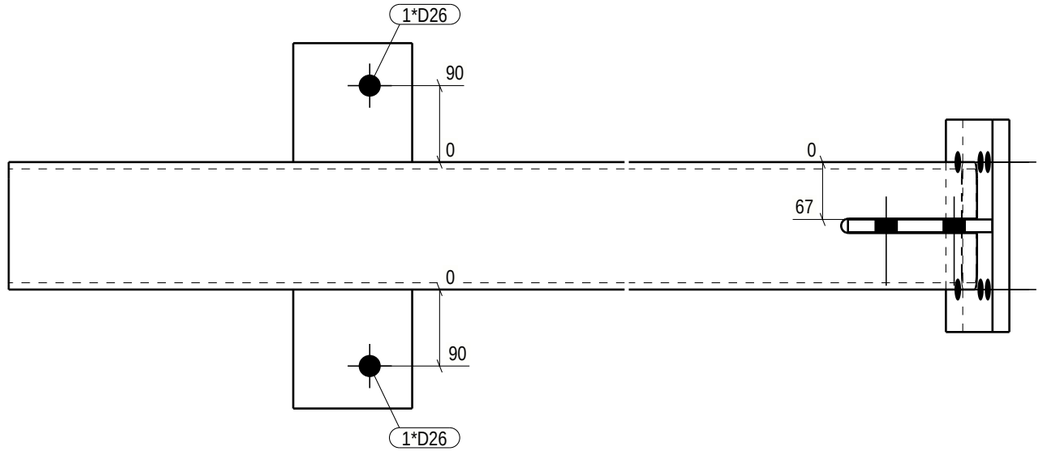

weld F53 and C26 before adding s28
(hidden edge to be welded)

GENERAL NOTES: For your safety, check weight before handling: 0-5kg Light 5-15kg Normal 15+kg Heavy

ALL WELDS ARE 4 ◺ UNLESS NOTED ON DRAWING

MATERIAL LIST FOR ASSEMBLY MK'D s.28 1 No. Required

Mark	Profile	Material	No.	Length	Area	Weight
s28	RHS150X150X8	S355J2H	1	3957	2.3	133.1 !!
C26	PL15*170	S355J2	1	568	0.2	9.9
F53	FL20*250	S355J2	1	450	0.3	17.7 !!
F101	FL15*140	S355J2	2	140	0.0	2.3
				Total	2.8	165.2

Finish Class
Standard

Surface treatment info:	Thickness/start point--> length	No.
Overall Painting	Primerµm whole asse***	1

Special surface treatment

weld a = 4◺

PHASE	QUANTITY
1	1

* o 3 0 4 8 0 - 1 * DS Stålkonstruktion * A s 2 8 *

PROJECT	Akkasæter Lager- og vedlikeholdshall			EXEC. CLASS	EXC 2
MEMBER	Søjle		QUANTITY: 1	PROJECT No	30480-1
REVISION		ISSUED: 07.11.2025	DRAFTER: ZLL BIM control: SST	DRAWING No.	s.28

Tekla Structures