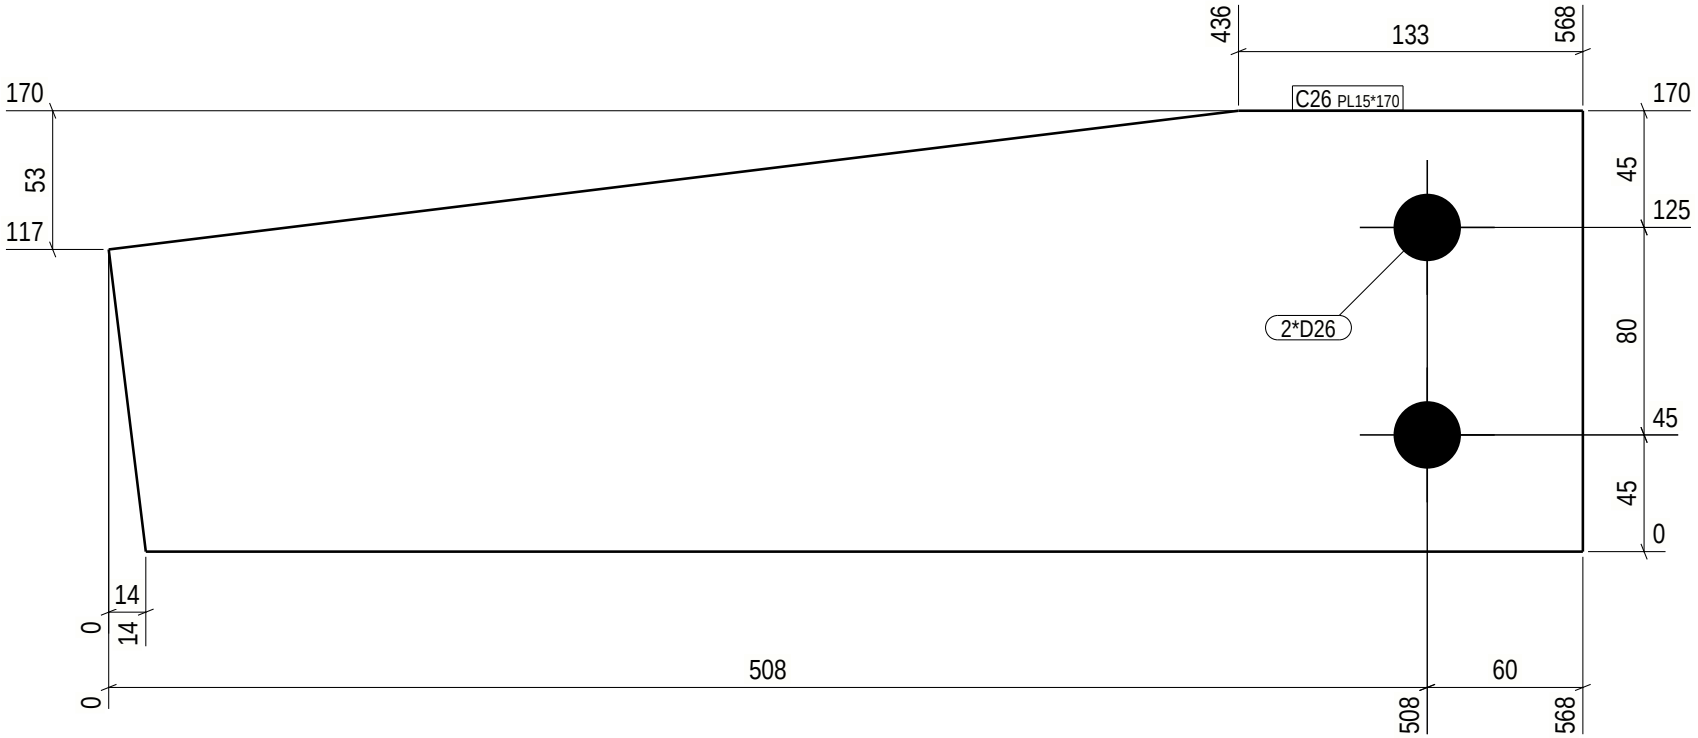



GENERAL NOTES: For your safety, check weight before handling:
0-5kg Light 5-15kg Normal 15+kg Heavy

MATERIAL LIST FOR PART - C26 15 PARTS REQUIRED

| POS. No. | PROFILE | No. | GRADE | L (mm) | AREA ($m^2$) | WEIGTH (kg) |
|---|---|---|---|---|---|---|
| C26 | PL15*170 | 1 | S355J2 | 568 | 0.2 | 9.9 |
| | | | TOTAL WEIGHT FOR | 15 | PARTS | 148.6 |

| Part list | Qty. |
|---|---|
| GS | 15 |

Execution class: EXC 2

No utilization on drawings = over 50%

V-SEAM
Utilization under 50%
EXC 2=> Acc. to process control
EXC 3=> 20% UT
Utilization over 50%
EXC 2=> 10% UT
EXC 3=> 20% UT

* o 3 0 4 8 0 - 1 * DS Stålkonstruktion * W C 2 6 *

| | | | | | |
|---|---|---|---|---|---|
| PROJECT | Akkasæter Lager- og vedlikeholdshall | | | PHASE | 1 / Phase 1 |
| MEMBER | Plade | | QUANTITY: 15 | PROJECT No | 30480-1 |
| REVISION | | ISSUED: 07.11.2025 | DRAFTER: ZLL<br>BIM control: SST | DRAWING No. | C.26 |

Tekla Structures