


Mini SERVO (ES08AII) SERIES

SERVO ES08A SPECIFICATIONS

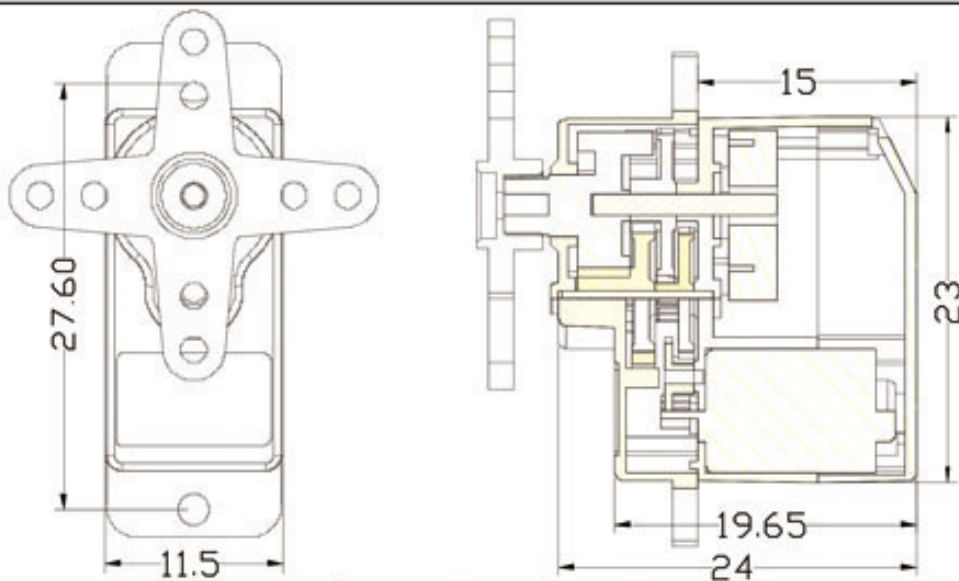

Operating Voltage:		4.8~6.0V
STD Direction:		Counter Clockwise / Pulse Traveling 1500 to 1900usec
Stall Torque:	4.8V	1.5 Kgf.cm(21.0 oz.in)
Operating Speed:	4.8V	0.12 Sec/60° at no load
Stall Torque:	6.0V	1.8 Kgf.cm(25.2 oz.in)
Operating Speed:	6.0V	0.10 Sec/60° at no load
Size:		23X11.5X24 mm
Weight:		8.5 g(0.31 oz)
Plug Available		FUT ;JR
Other		Analog,Plastics