
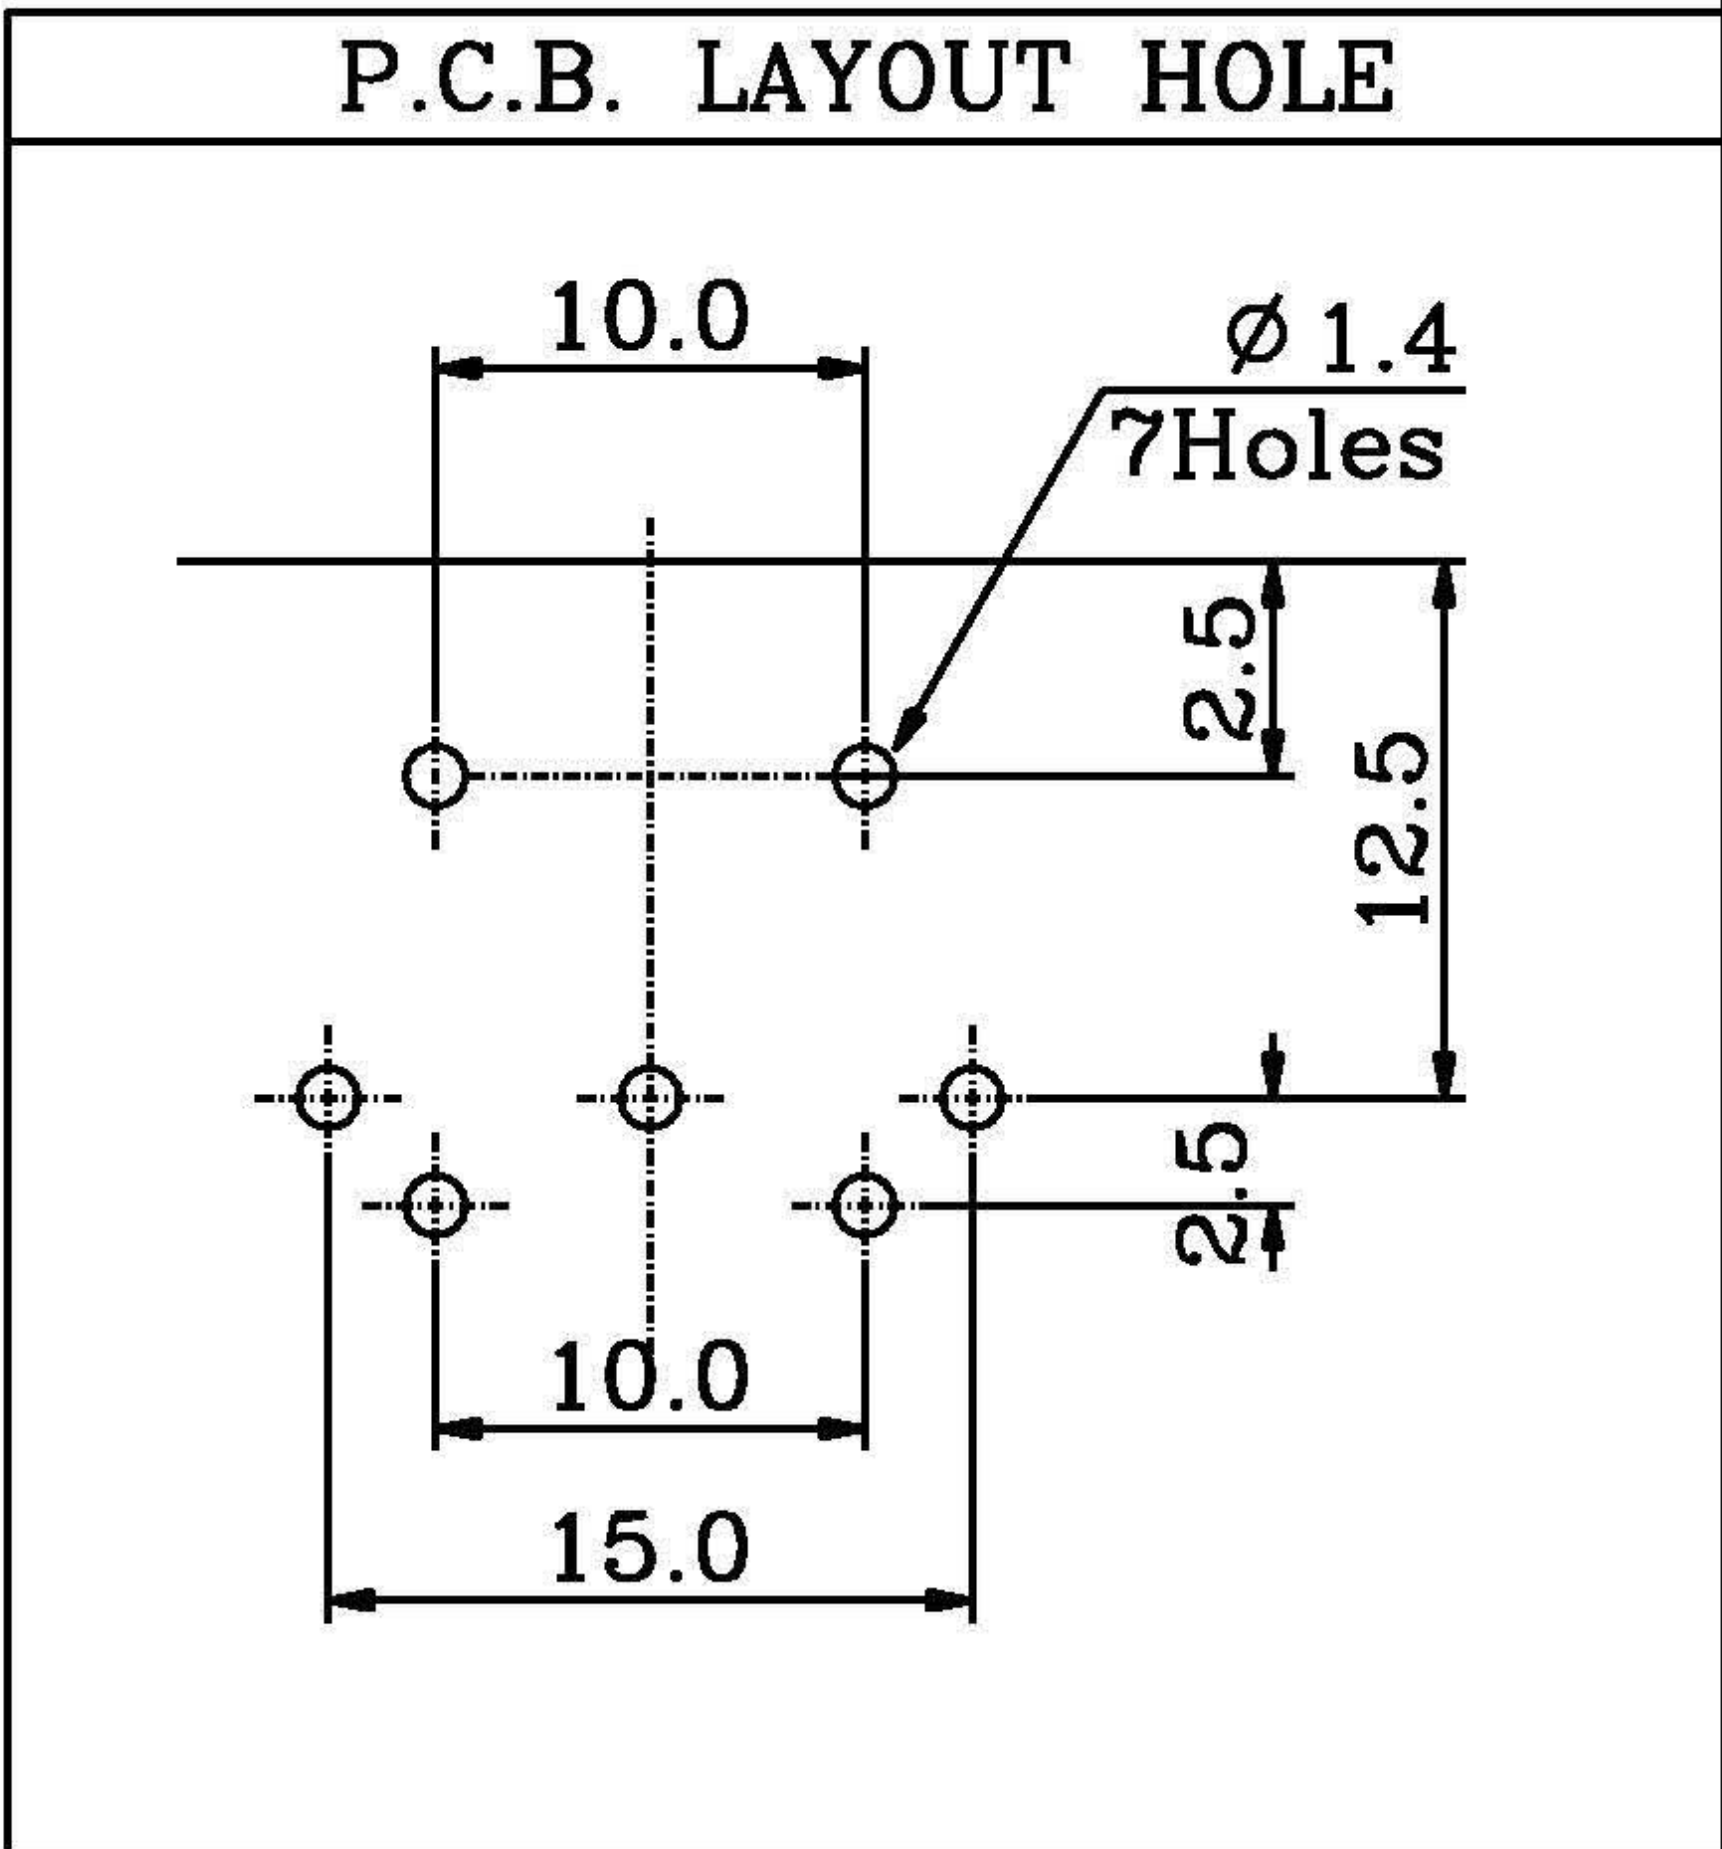
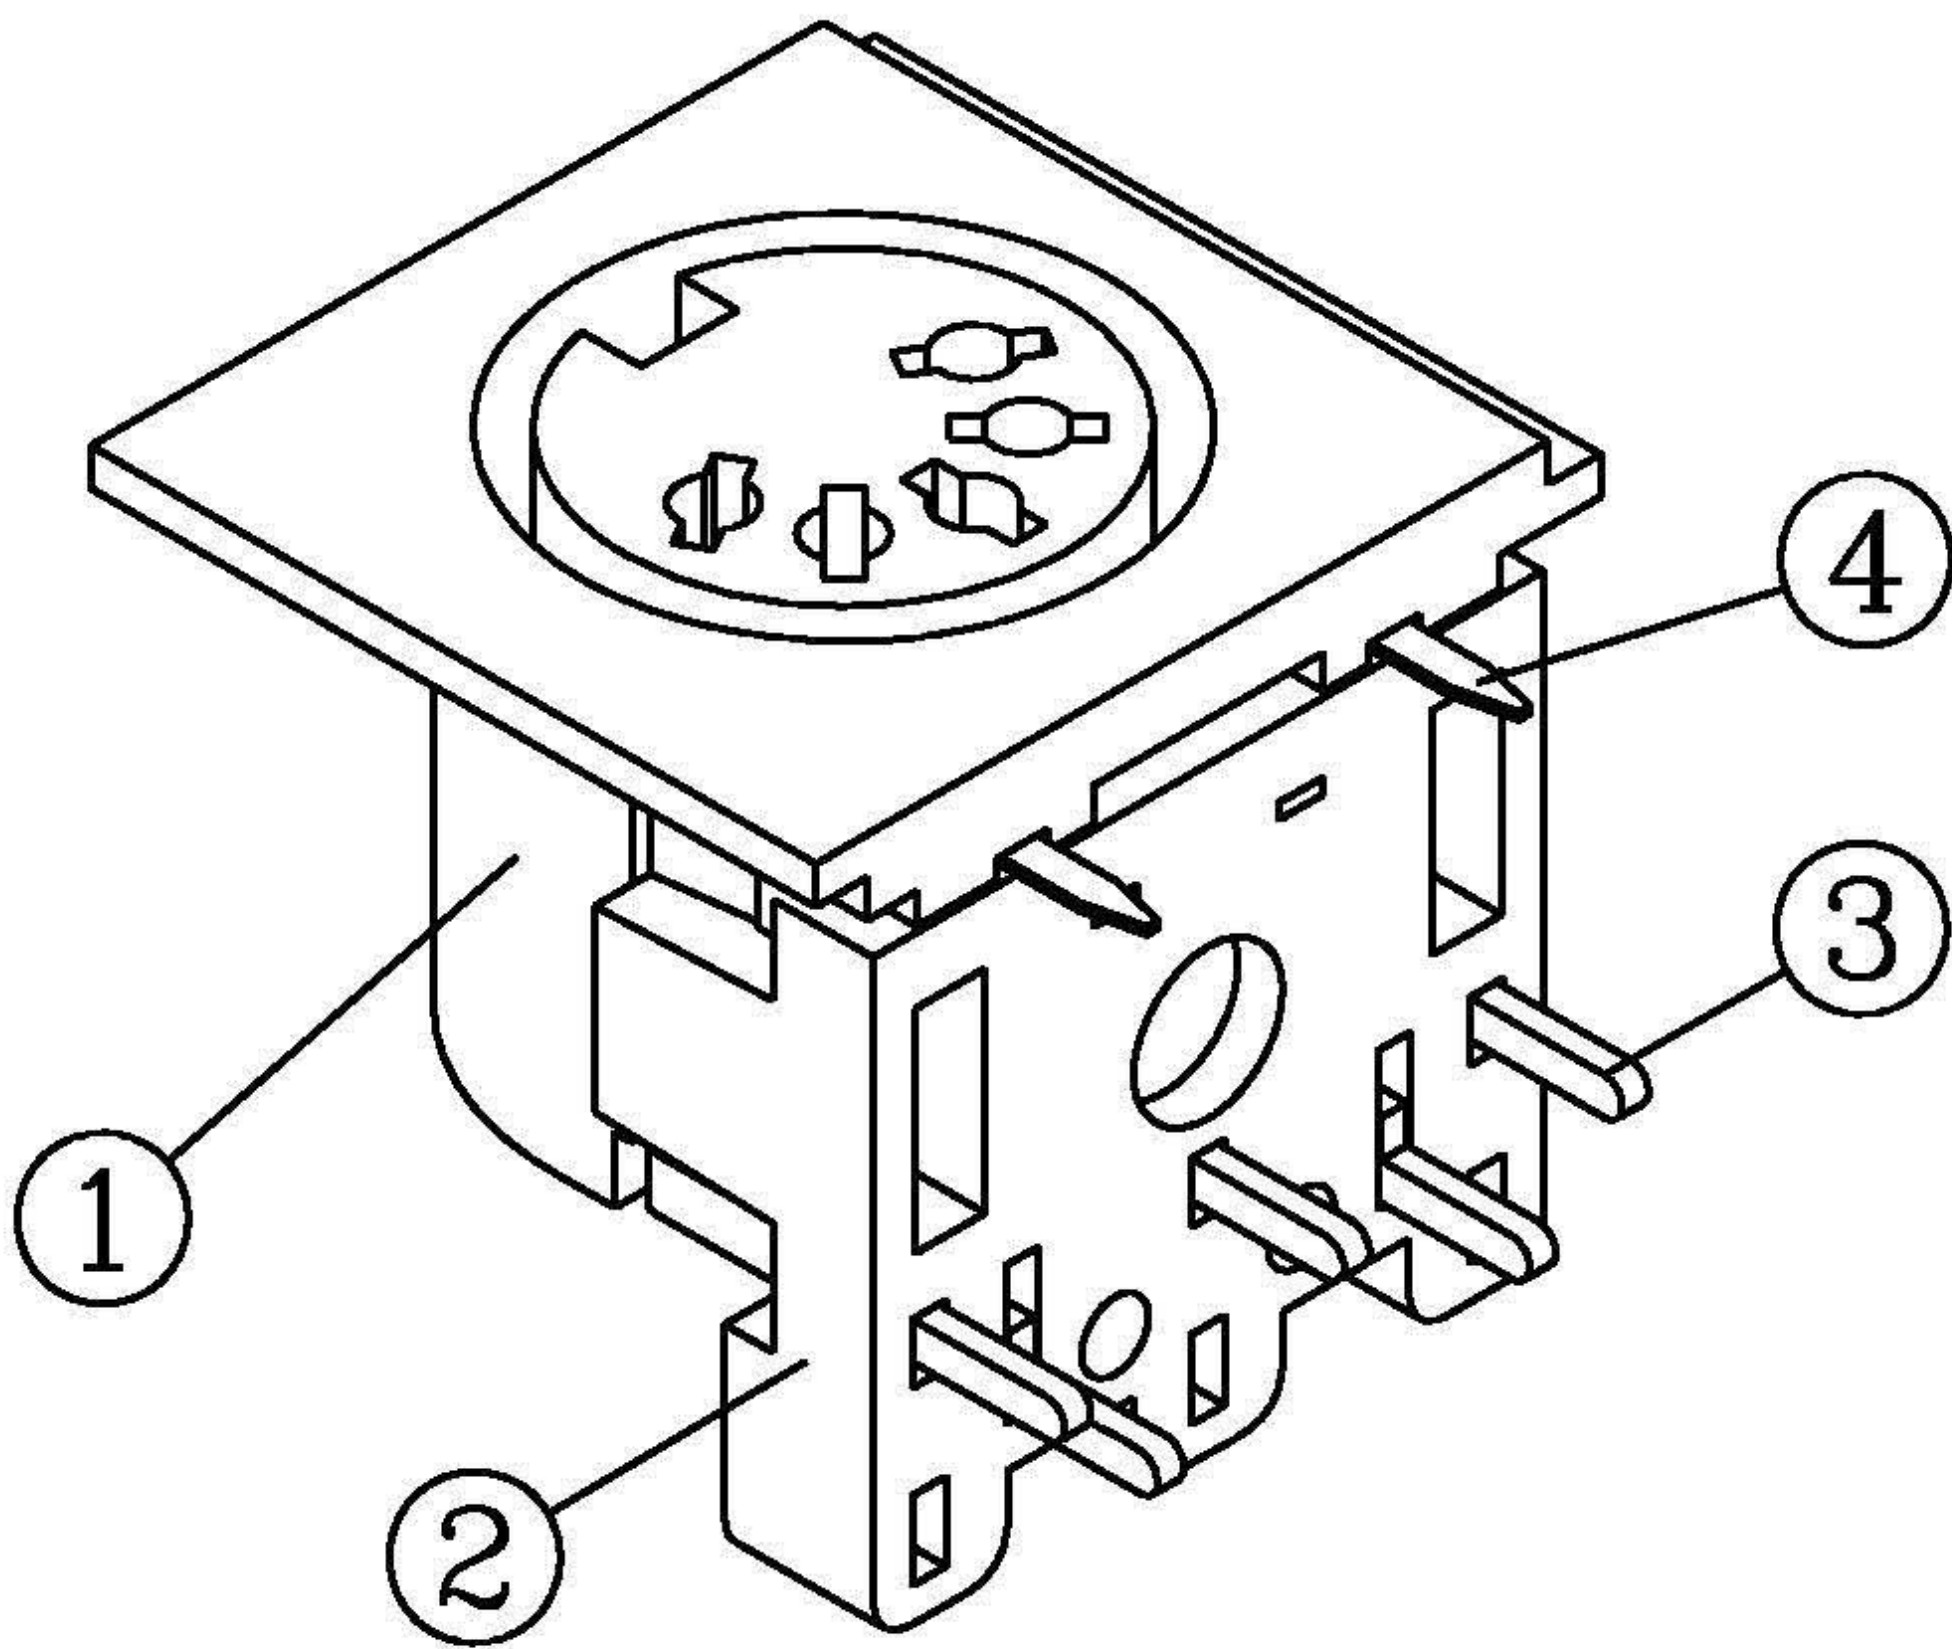


REV.	DESCRIPTION	DATE
△	MEET RoHS	2005.NOV.08

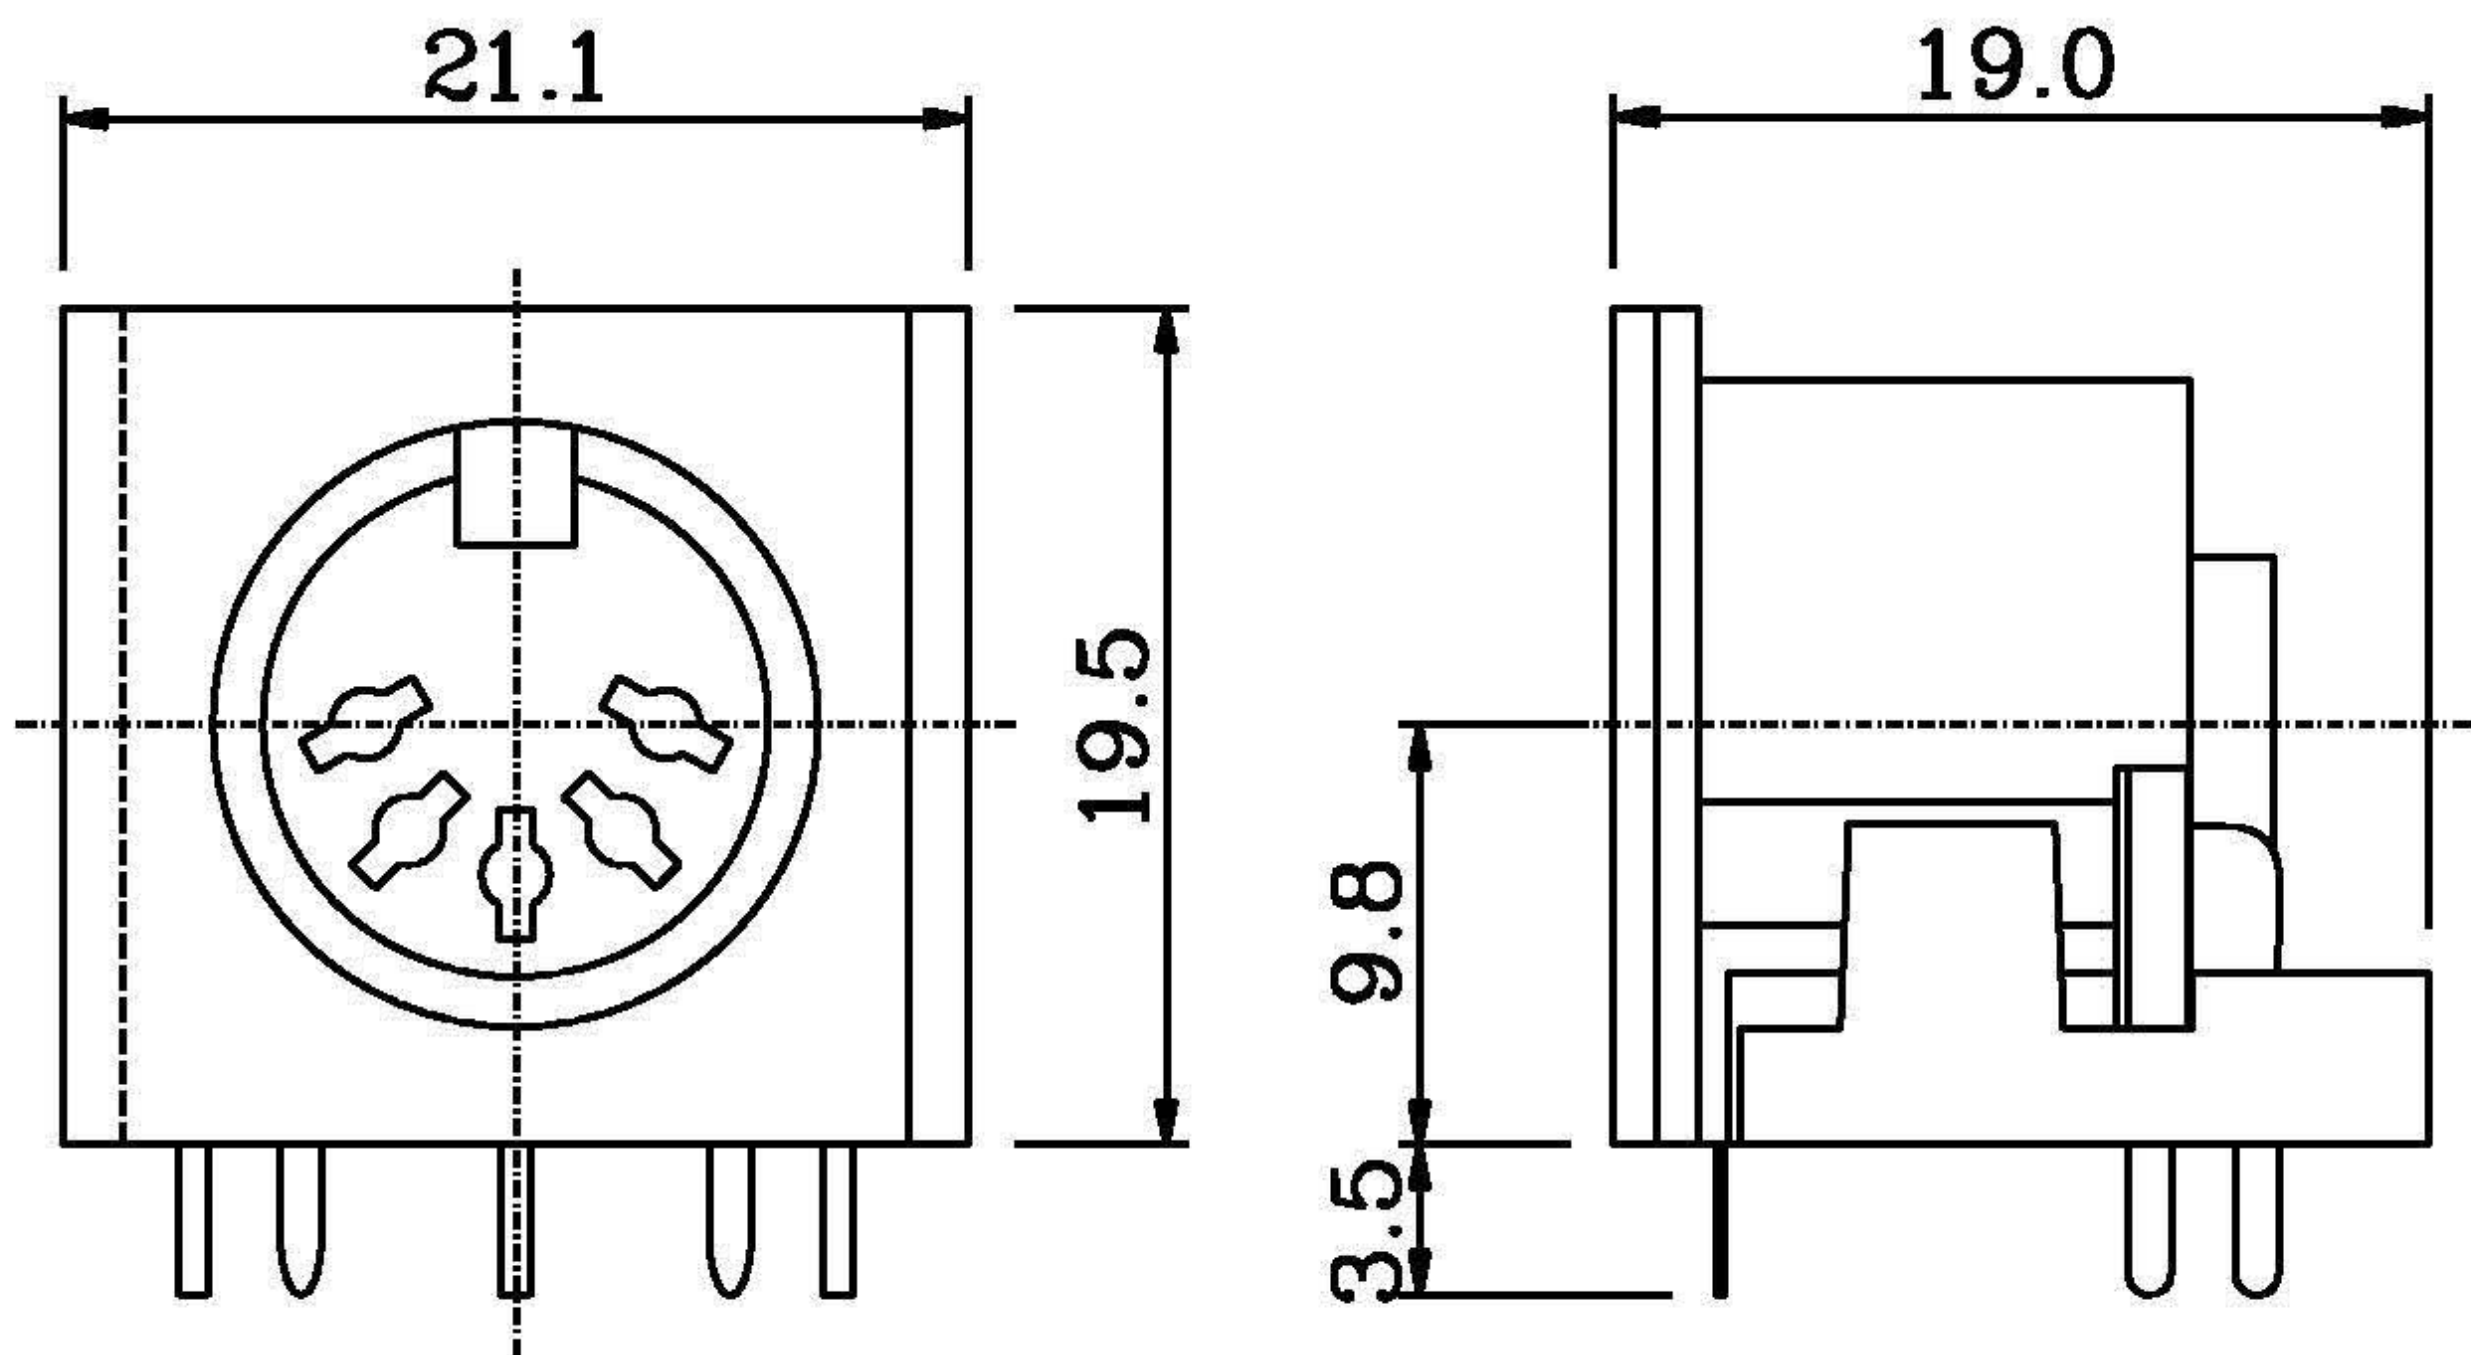

4	EARTH TERMINAL	1	BSR-H (0.2t)	[C1519R-H]	NICKEL	30-50U"
3	CONTACT TERMINAL	5	BSR-H (0.7t)	[C2680R]	SILVER PLATED	30-50U"
2	BASE	1	PBT	[D202G15]		UL94
1	MAIN BODY	1	PBT	[D202G15]		UL94
P/N	PART NAME	Q'TY	MATERIAL		PLATING	REMARKS

ARRANGEMENT OF CONTACTS							SPECIFICATIONS	
PARTS	3P	4P	5P	6P	7P	8P	Contact resistance	
ANGLE	180°	216°	180°	240°	270°	270°	20MΩ Max.	
POSITION OF VIEWS							Dielectric strength	
							1,000V AC/1 Minute	
							Insulation resistance	
							100MΩ Min. at 500V DC	
							Rating	
							100V AC 2A	

						Meet RoHS	Meet lead-free solder process
						YES	

DATE 2001.OCT.19	DRAW John	PROJECT NO.		PART NO.	
GENERAL TOLERANCE	APPROVE Gloria			DID-EP05S-R	
XXX. ±	.XXX ±	UNIT mm		DRAWING NO.	
XX. ±	.XX ±	TITLE		B1001-5P/10	
X. ±	.X ±	CONNECTORS			