

INSTALLATION OF THE SECURITY SYSTEMS

GOAL

The purpose of this procedure is to define safe, effective methods and standardize the installation of safety systems for diamond drills.

APPLICATION

This procedure applies to all employees of **MACHINES ROGER INTERNATIONAL**.

RESPONSIBILITIES

The worker is responsible for applying this procedure and for ensuring the smooth running of the operations and the quality of the work done. The supervisor must apply this procedure rigorously.


MANDATORY PPE

Mandatory basic PPE

INTERLOCK

FORTRESS interlocking system consists of two parts: The slider and the lock

1. The slider has to be installed on the door at all times
2. The lock has to be installed on the door frame at all times

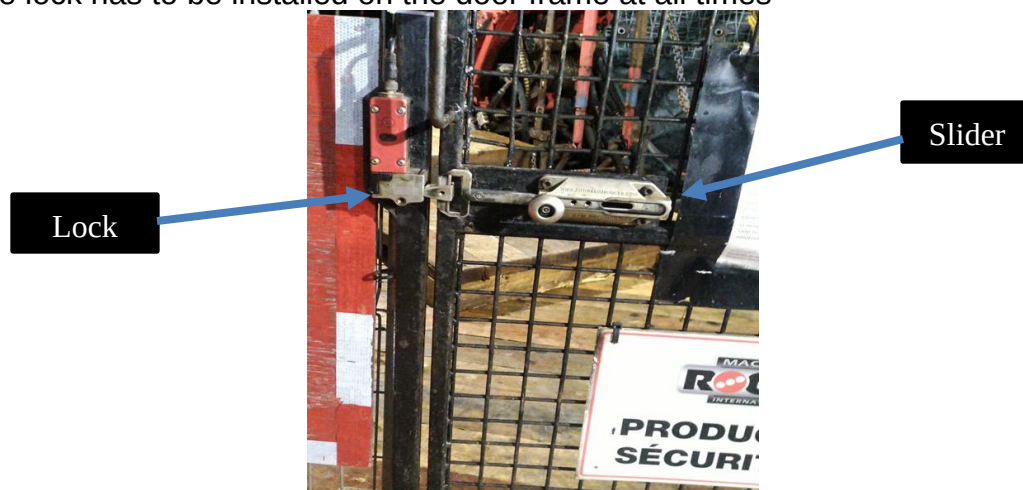

INSTALLATION OF THE SECURITY SYSTEMS

DEAD MAN

The dead man must be positioned at least 1.5 meters from the drill tower, next to the rod rack otherwise it is very important to respect the 1.5 meters.

Adds or modifications	Date	By
Change the « MAGNET SYSTEM » for the « FORTRESS ».	31-08-2023	S. Tremblay F. Croteau


Stéphane Tremblay
Health and safety superintendent