




Mono/Three-phase AC Network Interface

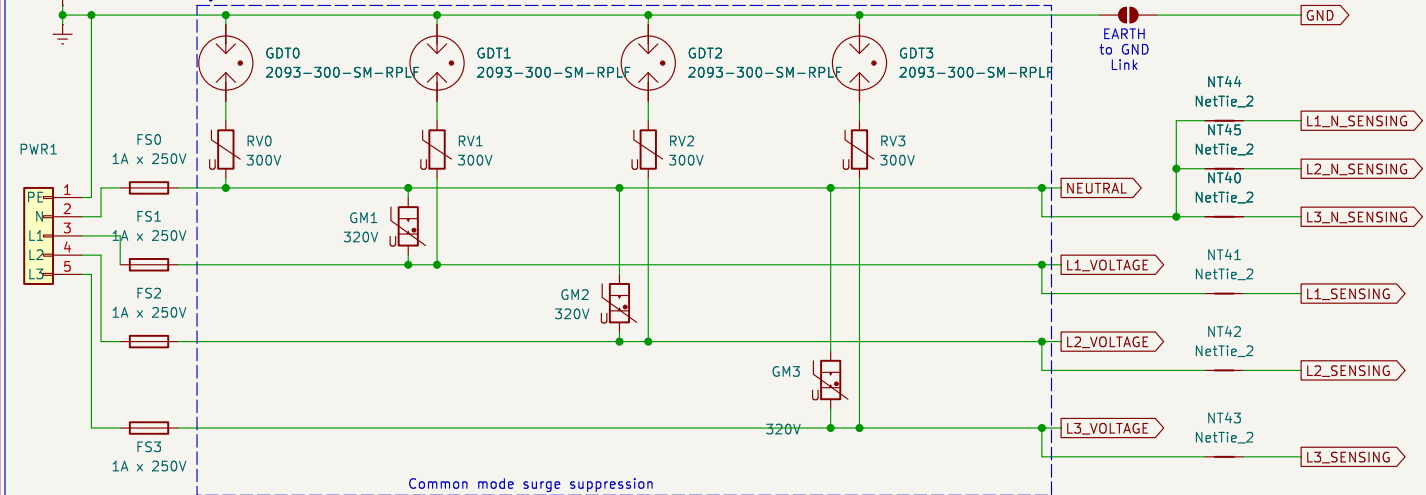

Temperature sensors

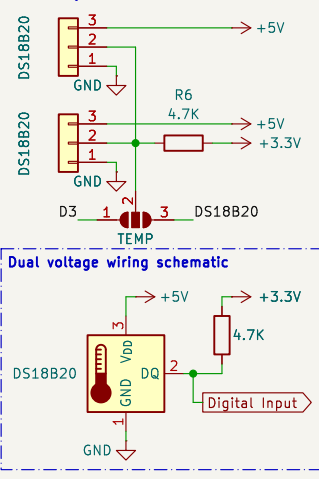


Processing unit

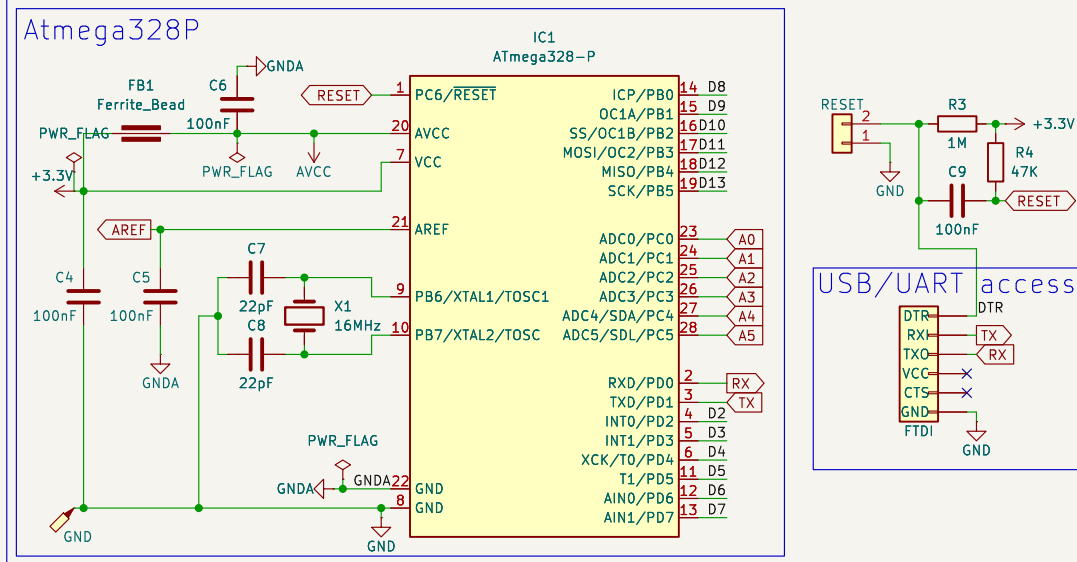


Voltage and Current sensors

Voltage sensor L1

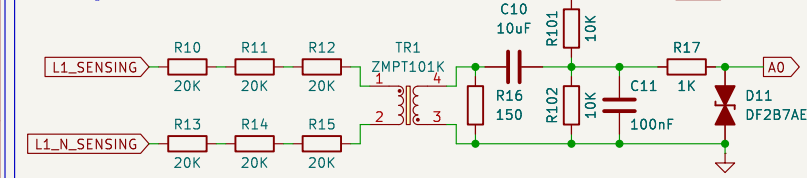


Current sensor L1

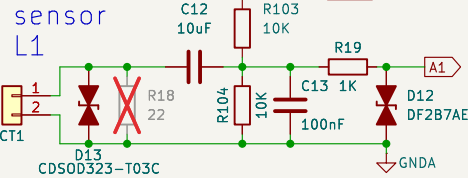


Common to mono and three phase

Voltage sensor L2

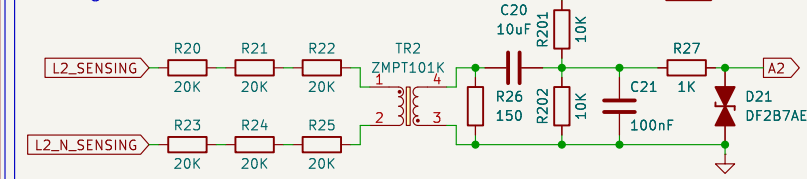


Current sensor L2

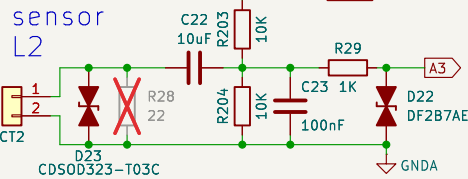


R16-R26-R36 only for Current Output CTs (old variant) Value to be calculated as before.

Voltage sensor L3

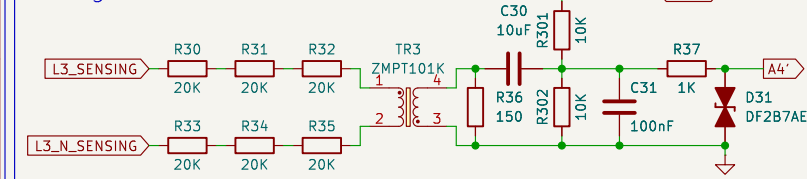


Current sensor L3

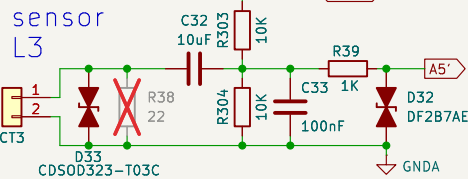


Three phases only

Power supplies


Embedded power supply

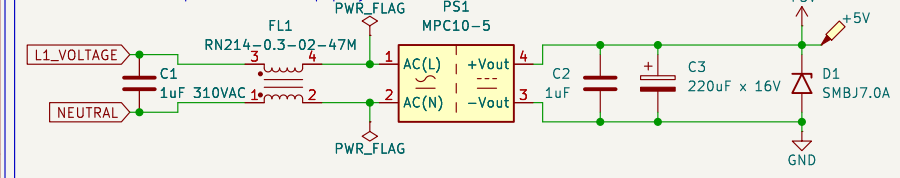

3.3V power supply

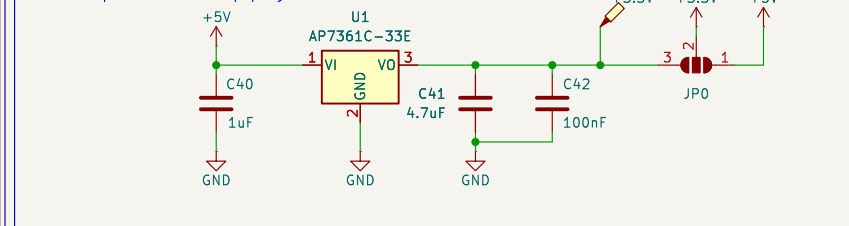


Vref supply

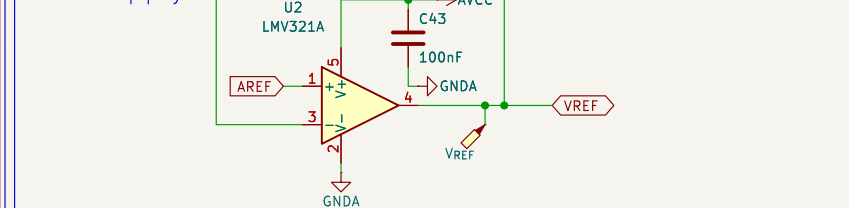


Expansion board interface



RF module

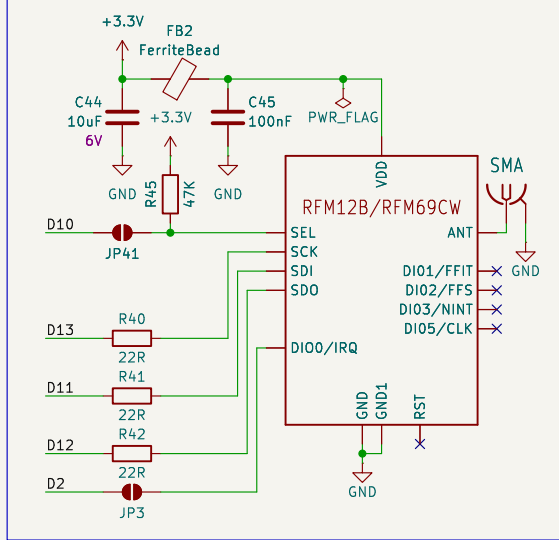

Multipurpose digital in/outputs

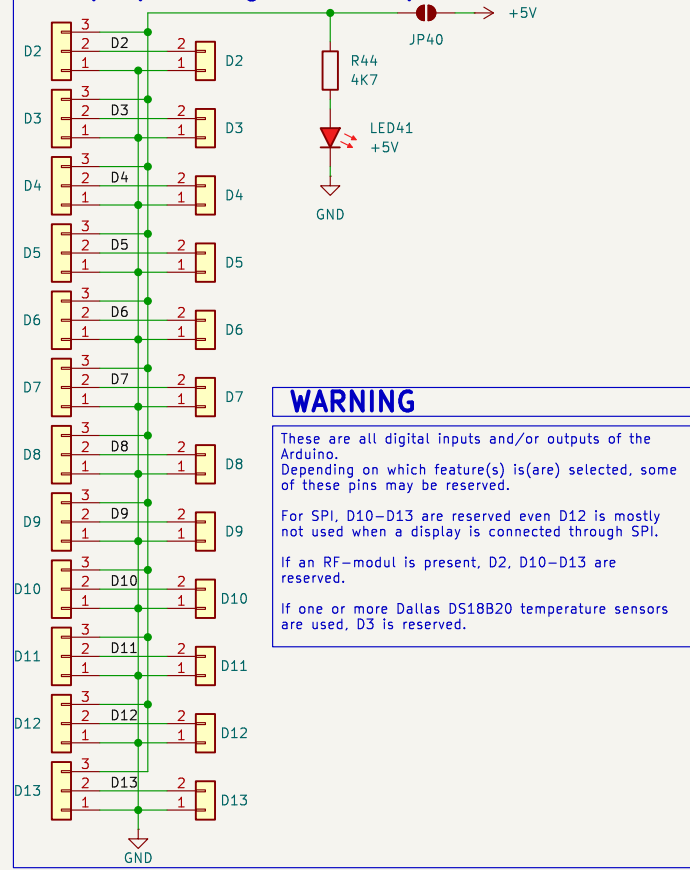

WARNING

These are all digital inputs and/or outputs of the Arduino. Depending on which feature(s) is(are) selected, some of these pins may be reserved. For SPI, D10-D13 are reserved even D12 is mostly not used when a display is connected through SPI. If an RF-module is present, D2, D10-D13 are reserved. If one or more Dallas DS18B20 temperature sensors are used, D3 is reserved.

Inspired by www.mk2pvrouter.co.uk

Sheet: /
File: 3phaseDiverter.kicad_sch

Title: 3 phase PV diverter - Main board

Size: A3
KiCad E.D.A. 9.0.8

Date: 2026-02-16

Rev: 6.0
Id: 1/1