


Mono/Three-phase AC Network Interface

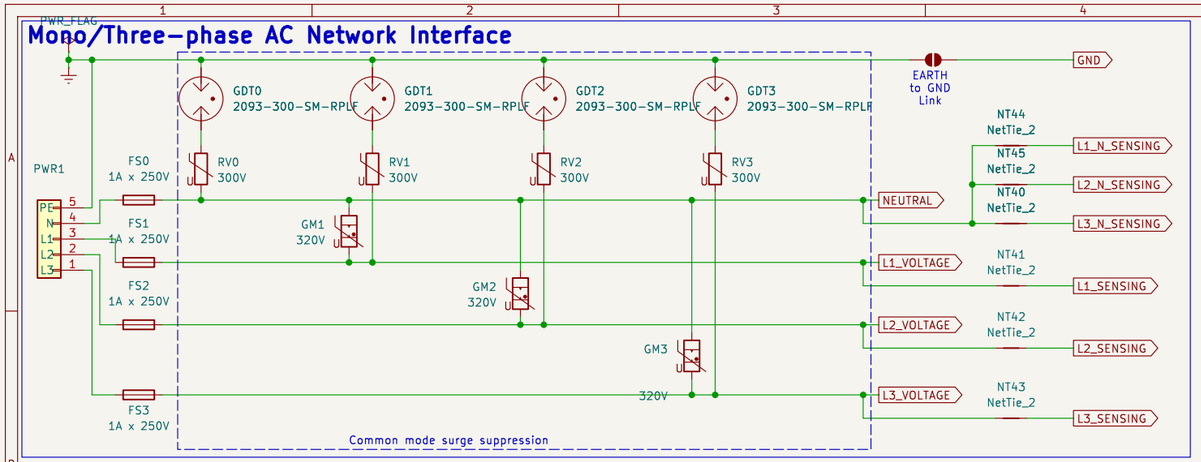


Temperature sensors

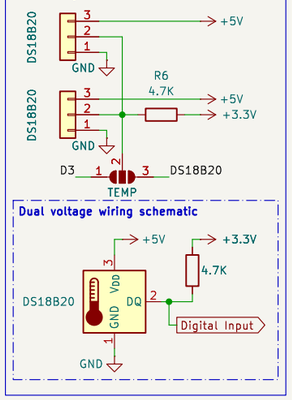

Processing unit

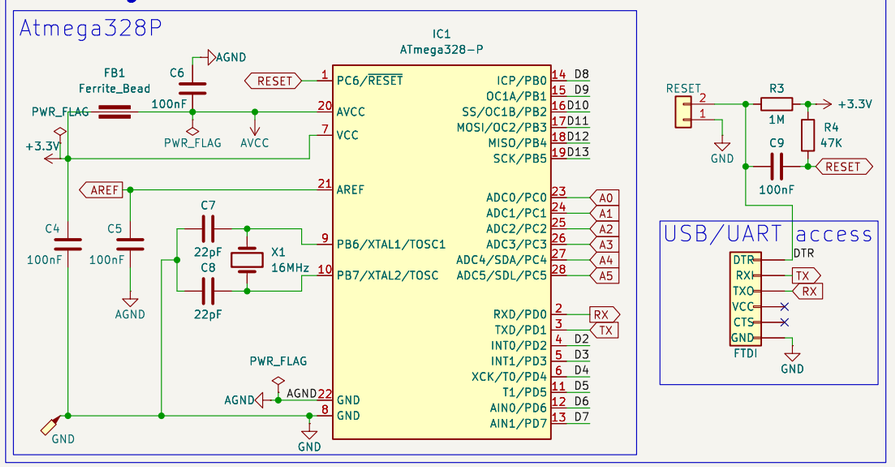

Voltage and Current sensors

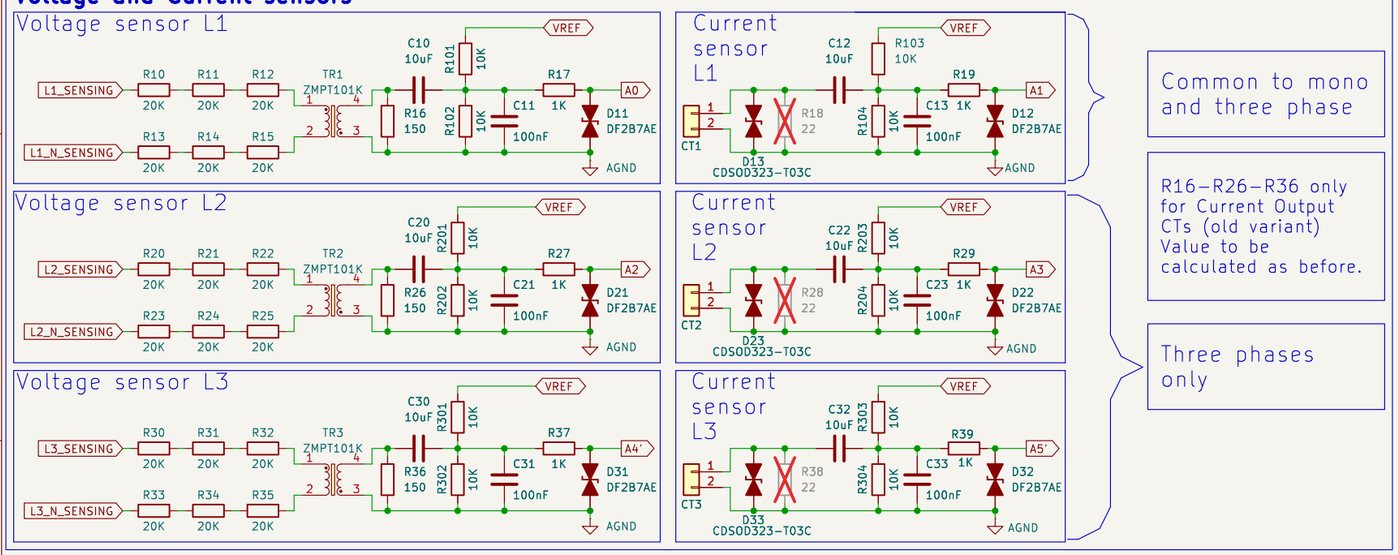


Common to mono and three phase


R16-R26-R36 only for Current Output CTs (old variant) Value to be calculated as before.

Three phases only

I2C Display



Multipurpose digital in/ouputs

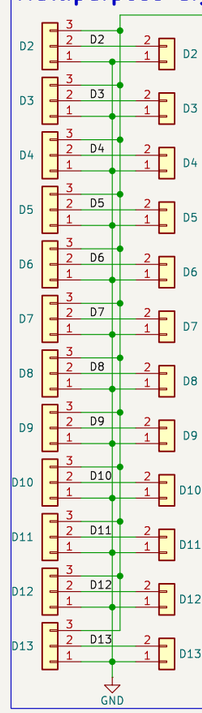

WARNING

These are all digital inputs and/or outputs of the Arduino.
Depending on which feature(s) is(are) selected, some of these pins may be reserved.


For SPI, D10-D13 are reserved even D12 is mostly not used when a display is connected through SPI.

If an RF-modul is present, D2, D10-D13 are reserved.


If one or more Dallas DS18B20 temperature sensors are used, D3 is reserved.

Power supplies


Embedded power supply

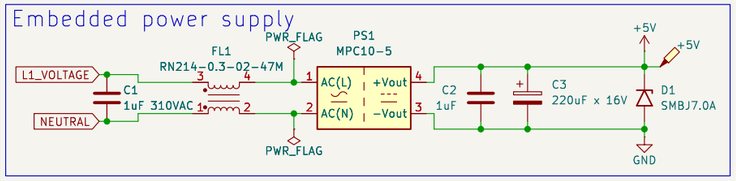


3.3V power supply

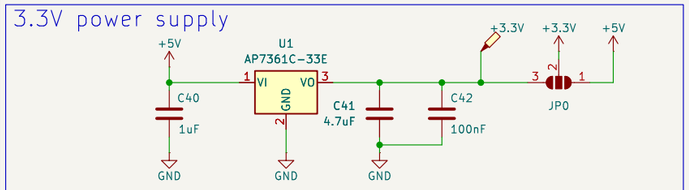


Vref supply

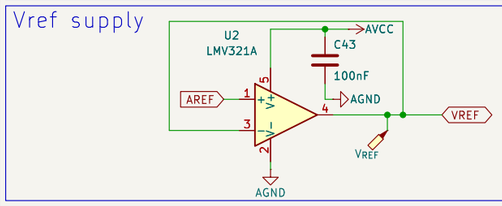


Expansion board interface

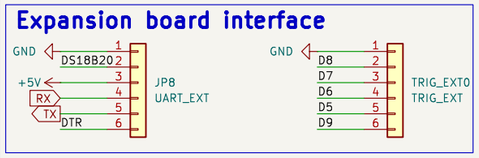

RF module

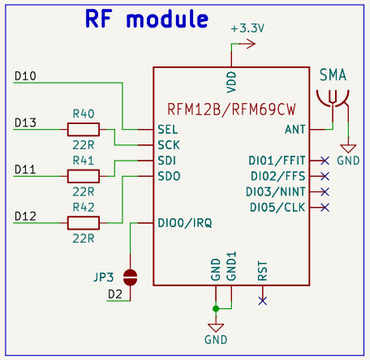

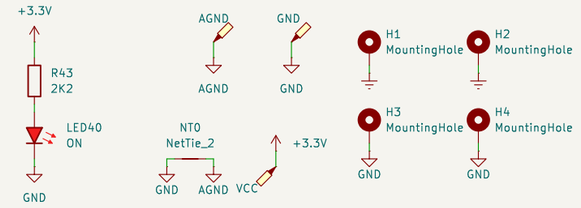

Inspired by www.mk2pvrouter.co.uk

Sheet: /
File: 3phaseDiverter.kicad_sch

Title: 3 phase PV diverter – Main board

Size: A3	Date: 2026-02-16	**Rev: 6.0**
KiCad E.D.A. 9.0.7		Id: 1/1