


TOPLEVEL

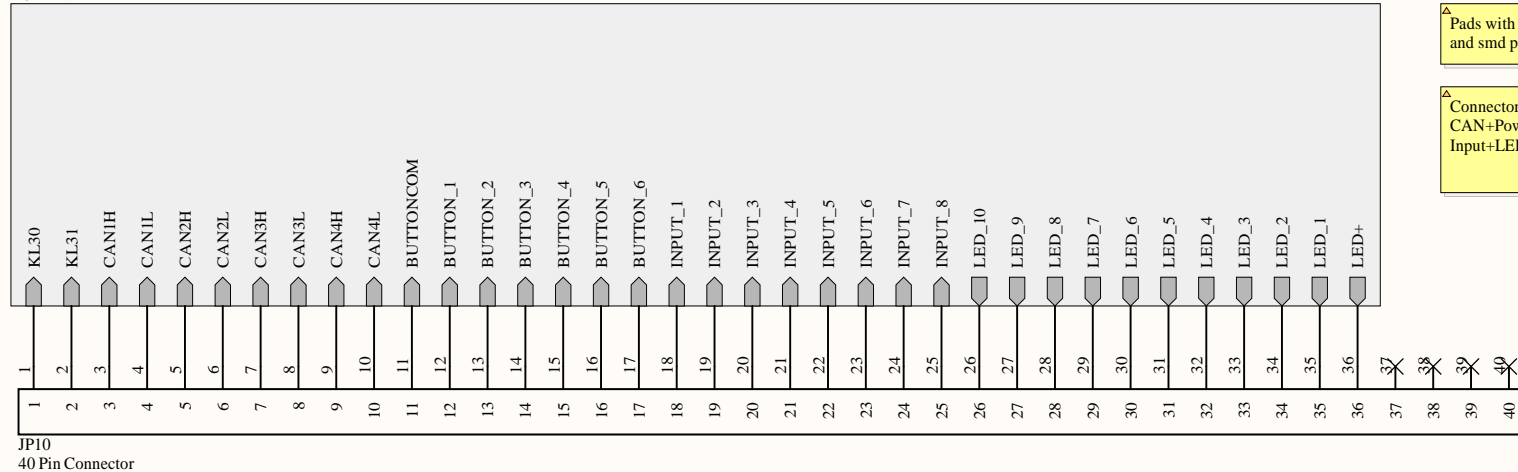


△ Pads with strain relief 5mm bore 2x and smd pad



△ Connector will be split into CAN+Power and Input+LED+Buttons

JP10  
40 Pin Connector

Title		
Size	Number	Revision
A4		
Date:	7.05.2022	Sheet of
File:	C:\Uni\...\DashLogger.SchDoc	Drawn By:

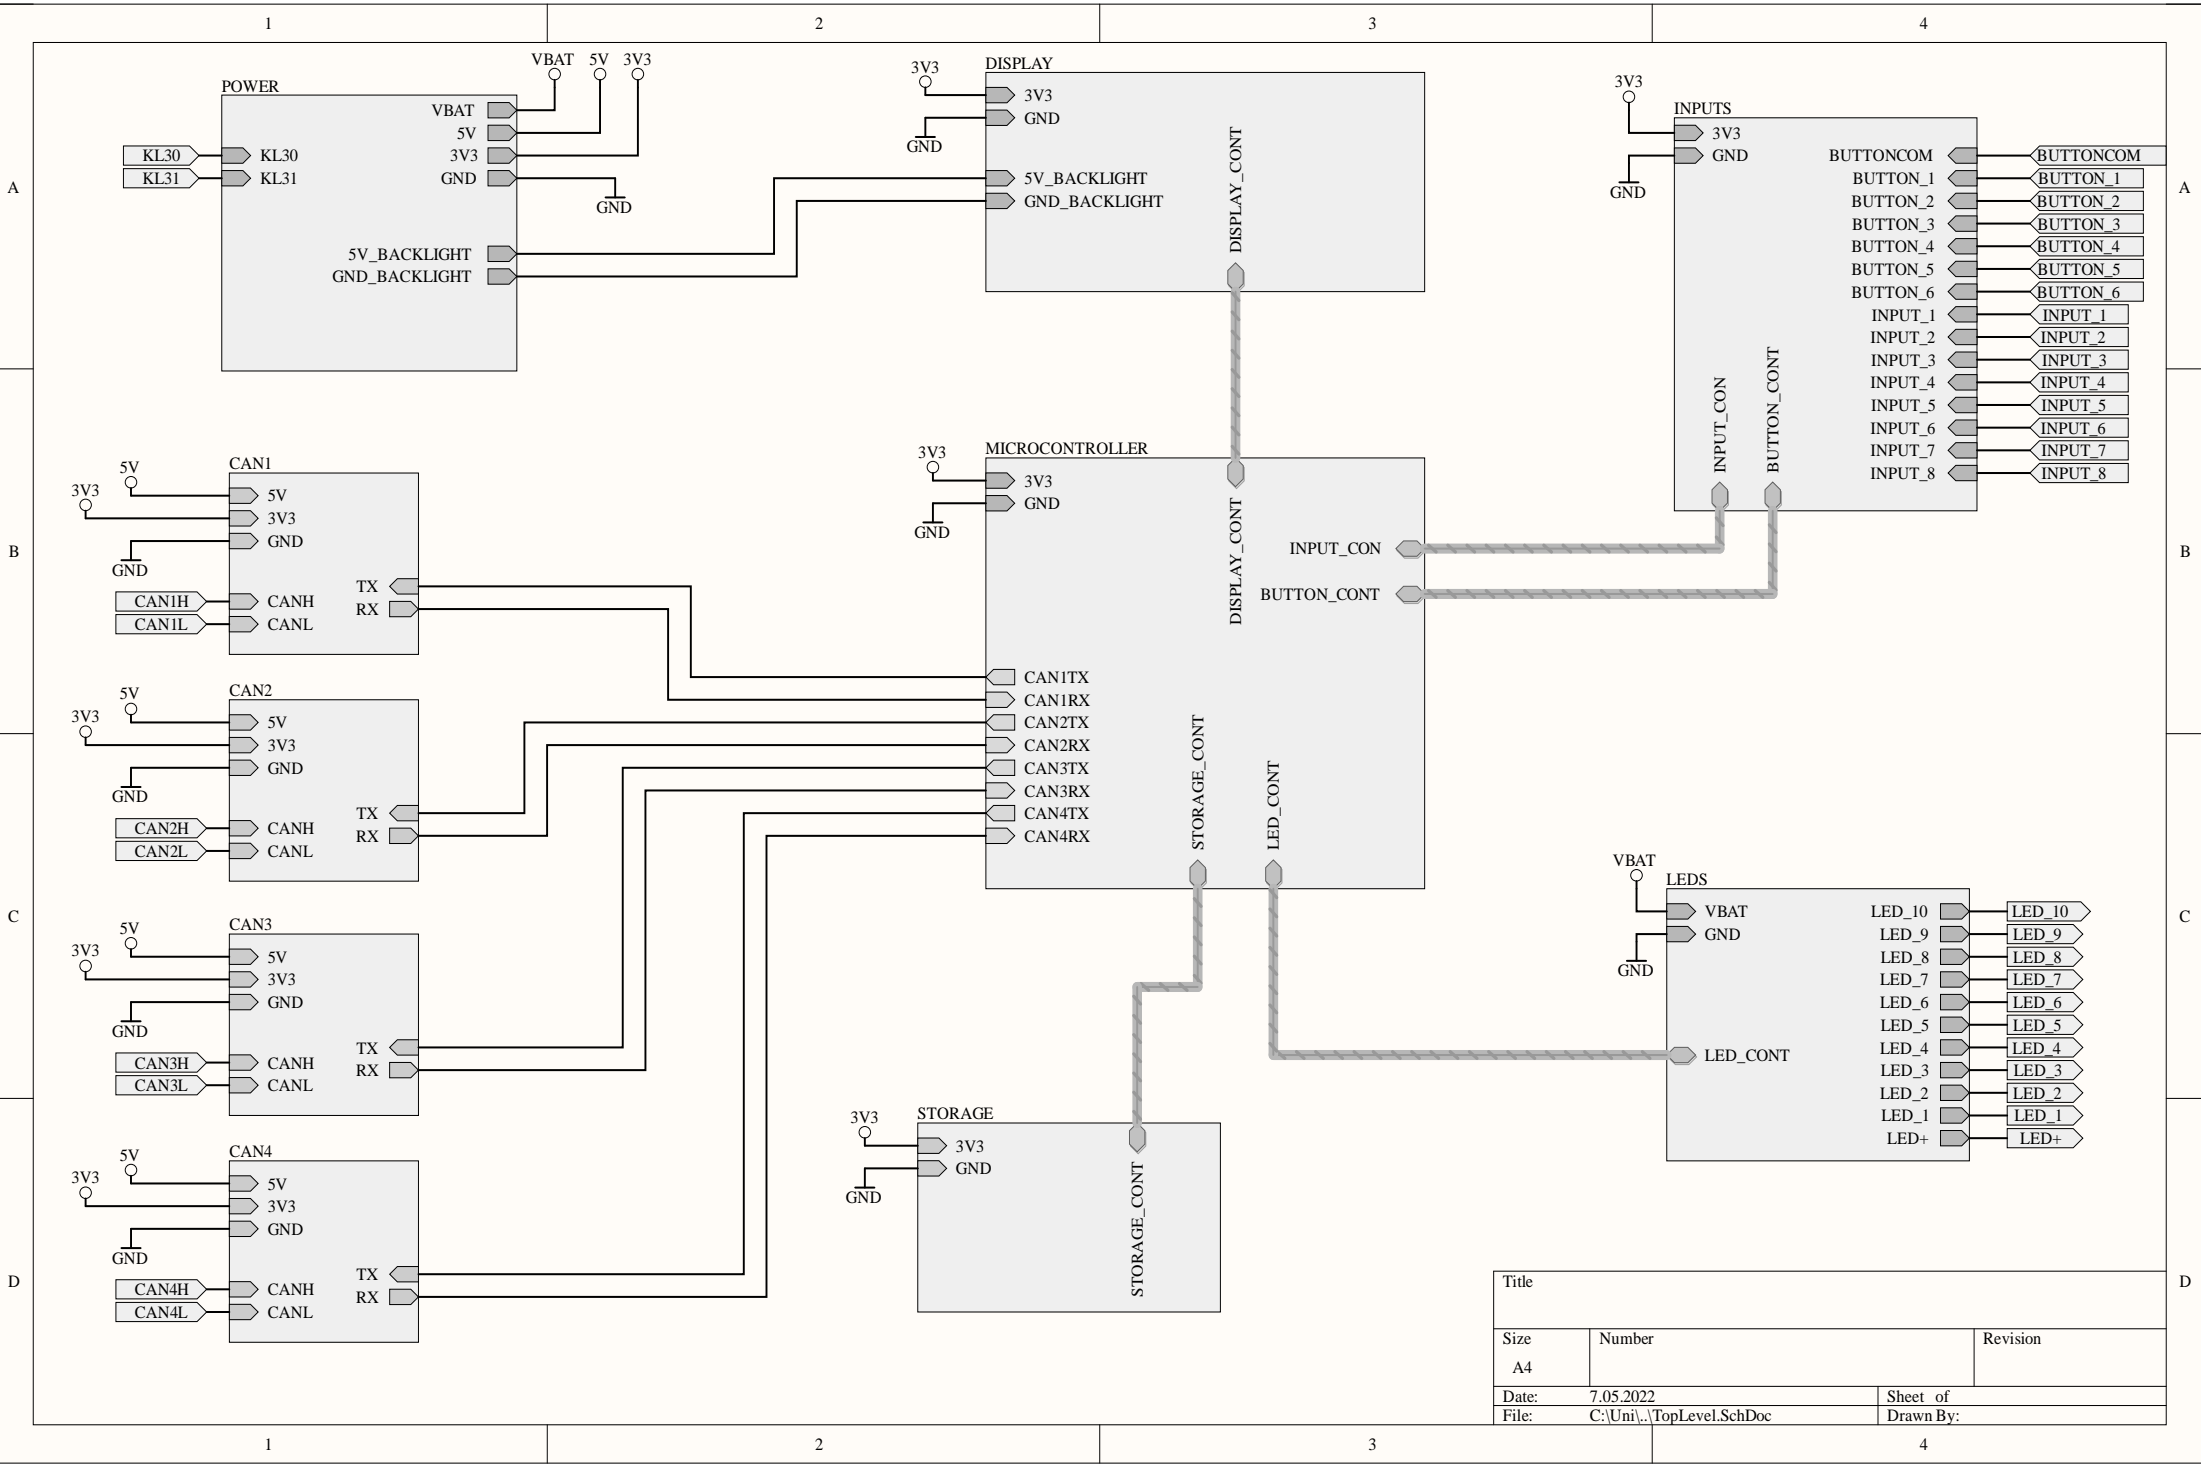


Title		
Size	Number	Revision
A4		
Date:	7.05.2022	Sheet of
File:	C:\Uni\...\TopLevel.SchDoc	Drawn By:

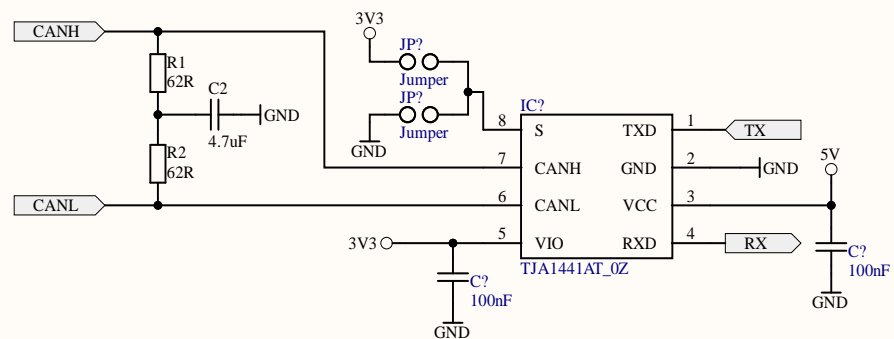

Title		
Size	Number	Revision
A4		
Date:	7.05.2022	Sheet of
File:	C:\Uni\...\CANInterface.SchDoc	Drawn By:

# POWER



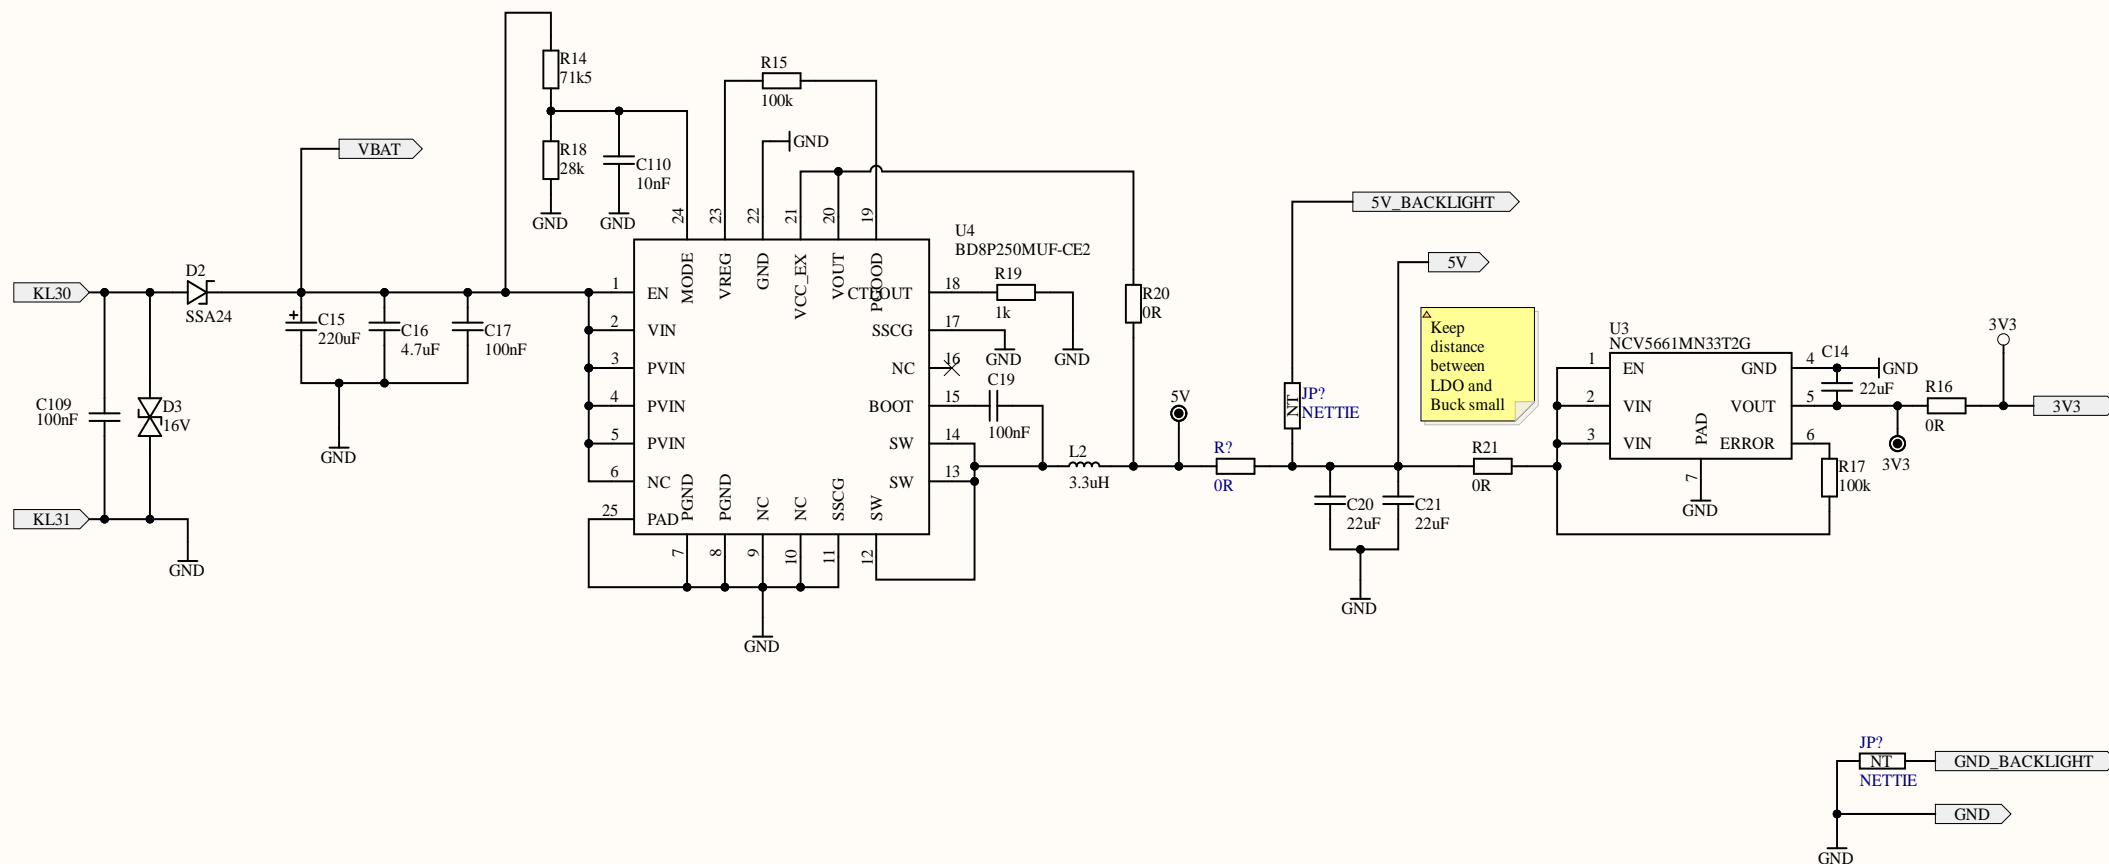


Title		
Size A4	Number	Revision
Date:	7.05.2022	Sheet of
File:	C:\Uni\...\Power.SchDoc	Drawn By:

## 8

8

# DISPLAY

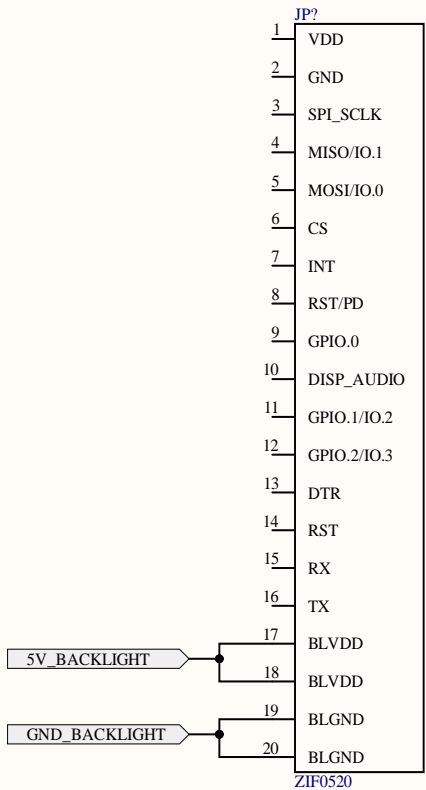

Title		
Size	Number	Revision
A4		
Date:	7.05.2022	Sheet of
File:	C:\Uni\...\Display.SchDoc	Drawn By:

A

B

C


D

A



B

C

D





# SDCARD

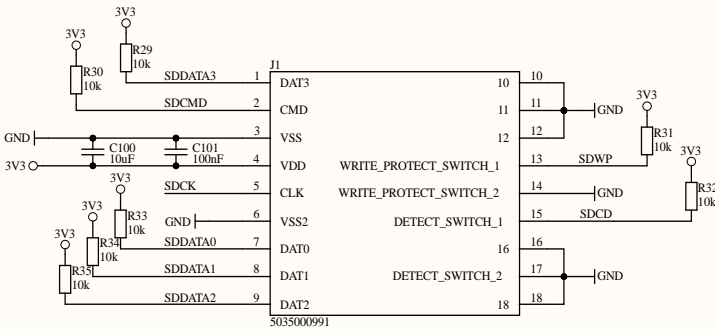

Title		
Size A3	Number	Revision
Date: 7.05.2022	Sheet of	
File: C:\Uni\...\Storage.SchDoc	Drawn By:	

GND  
GND


VBAT LED+

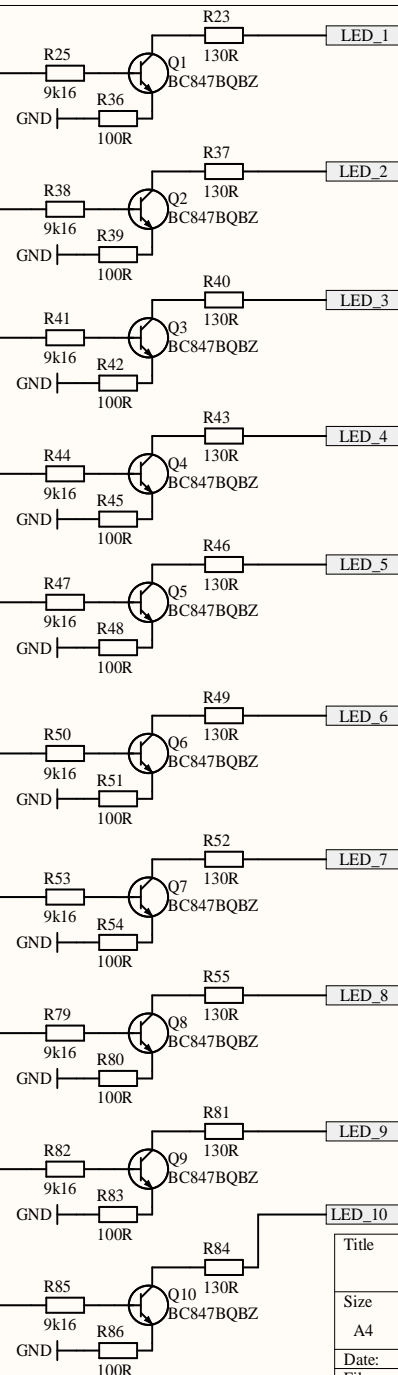

Constant Current Sources  
20mA

Title		
Size	Number	Revision
A4		
Date:	7.05.2022	Sheet of
File:	C:\Uni\...\LEDs.SchDoc	Drawn By:



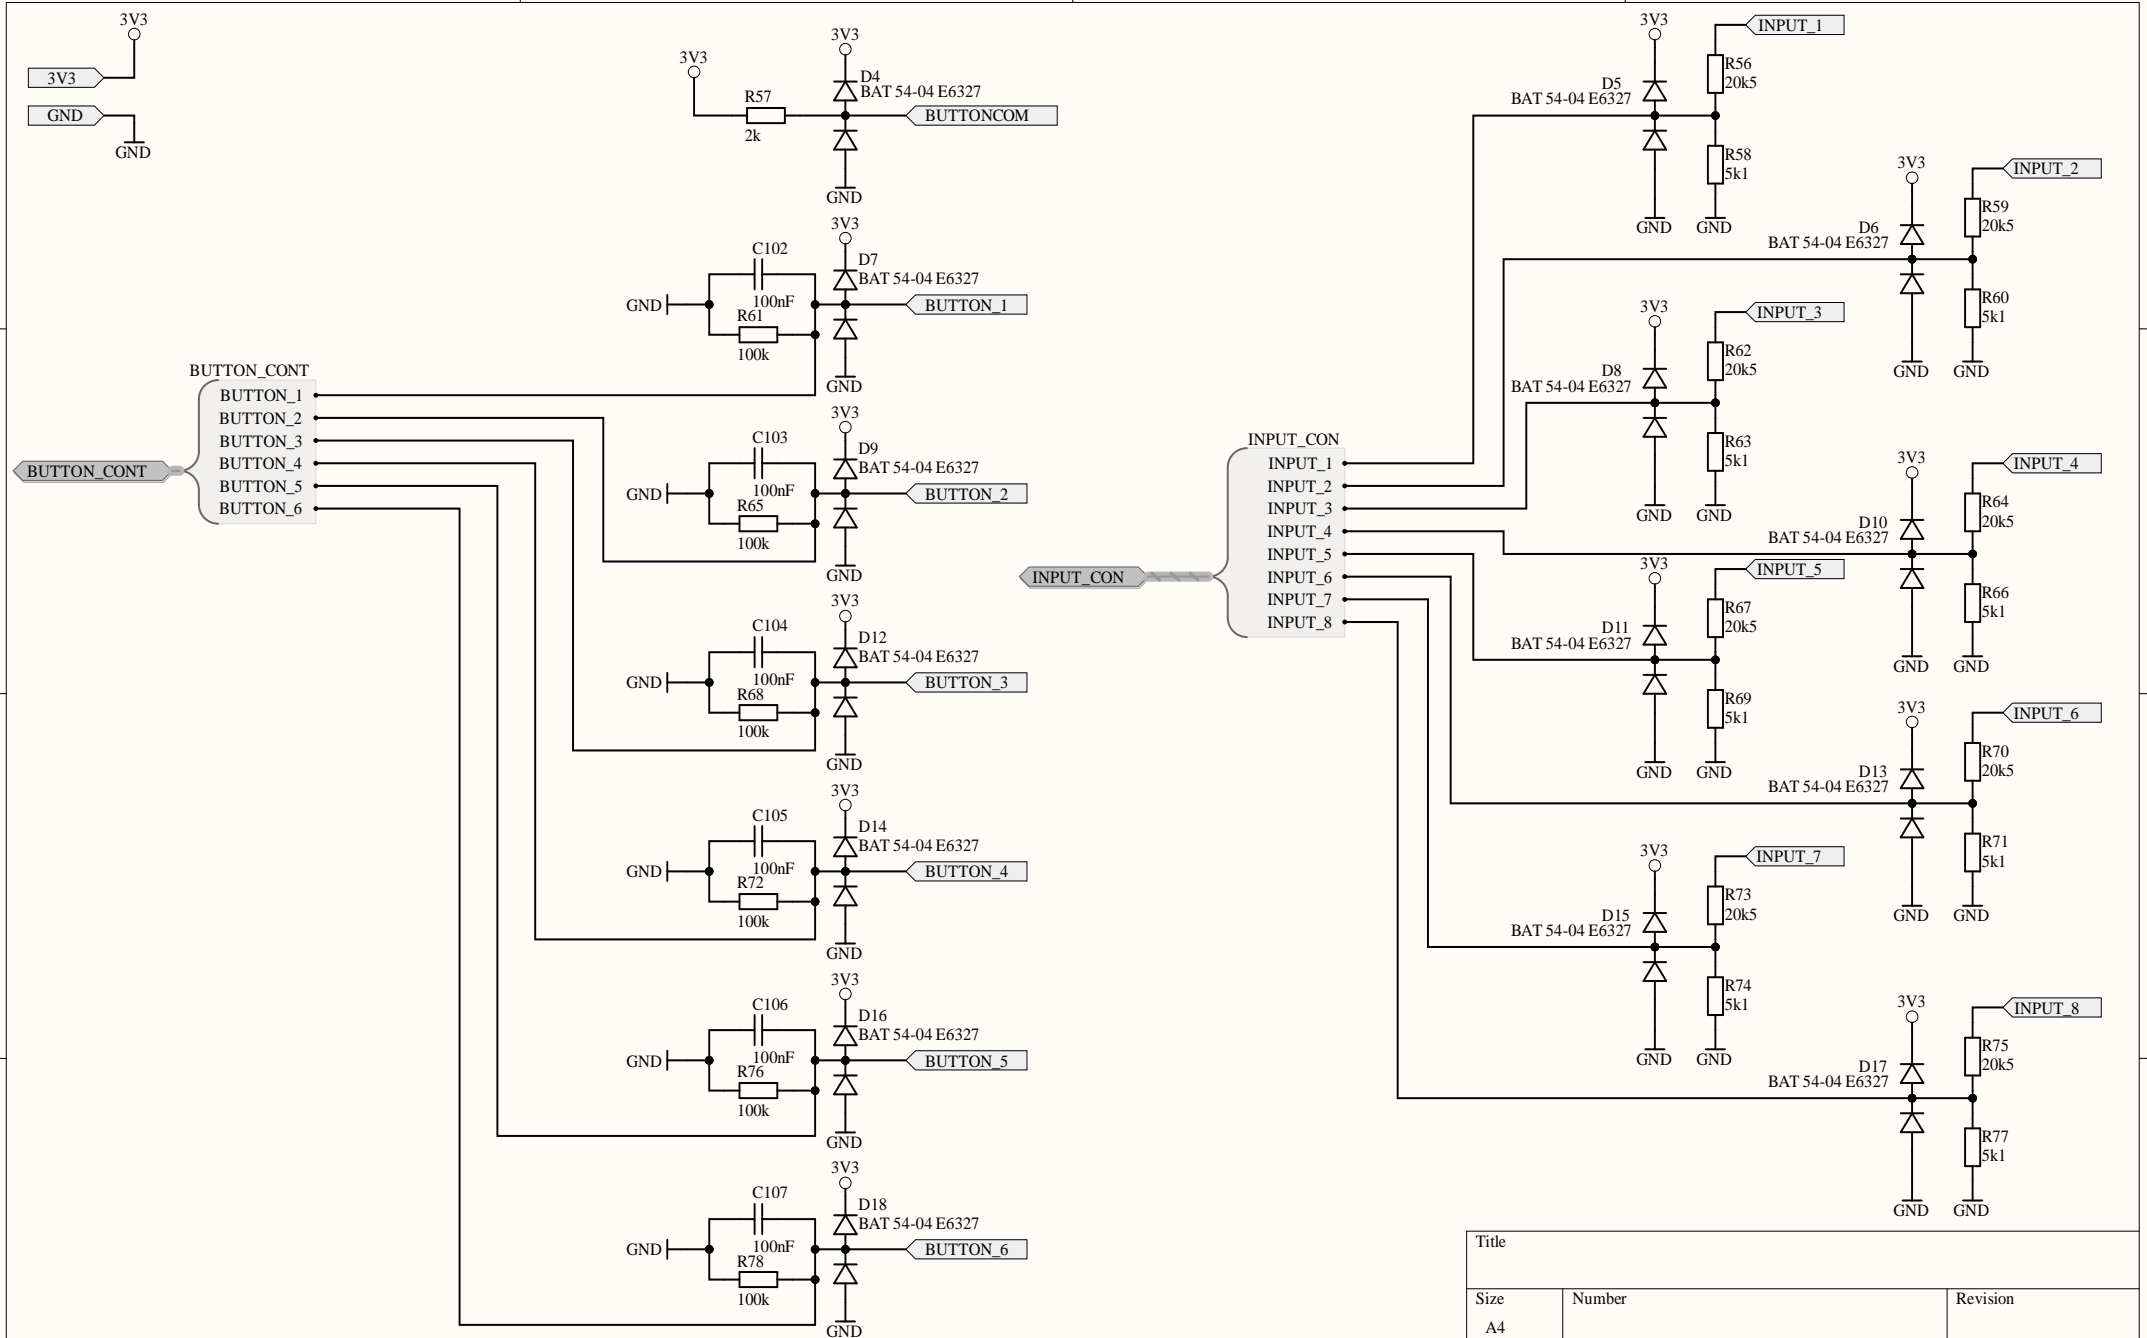

Title		
Size	Number	Revision
A4		
Date:	7.05.2022	Sheet of
File:	C:\Uni\...\Inputs.SchDoc	Drawn By: