


Pyragas delayed feedback: controller-validation gain sweep

24 validation gains; delay = 1600 steps, sign = -1, delayed signal = raw readout

—●— Quality pass Reference = 0 ★ Selected K = 0.768091

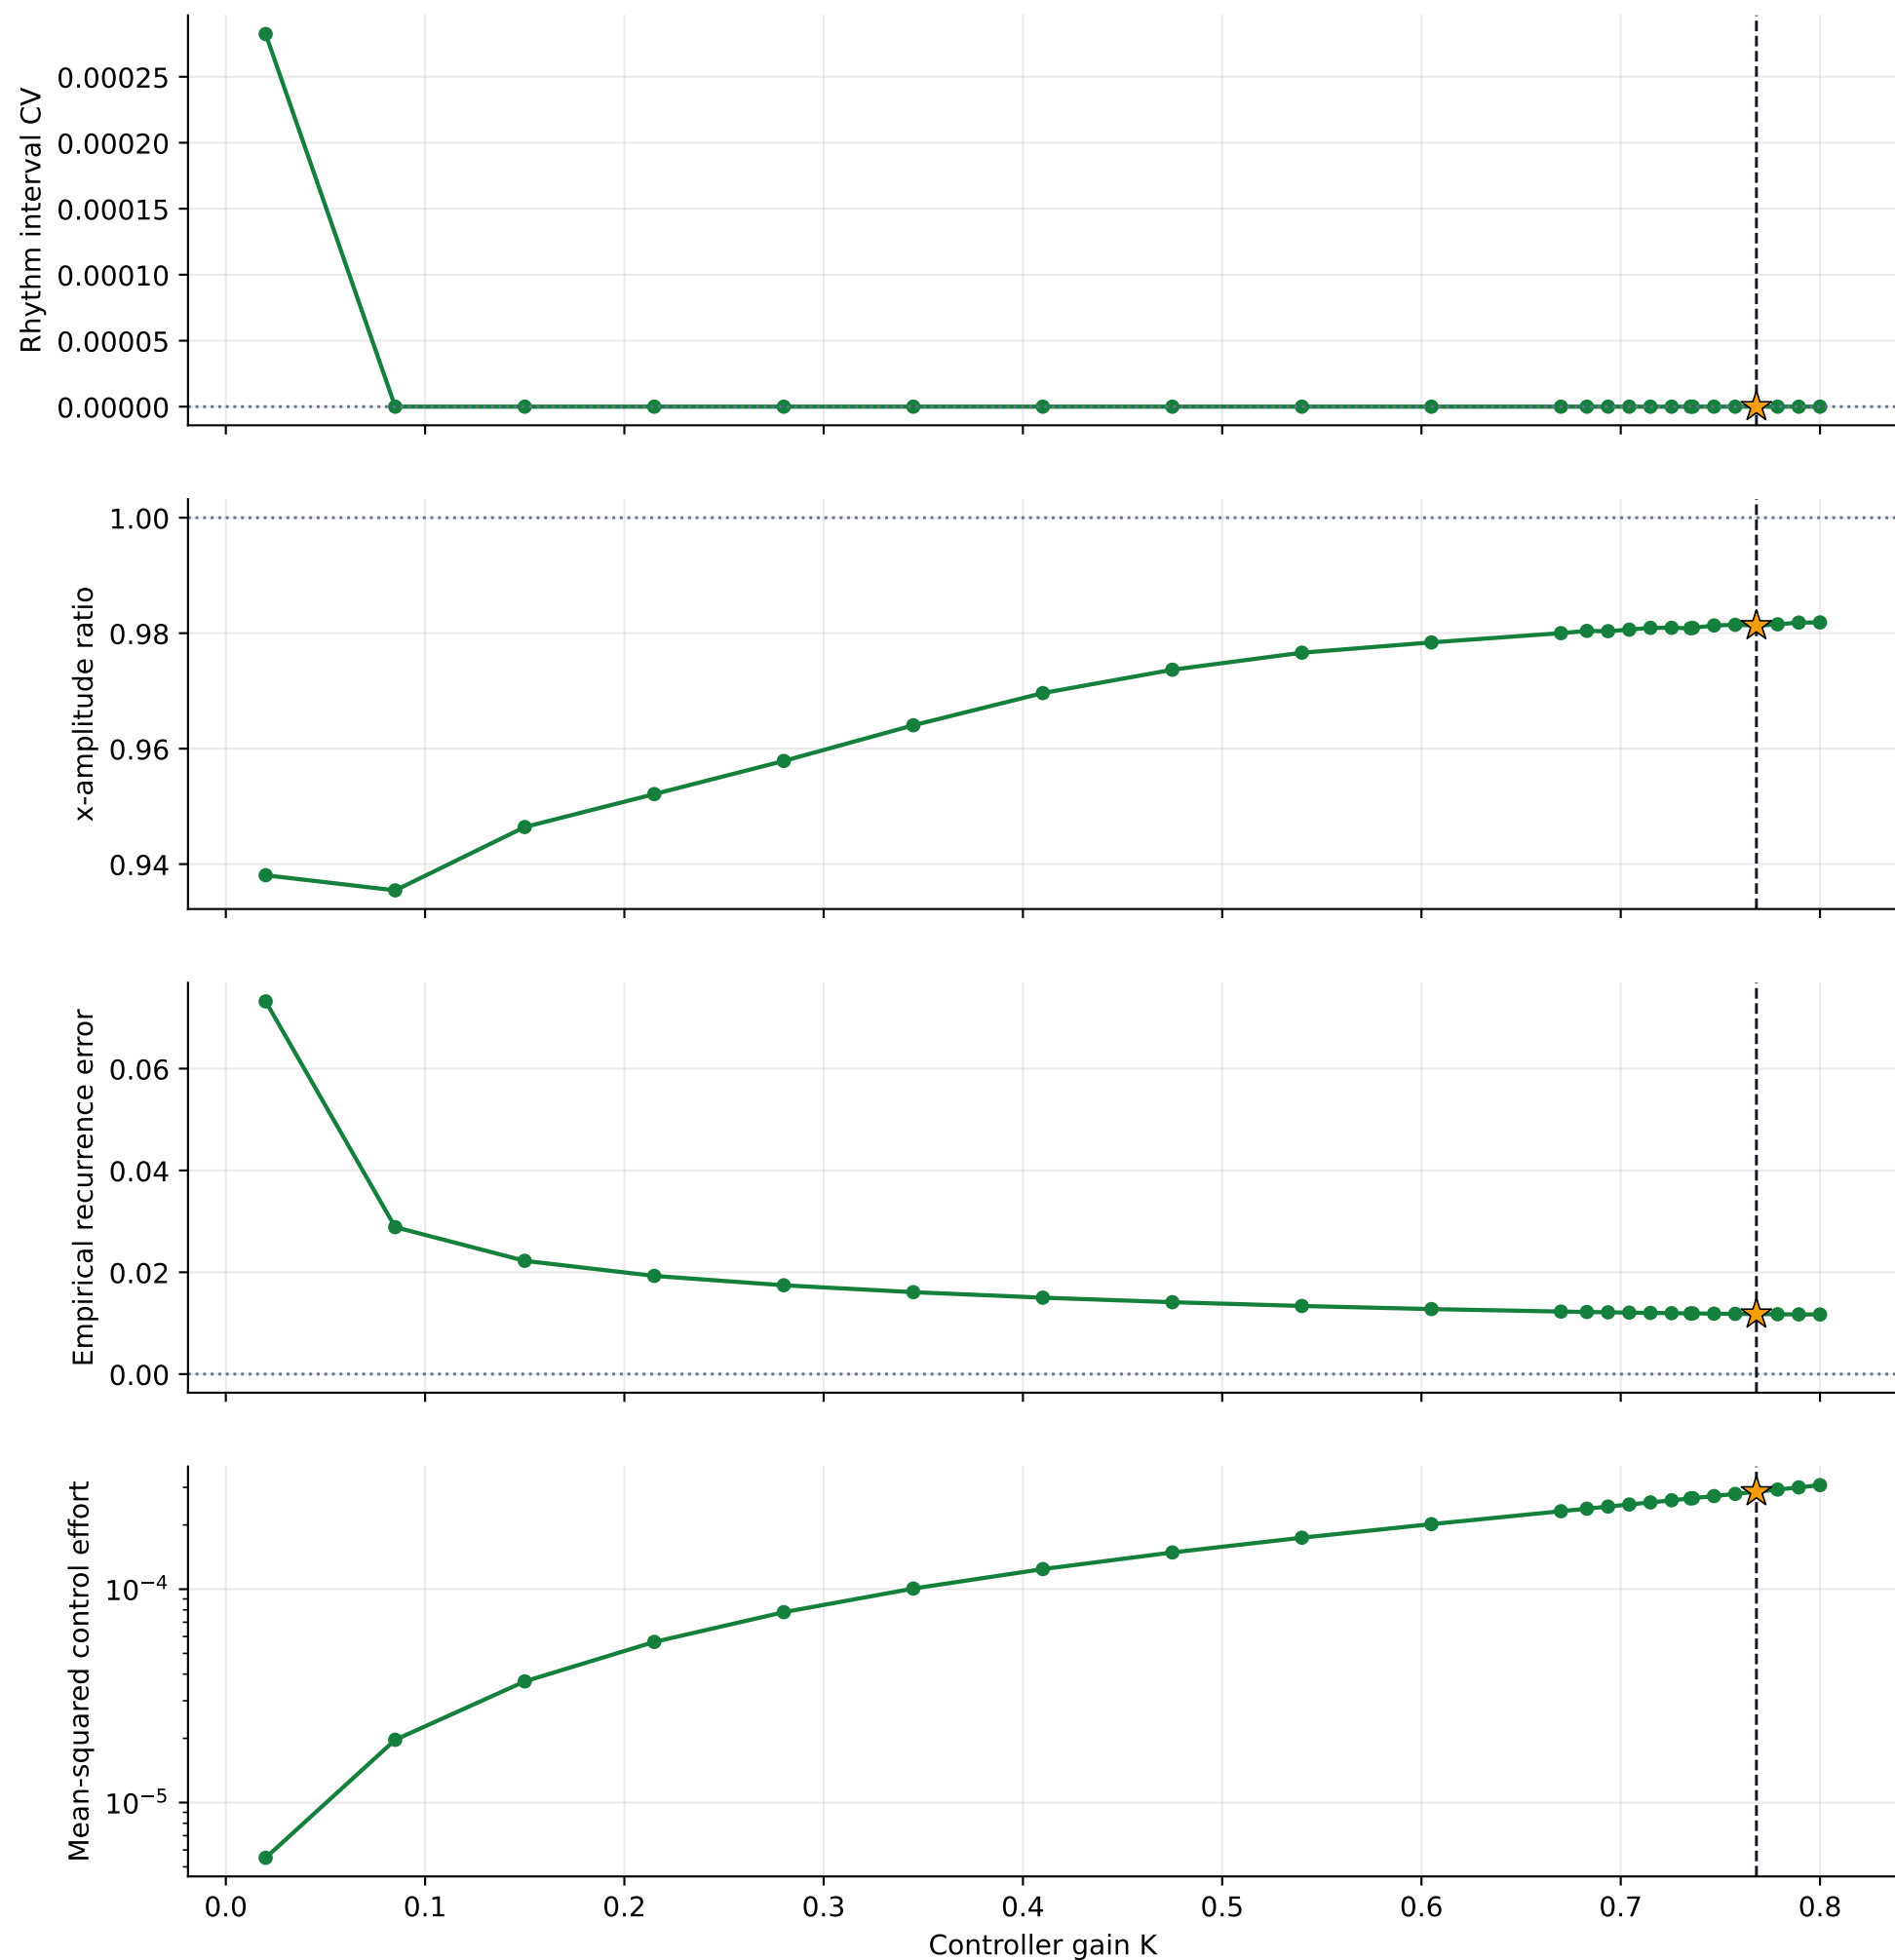

Validation sweep only. The held-out controller-test segment was not used to select K .