






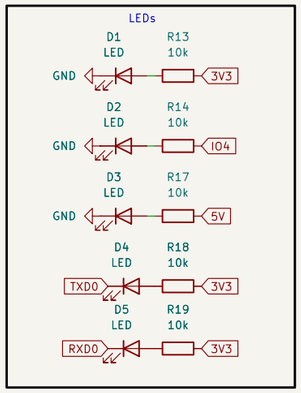





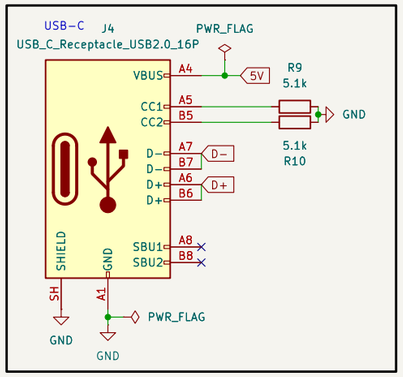








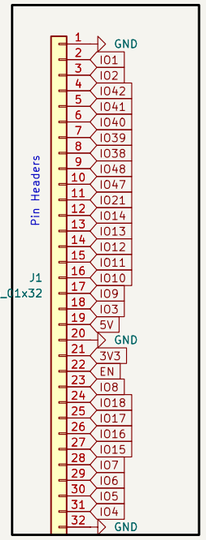

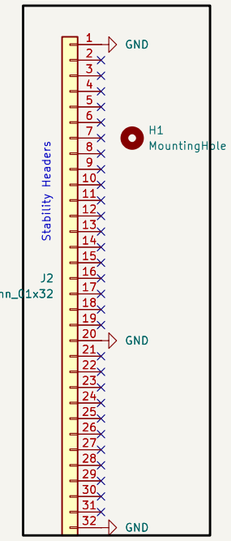

notes

ESP32-S3-N8R8

IO4 is led

IO16 is programmable button

EN is reboot

make sure not to feed voltage both from board and other source

to flash: Hold boot and press reset, originally MC

to restart, press reset

Never use IO35-37 unless verified in datasheet

IO3 IO45 IO46 Are specials, not used as is

IO45/IO46: strap pins, keep low at boot

Resistors for buttons mayby unneccessary

Limit 3V3 output better to use 5V

fixes implemented

reset button might need higher capacitance

boot button might be screwed until capacitor charged

3V3 connection for UART USB-C

todo:

can we get kicad simulating?

not now

Sheet: /

File: esp32-hat.kicad_sch

Title:

Size: A3 | Date: | **Rev:**

KiCad E.D.A. 10.0.7 | Id: 1/1