
Micro SD Holder

DM3AT-SF-PEJM5

J1

Micro_SD_Card_Det_Hirose_DM3AT

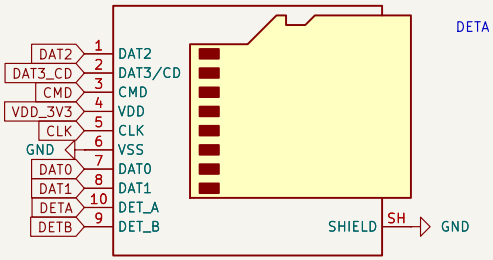


C1: 100 nF, ceramic X5R/X7R, >= 10 V, 0603 or 0805
C2: 10 uF, ceramic X5R/X7R, >= 10 V, 0805 (not 0402)
Place both close to J1 pin 4 (VDD), short path to GND

DETA and DETB: one of them internal pullup in firmware. Draws power with card plugged in.


fluff

H1
MountingHole

decoupling capacitors
place close to J1




pull-up

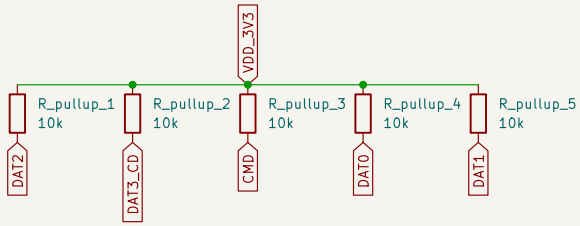


connection pins

J_Real_Pins1
Conn_01x10_Pin



stability unconnected pins

J_Stability_Pins1
Conn_01x10_Pin



Sheet: /
File: micro-sd-reader-hat.kicad_sch

Title:

Size: A4 | Date: | **Rev:**
KiCad E.D.A. 10.0.7 | Id: 1/1