

Contents

Contents	1
Preface	2
Important Notes	2
LVGL Demo	2
NerdMiner_v2 (Freenove Miner)	2
Miner	3
Freenove ESP32 Display	4
Hardware Interfaces	4
Obtaining the BTC Receiving Address	5
NerdMiner_v2 (Freenove Miner)	11
Project Introduction	11
Precautions	11
Compatibility Description	12
How to Use	13
Firmware Flashing & Update	13
Wi-Fi Configuration	20
Management Tool	23
Public Pool	23
NMMiner	25
Project Introduction	25
Precautions	25
Compatibility Description	26
How to Use	27
Firmware Flashing and Activating	27
Wi-Fi Configuration	31
Management Tools	35
NMController Client	35
NMController Web	38
IP Address Management	39
Public Pool	40

Preface

Important Notes


When you first power on the Freenove ESP32 Display, one of the following two interfaces may occur.

LVGL Demo

Some models may display a dynamic demo interface, featuring a modern user profile UI.

Please rest assured! This is not "malicious software" or a "used device."

This is a classic **benchmark/demo program** built on LVGL, a popular open-source embedded graphics library. It serves as an industry-standard tool to evaluate and demonstrate the development board's performance in rendering smooth graphics, handling animations, and supporting responsive touch interactions. You can easily overwrite it by **uploading a new sketch**. When you follow the tutorial to upload your first program, this demo will be automatically erased and replaced.

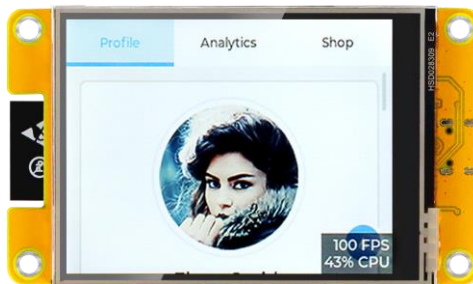


All models of the Freenove ESP32 Display are compatible with [NerdMiner_v2\(Freenove Miner\)](#) and [NMMiner](#). You can use either firmware based on your needs.

If you have any concerns, please feel free to contact us via support@freenove.com

NerdMiner_v2 (Freenove Miner)

Some displays have been preinstalled with the NerdMiner_V2 firmware, and the following interface will show up. In this case, you can directly [make configuration as per the tutorial](#).

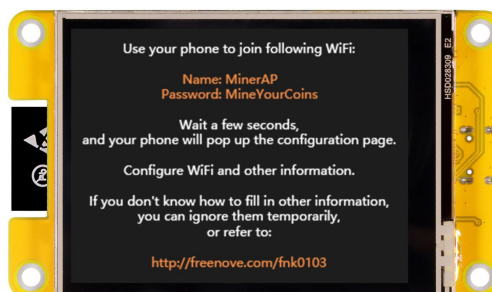

The device you received may come pre-installed with either the stable version (with a computing power of approximately 350 KH/s) or the high-performance version (with a computing power of around 630 KH/s) firmware. You can quickly switch between versions within 5 minutes according to your needs. For specific steps, please refer to the section on "[Firmware Flashing & Update](#)."

Miner

This tutorial aims to introduce two excellent Bitcoin Mining projects. Freenove has adapted and validated these projects to ensure stable operation on our Freenove ESP32 Display, and have accordingly compiled detailed usage tutorials.

Disclaimer:

Freenove is not the original developer of these projects. All development, maintenance, feature implementation, and commercial licensing are the sole responsibility of their respective official developers.


Miner Compatibility

Provide a tutorial to show how to install or upgrade the following miner firmware.

Model	NerdMiner (Freenove version, free) (May pre-installed in the product) (May need to upgrade to get 630 KH/s)	NMMiner (2.99 USD per device) (Need to buy and install it yourself)
2.8 Inch ST7789 TN	 fully compatible	 fully compatible
2.8 Inch ILI9341 TN	 fully compatible	 fully compatible
3.2 Inch ST7789 IPS	 fully compatible	 fully compatible, light theme
3.5 Inch ST7796 TN	 fully compatible	 fully compatible
4.0 Inch ST7796 TN	 fully compatible	 fully compatible

Freenove ESP32 Display


Hardware Interfaces

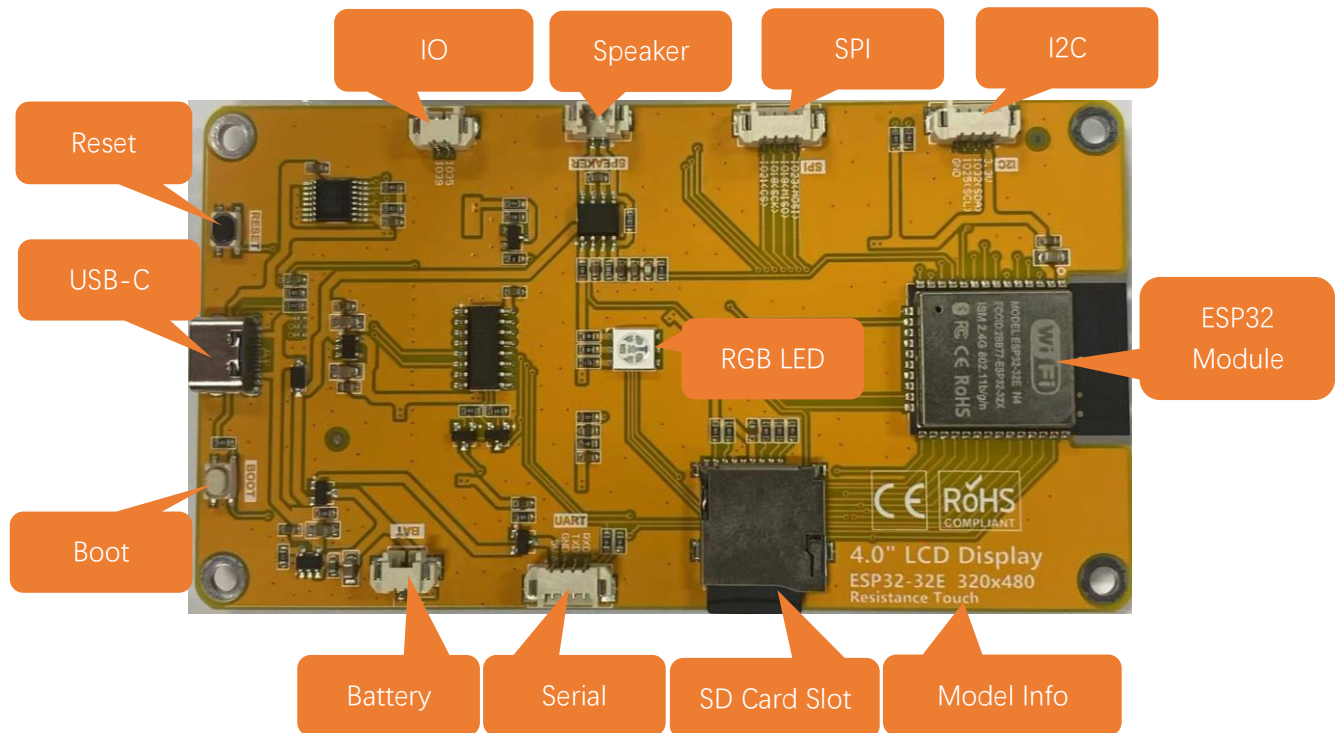


Obtaining the BTC Receiving Address

Note: If you already have a BTC receiving address, feel free to skip this step. Otherwise, the following section will guide you through obtaining a new one.


1. Click this link (<https://www.exodus.com/download>) to open the Exodus downloading interface. Choose the version consistent with your system.

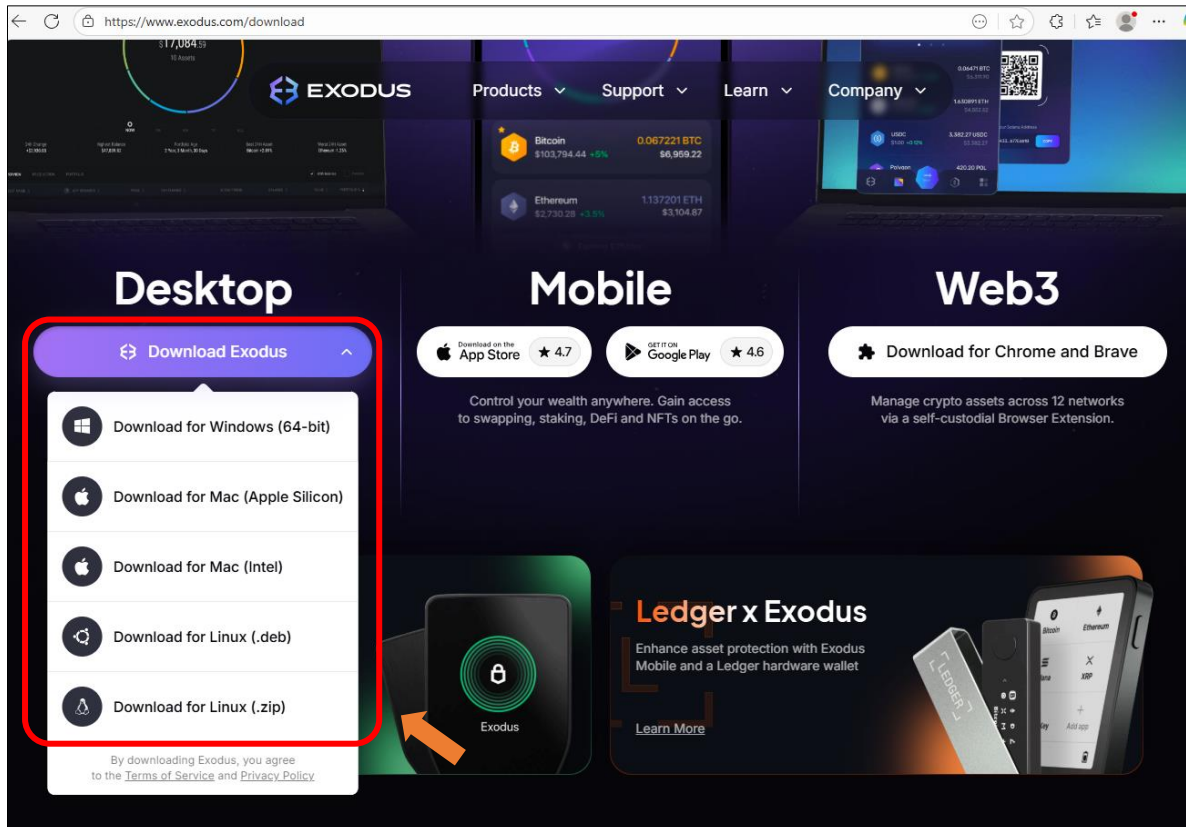


2. Open the downloaded installation package to install.

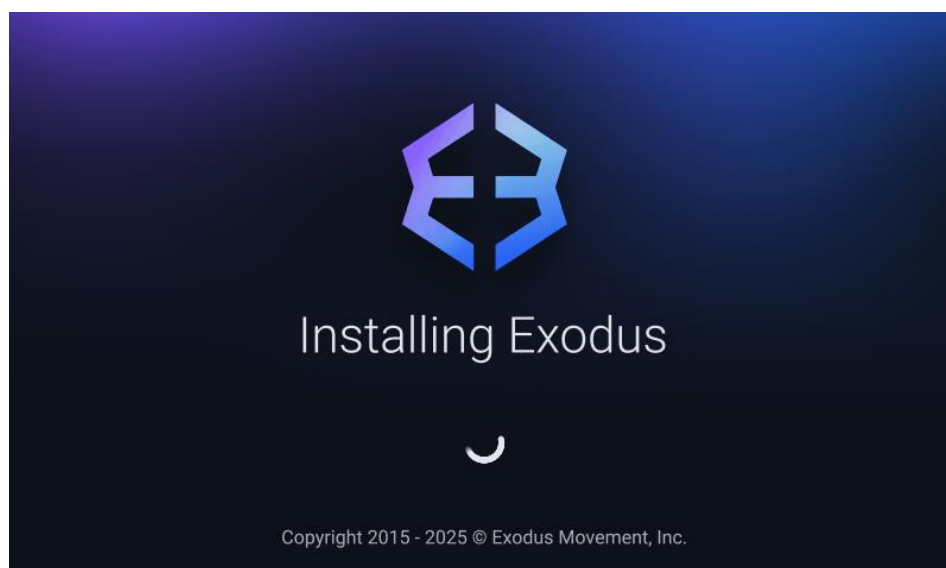

3. The following prompt indicates that the installation is successful.

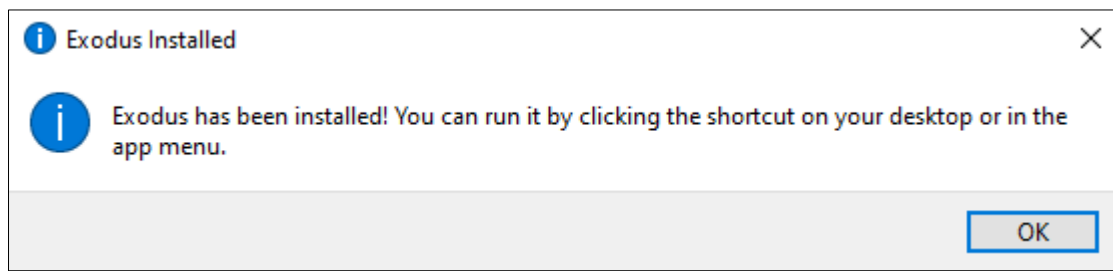


4. Open **Exodus**, click "Setting".

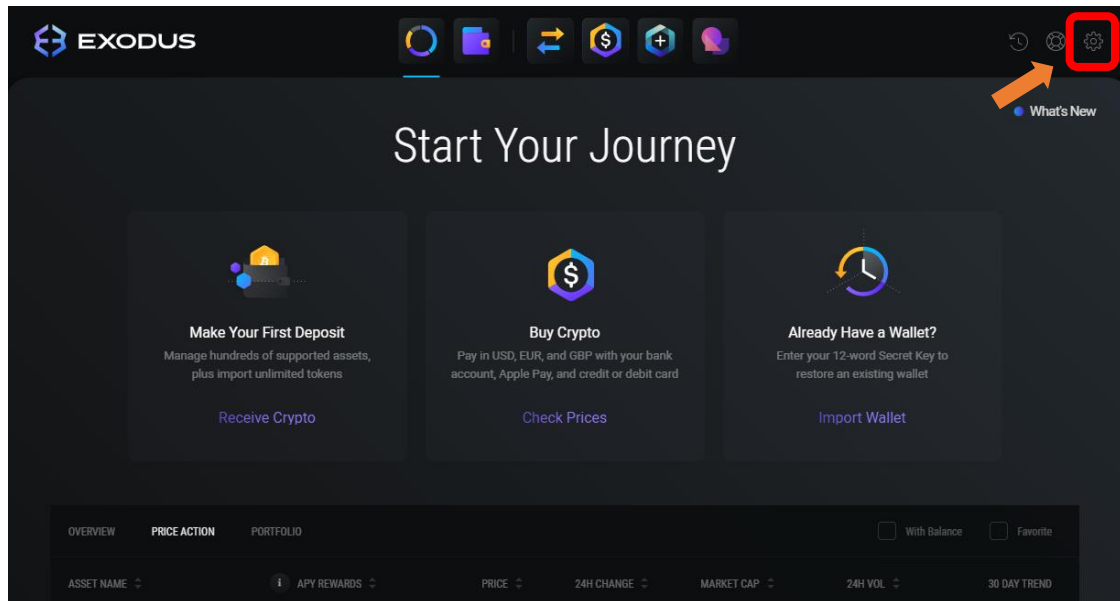


5. Click "Backup" to create your password for registering your wallet.


Important Note: Do not forget or share this password with anyone.

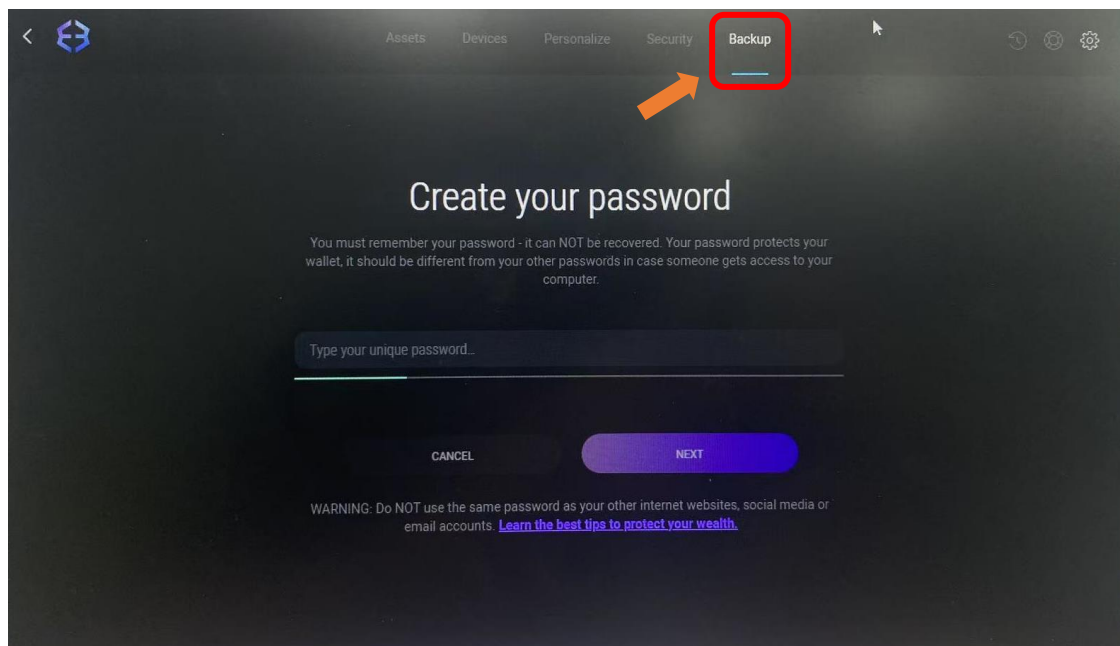


6. Click "NEXT".

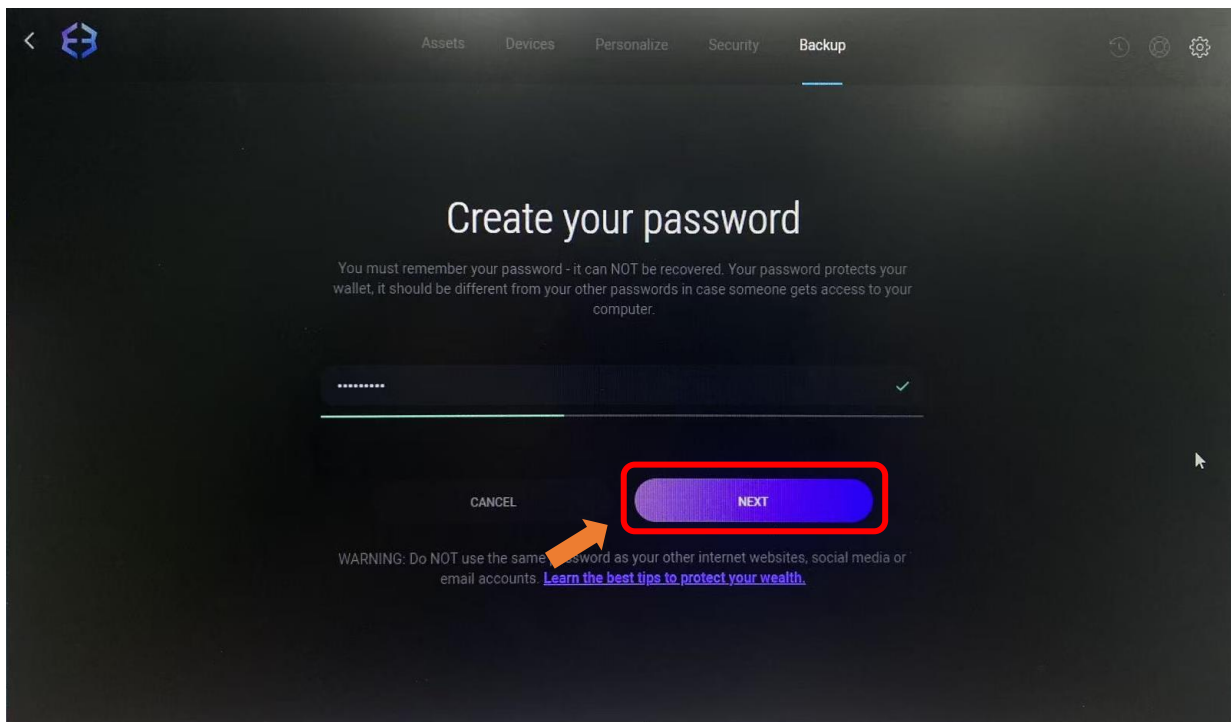

7. Enter the password again and click "NEXT".

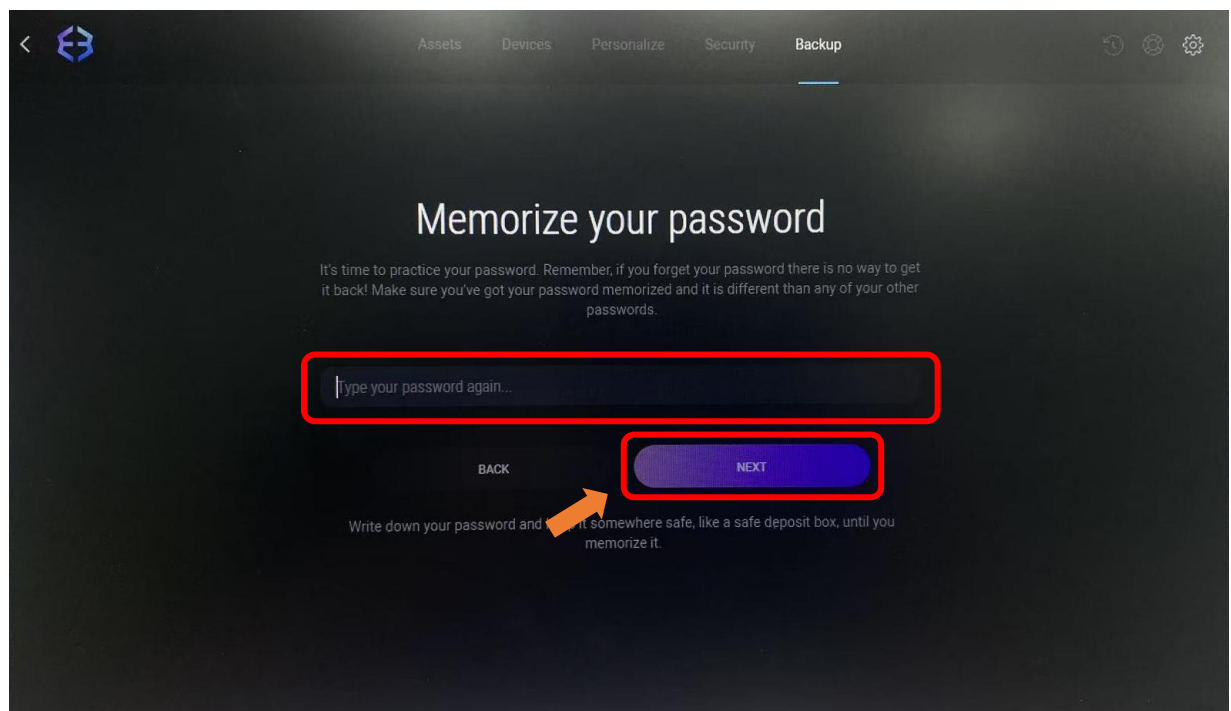

8. Check the box “I understand the risks of sharing my Secret Key”, and click “VIEW SECRET KEY”.

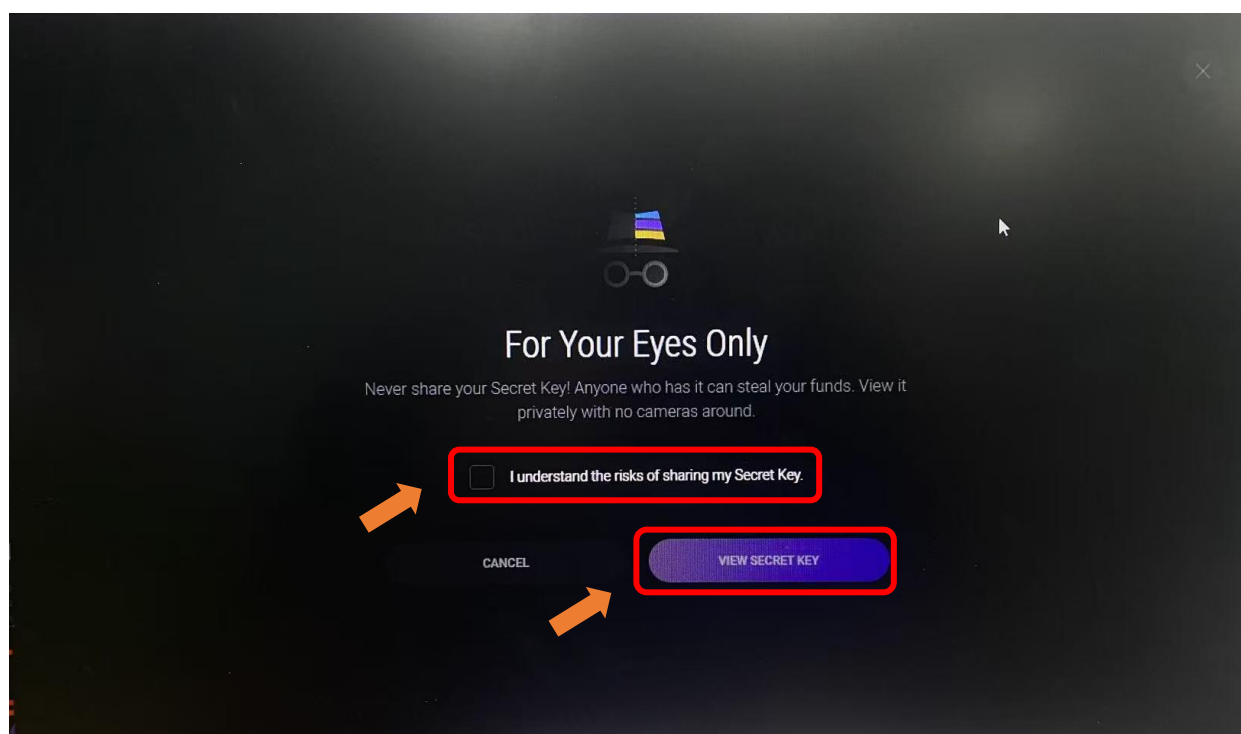


9. Check “Show Secret Key”.


Please note: This interface cannot be screenshot or photographed. Do not disclose any information related to these mnemonic words to anyone. You must securely store these 12 mnemonic words corresponding to the numbers. Without them, you will permanently lose access to this wallet.

10. Click “DONE”.


11. Select the correct answer based on the recorded mnemonic words. Then click “DONE”.

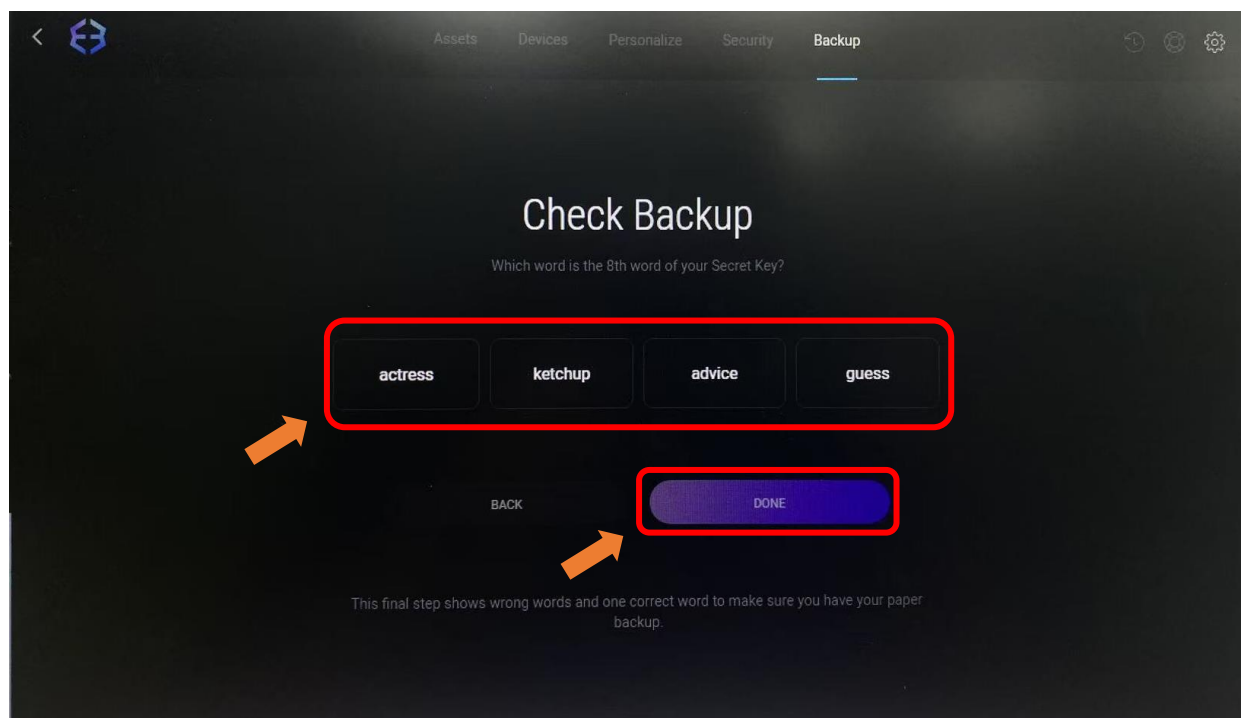


12. So far, you have successfully created your wallet.

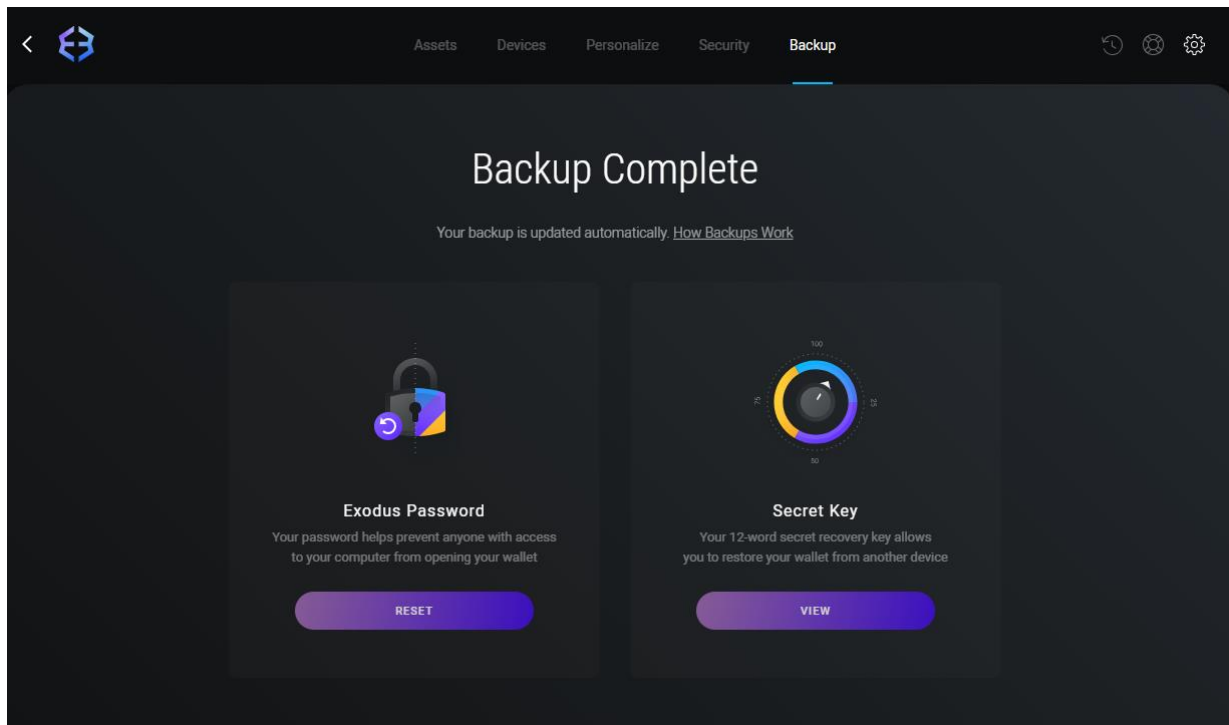


13. Click "Assets", type "BTC" to search, and then click "Bitcoin".

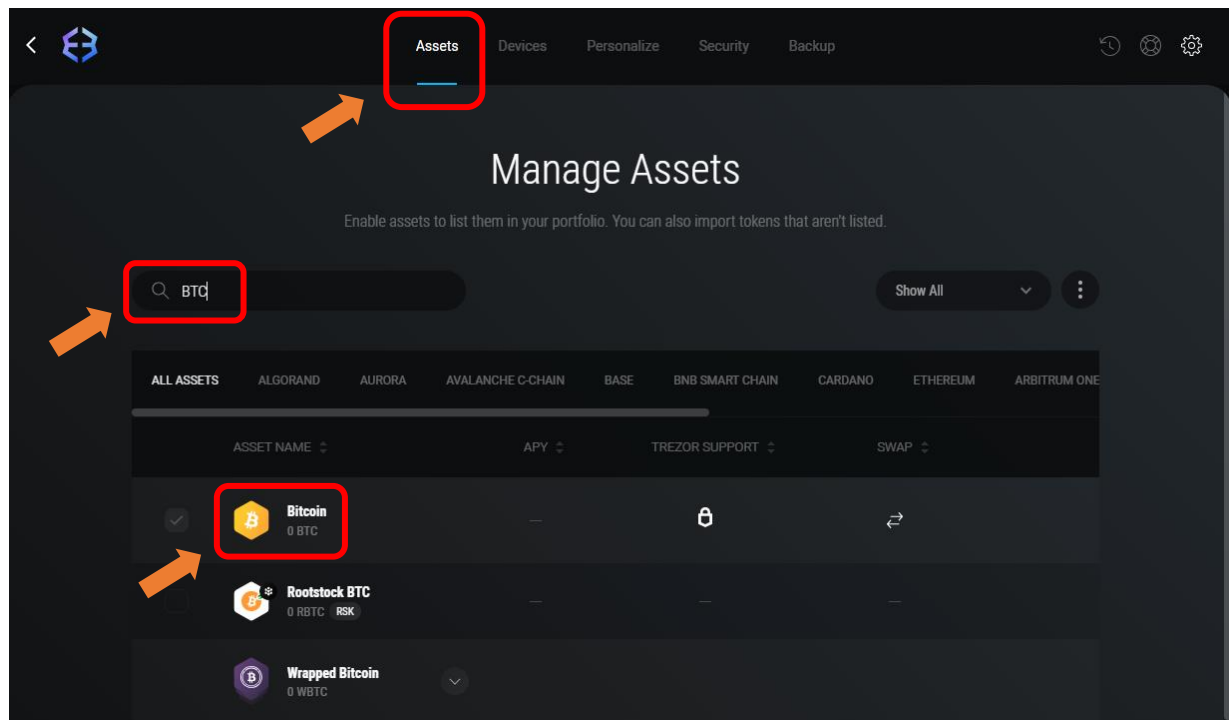

14. Click "Receive".

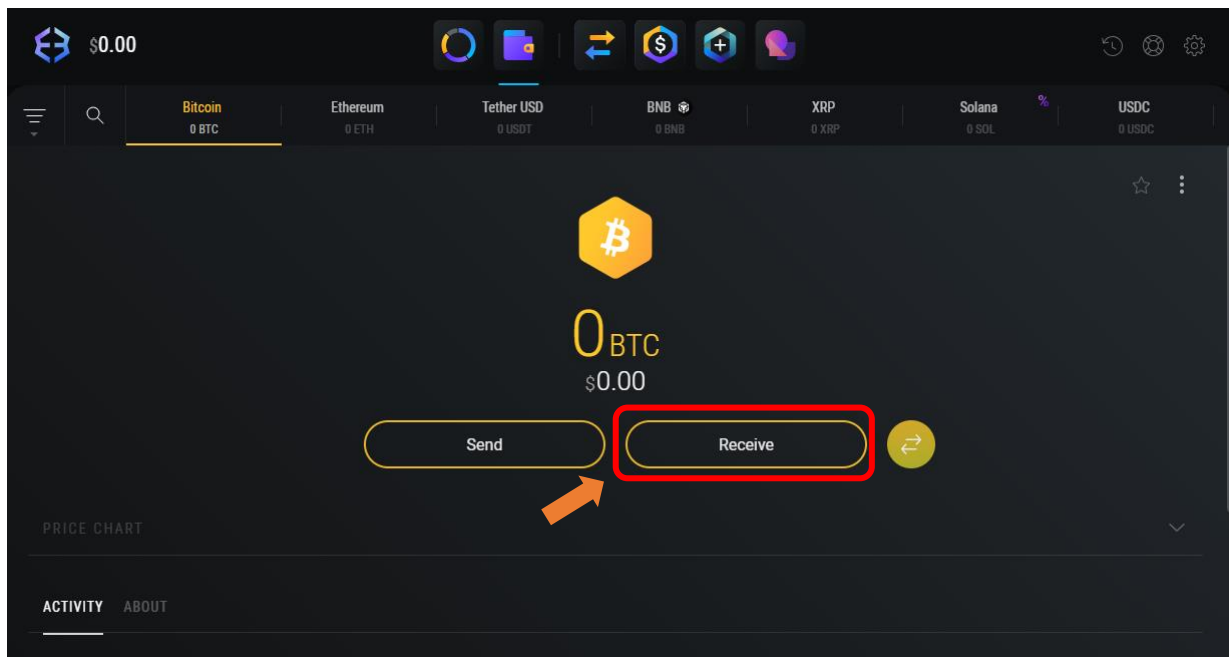

15. The generated string of characters is a BTC address. This address can be publicly shared and is used to receive BTC.

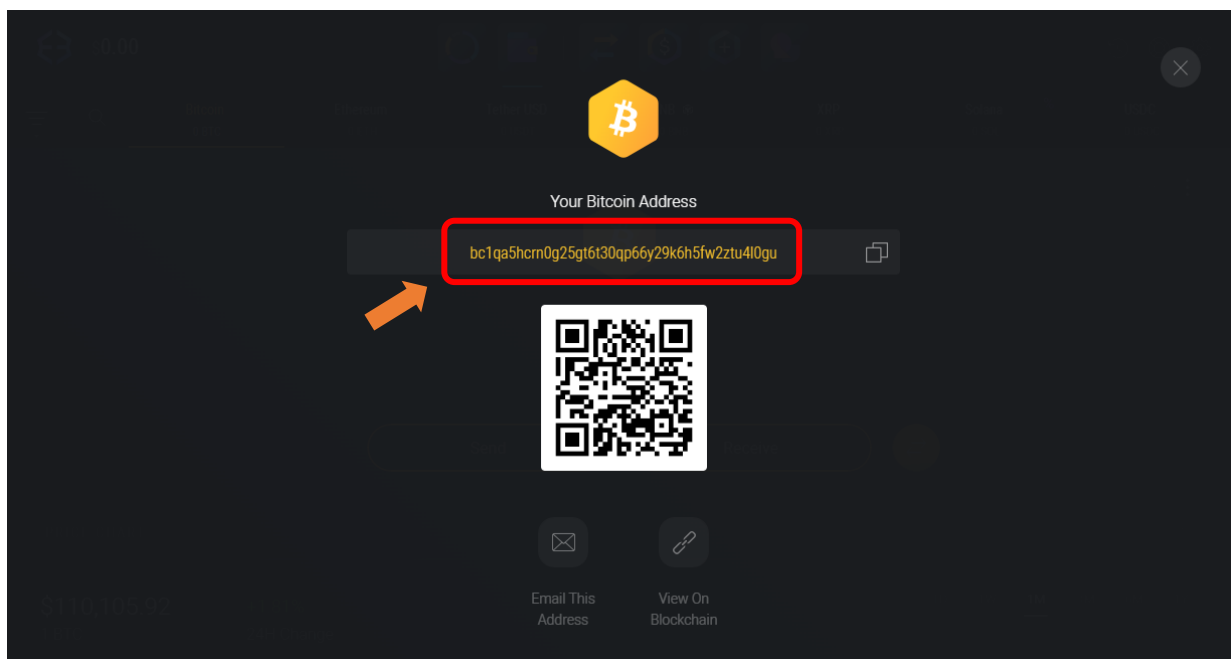

For any Exodus-related usage questions, answers can be found at:

<https://www.exodus.com/support/en/>

If you have any concerns, please feel free to contact us via support@freenove.com

NerdMiner_v2 (Freenove Miner)

This project utilizes Freenove ESP32 Display and NerdMiner_v2 to implement Bitcoin mining. Even if you have no prior knowledge of programming or cryptocurrency, you can easily complete the process by following this tutorial.

Project Introduction

NerdMiner_v2 (https://github.com/BitMaker-hub/NerdMiner_v2) is an excellent open-source BTC mining firmware designed for ESP32 development boards. Its goal is to allow users to experience the process of "mining a Bitcoin block" using a small piece of hardware. The primary aim of this project is to help more people **learn about cryptocurrency mining** while owning an aesthetically pleasing desktop accessory.

NerdMiner_v2 supports mining on **solo pools** by implementing the **Stratum protocol** (by default, it connects to **public-pool.io**, which supports Nerdminer devices, but the pool address can be customized). Freenove has ported this project to run on the Freenove ESP32 Display.

This tutorial will guide you through the process of running the project on the Freenove ESP32 Display.

Precautions

- **Cost**
 - As of the time of writing this document, NerdMiner_v2 is temporarily free to use.
- **Security Precautions**
 - Never disclose your wallet's private key or recovery phrase to anyone. The only information you need to provide is your public cryptocurrency receiving address.
- **Troubleshooting**
 - If you have followed the tutorial but are still unable to use the miner, please feel free to contact us for assistance. (support@freenove.com)

Compatibility Description

At the time of writing this guide, the Freenove ESP32 Display is available in five different models. Although they vary in terms of screen drivers, resolutions, and screen sizes, all of them can be set up using this tutorial to learn how to use NerdMiner_v2.

The official firmware of NerdMiner_v2 is not fully compatible with this product. Therefore, Freenove has conducted secondary development based on it to ensure stable operation.

Miner Compatibility

Provide a tutorial to show how to install or upgrade the following miner firmware.

Model	NerdMiner (Freenove version, free) (May pre-installed in the product) (May need to upgrade to get 630 KH/s)	NMMiner (2.99 USD per device) (Need to buy and install it yourself)
2.8 Inch ST7789 TN	 fully compatible	 fully compatible
2.8 Inch ILI9341 TN	 fully compatible	 fully compatible
3.2 Inch ST7789 IPS	 fully compatible	 fully compatible, light theme
3.5 Inch ST7796 TN	 fully compatible	 fully compatible
4.0 Inch ST7796 TN	 fully compatible	 fully compatible

If you have any concerns, please feel free to contact us via support@freenove.com


How to Use

Firmware Flashing & Update


Whether you want to flash the Freenove Miner firmware or upgrade the Freenove Miner firmware, you can proceed by following the steps in this chapter's tutorial.

Note: Since the official NerdMiner_v2 firmware is not compatible with this product, this tutorial only demonstrates how to flash the adapted firmware onto the product via Freenove official website. For information on the official NerdMiner_v2 firmware tool ([Bitronics Flasher](#)), please refer to the relevant documentation separately.


1. Connect the Freenove ESP32 Display to your computer.

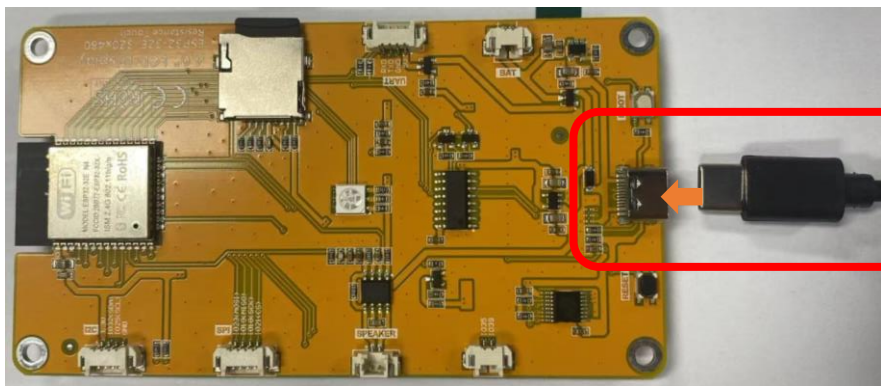


2. Open the [Freenove - Web Flasher](#) and click "Select device".

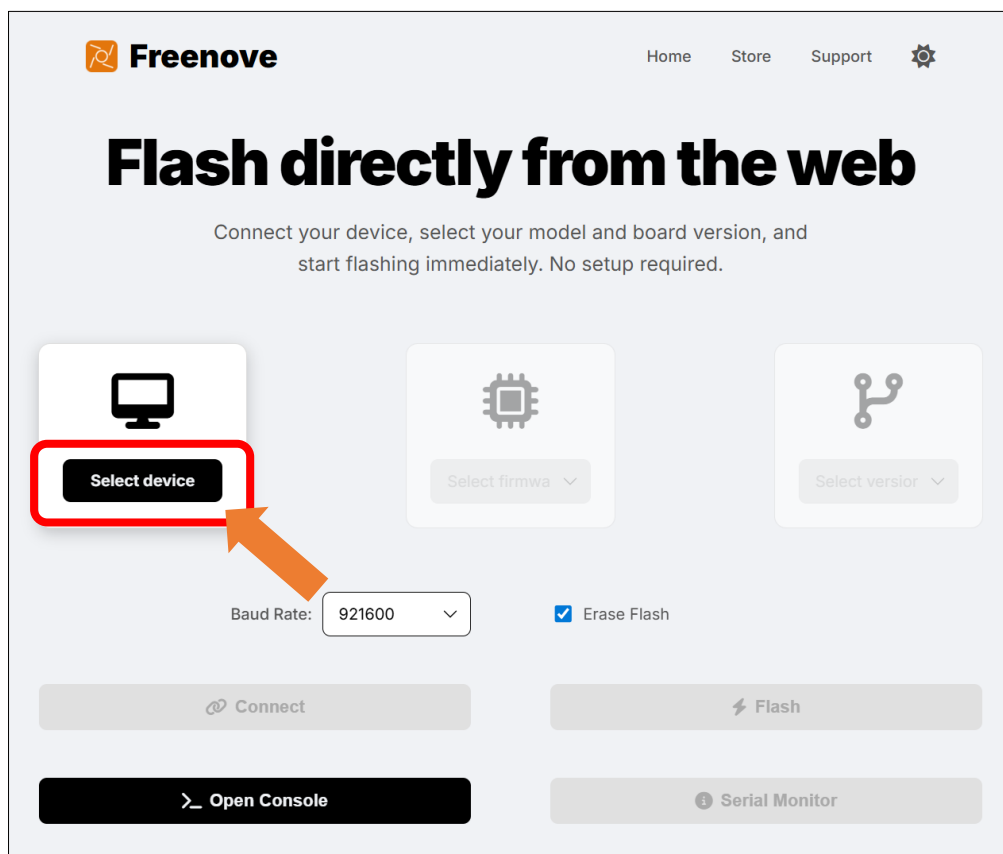

3. Select “FNK0103”

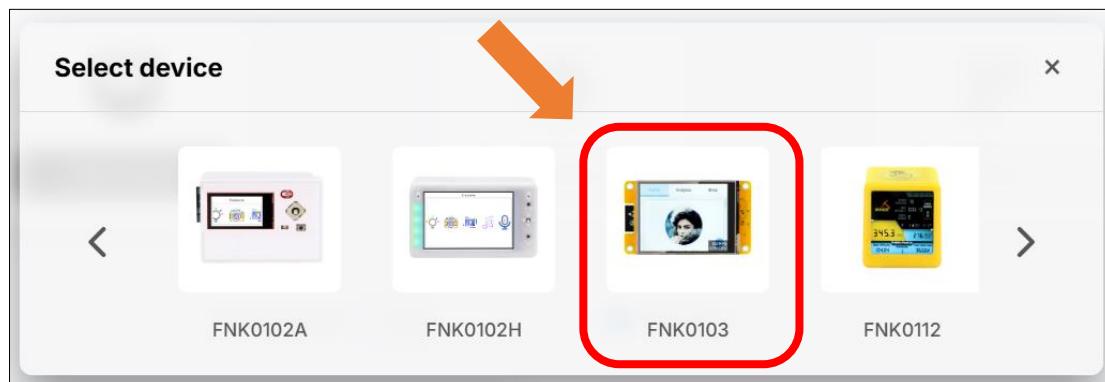


4. Click “Select firmware” and select the firmware corresponding to your display model.

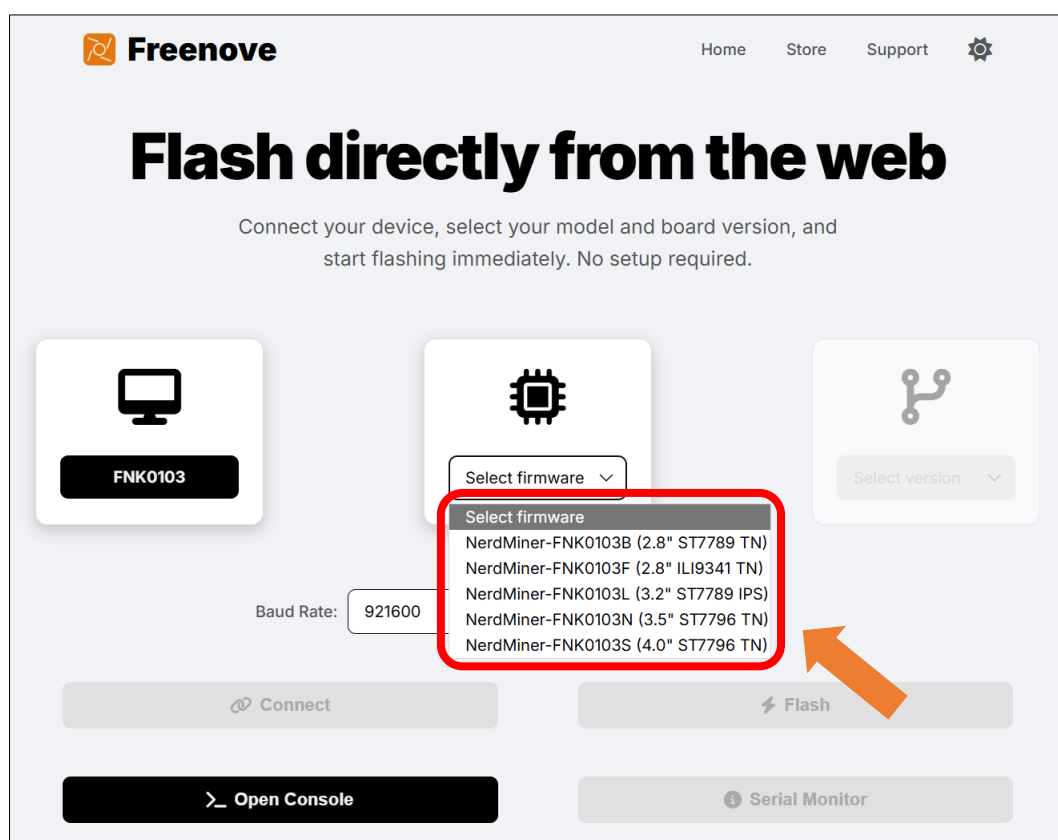

If you have any concerns, please feel free to contact us via support@freenove.com

5. Click “**Select version**” to select the appropriate version.

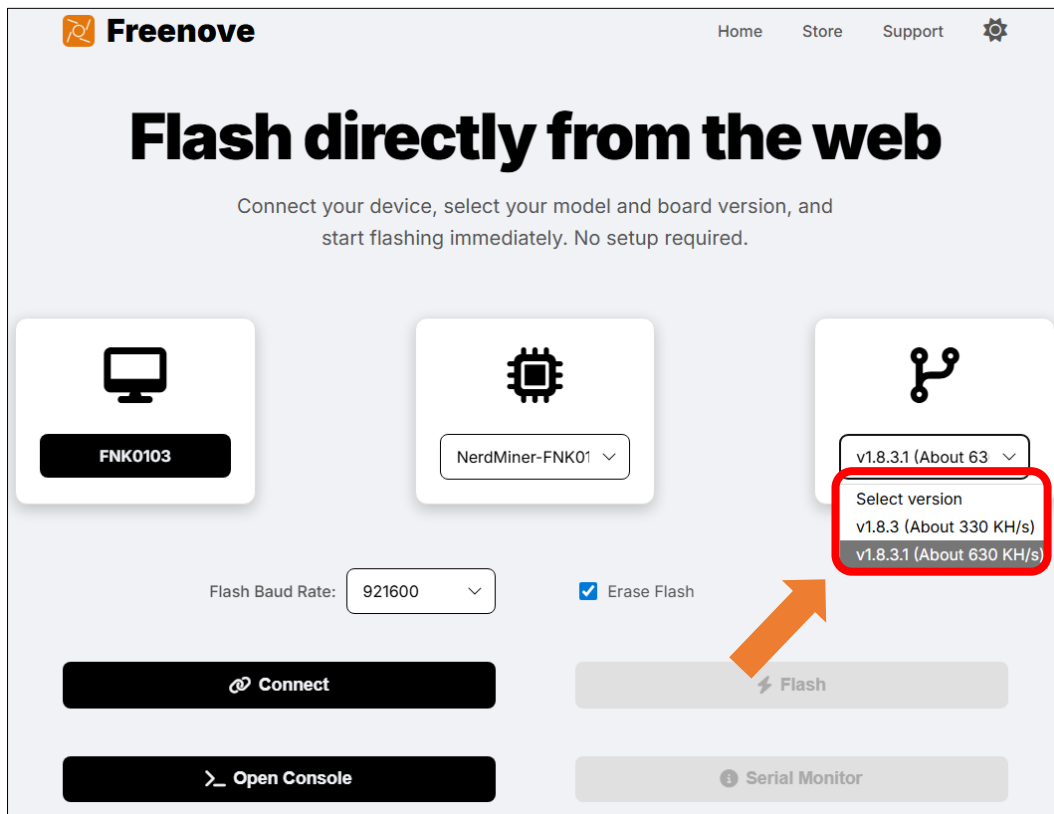


Note: As of the time of this document's creation, the Freenove Miner is available in two versions: the stable version (approximately 330 KH/s) and the high-performance version (approximately 630 KH/s). You can select the version that best fits your needs. The high-performance version is an enhanced iteration by Freenove built upon the original NerdMiner V2, delivering improved capability while fully preserving its native interface and operational logic, ensuring a consistent and smooth user experience.

Click "**Connect**", select the correct serial port from the pop-up window in the upper left corner of the webpage, and then click "**Connect**" within that window.


Note:

1. The port number (e.g., COMx) is dynamically assigned by your system. The specific value (such as COM3, COM5, etc.) may differ from the example in the diagram. Please select the port that is actually displayed.
2. COM1 is typically not the port for the target device. Please select a different port to connect.

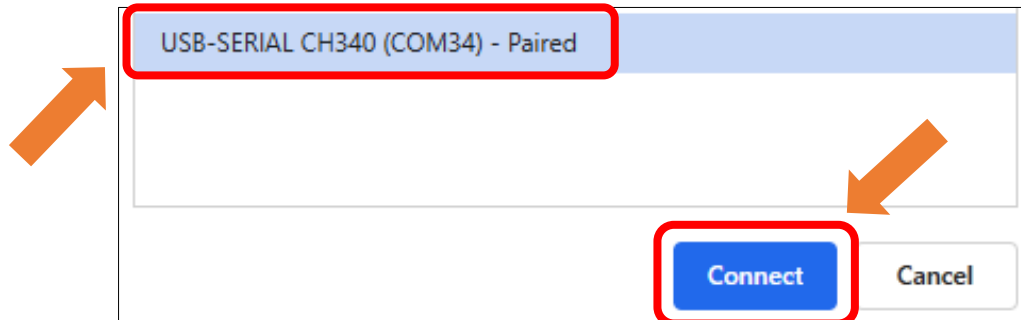

6. Click "**Flash**" to start the firmware burning process.

Note: If you only want to update the firmware without reconfiguring the network, you can leave the "Erase Flash" checkbox unchecked.

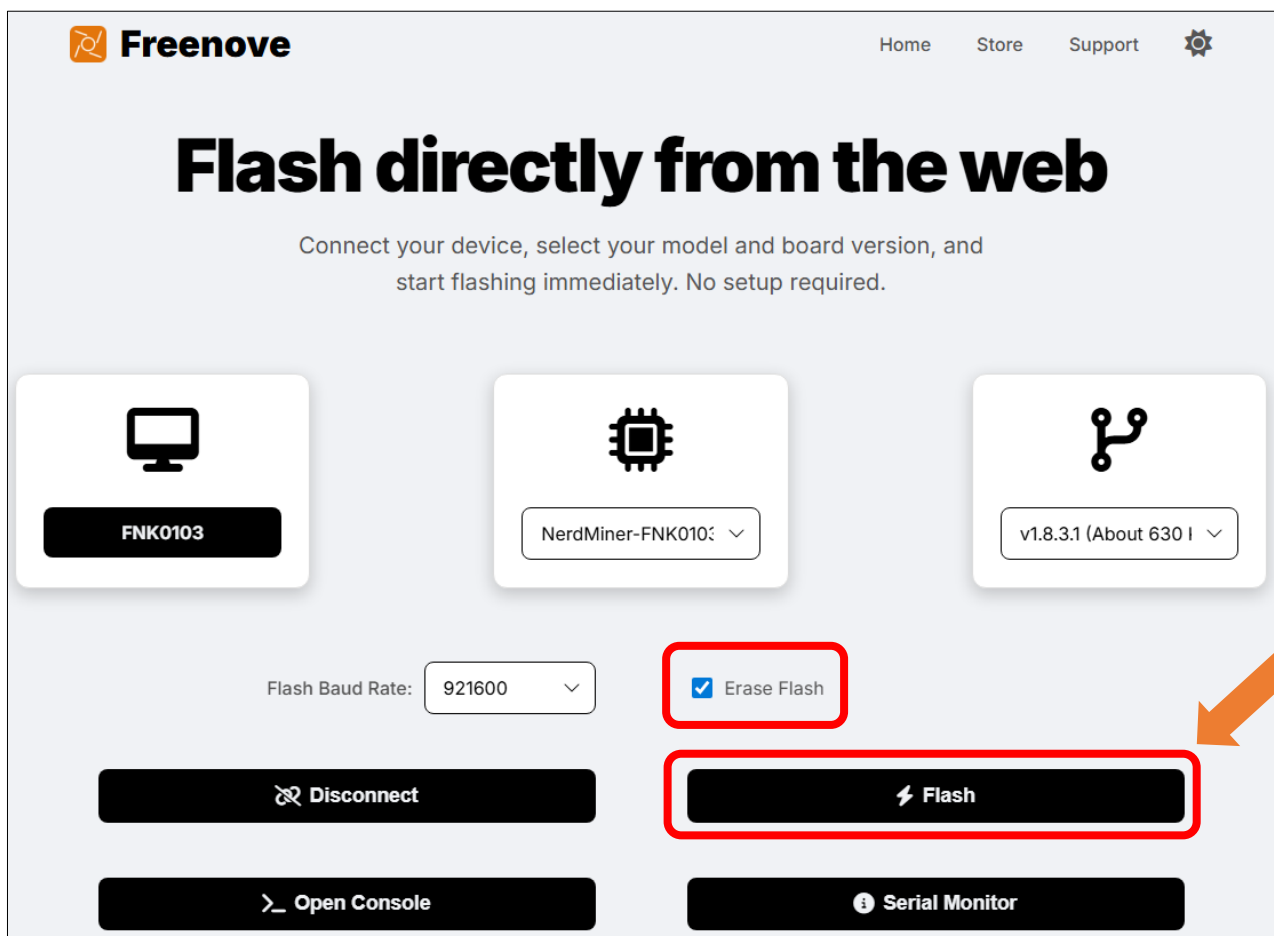


7. The device starts flashing the firmware.


Note:

1. Do not disconnect the device from your computer during the firmware flashing process!
2. If the download does not start after clicking "Flash", it may be due to network latency. Try refreshing the webpage and attempting the process again.
3. If the "Flash" button is disabled (grayed out), please check that all previous configuration steps have been completed.

If you have any concerns, please feel free to contact us via support@freenove.com

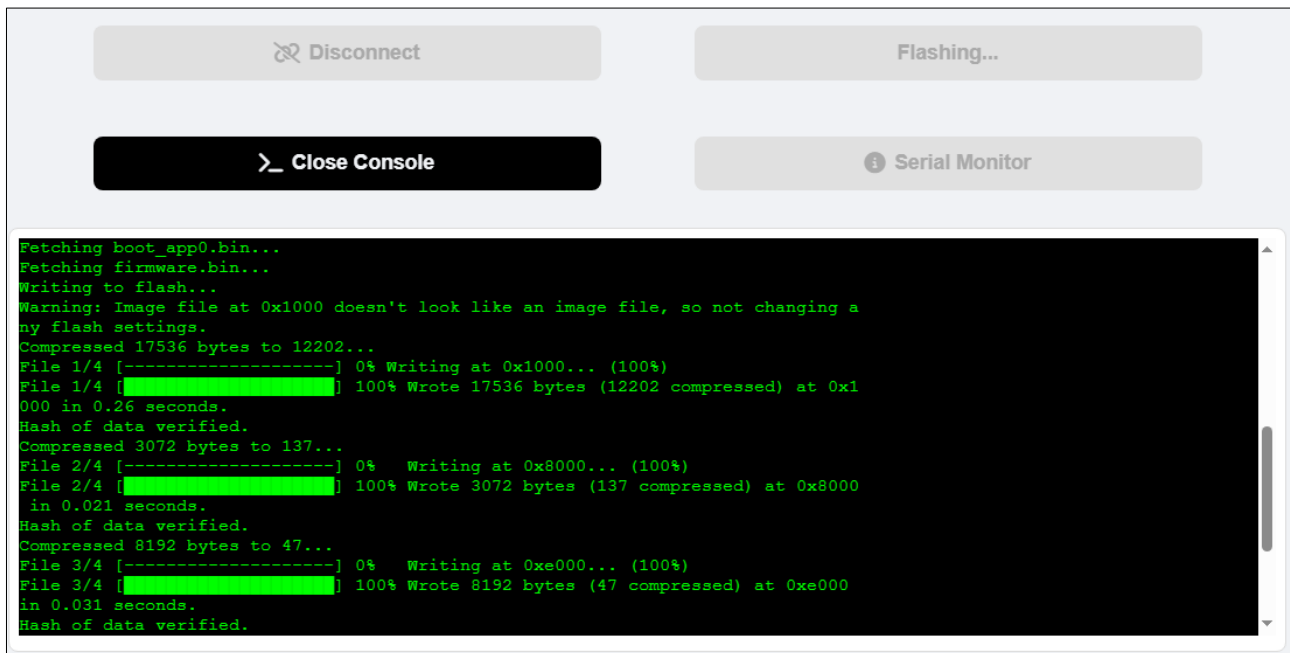


When the console displays the following text, the device starts to work.

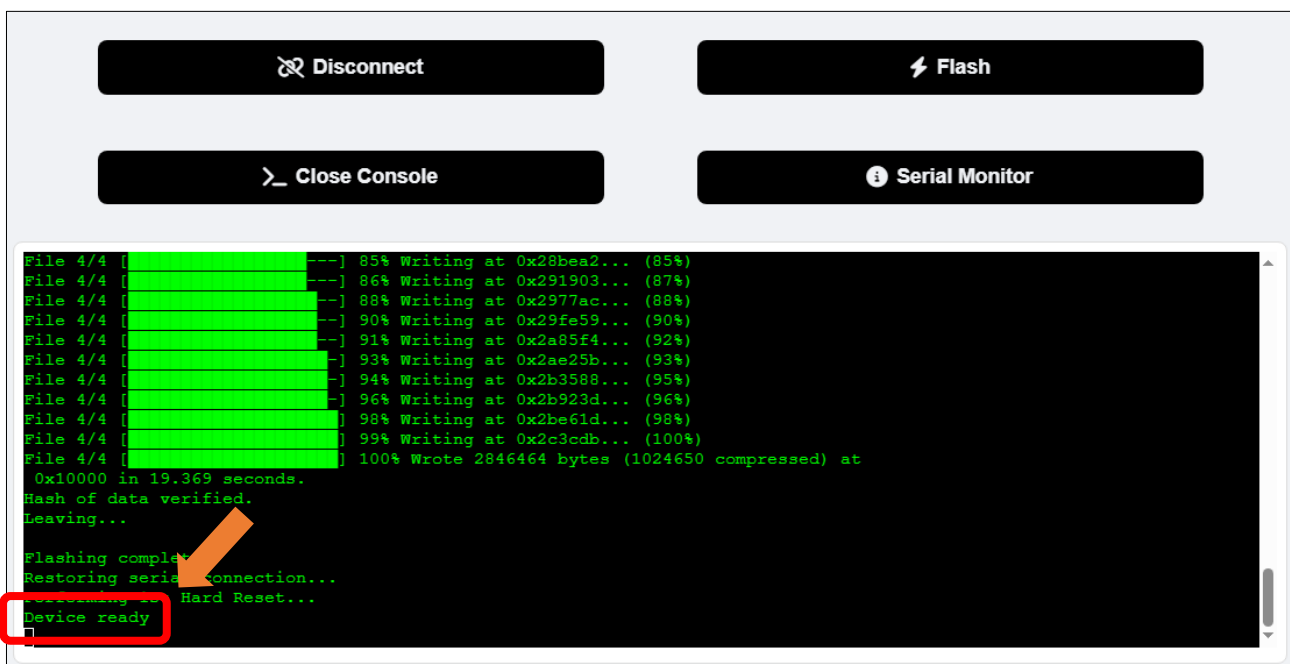


Note: During the first boot, the screen may display a solid color (e.g., white or other colors) for a few seconds. Please wait patiently, as this is normal and does not affect functionality.



8. (Optional) Click "Serial Monitor" to open the serial monitor.

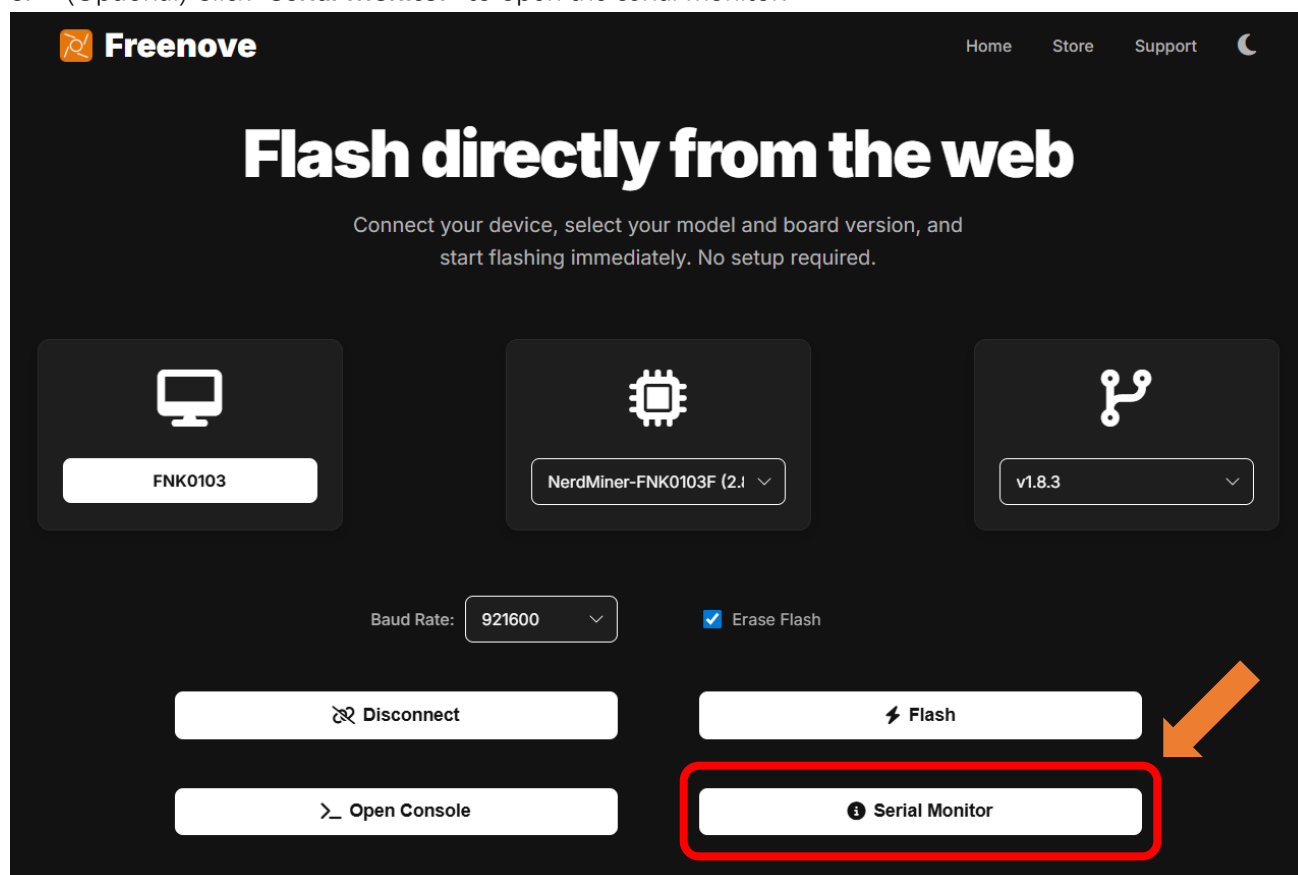


Set the baudrate to 115200, the serial monitor will output debugging information in real-time.

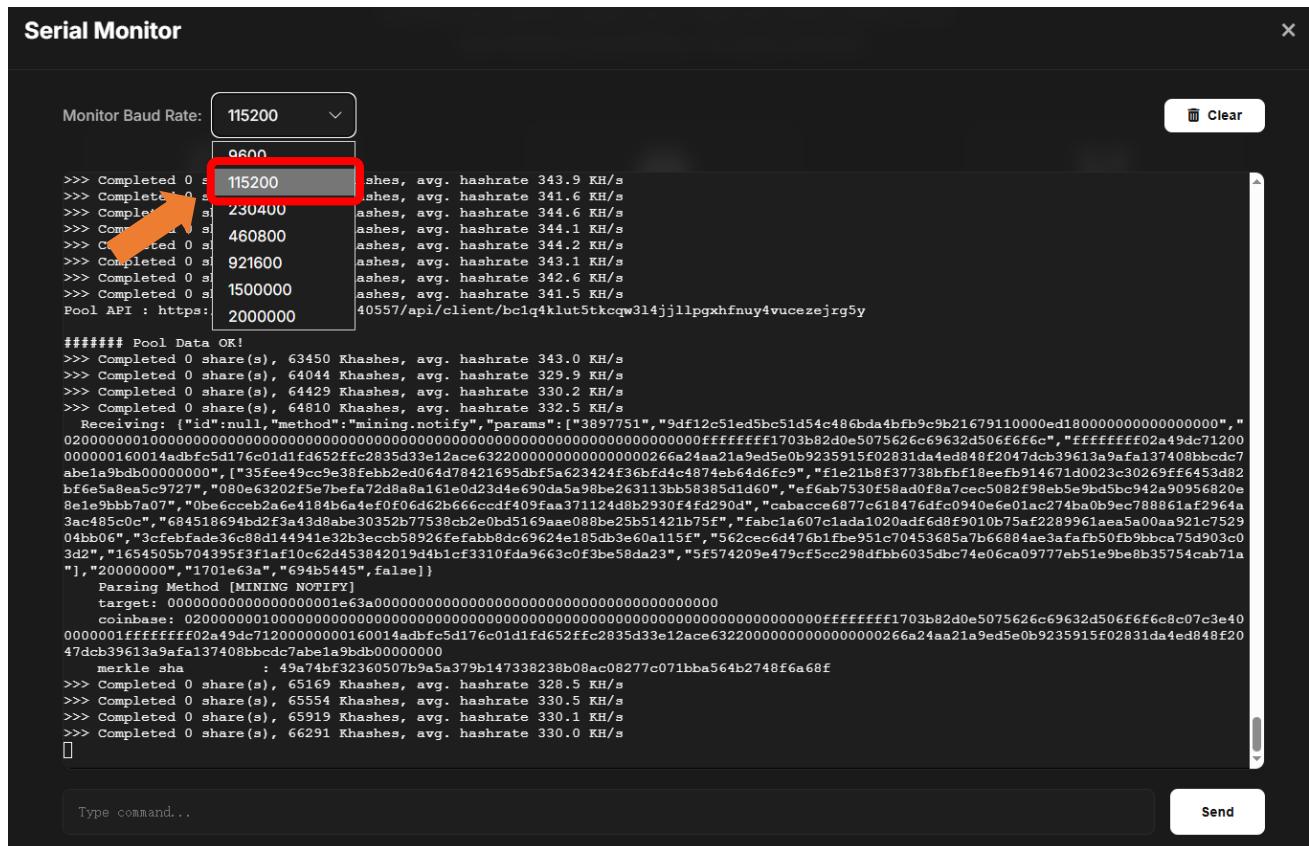

Wi-Fi Configuration


1. Connect the Freenove ESP32 Display to your computer. If the firmware has not been flashed yet, please navigate back to the [Firmware Flashing Section](#) to do it.

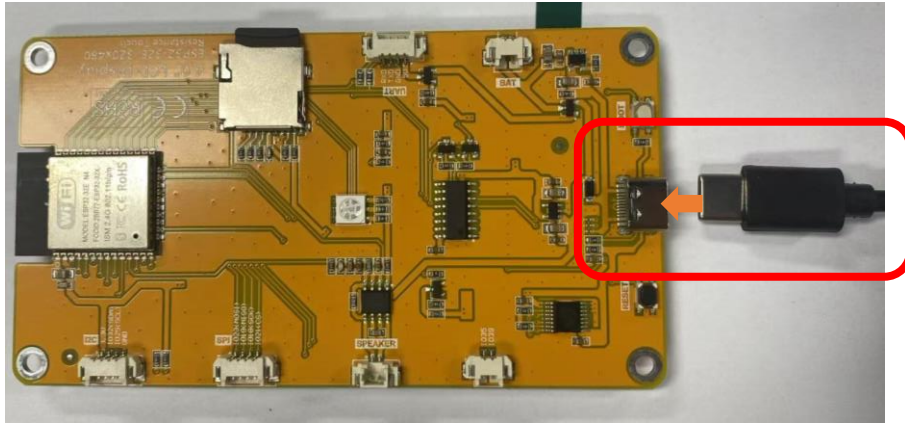


2. Turn ON WLAN and connect to **MinerAP**

WiFi SSID: **MinerAP**

PASSWORD: **MineYourCoins**

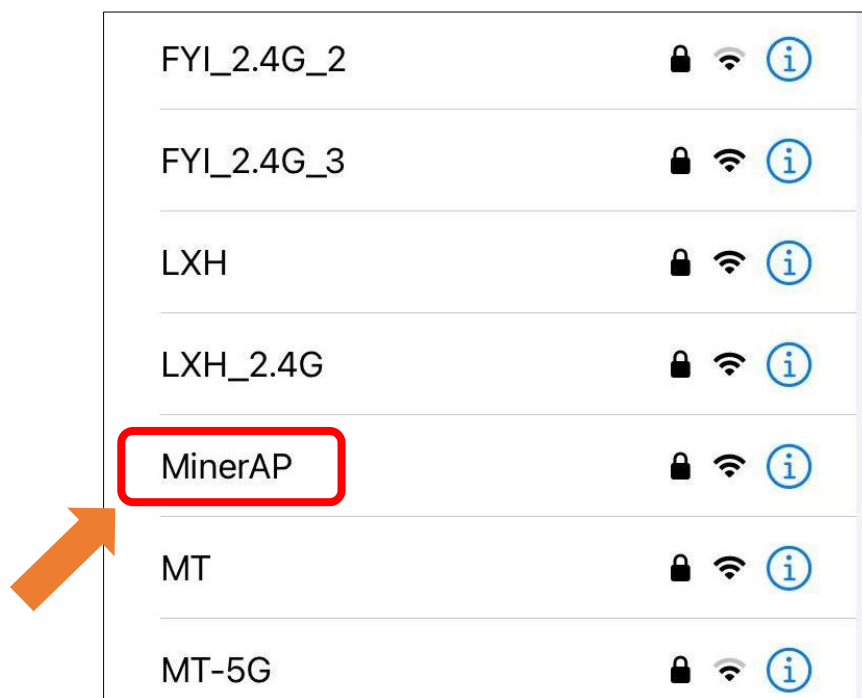


3. Click "Configure WiFi"

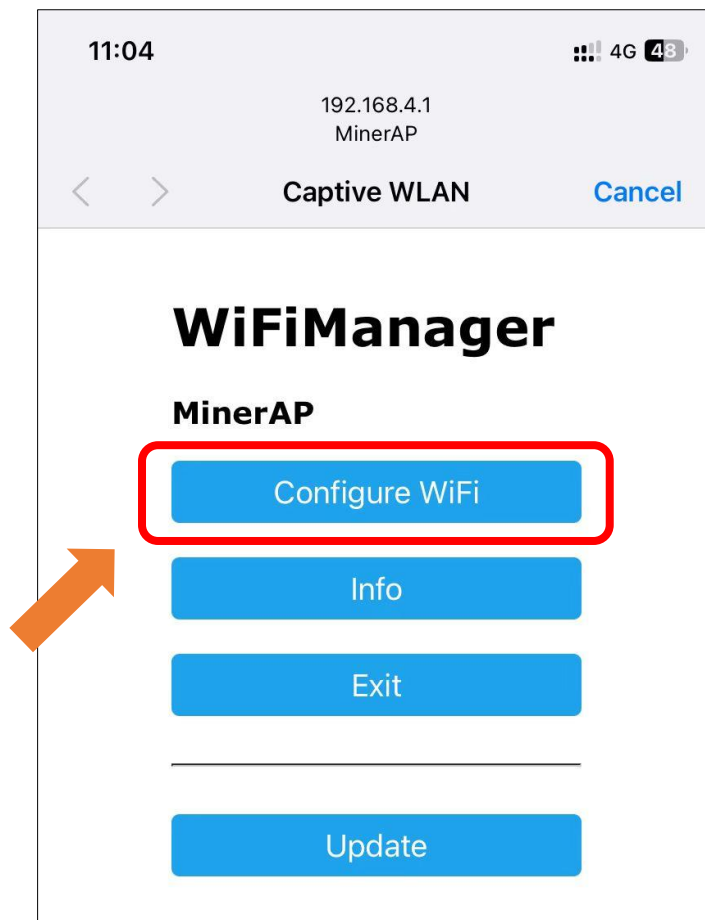

Note: If the page does not redirect automatically, please visit 192.168.4.1 in your browser.

4. Select your network. Please note that ESP32 **only** supports 2.4GHz network.

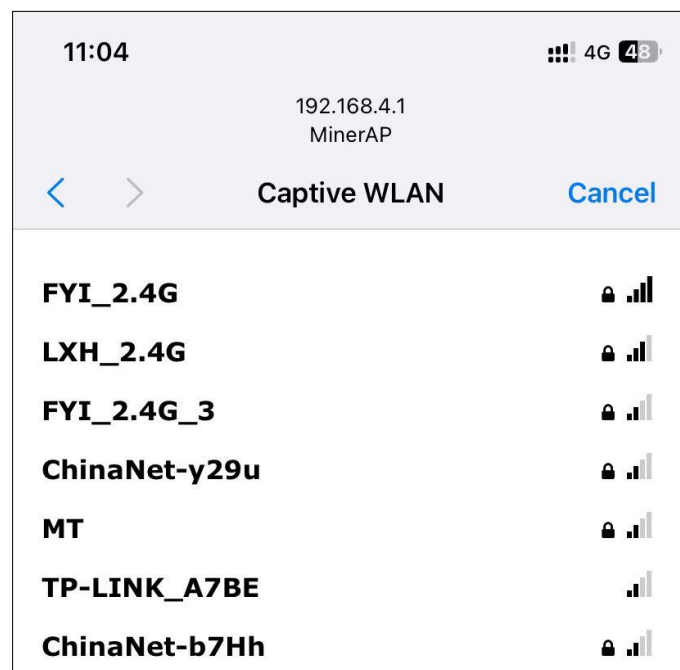

5. Configure device information.
6. If you do not have a BTC address yet, please refer to [Obtaining the BTC Receiving Address](#) Section to get it.
7. If the mining efficiency is unsatisfactory, you can switch to [other mining pools](#) as needed.

The screenshot shows the 'Captive WLAN' configuration screen of the NerdMiner_v2 device. The status bar at the top shows the time 11:05, signal strength, 4G network, and 47% battery. The IP address 192.168.4.1 and the device name MinerAP are displayed. The configuration fields are as follows:

- SSID:** FYI_2.4G
- Password:** A field with 12 dots, highlighted with a red box and an orange callout: 'Input the correct WiFi password'.
- Pool url:** public-pool.io, highlighted with a red box and an orange callout: 'Change mining pool if needed'.
- Pool port:** 21496
- Your BTC address:** bc1q4klut5tkcqw3l4jllpgxhfnuy4vucezejrg5y, highlighted with a red box and an orange callout: 'Input your BTC address'.
- Timezone from UTC (-12/+12):** 8, highlighted with a red box and an orange callout: 'Configure the correct timezone'.

Below these fields is a 'Features' section with a checked checkbox for 'Save mining statistics to flash memory.' and a large blue 'Save' button at the bottom.


Please note: The address pre-filled in the "Your BTC address" field is for quick testing only. Before starting actual mining, be sure to replace it with your personal [Bitcoin wallet address](#) to avoid loss of earnings.

Management Tool


Public Pool

When using the pool public-pool.io:21496, you can manage it via the web link <https://web.public-pool.io/#/>.

1. Open public-pool

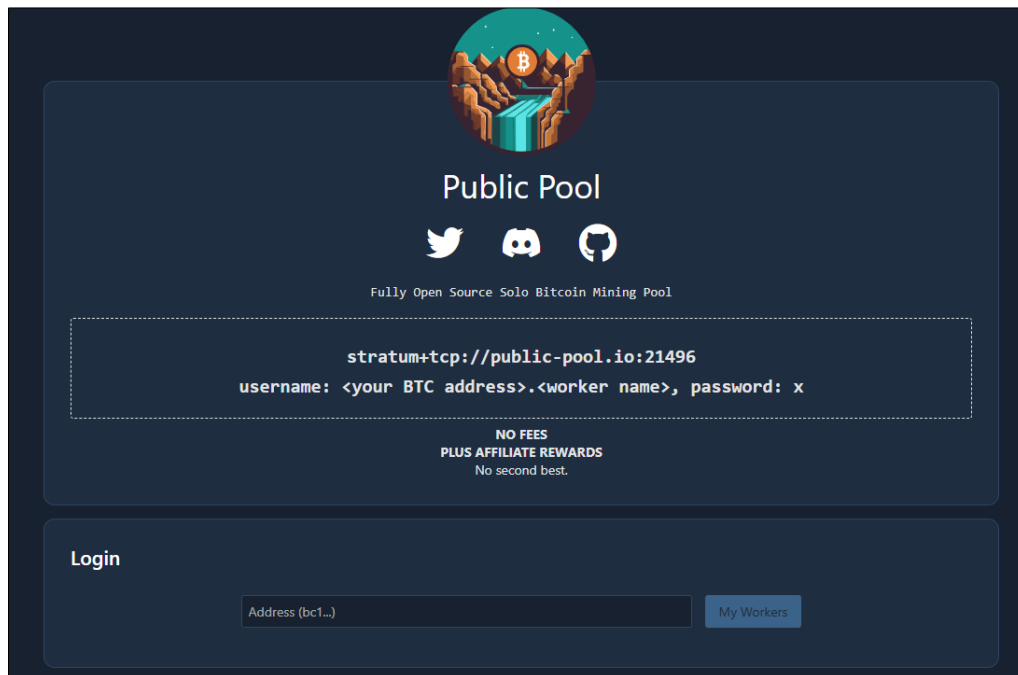

2. Enter your BTC receiving address, and click "My Workers".

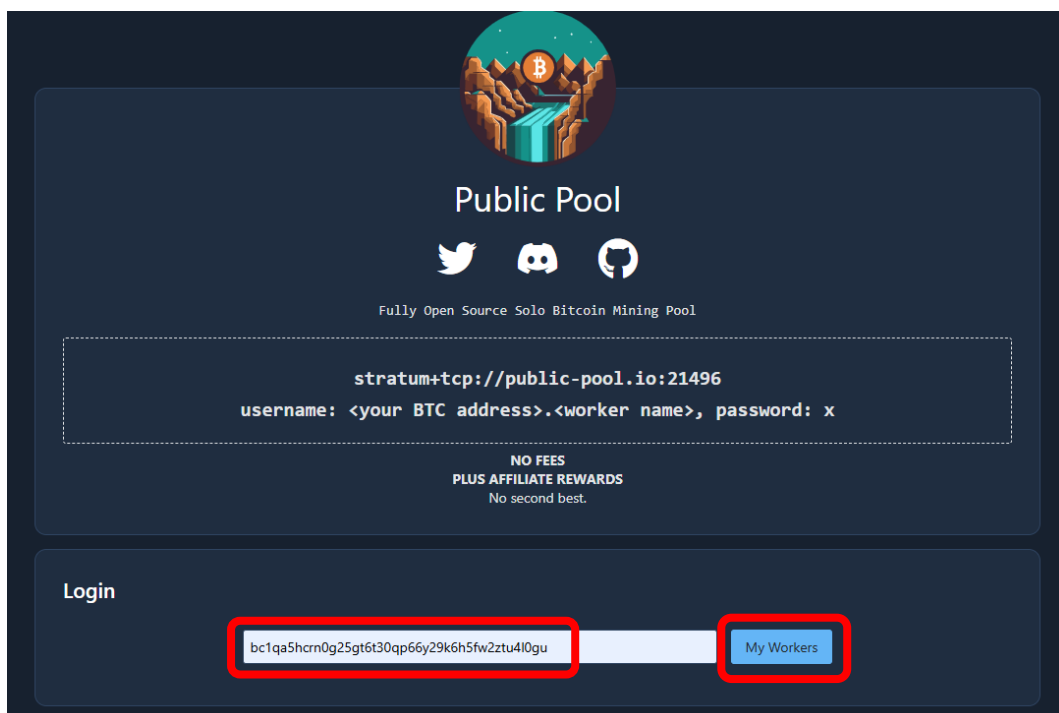

3. You can view the current working status of the worker.



Please note: This webpage only detects and manages miners currently working in the Public Pool that use your BTC address as the login or payout address. Once the pool is changed, this webpage will no longer be accessible for management.

NMMiner

This project utilizes Freenove ESP32 Display and NMMiner to implement Bitcoin mining. It requires some programming background and a basic understanding of digital currencies.

Project Introduction

NMMiner (<https://github.com/NMminer1024/NMMiner>) is an excellent BTC mining firmware specifically designed for ESP32 development boards. It breaks away from the traditional mining requirements of massive electricity consumption and high hash rates by adopting a SOLO mining mode. In this mode, every computation has the chance to independently win the entire block reward. NMMiner supports all cryptocurrencies based on the SHA256d algorithm, such as **BTC, BCH, XEC, and DGB**. Freenove has successfully ported this project to run on the Freenove ESP32 Display.

This tutorial will guide you through the process of running the project on the Freenove ESP32 Display.

NMMiner offers two management tools:

1. **NMController Client**: Windows desktop application
2. **NMController Web**: A cross-platform web client designed with Python, compatible with both Windows and macOS systems.

Precautions

- **Cost**
 - NMMiner is currently a paid service. Each device requires a unique license for activation. Therefore, you will need to purchase a separate activation code for every development board you plan to use in order to complete the activation process.
- **Security Precautions**
 - Never disclose your wallet's private key or recovery phrase to anyone. The only information you need to provide is your public cryptocurrency receiving address.
- **Troubleshooting**
 - If you have followed the tutorial but are still unable to use the miner, please feel free to contact us for assistance. (support@freenove.com)

Compatibility Description

At the time of writing this guide, the Freenove ESP32 Display is available in five different models. Although they vary in terms of screen drivers, resolutions, and screen sizes, all of them can be set up using this tutorial to learn how to use NMMiner.

Miner Compatibility


Provide a tutorial to show how to install the following miner firmware.

Model	NerdMiner (Freenove version, free) (Pre-installed in the product)	NMMiner (2.99 USD per device) (Need to buy and install it yourself)
2.8 Inch ST7789 TN	 fully compatible	 fully compatible
2.8 Inch ILI9341 TN	 fully compatible	 fully compatible
3.2 Inch ST7789 IPS	 fully compatible	 fully compatible, light theme
3.5 Inch ST7796 TN	 fully compatible	 fully compatible
4.0 Inch ST7796 TN	 fully compatible	 fully compatible

How to Use

Firmware Flashing and Activating

1. Open the [NMMiner Flash ESPTool](#) interface, click to select the device.

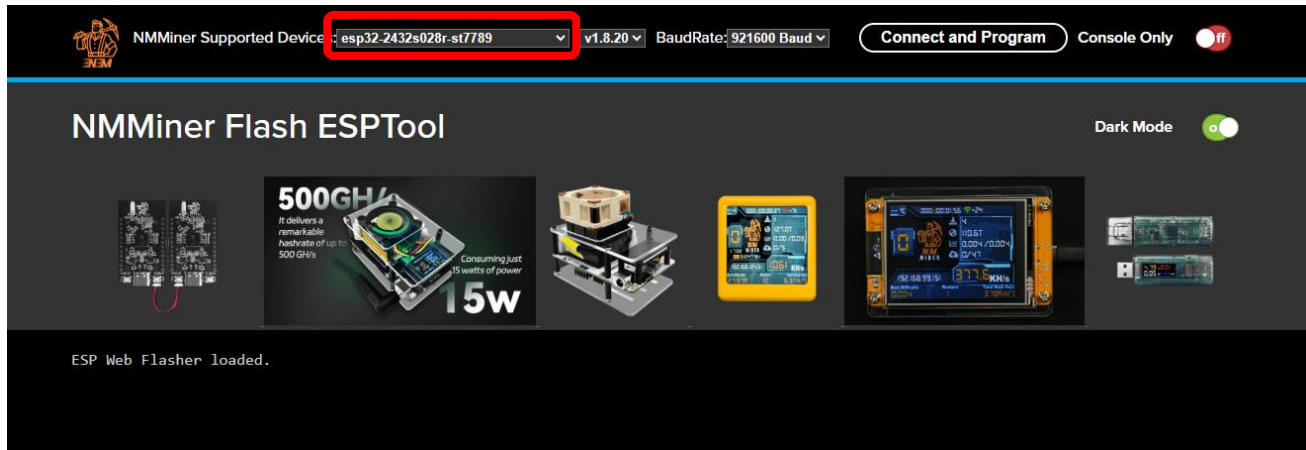


2. Select the device corresponding to your display according to the table below.

Models	Device Name
FNK0103F_2P8	esp32-2432s028r-ili9341
FNK0103B_2P8	esp32-2432s028r-st7789
FNK0103L_3P2	esp32-2432s024
FNK0103N_3P5	esp32-3248s035
FNK0103S_4P0	esp32-3248s035

If you have any concerns, please feel free to contact us via support@freenove.com


3. Connect the Freenove ESP32 Display to your computer.

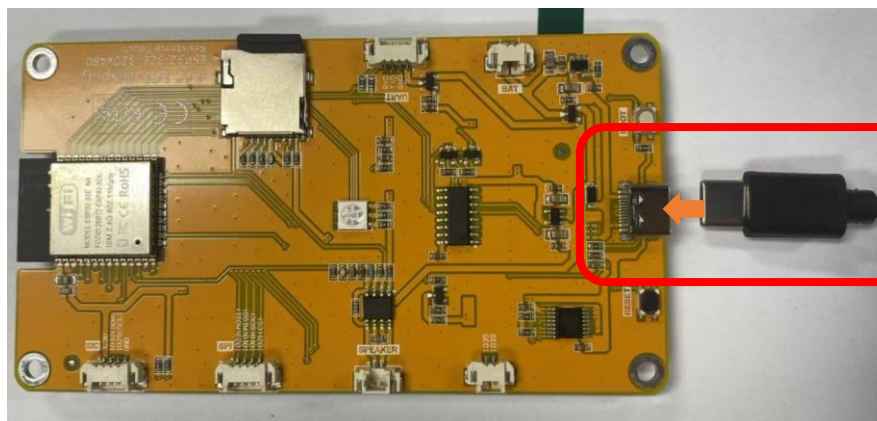


4. Click “**Connect and Program**”, select the correct port in the pop-up window, and click “**Connect**”.

Please note:


- The port may vary among computers
- Generally, COM1 is not the serial port of the ESP32.

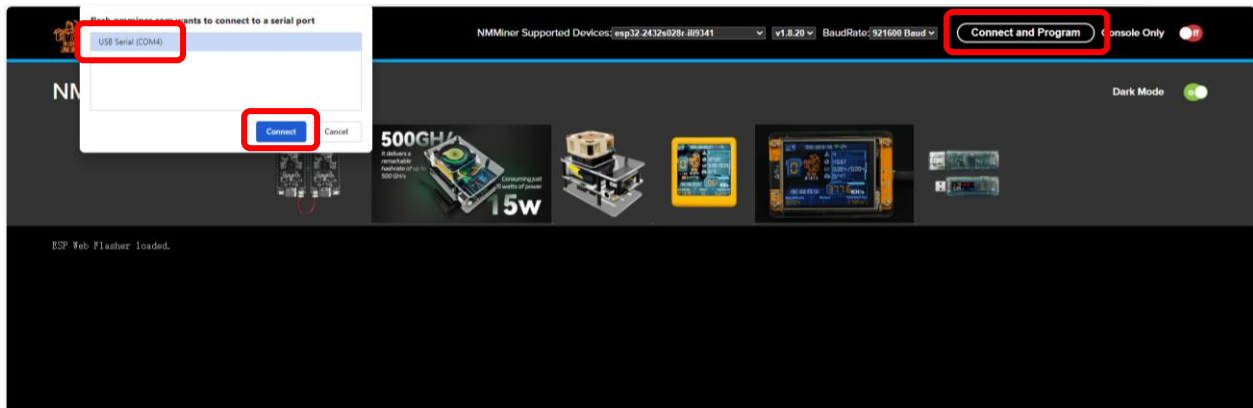


5. The firmware starts to flash into the Freenove ESP32 Display. **Do NOT remove power supply during this process.**

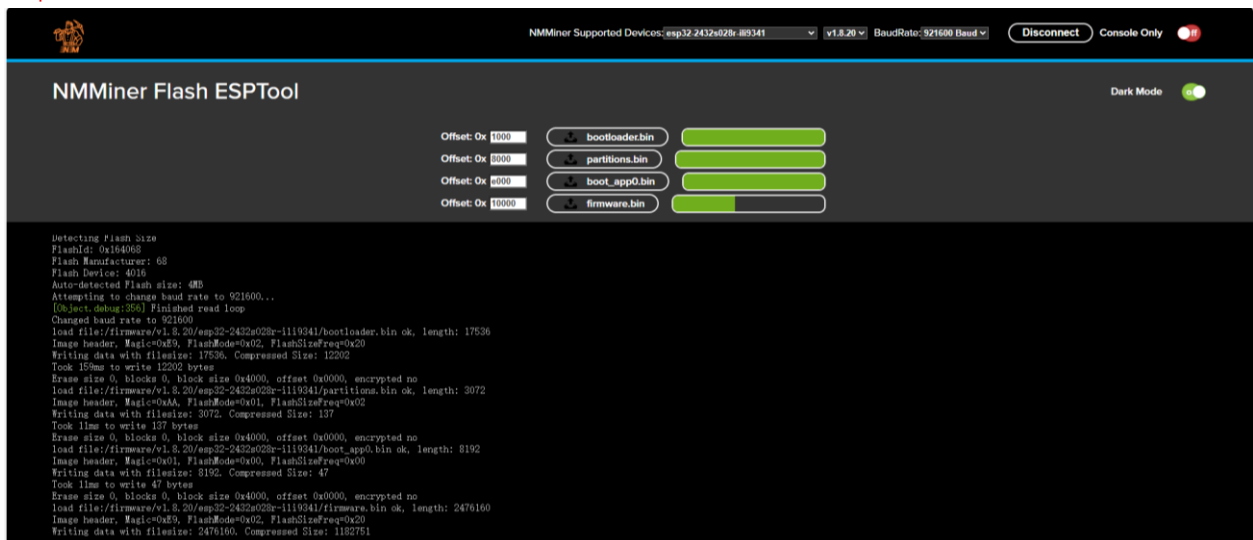

6. Click “**Get License Code**” after the firmware successfully flashes.

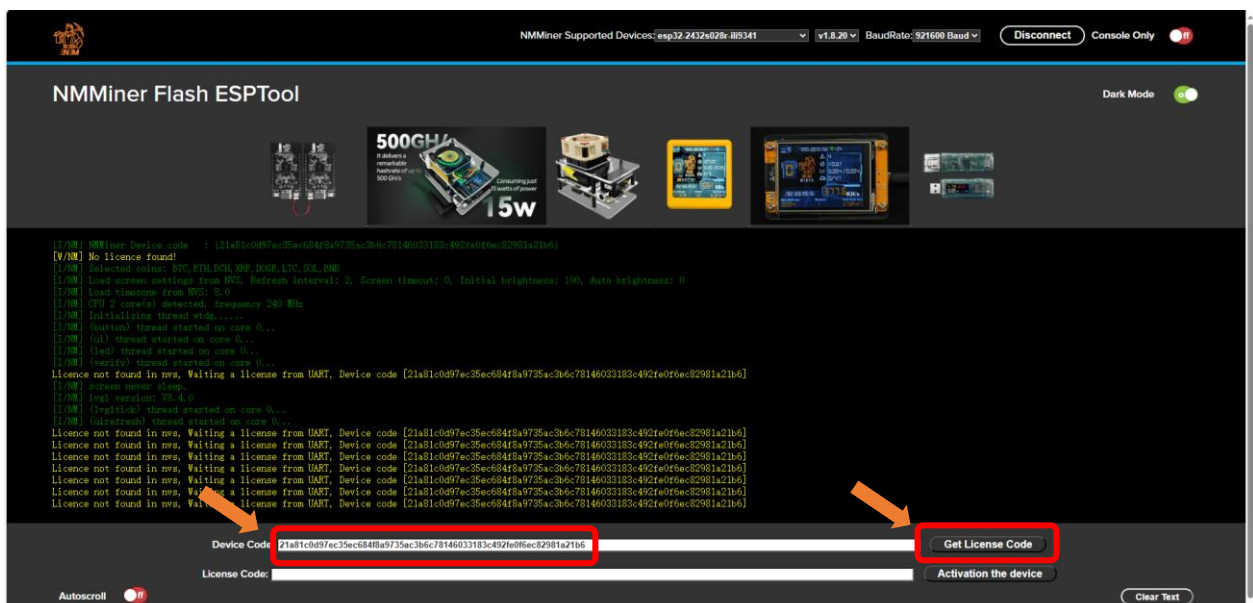


7. Click “PayPal Activate” to make payment.

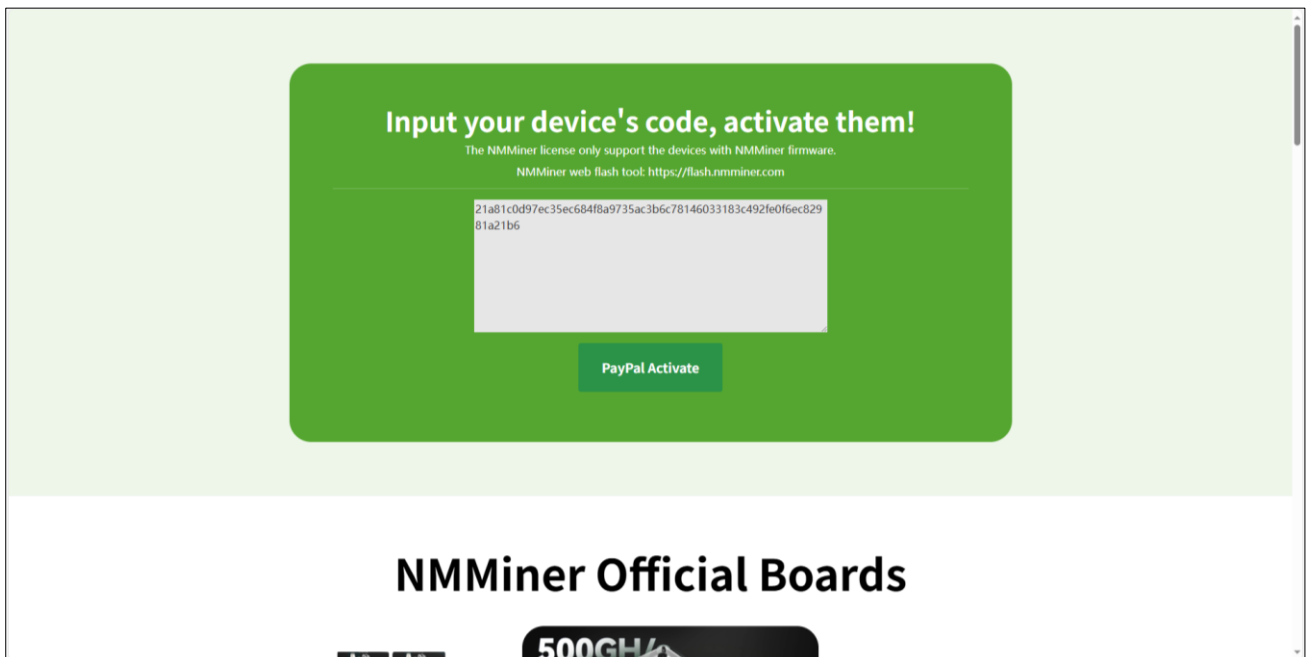


8. Please securely store the generated License (important). **If the License is lost, it will need to be repurchased.**

When generating the license, the website will automatically download a CSV file containing the License information. You may also save the current webpage URL, as it can be reopened later.

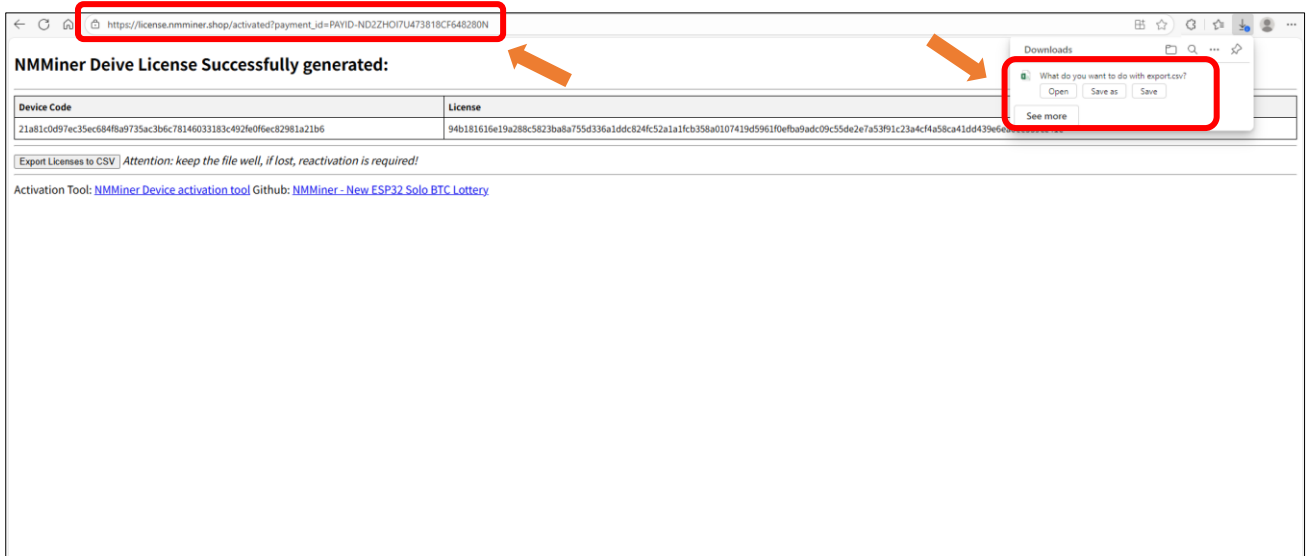


Please note: Each device requires a unique license code for activation. Therefore, you will need to purchase a separate activation code for every development board you plan to use in order to complete the activation process.

9. Enter the License Code and click “Activation the device”.

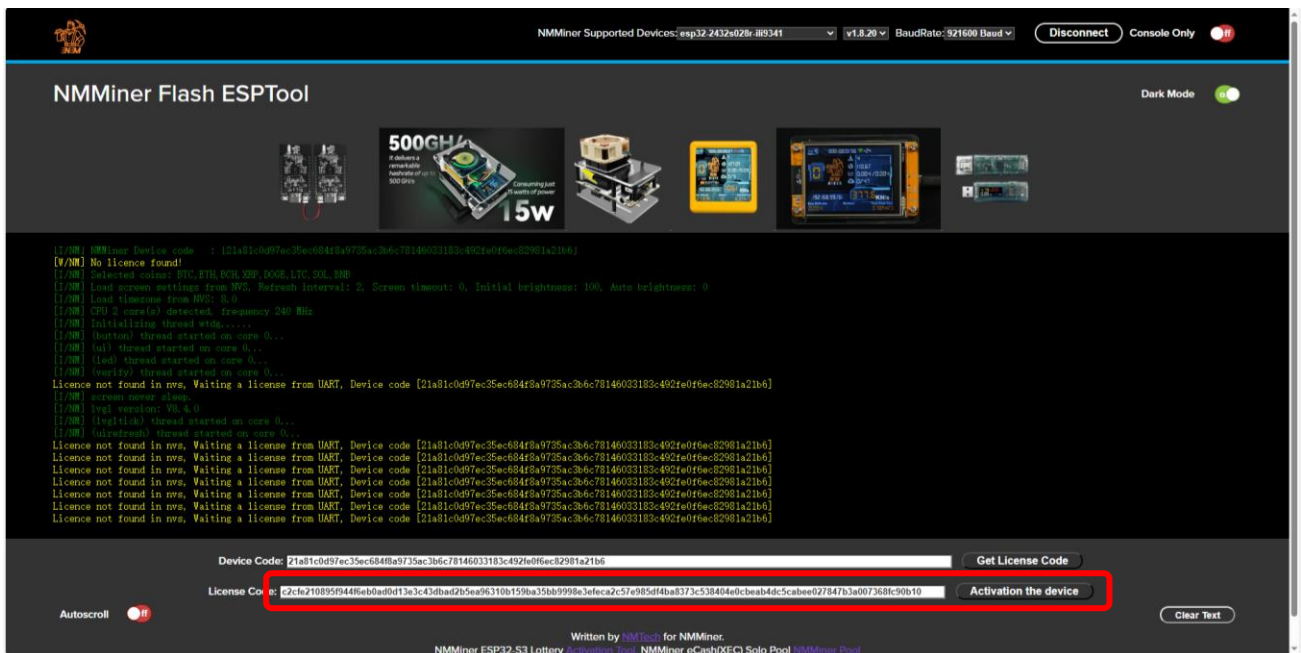


10. Now the device is successfully activated.

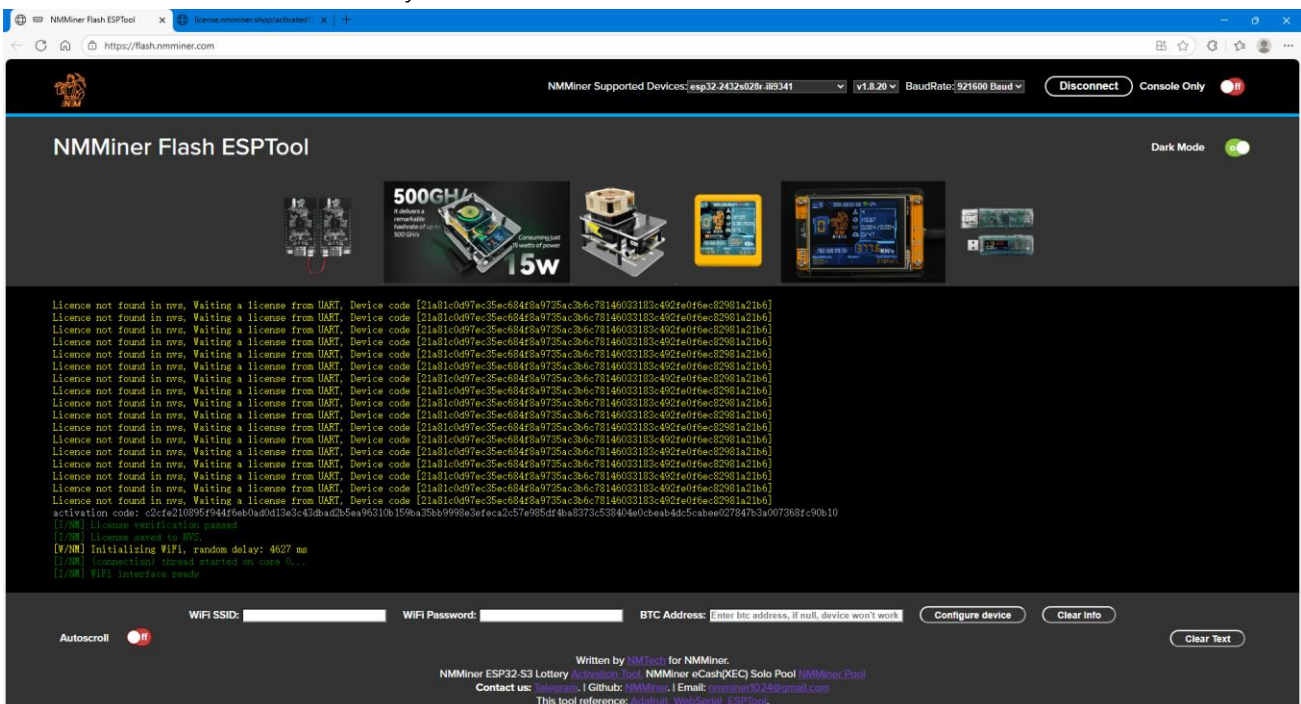


If you have any concerns, please feel free to contact us via support@freenove.com

Wi-Fi Configuration


1. Connect the Freenove ESP32 Display to your computer. If the firmware has not been flashed yet, please navigate back to the [previous section](#) to do it.

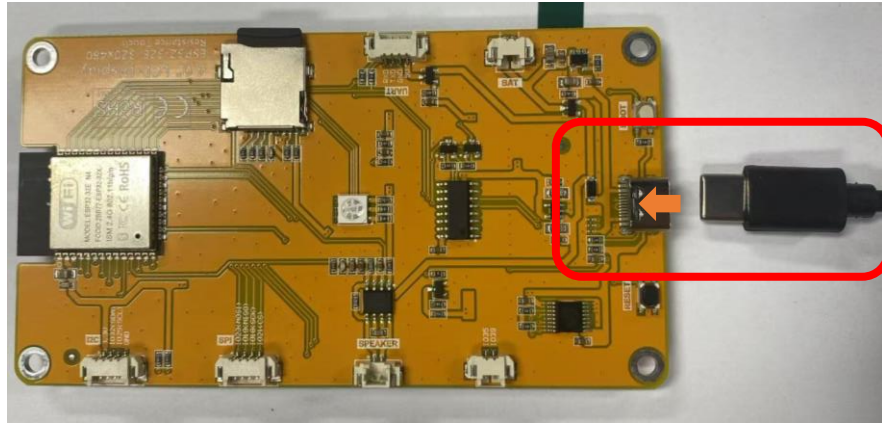

2. Turn ON WLAN, locate and click “nmap-2.4g”.

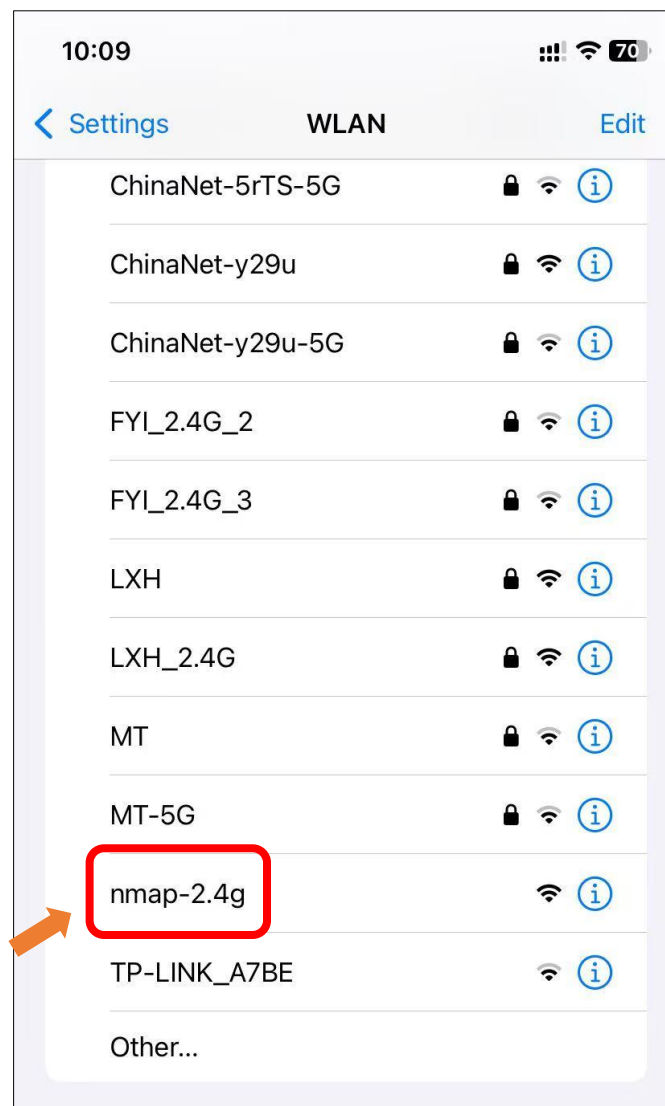

3. Wait for it to pop up the following interface, click “Configure WiFi”.

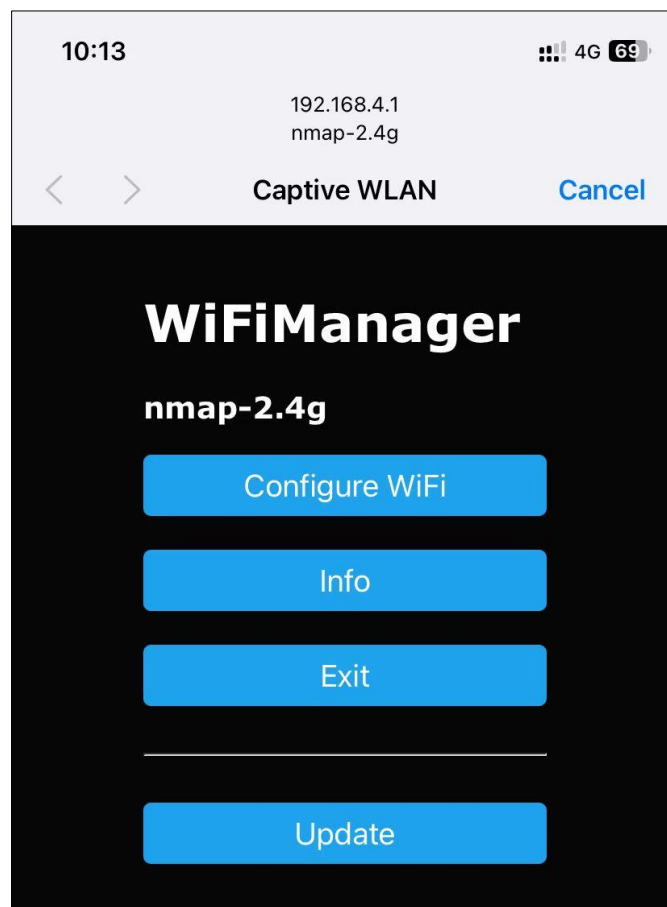


Note: If the page does not redirect automatically, please visit 192.168.4.1 in your browser.

4. Select your network. Please note that ESP32 **only** supports 2.4GHz network.



5. Enter the correct WiFi password.

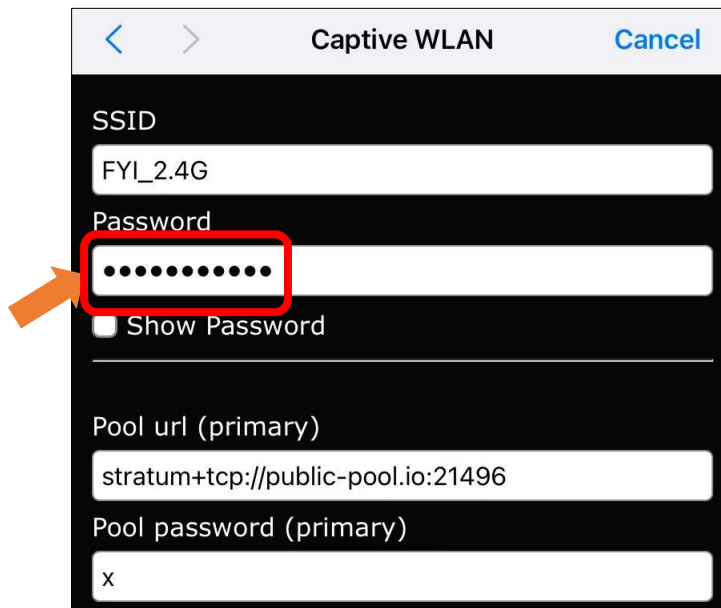

Captive WLAN Cancel


SSID
FYI_2.4G

Password
.....
☐ Show Password

Pool url (primary)
stratum+tcp://public-pool.io:21496

Pool password (primary)
x

6. Enter the mining pool information. If the mining efficiency is unsatisfactory, you can switch to [other mining pools](#) as needed.

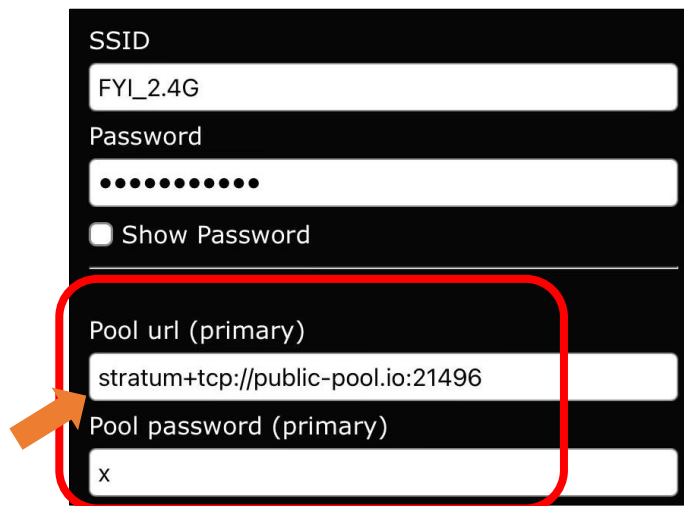


SSID
FYI_2.4G

Password
.....
☐ Show Password

Pool url (primary)
stratum+tcp://public-pool.io:21496

Pool password (primary)
x

7. Enter the correct BTC address. If you do not have a BTC address yet, please refer to [Obtaining the BTC Receiving Address](#) Section to get it.

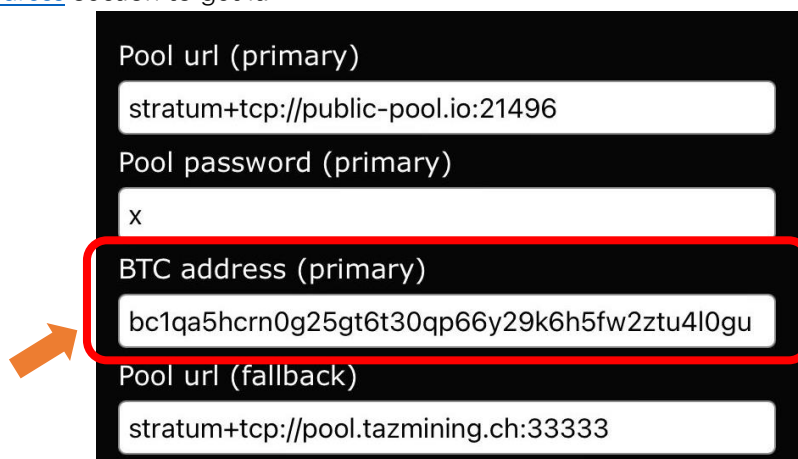


Pool url (primary)
stratum+tcp://public-pool.io:21496

Pool password (primary)
x

BTC address (primary)
bc1qa5hcrn0g25gt6t30qp66y29k6h5fw2ztu4l0gu

Pool url (fallback)
stratum+tcp://pool.tazmining.ch:33333

8. Enter the correct time zone.

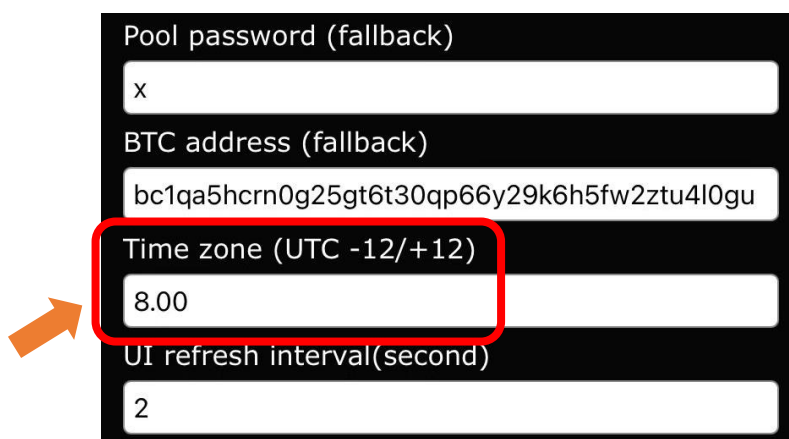

Pool password (fallback)

x

BTC address (fallback)

bc1qa5hcrn0g25gt6t30qp66y29k6h5fw2ztu4l0gu


Time zone (UTC -12/+12)

8.00

UI refresh interval(second)

2

9. Click "Save" to save the configuration.

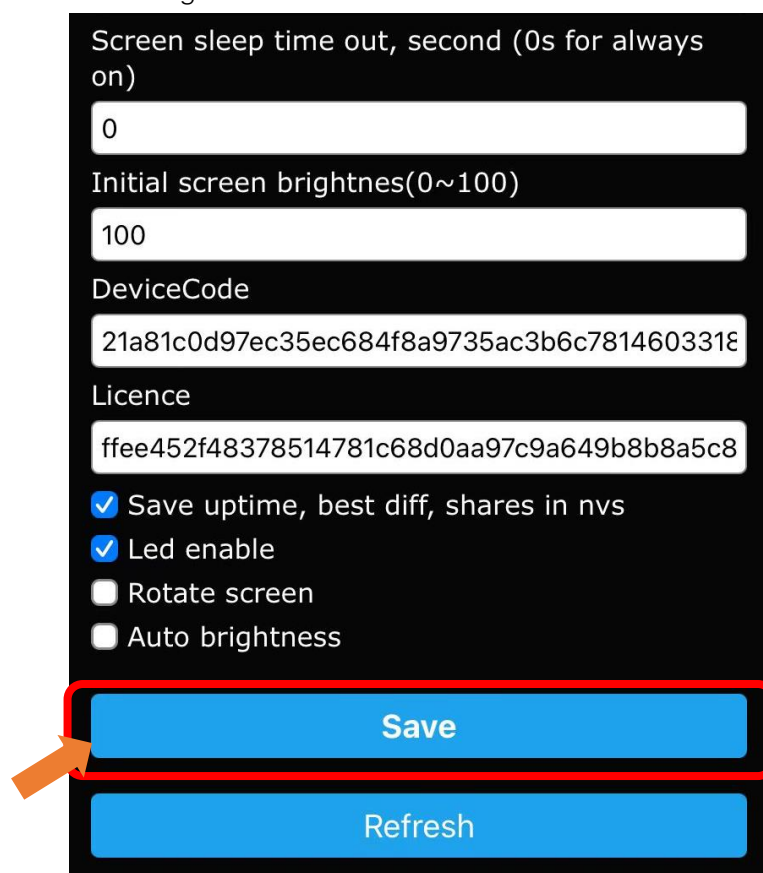

Screen sleep time out, second (0s for always on)

0

Initial screen brightness(0~100)

100

DeviceCode

21a81c0d97ec35ec684f8a9735ac3b6c7814603318

Licence

ffee452f48378514781c68d0aa97c9a649b8b8a5c8

☒ Save uptime, best diff, shares in nvs

☒ Led enable

☐ Rotate screen

☐ Auto brightness

Save

Refresh

10. Now the NMMiner project begins to work.




Management Tools

NMController Client


Note:

- 1) NMController Client only works on Windows.
- 2) The NMController client, which is downloaded from NMMiner official, may trigger false positives from antivirus programs, incorrectly flagging it as a virus. If you do not trust it, you can use alternative methods provided in this document to manage your device.


1. Click to open the [NMMiner GitHub website](https://github.com/NMminer1024/NMMiner), click **Code** -> **Download ZIP**

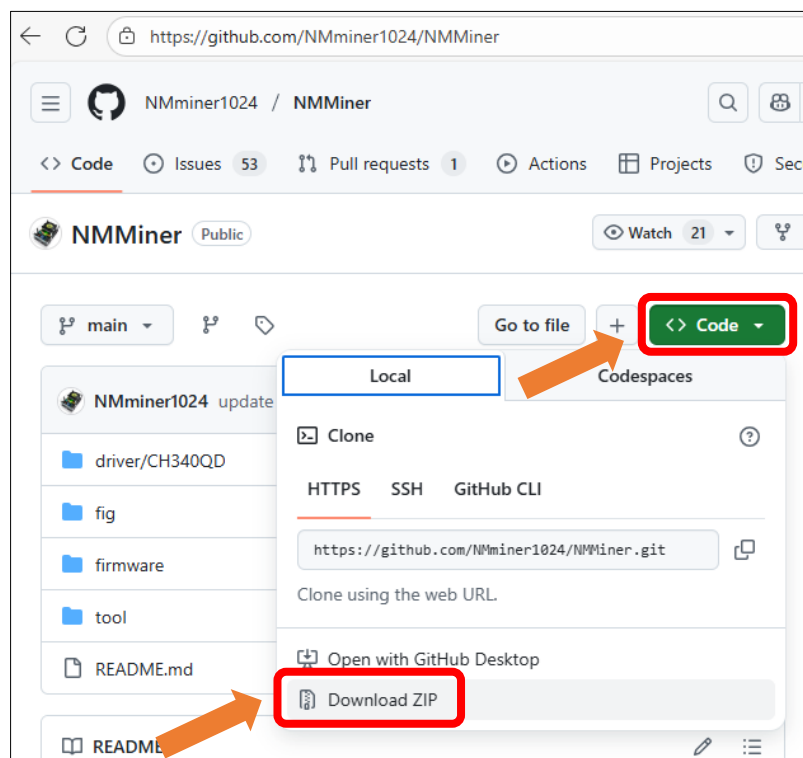


2. Extract the downloaded files, click **tool** -> **nmcontroller_client**, double click "NMControllerSetup_x64.msi" to open it.

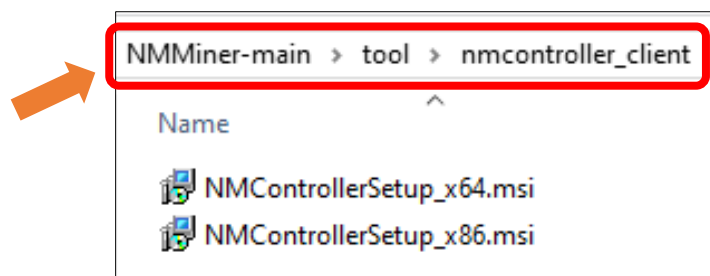


- Click **"Next"**.

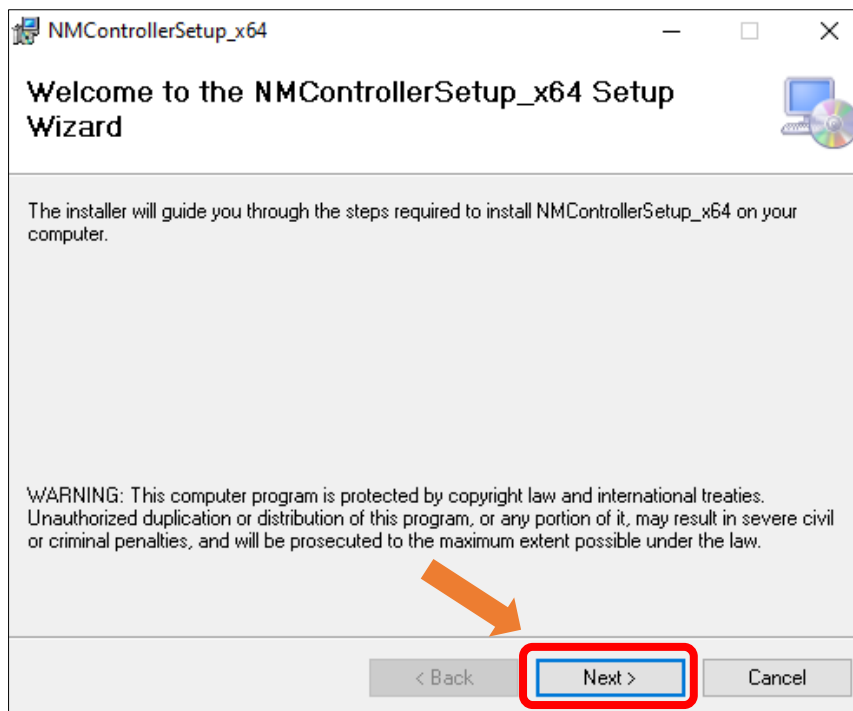

- Click **"Browse"** to select the installation location, check **"Just me"**, and click **"Next"**.

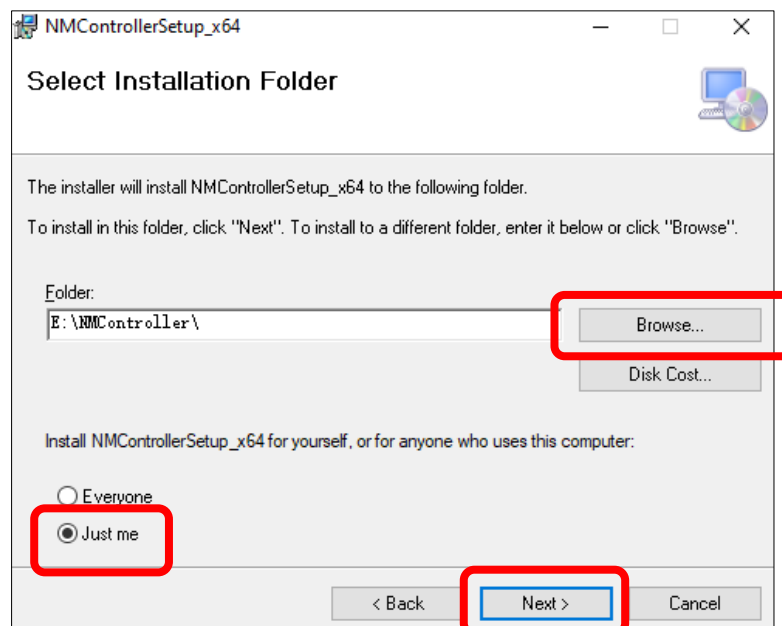

5. Close the window when the installation completes.

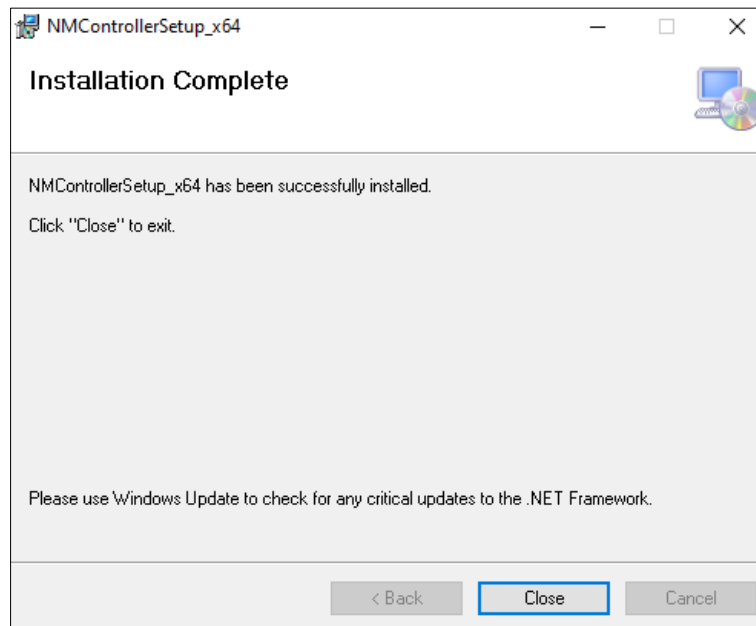

Open the installed NMController Client and you can see the current device data.


NMController v0.4.1												
IP	BoardType	HashRate	Share	Pool	NetDiff	LastDiff	BestDiff	Valid	Temp	RSSI(dBm)	FreeHeap	Version
192.168.1.26	cyd 2.8	999.55KH/s	0/162/100.0%	public-pool.io:21496	146.7T	0.010	23.99 23.99	0	0.0	-37	98.20	v1.8.20

If you have any concerns, please feel free to contact us via support@freenove.com


NMController Web

NMController Web: A cross-platform web client designed with Python, compatible with both Windows and macOS systems.

1. Click to open the [NMMiner GitHub website](https://github.com/NMminer1024/NMMiner), click **Code** -> **Download ZIP**

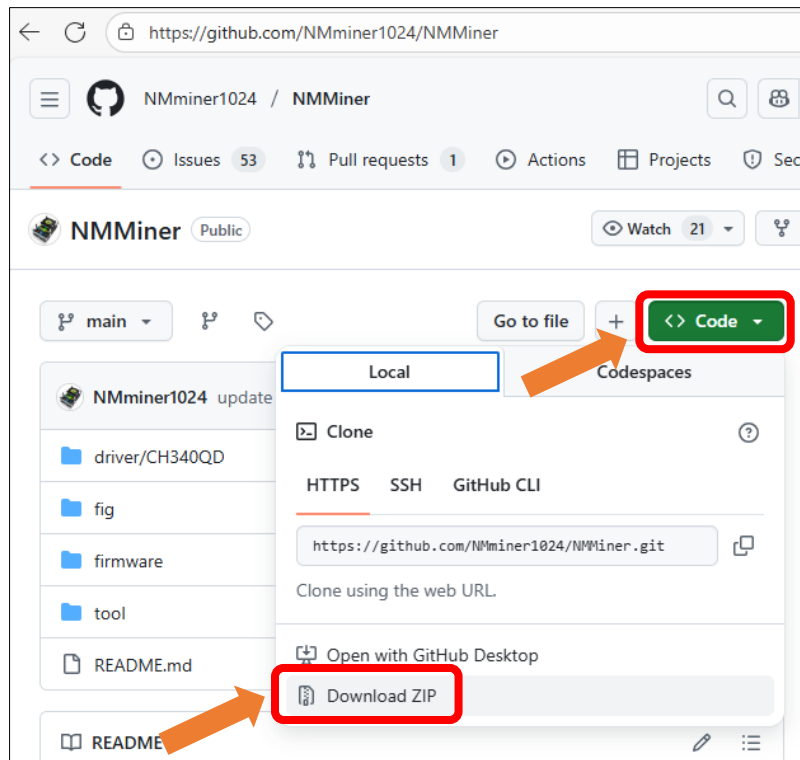

2. Extract the downloaded files, click **tool** -> **nmcontroller_web**, select the folder based on your computer's OS.

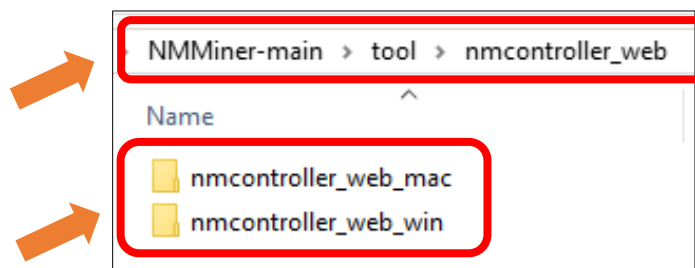


3. Double click to run the program.
 - (1) You can access the management interface by visiting <http://localhost:7877> on the current device.
 - (2) Devices in the same LAN can access the management interface by visiting <http://192.168.1.24:7877>

Notes:

- The following interface must NOT be closed when using NMController Web.
- The COM port may vary among devices. Please refer to the printed information for the correct port number.

```
2025-10-21 16:03:22,056 [INFO] NM Centralized Monitor Server running...
2025-10-21 16:03:22,056 [INFO] NMMiner firmware version v0.3.01 or later is required.
2025-10-21 16:03:22,948 [INFO] The latest version of NMMiner is v1.8.20.
2025-10-21 16:03:22,949 [INFO] NMMiner_Info Starting UDP listener...
2025-10-21 16:03:22,950 [INFO] NMMiner_Info Listening on 0.0.0.0:12345
2025-10-21 16:03:23,496 [INFO] [BtcInfoThread] BTC Price: $108069, Block Reward: 3.125 BTC, Reward Value: $337715.62
2025-10-21 16:03:24,952 [INFO] Access the web monitor at http://192.168.1.24:7877 or http://localhost:7877
2025-10-21 16:03:24,953 [INFO] Serving on http://0.0.0.0:7877
```

4. Access the corresponding address to open the management tool.

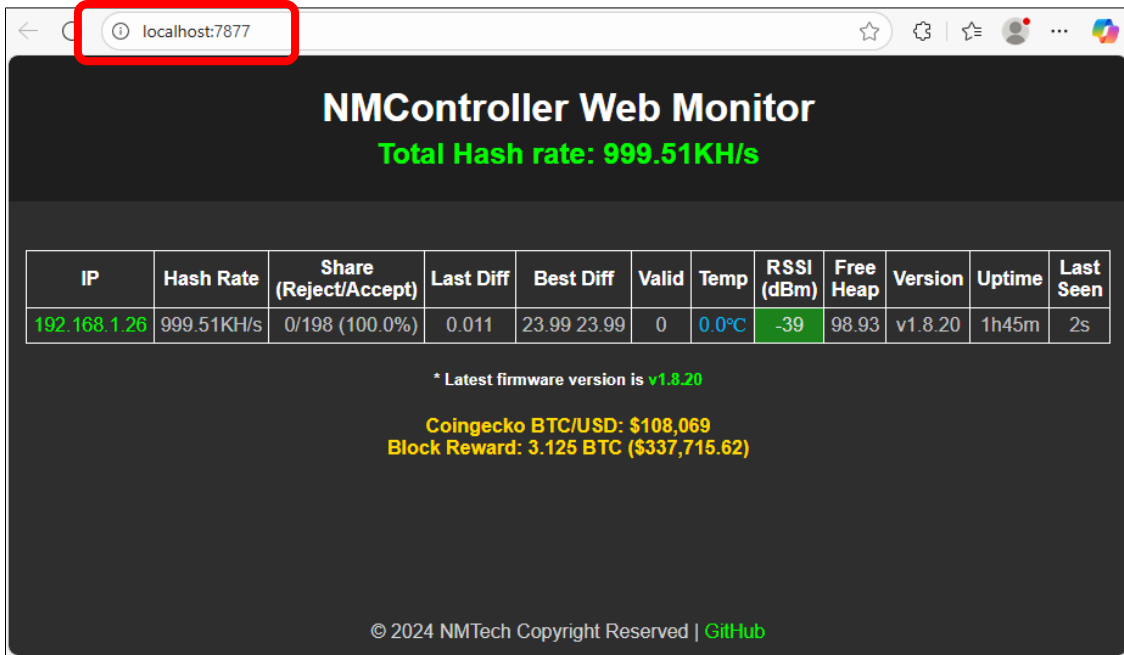

IP	Hash Rate	Share (Reject/Accept)	Last Diff	Best Diff	Valid	Temp	RSSI (dBm)	Free Heap	Version	Uptime	Last Seen
192.168.1.26	999.51KH/s	0/198 (100.0%)	0.011	23.99 23.99	0	0.0°C	-39	98.93	v1.8.20	1h45m	2s

* Latest firmware version is **v1.8.20**


Coingecko BTC/USD: \$108,069
Block Reward: 3.125 BTC (\$337,715.62)

© 2024 NMTech Copyright Reserved | [GitHub](#)

IP Address Management

In the NMMiner interface, there is an IP address displayed. Devices connected to the same local network can access this IP address to open the management interface.




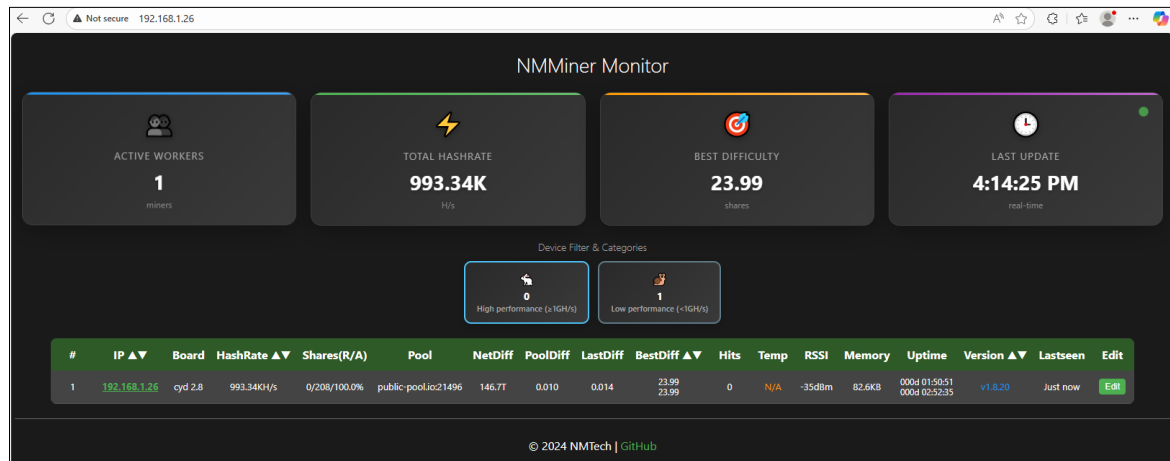


Public Pool

When the mining pool public-pool.io:21496 is selected, you can manage it via the web interface using the link (<https://web.public-pool.io/#/>).

1. Open public-pool

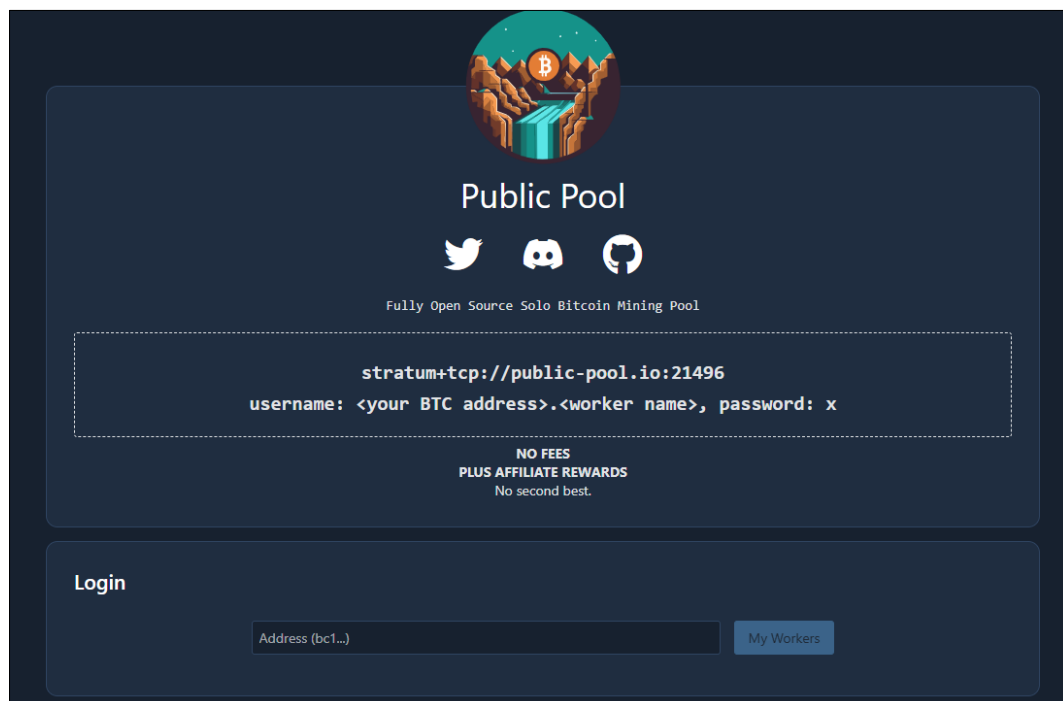

2. Enter BTC receiving address, and click "My Workers".

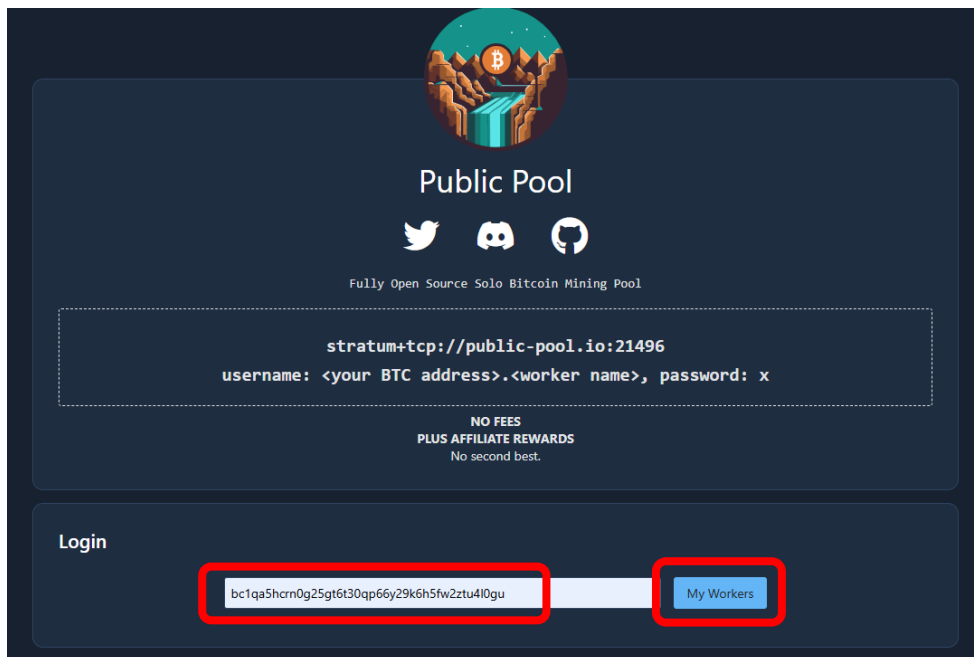

The image shows the 'Public Pool' login interface. At the top is a Bitcoin logo and the text 'Public Pool' with social media icons. Below is the pool's description: 'Fully Open Source Solo Bitcoin Mining Pool'. A code block contains the connection string 'stratum+tcp://public-pool.io:21496' and the login format 'username: <your BTC address>.<worker name>, password: x'. It also states 'NO FEES PLUS AFFILIATE REWARDS No second best.' The 'Login' section has a text input field containing a long alphanumeric string and a 'My Workers' button, both highlighted with red rectangles.

Public Pool

Fully Open Source Solo Bitcoin Mining Pool

```
stratum+tcp://public-pool.io:21496
username: <your BTC address>.<worker name>, password: x
```

NO FEES
PLUS AFFILIATE REWARDS
No second best.

Login

bc1qa5hcrn0g25gt6t30qp66y29k6h5fw2ztu4l0gu

My Workers

3. You can view the current working status of the worker.



Please note: This webpage only detects and manages miners currently working in the Public Pool that use your BTC address as the login or payout address. Once the pool is changed, this webpage will no longer be accessible for management.

