

Getting Started

It is recommended to first read **Tutorial.pdf** in the unzipped folder you created.

Get Support and Offer Input

Freenove provides free and responsive product and technical support, including but not limited to:

- Product quality issues
- Product use and build issues
- Questions regarding the technology employed in our products for learning and education
- Your input and opinions are always welcome
- We also encourage your ideas and suggestions for new products and product improvements

For any of the above, you may send us an email to:

support@freenove.com

Safety and Precautions

Please follow the following safety precautions when using or storing this product:

- Keep this product out of the reach of children under 6 years old.
- This product should be **used only when there is adult supervision present** as young children lack necessary judgment regarding safety and the consequences of product misuse.
- This product contains small parts and parts, which are sharp. This product contains electrically conductive parts.
Use caution with electrically conductive parts near or around power supplies, batteries and powered (live) circuits.
- When the product is turned ON, activated or tested, some parts will move or rotate. **To avoid injuries to hands and fingers keep them away from any moving parts!**
- It is possible that an improperly connected or shorted circuit may cause overheating. **Should this happen, immediately disconnect the power supply or remove the batteries and do not touch anything until it cools down!** When everything is safe and cool, review the product tutorial to identify the cause.
- Only operate the product in accordance with the instructions and guidelines of this tutorial, otherwise parts may be damaged or you could be injured.
- Store the product in a cool dry place and avoid exposing the product to direct sunlight.
- After use, always turn the power OFF and remove or unplug the batteries before storing.

About Freenove

Freenove provides open source electronic products and services worldwide.

Freenove is committed to assist customers in their education of robotics, programming and electronic circuits so that they may transform their creative ideas into prototypes and new and innovative products. To this end, our services include but are not limited to:

- Educational and Entertaining Project Kits for Robots, Smart Cars and Drones
- Educational Kits to Learn Robotic Software Systems for Arduino, Raspberry Pi and micro:bit
- Electronic Component Assortments, Electronic Modules and Specialized Tools
- **Product Development and Customization Services**

You can find more about Freenove and get our latest news and updates through our website:

<http://www.freenove.com>

Copyright

All the files, materials and instructional guides provided are released under [Creative Commons Attribution-NonCommercial-ShareAlike 3.0 Unported License](#). A copy of this license can be found in the folder containing the Tutorial and software files associated with this product.



This means you can use these resources in your own derived works, in part or completely but **NOT for the intent or purpose of commercial use**.

Freenove brand and logo are copyright of Freenove Creative Technology Co., Ltd. and cannot be used without written permission.



Raspberry Pi® is a trademark of Raspberry Pi Foundation (<https://www.raspberrypi.org/>).

Contents

Contents.....	1
Chapter 0 Processing	1
Download Code	1
Installing Processing Software	2
First Use	6
Installing Hardware I/O Library.....	8
Set Commands to run on the Terminal.....	11
Projects Board for Raspberry Pi	13
Chapter 1 LED	14
Project 1.1 Blink	14
Project 1.2 MouseLED.....	21
Chapter 2 FollowLight	26
Project 2.1 FollowLight	26
Chapter 3 PWM	31
Project 3.1 BreathingLED	31
Chapter 4 RGBLED	39
Project 4.1 Multicolored LED	39
Chapter 5 Buzzer	48
Project 5.1 ActiveBuzzer	48
Chapter 6 ADC Module.....	54
Project 6.1 Voltmeter.....	54
Chapter 7 ADC & LED.....	62
Project 7.1 SoftLight.....	62
Chapter 8 Thermistor	68
Project 8.1 Thermometer	68
Chapter 9 Motor & Driver.....	77
Project 9.1 Motor.....	77
Chapter 10 74HC595 & LED Bar Graph.....	87
Project 10.1 FollowLight	87
Chapter 11 74HC595 & Seven-segment display.....	95
Project 11.1 Seven -segment display.	95
Project 11.2 4-digit Seven-segment display.....	102
Chapter 12 74HC595 & LED Matrix.....	109
Project 12.1 LED Matrix	109
Chapter 13 I2C-LCD1602	119
Project 13.1 LCD.....	119
Chapter 14 Joystick	128
Project 14 Joystick.....	128
Chapter 15 Relay	135
Project 15.1 Relay & LED.....	135
Chapter 16 Stepper Motor.....	143

Project 16.1 Stepper Motor	143
Chapter 17 Matrix Keypad	153
Project 17.1 Calculator.....	153
Chapter 18 Infrared Motion Sensor.....	162
Project 18.1 Sense LED	162
App 1 Oscilloscope	170
App 1.1 Oscilloscope.....	170
App 2 Control Graphics.....	175
App 2.1 Ellipse.....	175
App 3 Pong Game	180
App 3.1 Pong Game	180
App 4 Snake Game	187
App 4.1 Snake Game.....	187
App 5 Tetris Game.....	194
App 5.1 Tetris Game.....	194
What's Next?	200

Chapter 0 Processing

Processing is a software used to write programs that can run on computers. Processing software is free and open source running on the Mac, Windows, and GNU/Linux platforms, which is the same as Arduino software. In fact, the development of Arduino software is based on Processing software, and they still have similar interface.

Programs written with Processing are also called sketches, and Java is the default language. Java language and C++ language have many similarities, so readers who have learned our basic tutorial are able to understand and write simple Processing sketches quickly.

This tutorial will introduce how to install and use processing software on Raspberry Pi through some electronic circuit projects. Chapters and sequence in this tutorial are basically the same as those in the C and python language tutorial. Our elaborate electronic circuits and interactive project with Processing are attached at the end, including virtual instruments, games (2D and 3D versions), etc.

Download Code

Run the following command to download the code to Raspberry Pi.

```
cd ~  
git clone --depth 1 https://github.com/Freenove/Freenove\_Projects\_Kit\_for\_Raspberry\_Pi.git
```

Run the command to rename the folder.

```
mv Freenove_Projects_Kit_for_Raspberry_Pi/ Freenove_Kit/
```

Installing Processing Software

Installing the installation package for Processing Software.

Make sure your RPi always has internet access during the download process. Please download the corresponding Processing software installation package according to your Raspberry Pi system bitness.

You can check the current system bitness with the following command:

```
getconf LONG_BIT
```

Method 1:

If you have a 32-bit system, enter the following command to install the package.

```
wget https://github.com/processing/processing4/releases/download/processing-1292-4.2/processing-4.2-linux-arm32.tgz
```


If you have a 64-bit one, enter the following command to install the package.

```
wget https://github.com/processing/processing4/releases/download/processing-1292-4.2/processing-4.2-linux-arm64.tgz
```


Method 2:

You can also download the installation package directly from the Processing official website:

<https://processing.org/>

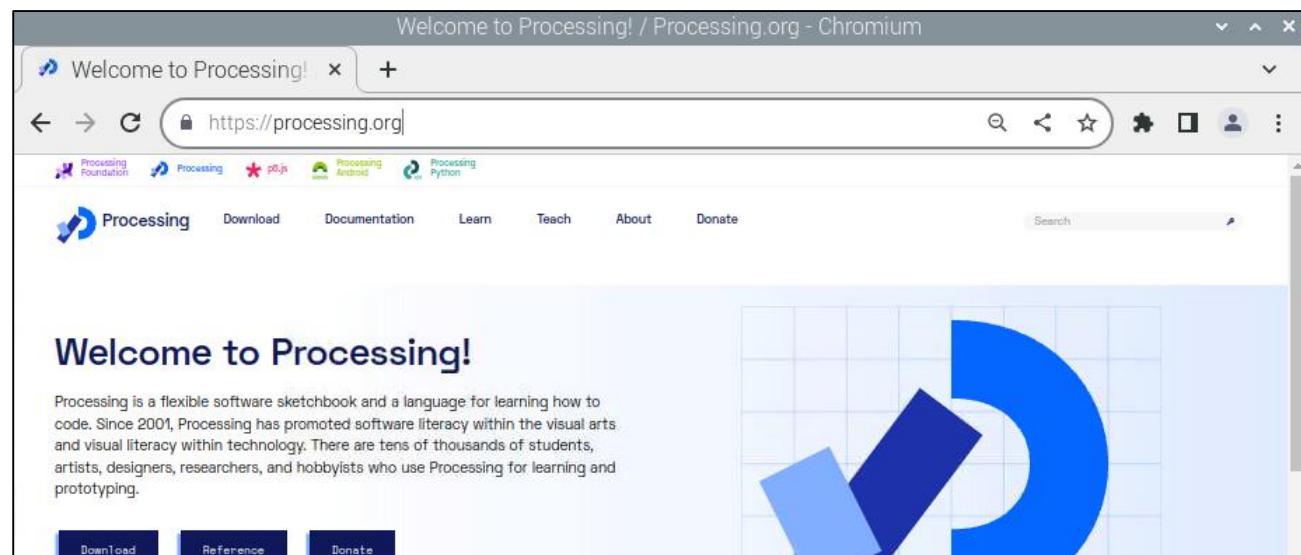


Click “Download” . Choose to download the software installation package corresponding to the current Raspberry Pi system bitness.

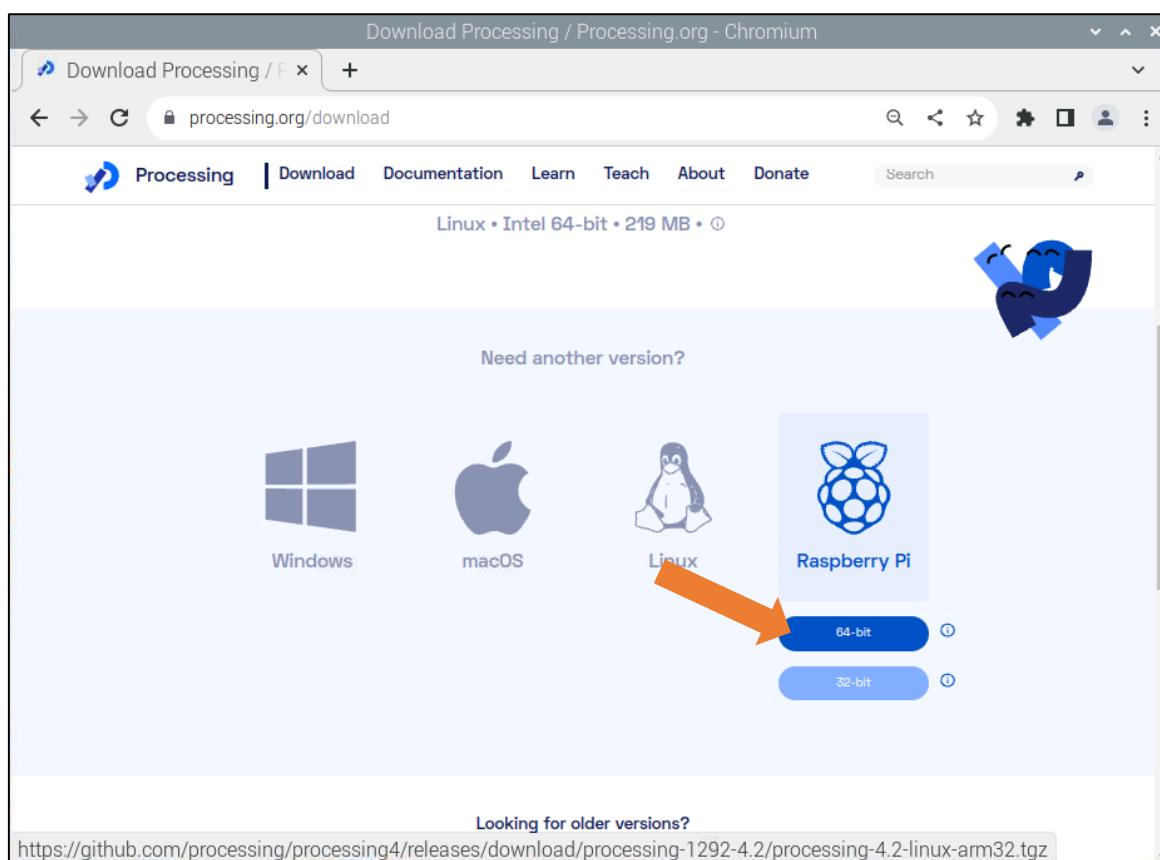

It is recommended to use the first method to download the software package.

Find the directory where the installation package is located and extract it to the current directory.

The default directory of the installation package using the first method is: /home/pi, and with the second method, it is: /home/pi/Downloads

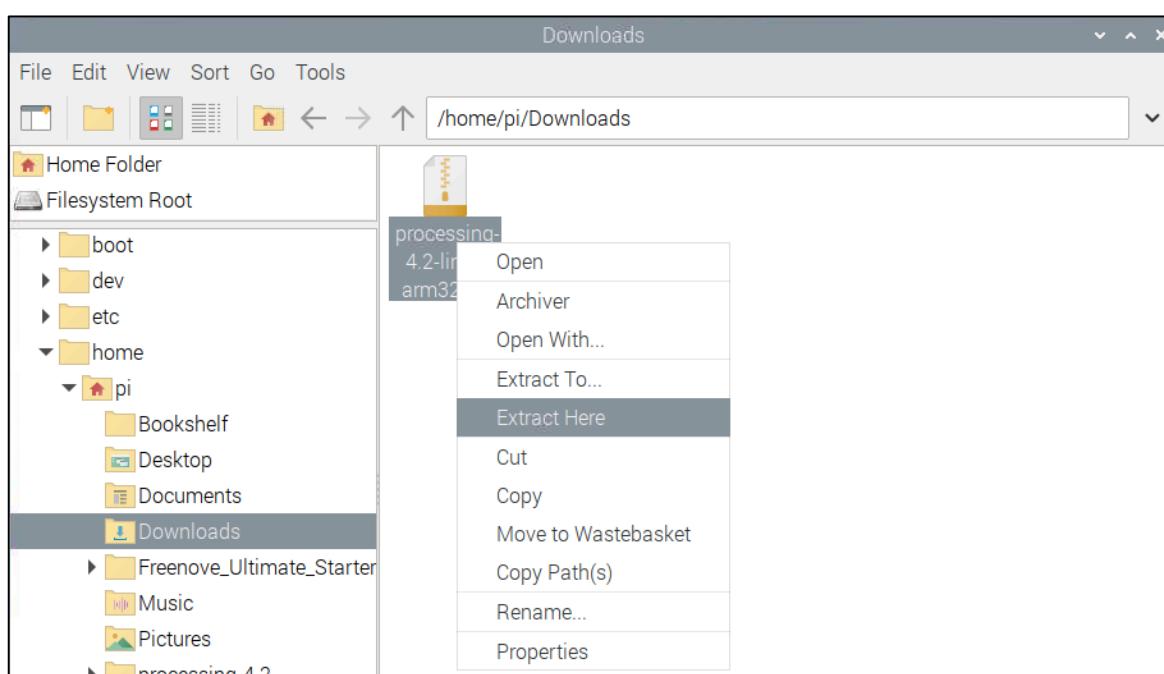



Take the first method as an example: enter the following command to install processing

1. Run the command to enter the folder.


```
cd ~/processing-4.2
```

2. Run the command to install software.

```
sh ./install.sh
```

```
pi@raspberrypi:~ $ cd ~/processing-4.2
pi@raspberrypi:~/processing-4.2 $ sh ./install.sh
Adding desktop shortcut, menu item and file associations for Processing... done!
pi@raspberrypi:~/processing-4.2 $
```

After finishing installation, there will be shortcut in Menu and desktop.

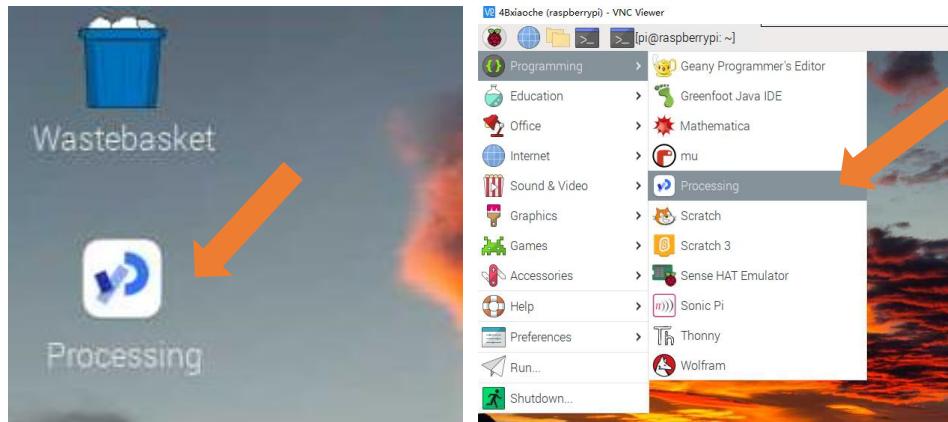

It is worth noting that the Raspberry Pi 5 series is used in this tutorial, which makes the running of Processing smoother. When using other models, there may be a phenomenon of freezing. When the freezing occurs, you cannot complete the experiment. At this time, try to lower the version of Processing, such as the specific version of processing 3.5.3, you can visit the following link:

<https://github.com/processing/processing/releases>

The installation command for Processing 3.5.3 is as below:

```
wget https://github.com/processing/processing/releases/download/processing-0269-3.5.3/processing-3.5.3-linux-armv6hf.tgz
```

Before installing the old version of Processing, you should uninstall Processing 4.2.

The uninstallation steps are as follows::


1. Run the command to enter the folder.

```
cd ~/processing-4.2
```


2. Run the command to uninstall software.

```
sh ./uninstall.sh
```

After the installation is complete, you can double-click the software icon on the desktop to enter the "Processing" software, or you can open the software processing in the system's start menu, as shown in the following figure:

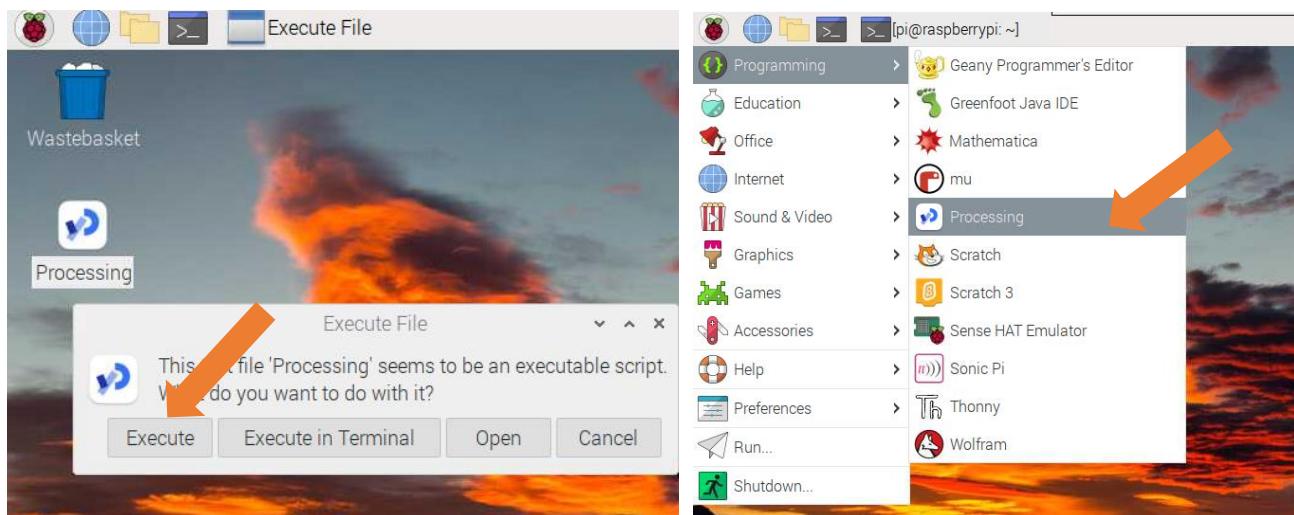

Interface of processing software is shown below:

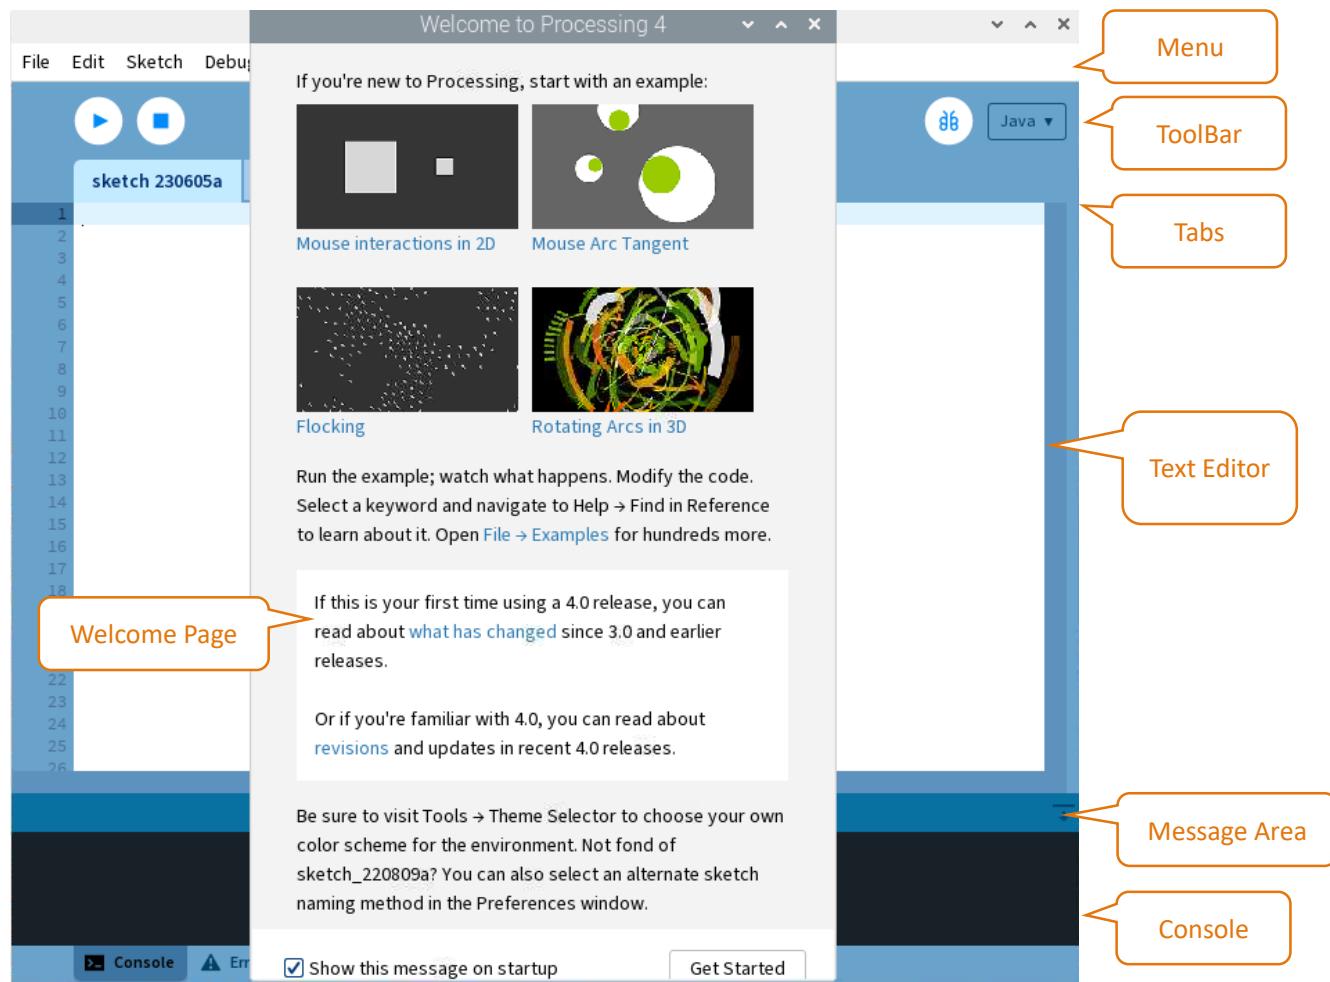


You're now running the Processing Development Environment (or PDE). There's not much to it; the large area is the Text Editor, and there's a row of buttons across the top; this is the toolbar. Below the editor is the Message Area, and below that is the Console. The Message Area is used for one line messages, and the Console is used for more technical details.

First Use


In the editor, type the following:

```
1 ellipse(50, 50, 80, 80);
```


This line of code means "draw an ellipse, with the center 50 pixels over from the left and 50 pixels down from the top, with a width and height of 80 pixels." Click the Run button (the triangle button in the Toolbar).

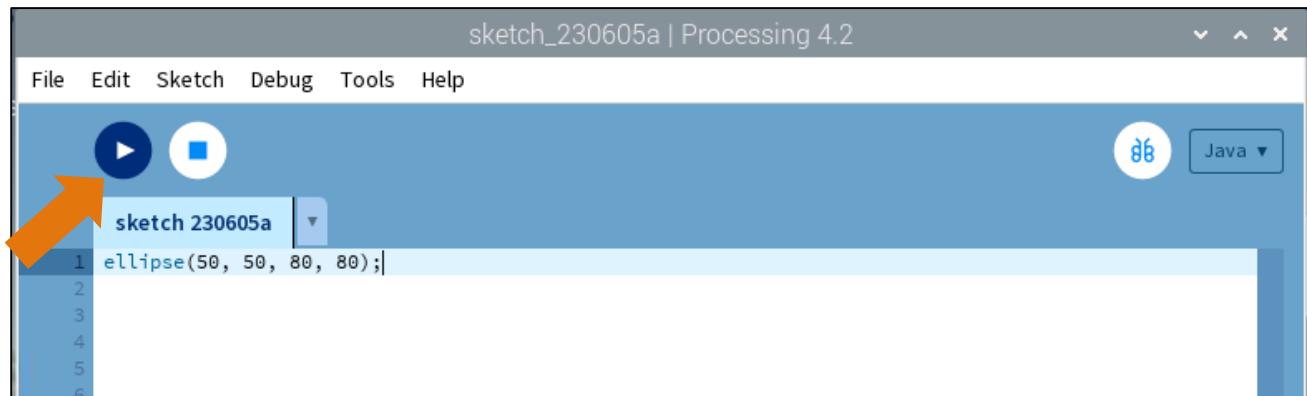

If you've typed everything correctly, you'll see a circle on your screen.

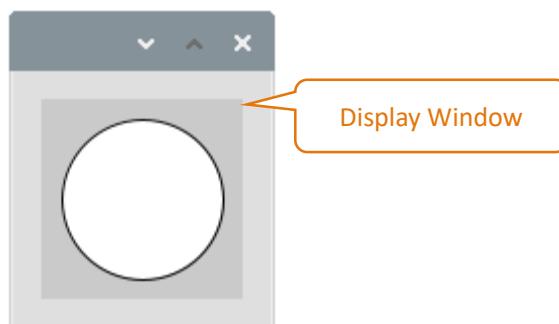


Click on "Stop" (the rectangle button in the Toolbar) or "Close" on Display Window to stop running the program. If you didn't type it correctly, the Message Area will turn red and report an error. If this happens, make sure that you've copied the example code exactly: the numbers should be contained within parentheses and have commas between each of them, and each line should end with a semicolon.

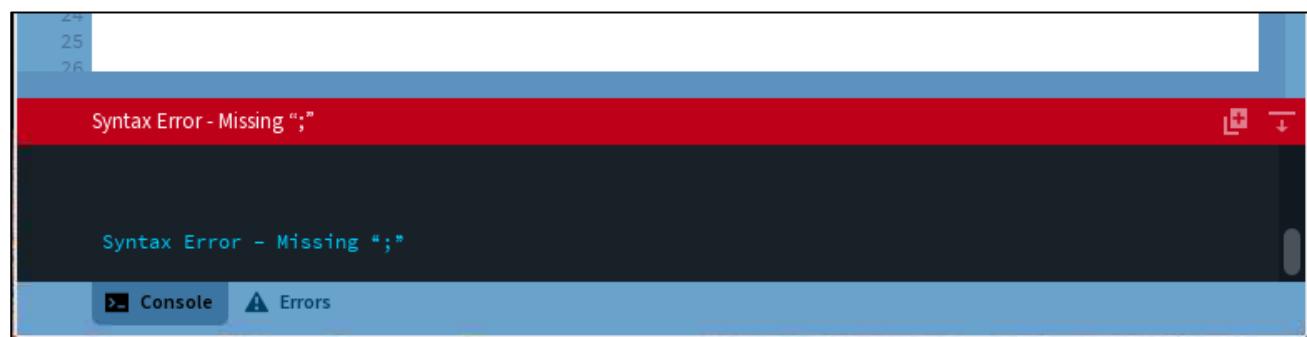

You can export this sketch to an application to run it directly without opening the Processing.

To export the sketch to the application, you must first save it.


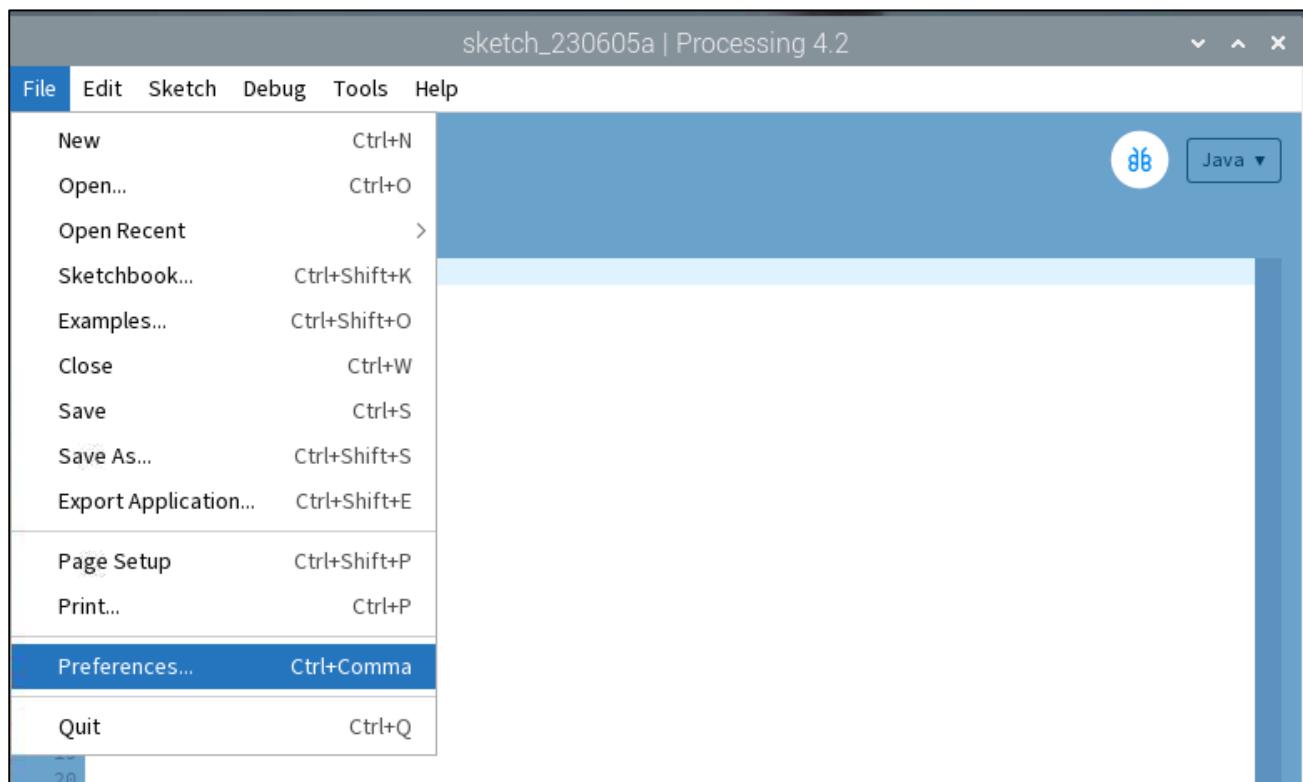


So far, we have completed the first use. I believe you have felt the joy of it.

Installing Hardware I/O Library



In this tutorial, the Freenove_Processing_IO library needs to be installed in order to perform corresponding experiments. The Freenove_Processing_IO library allows access to the Raspberry Pi's hardware peripherals, such as digital inputs and outputs, serial buses, etc., in a manner similar to the Arduino platform. In Processing 4.0 and above, manual installation is required.

Open Processing, click File > Preferences to check the library installation path, which, by default, is /home/pi/sketchbook

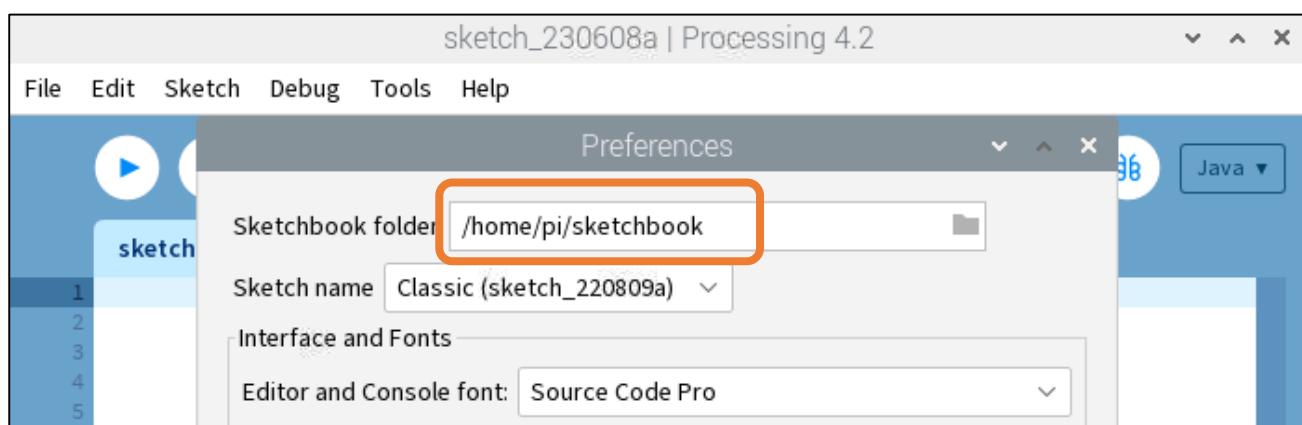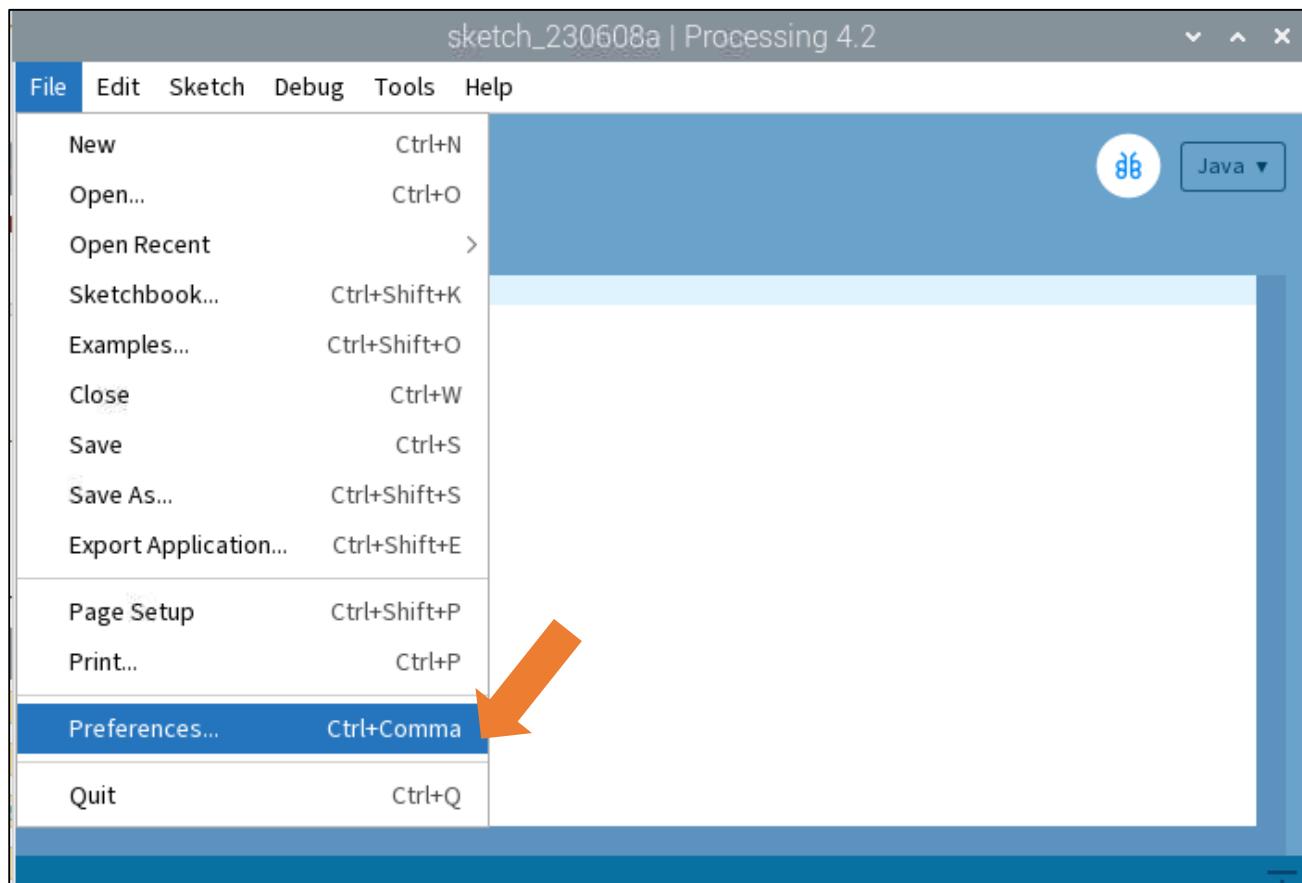


Copy the io folder under /home/pi/Freenove_Kit/Processing/Lib to the Processing library loading directory:

It is worth noting that when opening the file path /home/pi/sketchbook, if there is no folder "libraries", create a folder and name it "libraries".

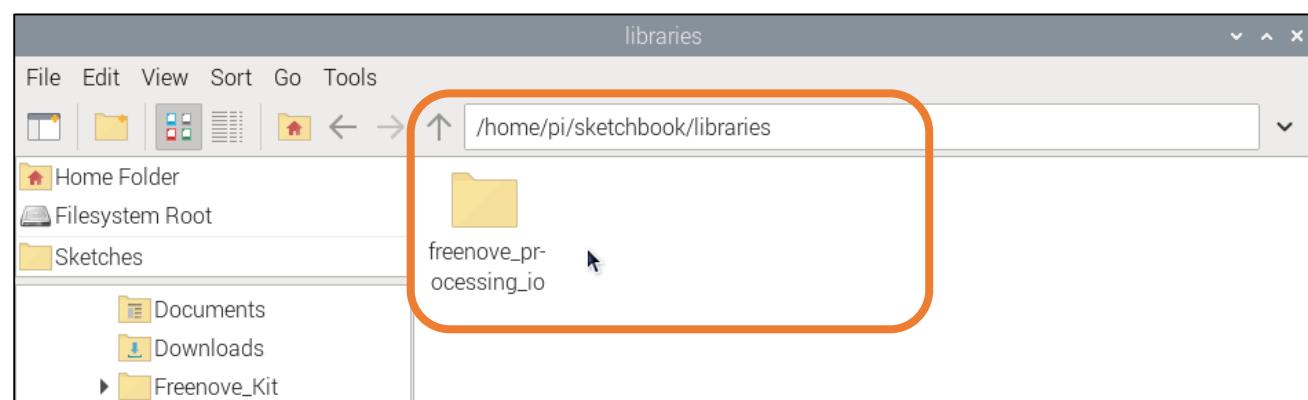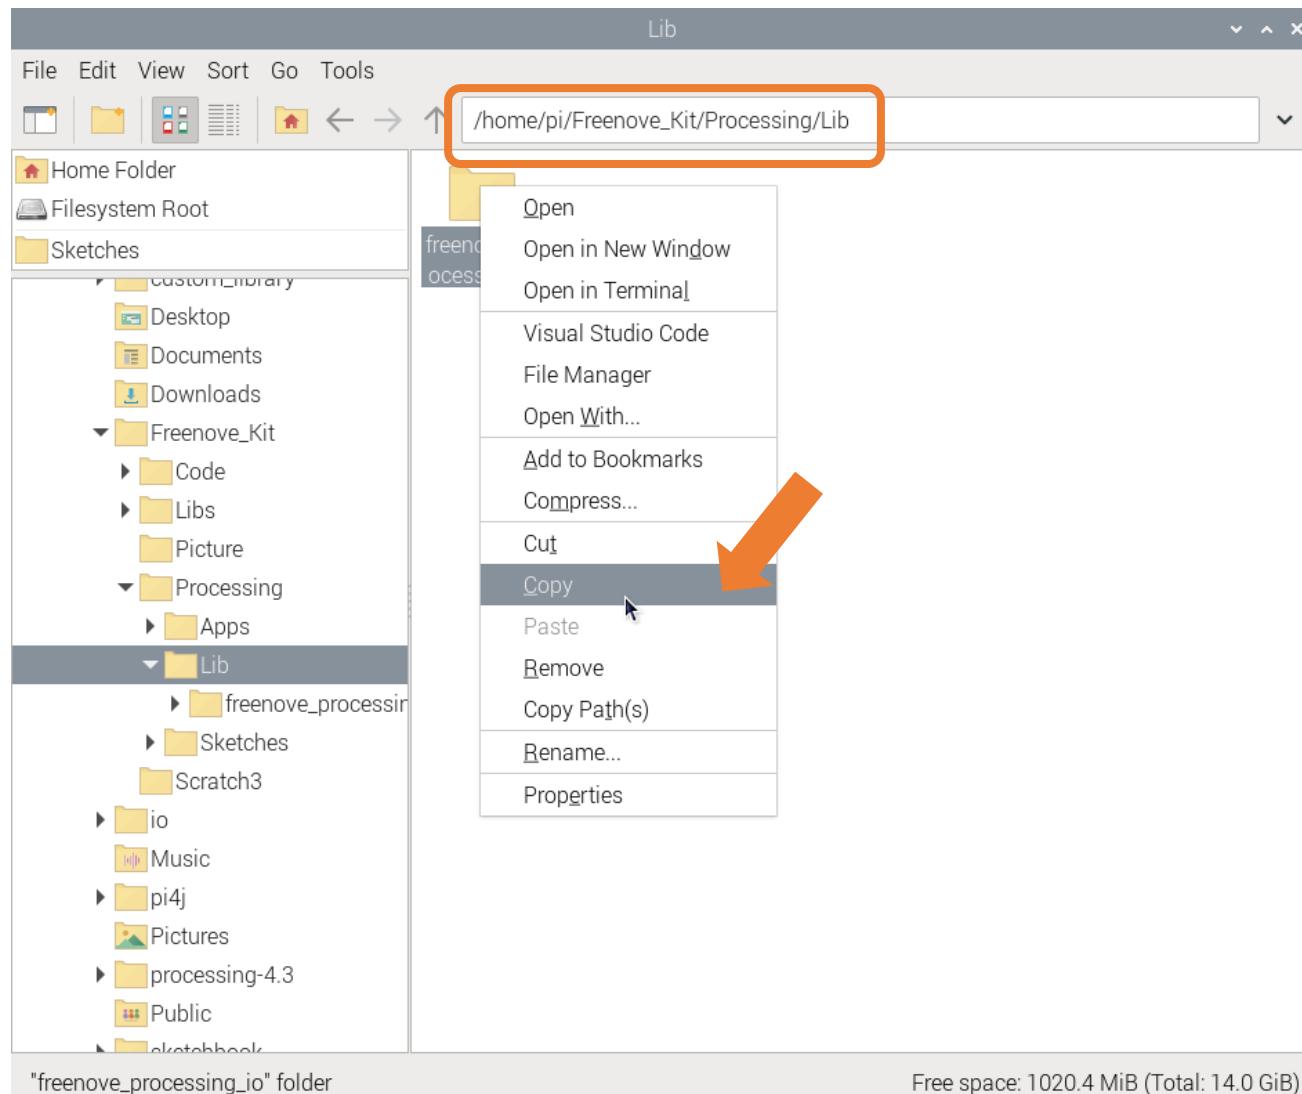


Re-open Processing, clickt Sketch> Import Library, and you can see that the Freenove_Processing_IO library has been successfully installed.

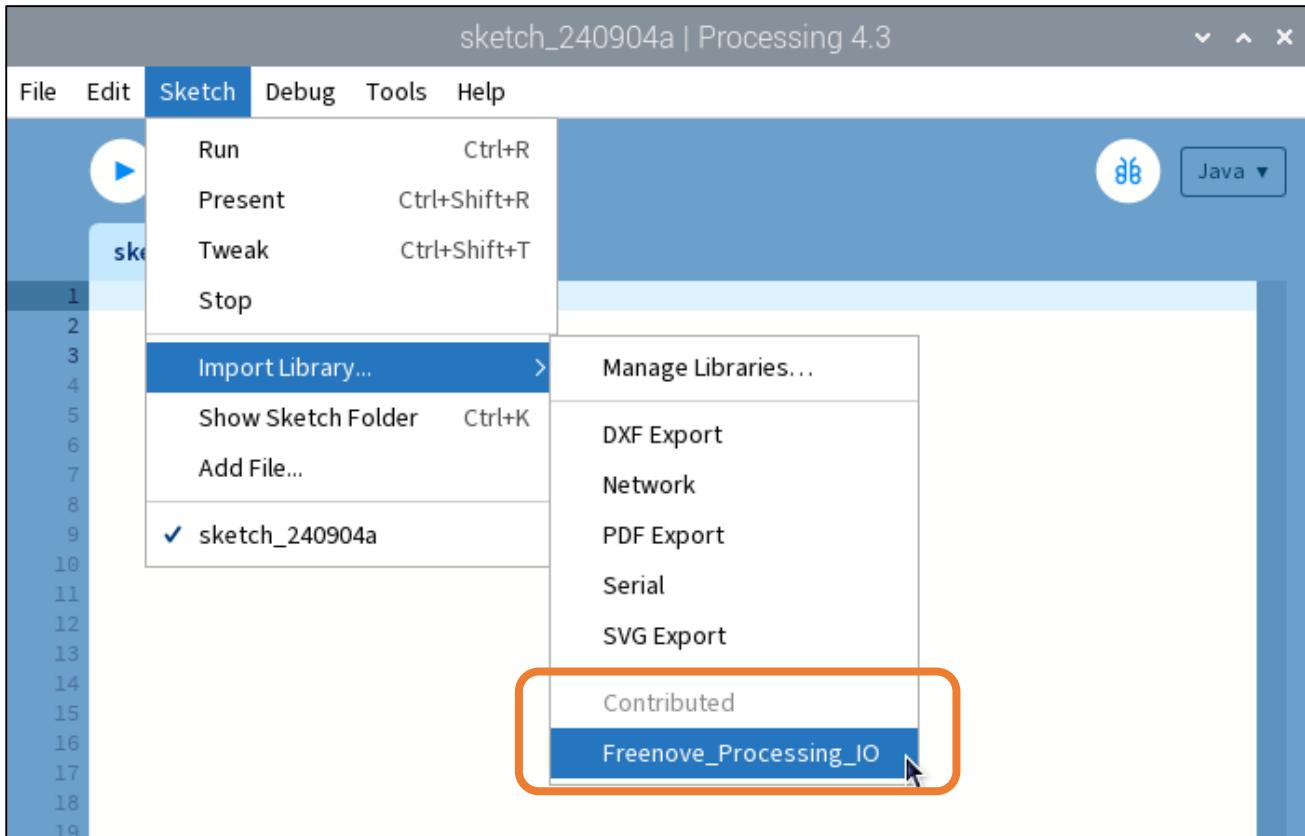


Set Commands to run on the Terminal

Check the current Processing startup command. Find the Processing execution file on the desktop, right-click and select Properties. Or open the software Processing Properties option in the system's start menu, as shown in the figure below:

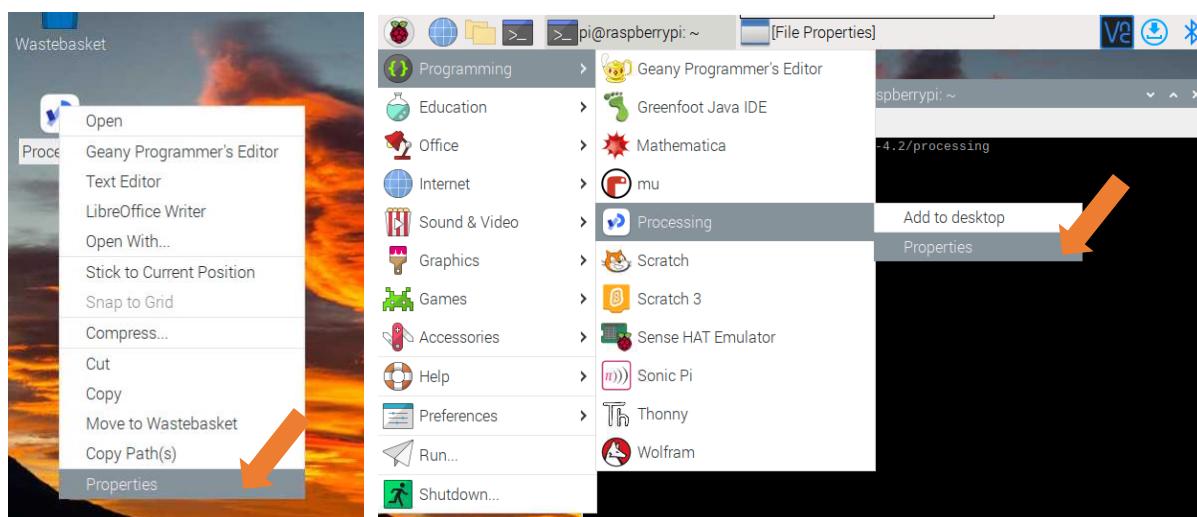

Select Desktop Entry, the content in Command is the current Processing terminal startup command, enter the following content in the terminal to open Processing. The command is different according to the installation path.

```
/home/pi/processing-4.2/processing
```

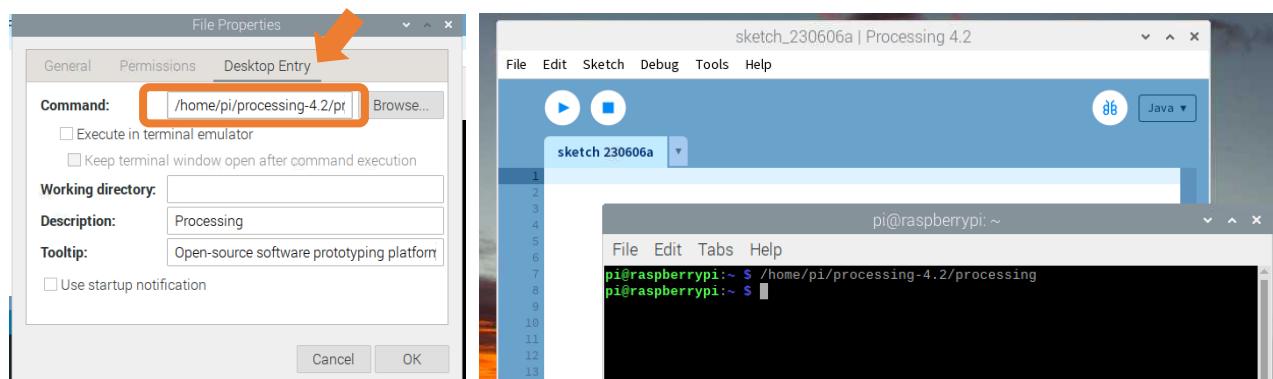

Define an alias for the command

For the convenience of use, we set an alias for the Processing terminal startup command.


The specific steps are as follows:


1. Enter the following command to edit the \$HOME/.bashrc file.

```
nano $HOME/.bashrc
```

2. Add processing command alias.

```
alias processing='/home/pi/processing-4.2/processing'
```



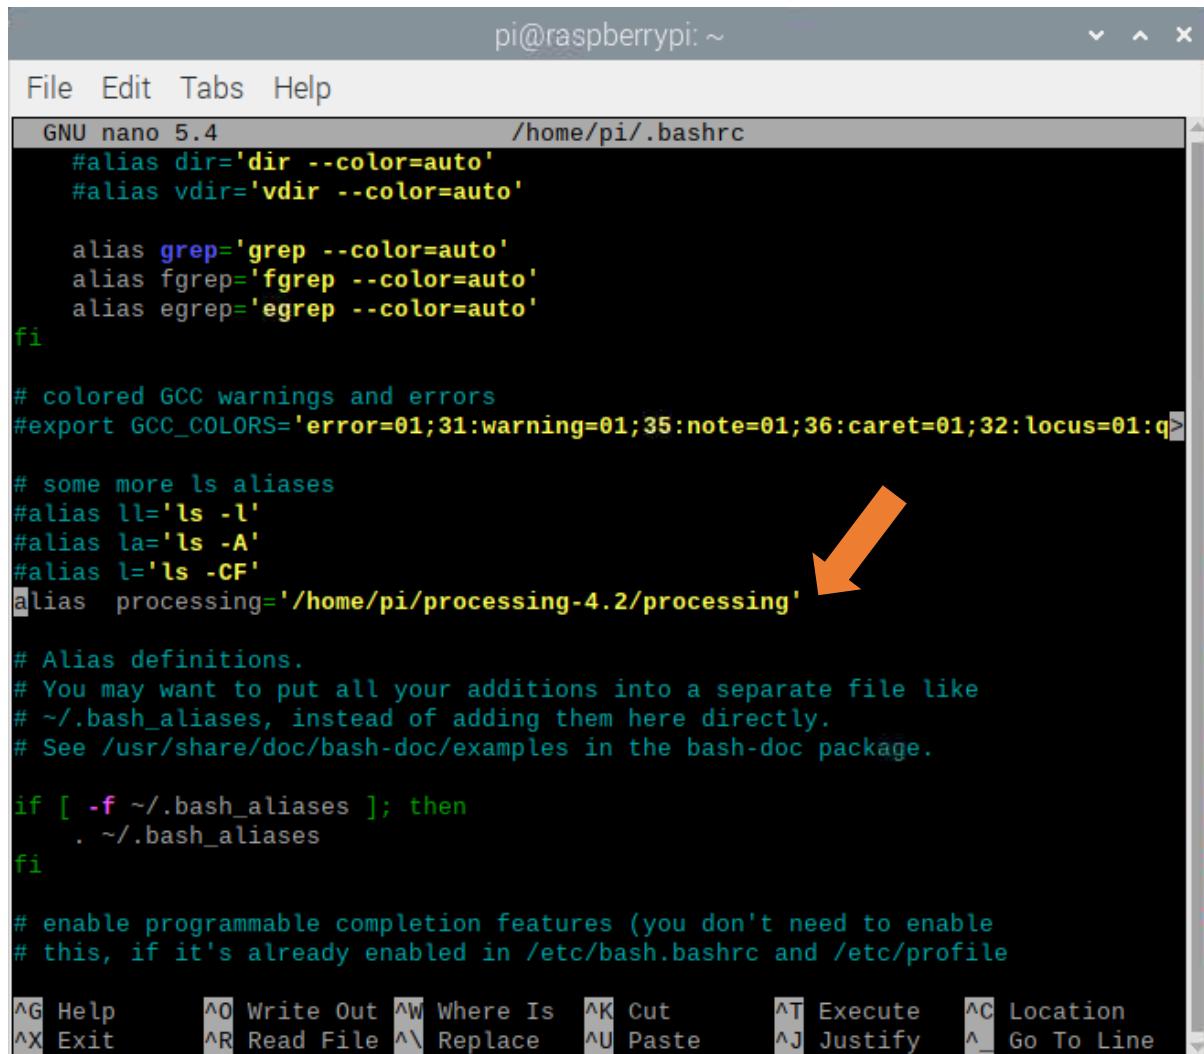

```

pi@raspberrypi: ~
File Edit Tabs Help
GNU nano 5.4                               /home/pi/.bashrc
#alias dir='dir --color=auto'
#alias vdir='vdir --color=auto'

alias grep='grep --color=auto'
alias fgrep='fgrep --color=auto'
alias egrep='egrep --color=auto'
fi

# colored GCC warnings and errors
#export GCC_COLORS='error=01;31:warning=01;35:note=01;36:caret=01;32:locus=01:q>

# some more ls aliases
alias ll='ls -l'
alias la='ls -A'
alias l='ls -CF'
alias processing='/home/pi/processing-4.2/processing' ↓

# Alias definitions.
# You may want to put all your additions into a separate file like
# ~/.bash_aliases, instead of adding them here directly.
# See /usr/share/doc/bash-doc/examples in the bash-doc package.

if [ -f ~/.bash_aliases ]; then
    . ~/.bash_aliases
fi

# enable programmable completion features (you don't need to enable
# this, if it's already enabled in /etc/bash.bashrc and /etc/profile)


^G Help      ^O Write Out  ^W Where Is  ^K Cut      ^T Execute  ^C Location
^X Exit      ^R Read File  ^Y Replace   ^U Paste    ^J Justify  ^L Go To Line

```

Press "CTRL"+"O" and then "Enter" to save the modified content. Then press "CTRL"+"X" to exit editing.

Close all current terminal pages, open a new terminal page again, enter the following command, open the command list of defined alias to check whether the addition is successful:

```
alias -p
```

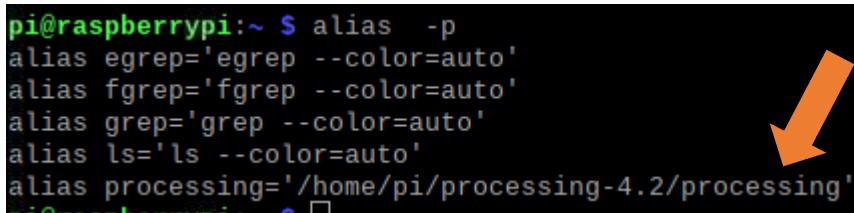


```

pi@raspberrypi:~ $ alias -p
alias egrep='egrep --color=auto'
alias fgrep='fgrep --color=auto'
alias grep='grep --color=auto'
alias ls='ls --color=auto'
alias processing='/home/pi/processing-4.2/processing' ↓
pi@raspberrypi:~ $ 


```

Open the terminal and enter the following to test the terminal command

```
processing
```

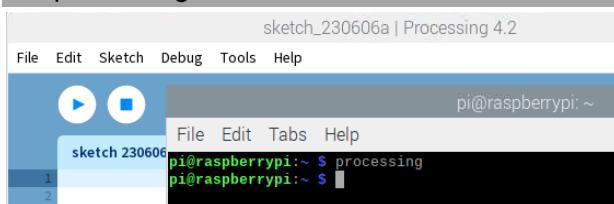

Projects Board for Raspberry Pi

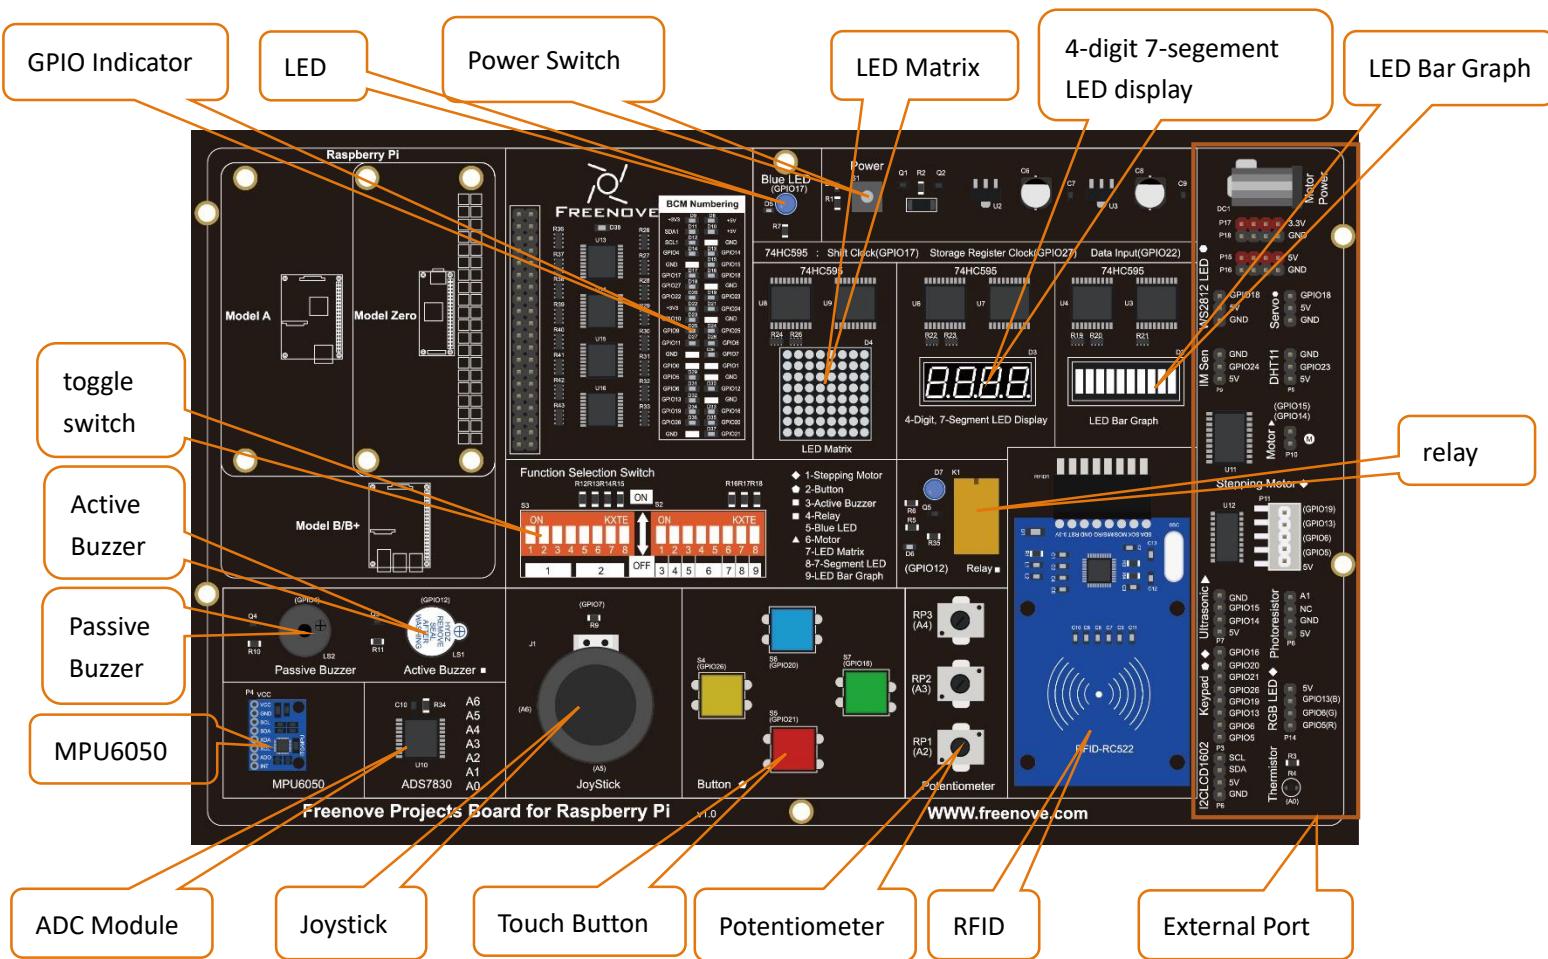

Note:

1. Stepper motor, keypad and RGBLED must NOT be used at the same time.
2. Touch button and keypad must NOT be used at the same time.
3. Active buzzer and relay must NOT be used at the same time.
4. Motor and ultrasonic module must NOT be used at the same time.
5. Servo and WS2812LED must NOT be used at the same time.
6. Batteries need to be plugged in when using the motor.



Chapter 1 LED


We will still start from Blink LED in this chapter, and also learn the usage of some commonly used functions of Processing Software.

Project 1.1 Blink


In this project, we will make a LED blink and have the Display window of Processing Blink at the same time.

Component List


Freenove Projects Board for Raspberry Pi

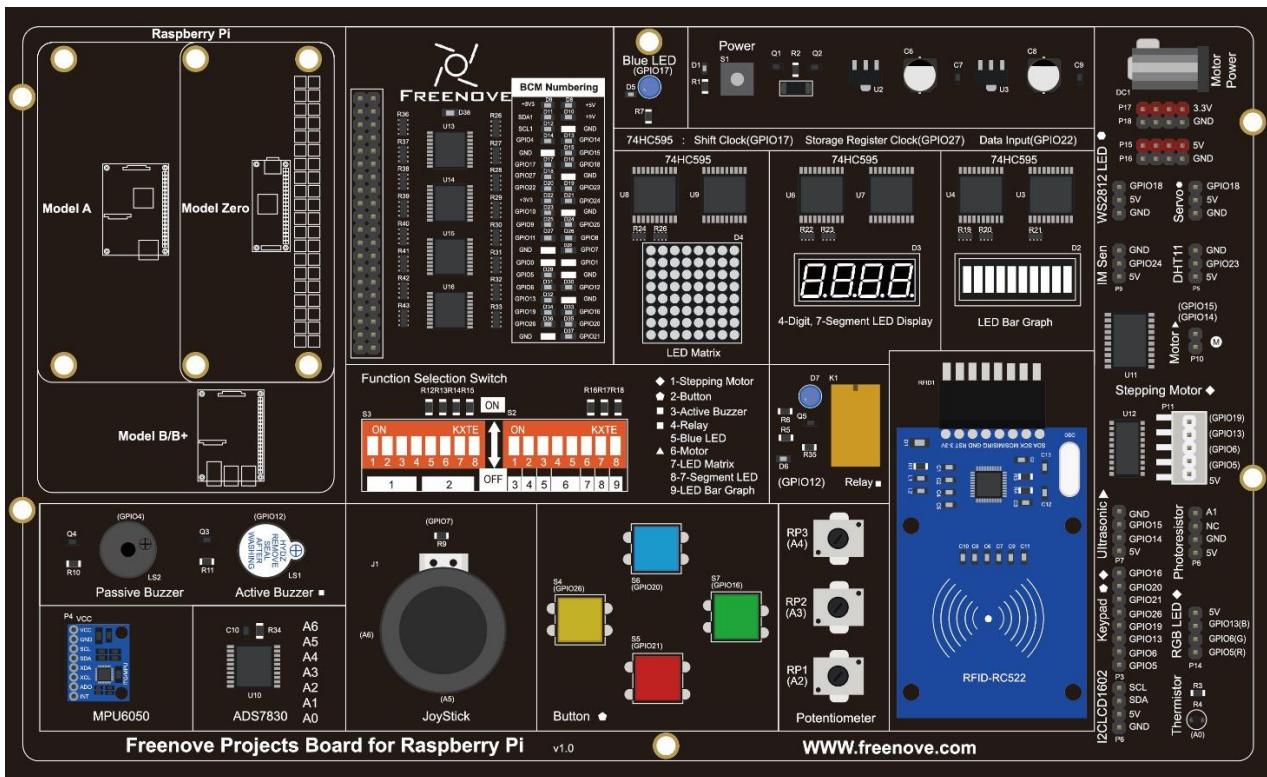


Raspberry Pi

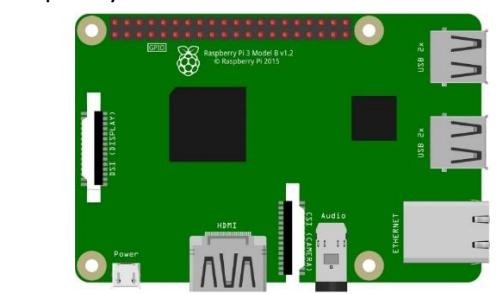

GPIO Ribbon Cable

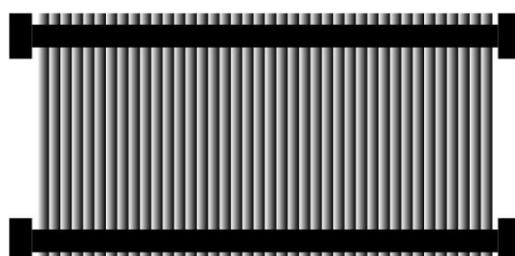

Circuit

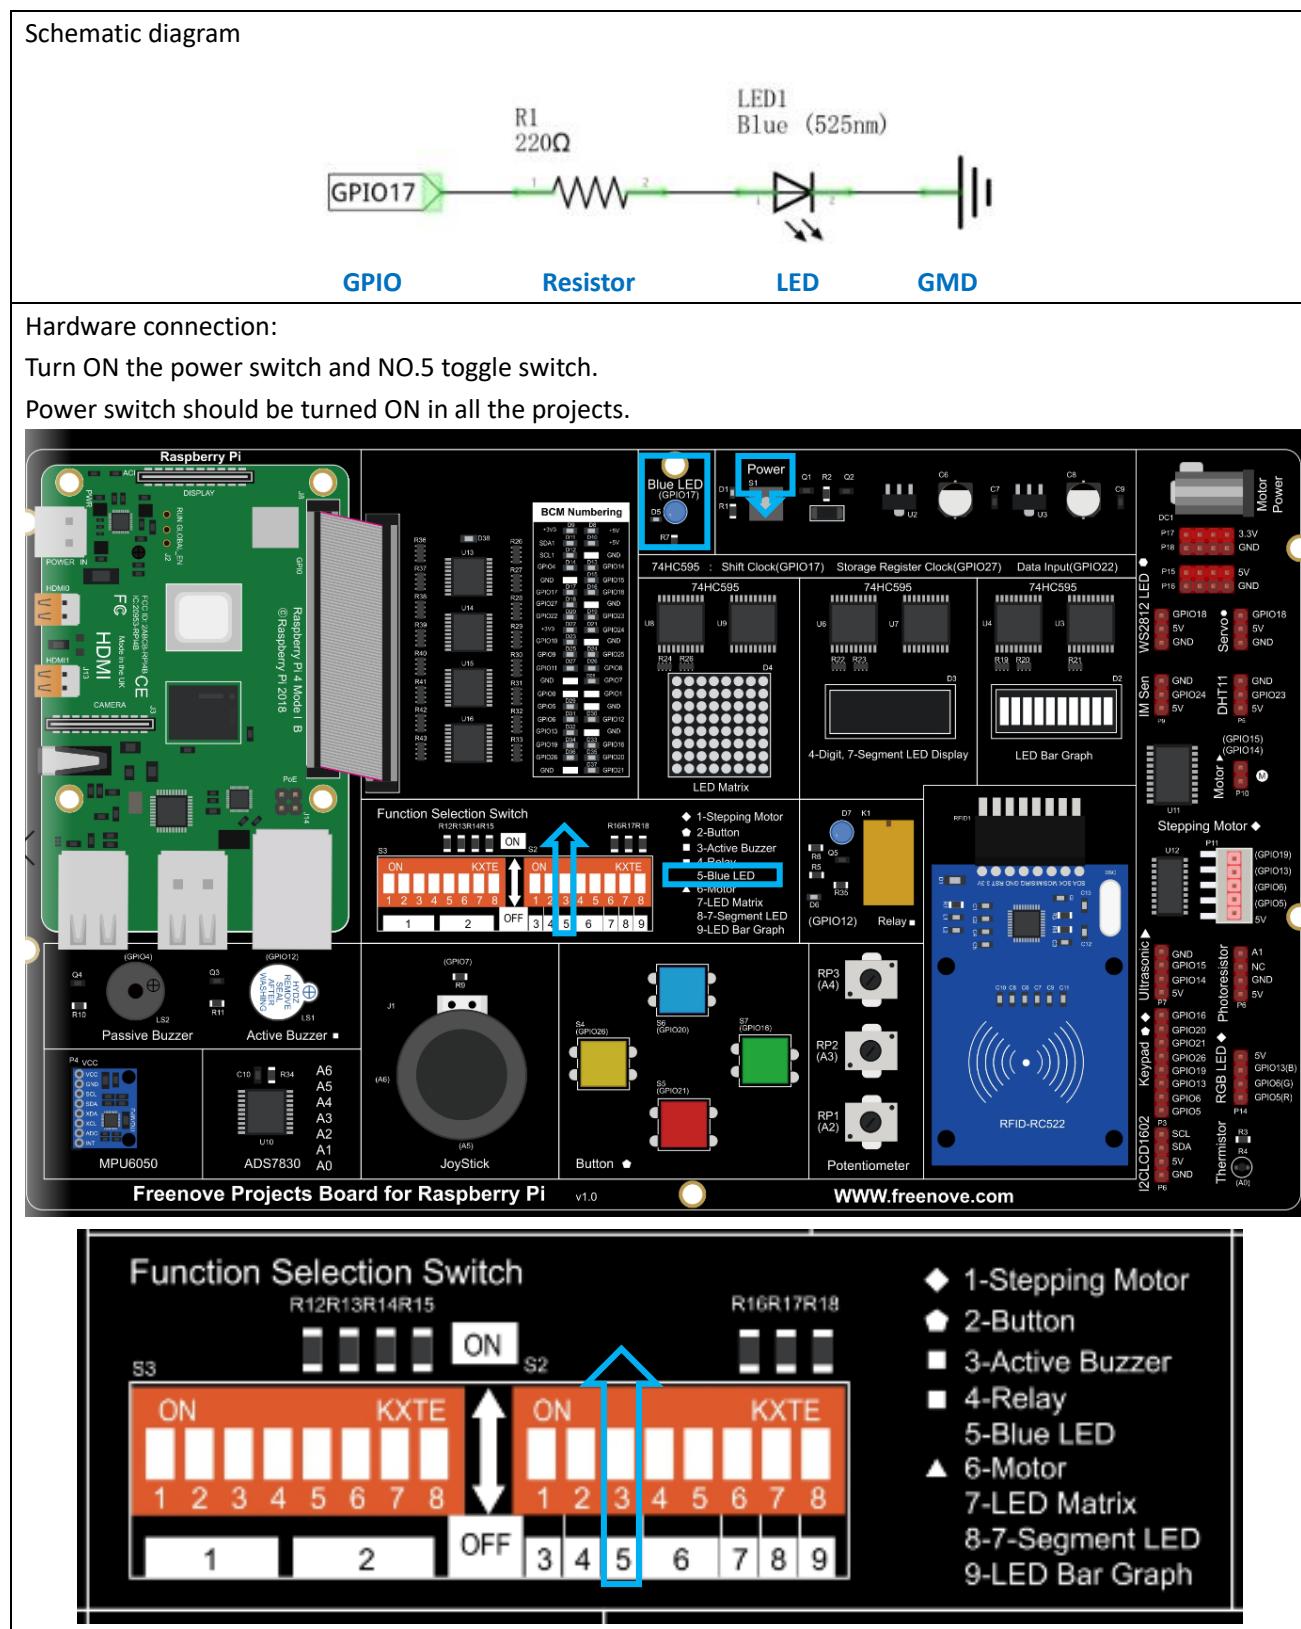

If you have any concerns, please send an email to: support@freenove.com



Sketch


Sketch 1.1.1 Blink

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_01_1_1_Blink
```


And then right-click to select Processing IDE

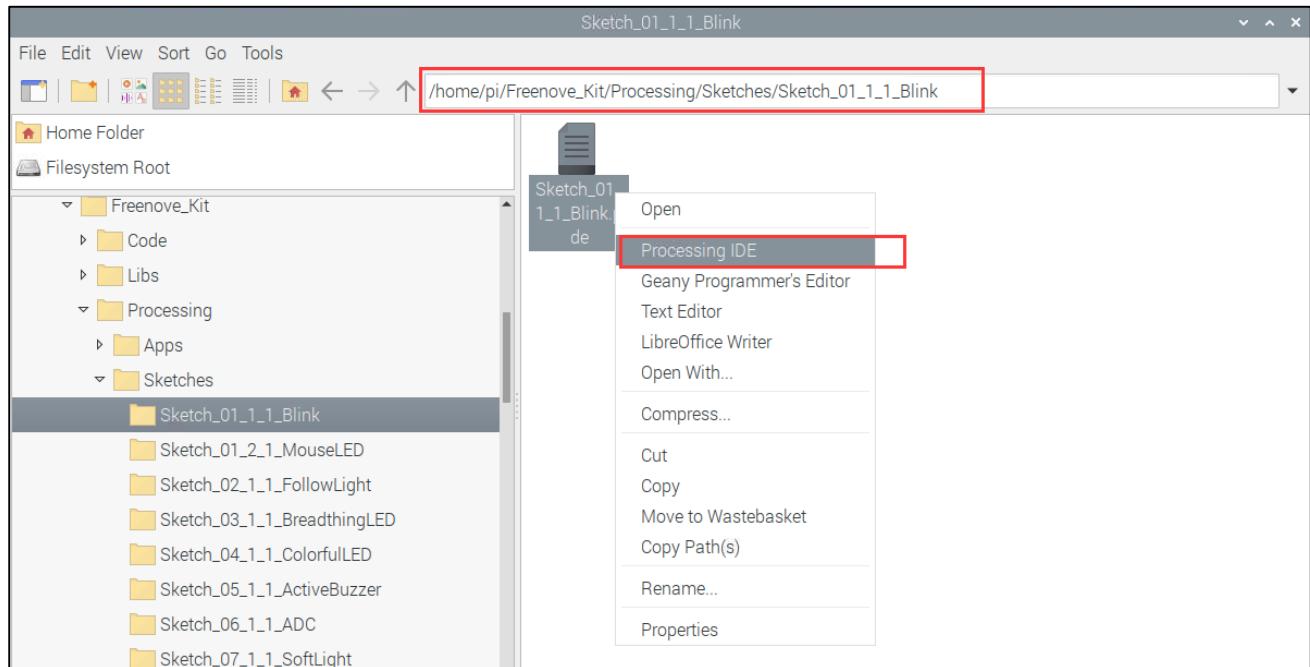

Or you can enter a command in the terminal to open the file Sketch_01_1_1_Blink. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_01_1_1_Blink/Sketch_01_1_1_Blink.pde
```


Open Processing and click Run.

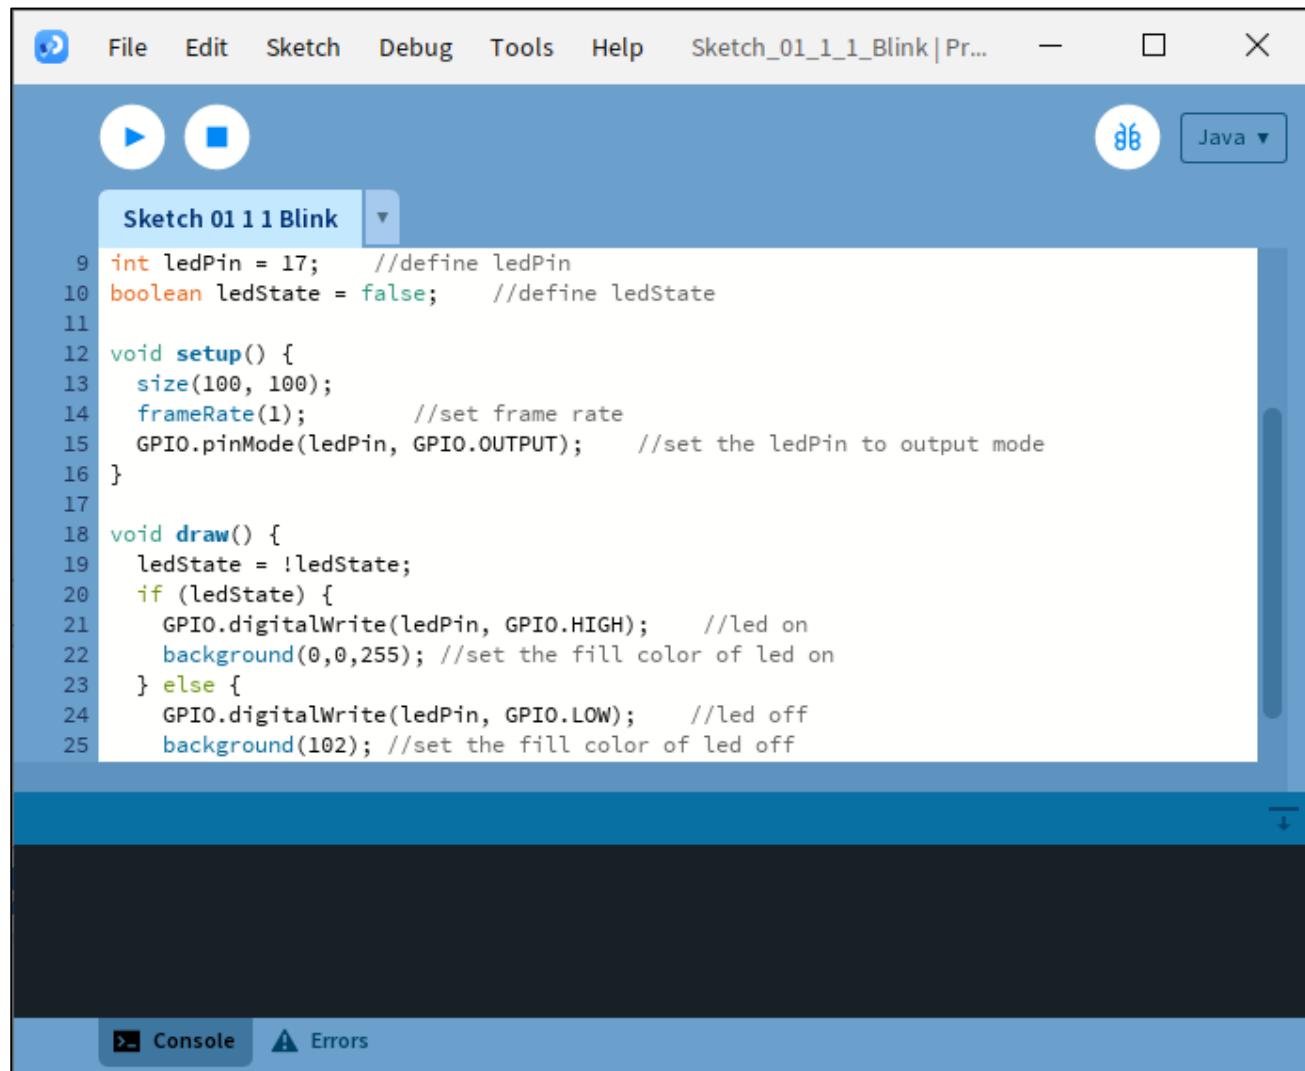

```

9 int ledPin = 17;      //define ledPin
10 boolean ledState = false;    //define ledState
11
12 void setup() {
13     size(100, 100);
14     frameRate(1);          //set frame rate
15     GPIO.pinMode(ledPin, GPIO.OUTPUT);    //set the ledPin to output mode
16 }
17
18 void draw() {
19     ledState = !ledState;
20     if (ledState) {
21         GPIO.digitalWrite(ledPin, GPIO.HIGH);    //led on
22         background(0,0,255); //set the fill color of led on
23     } else {
24         GPIO.digitalWrite(ledPin, GPIO.LOW);    //led off
25         background(102); //set the fill color of led off
  
```

After the program runs, LED will start Blinking and the background of Display window will change with the change of LED state.

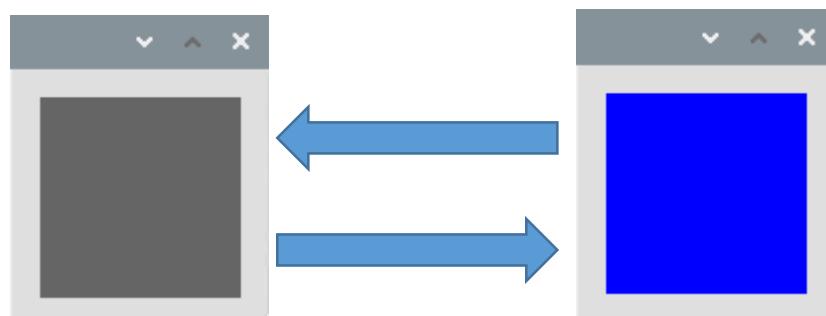

The following is program code:

1	import freenove.processing.io.*;
2	
3	int ledPin = 17; //define ledPin
4	boolean ledState = false; //define ledState
5	

```

6 void setup() {
7     size(100, 100);
8     frameRate(1);          //set frame rate
9     GPIO.pinMode(ledPin, GPIO.OUTPUT);    //set the ledPin to output mode
10 }
11
12 void draw() {
13     ledState = !ledState;
14     if (ledState) {
15         GPIO.digitalWrite(ledPin, GPIO.HIGH);    //led on
16         background(0,0,255); //set the fill color of led on
17     } else {
18         GPIO.digitalWrite(ledPin, GPIO.LOW);    //led off
19         background(102); //set the fill color of led off
20     }
21 }
```

Processing code usually have two functions: `setup()` and `draw()`, where the function `setup()` is only executed once while the function `draw()` will be executed repeatedly. In the function `setup()`, `size(100, 100)` specifies the size of the Display Window to 100x100pixel. `FrameRate(1)` specifies the refresh rate of Display Window to once per second, which means the `draw()` function will be executed once per second. `GPIO.pinMode (ledPin, GPIO.OUTPUT)` is used to set ledPin to output mode.

```

void setup() {
    size(100, 100);
    frameRate(1);          //set frame rate
    GPIO.pinMode(ledPin, GPIO.OUTPUT);    //set the ledPin to output mode
}
```

In `draw()` function, each execution will invert the variable "ledState". When "ledState" is true, LED is turned ON, and the background color of display window is set to red. And when the "ledState" is false, the LED is turned OFF and the background color of display window is set to gray. Since the function `draw()` is executed once per second, the background color of Display Window and the state of LED will also change once per second. This process will repeat in an endless loop to achieve the effect of blinking.

```

void draw() {
    ledState = !ledState;
    if (ledState) {
        GPIO.digitalWrite(ledPin, GPIO.HIGH);    //led on
        background(0,0,255); //set the fill color of led on
    } else {
        GPIO.digitalWrite(ledPin, GPIO.LOW);    //led off
        background(102); //set the fill color of led off
    }
}
```

The following is a brief description of some functions:

setup()

The `setup()` function is run once when the program starts.

draw()

It is called directly after the `setup()` function. The `draw()` function continuously executes the lines of code within its block until the program stops or `noLoop()` is called. `draw()` is called automatically and should never be called explicitly.

size()

Defines width and height of the display window in pixels.

frameRate()

Specifies the number of frames to be displayed every second.

background()

Set the color of the background of the display window.


GPIO.pinMode()

Configures a pin to act either as input or output.

GPIO.digitalWrite()

Sets an output pin to be either high or low.

All functions used in this code can be found in the Reference of Processing Software, in which built-in functions are described in details, and there are some sample programs. It is recommended that beginners learn more about usage and function of those functions. The localization of Reference can be opened with the following steps: click the menu bar "Help" → "Reference".

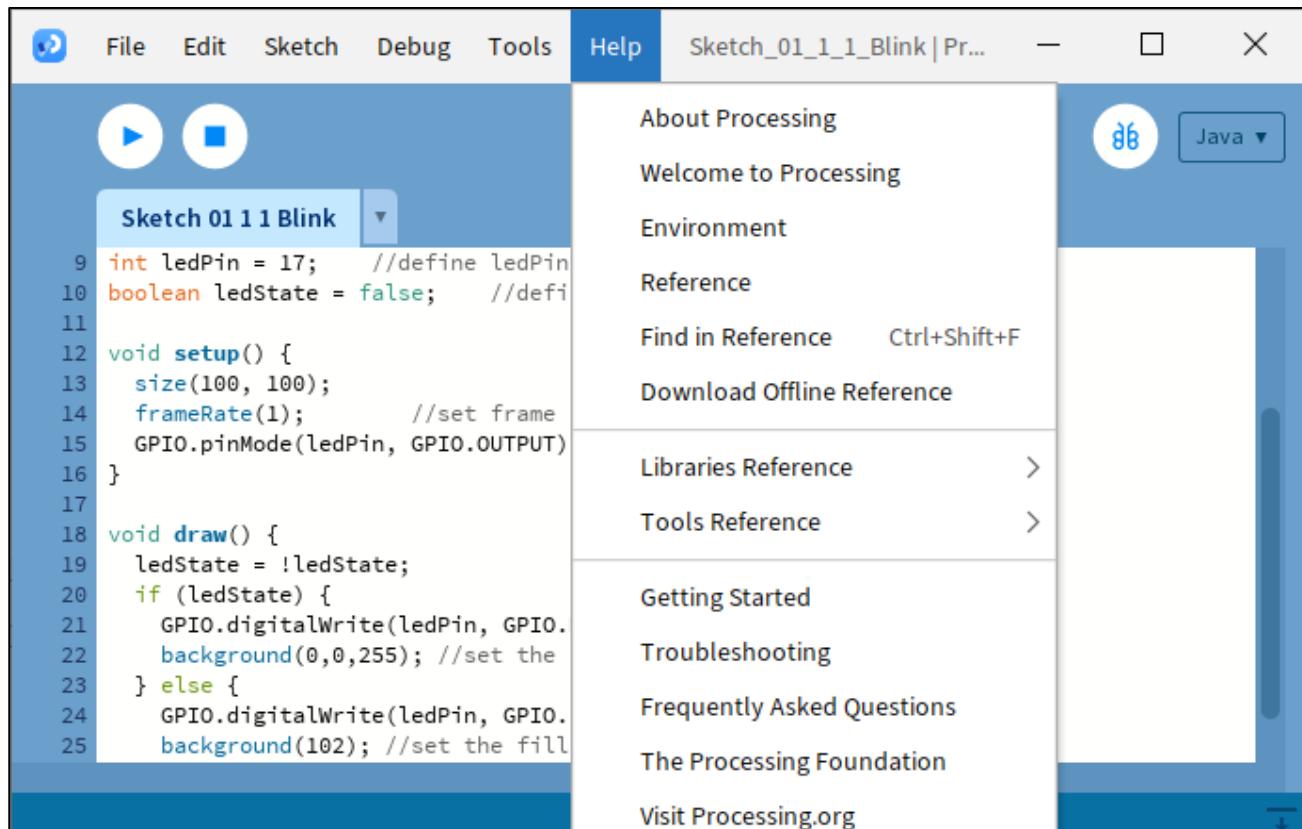

Then the following page will be displayed in the web browser:



Language	Reference.	Processing was designed to be a flexible software sketchbook.	
Libraries			
Tools			
Environment			
	Structure	Shape	Color
	0 (parentheses)	createShape()	Setting
	, (comma)	loadShape()	background()
	. (dot)	PShape	clear()
	/* */ (multiline comment)		colorMode()
	/** */ (doc comment)	2D Primitives	fill()
	// (comment)	arc()	noFill()
	; (semicolon)	ellipse()	noStroke()
	= (assign)	line()	stroke()
	[] (array access)	point()	

Or you can directly access to the official website for reference:<http://processing.org/reference/>


Project 1.2 MouseLED

In this project, we will use the mouse to control the state of LED.


The components and circuits of this project are the same as the previous section.

Component List


Freenove Projects Board for Raspberry Pi

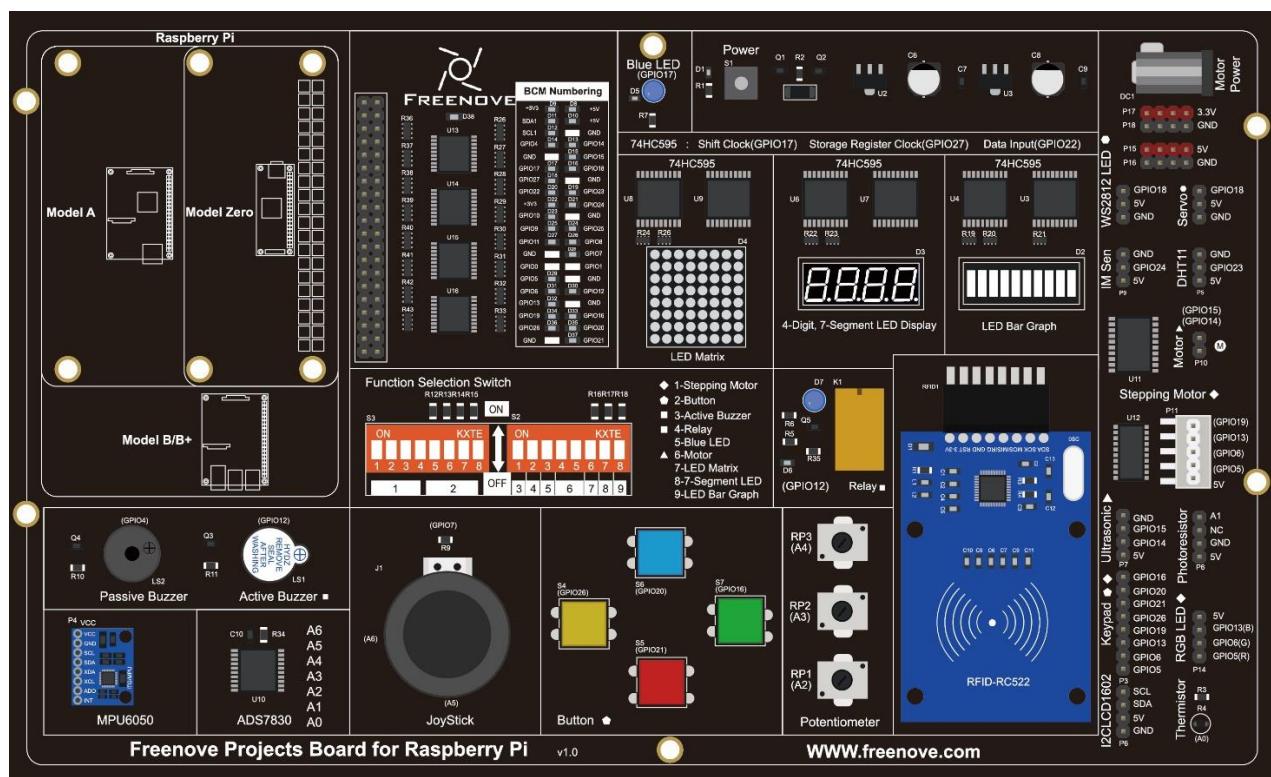

Raspberry Pi

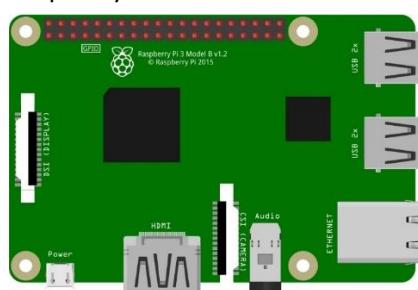


GPIO Ribbon Cable

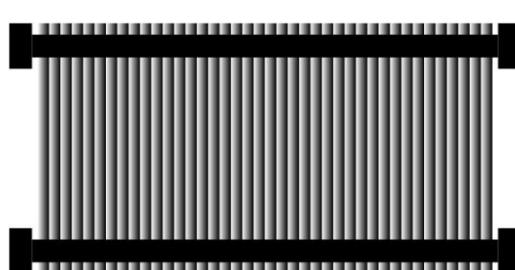

Circuit


Schematic diagram

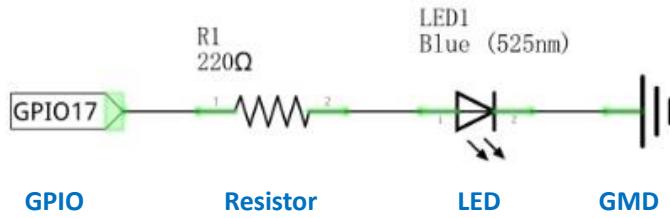

Hardware connection.

Turn ON the power switch and NO.5 toggle switch.

Power switch should be turned ON in all the projects.

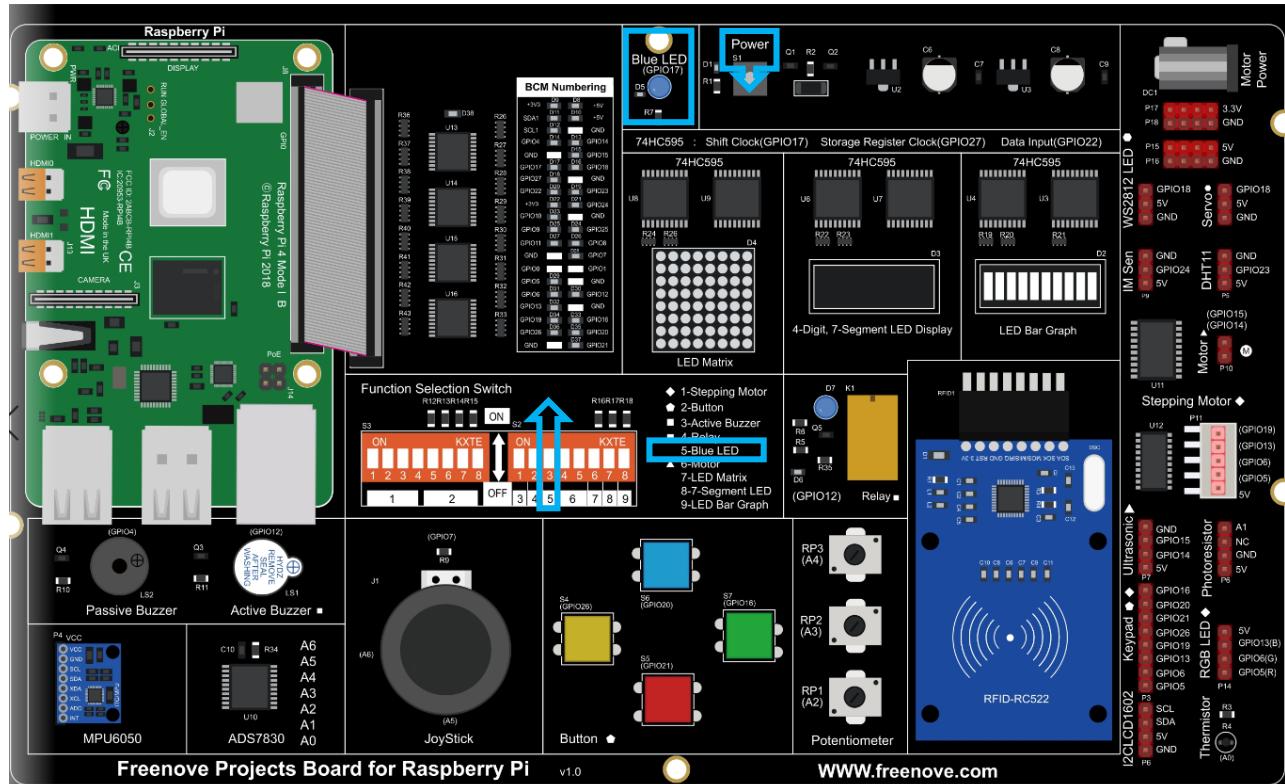

Function Selection Switch

R12R13R14R15

R16R17R18



◆ 1-Stepping Motor

◆ 2-Button

■ 3-Active Buzzer

■ 4-Relay

▲ 5-Blue LED

▲ 6-Motor

7-LED Matrix

8-7-Segment LED

9-LED Bar Graph

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 1.2.1 MouseLED

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_01_2_1_MouseLED
```

And then right-click to select Processing IDE.

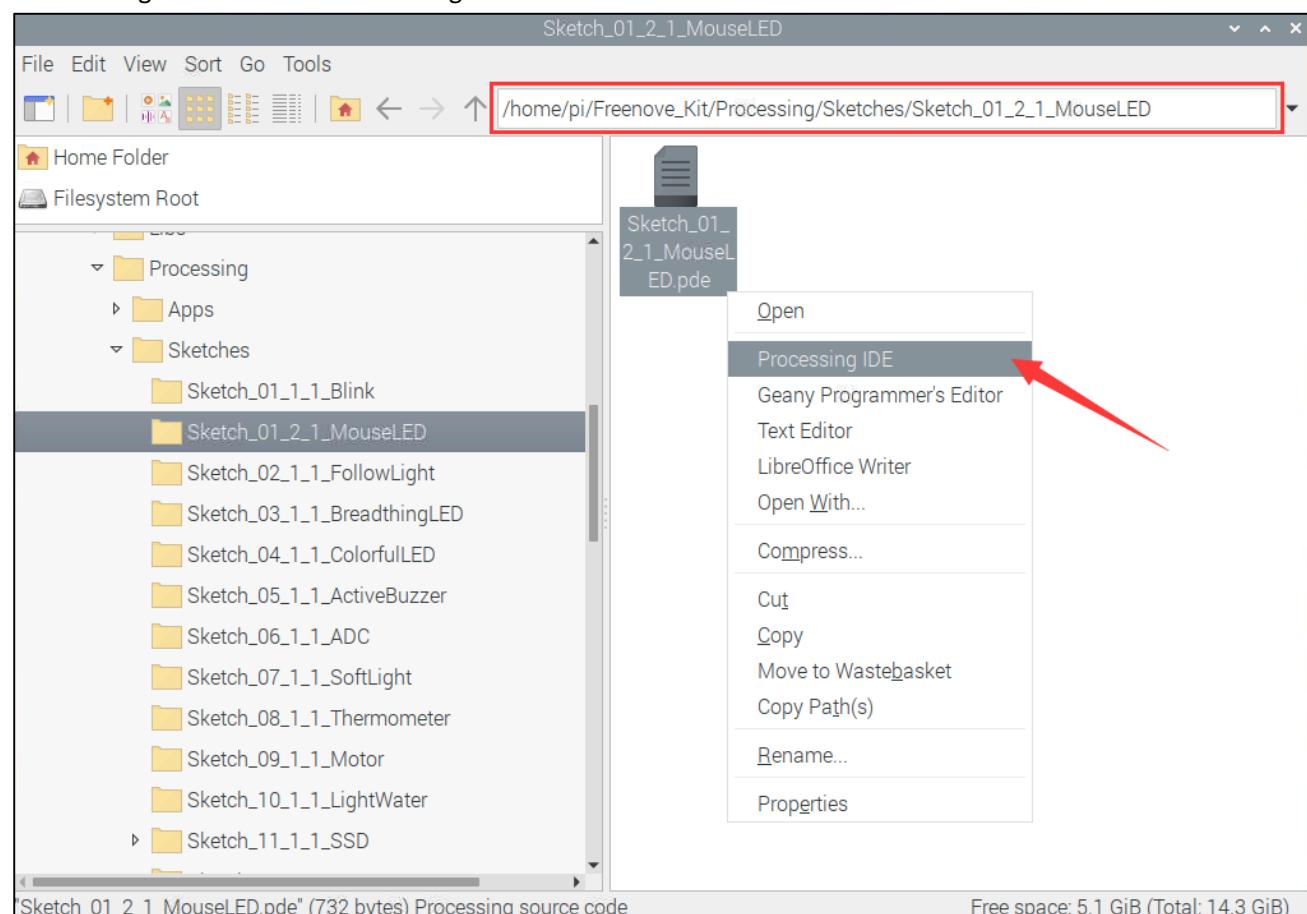

Or you can enter a command in the terminal to open the file Sketch_01_2_1_MouseLED. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_01_2_1_MouseLED/Sketch_01_2_1_MouseLED.pde
```


Open Processing and click Run.

The screenshot shows the Processing IDE interface. The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. The title bar says "Sketch_01_2_1_MouseLE...". The main area displays the following code:

```
9 int ledPin = 17;
10 boolean ledState = false;
11 void setup() {
12     size(100, 100);
13     GPIO.pinMode(ledPin, GPIO.OUTPUT);
14     background(102);
15 }
16
17 void draw() {
18     if (ledState) {
19         GPIO.digitalWrite(ledPin, GPIO.HIGH);
20         background(0,0,255);
21     } else {
22         GPIO.digitalWrite(ledPin, GPIO.LOW);
23         background(102);
```

At the bottom, there are tabs for "Console" and "Errors".

After the program runs, the LED is in OFF-state, and background color of Display window is gray. Click the grey area of the Display Window with the mouse, LED is turned ON and Display window background color becomes blue. Click on the Display Window again, the LED is turned OFF and the background color becomes gray, as shown below.

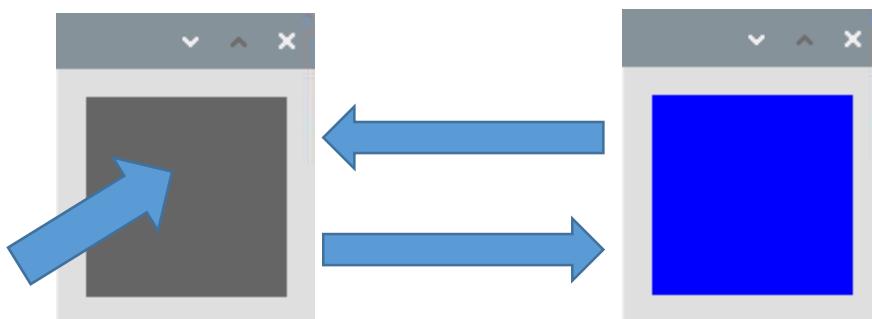

The following is program code:

```
1 import freenove.processing.io.*;
2
3 int ledPin = 17;
4 boolean ledState = false;
5 void setup() {
6     size(100, 100);
7     GPIO.pinMode(ledPin, GPIO.OUTPUT);
8     background(102);
9 }
10
11 void draw() {
12     if (ledState) {
13         GPIO.digitalWrite(ledPin, GPIO.HIGH);
14         background(0, 0, 255);
15     } else {
16         GPIO.digitalWrite(ledPin, GPIO.LOW);
17         background(102);
18     }
19 }
20
21 void mouseClicked() { //if the mouse Clicked
22     ledState = !ledState; //Change the led State
23 }
```

The function `mouseClicked()` in this code is used to capture the mouse click events. Once the mouse is clicked, the function will be executed. We can change the state of the variable “`ledState`” in this function to realize controlling LED by clicking on the mouse.

```
void mouseClicked() { //if the mouse Clicked
    ledState = !ledState; //Change the led State
}
```

If you need help, please send an email to: support@freenove.com



Chapter 2 FollowLight

We have learned how to control an LED to blink. Next we will learn how to control a number of LEDs.

Project 2.1 FollowLight


In this project, we will use the mouse to control the LED

Component List

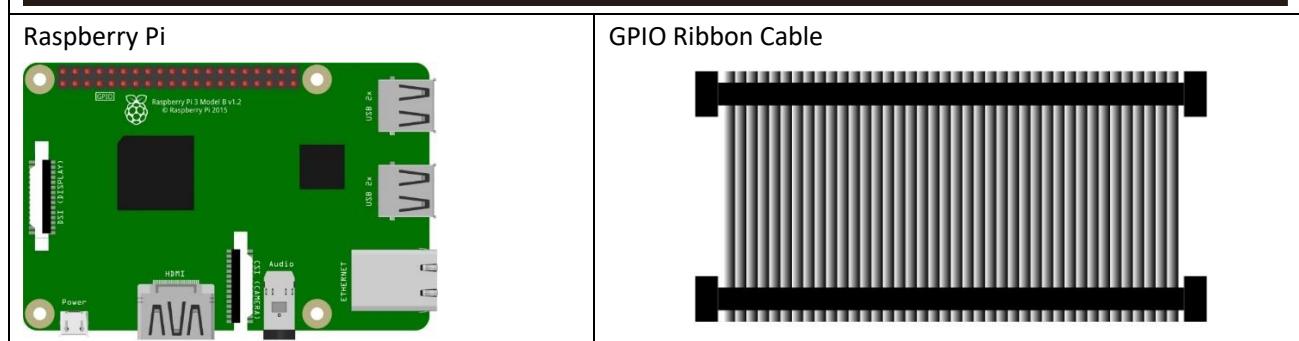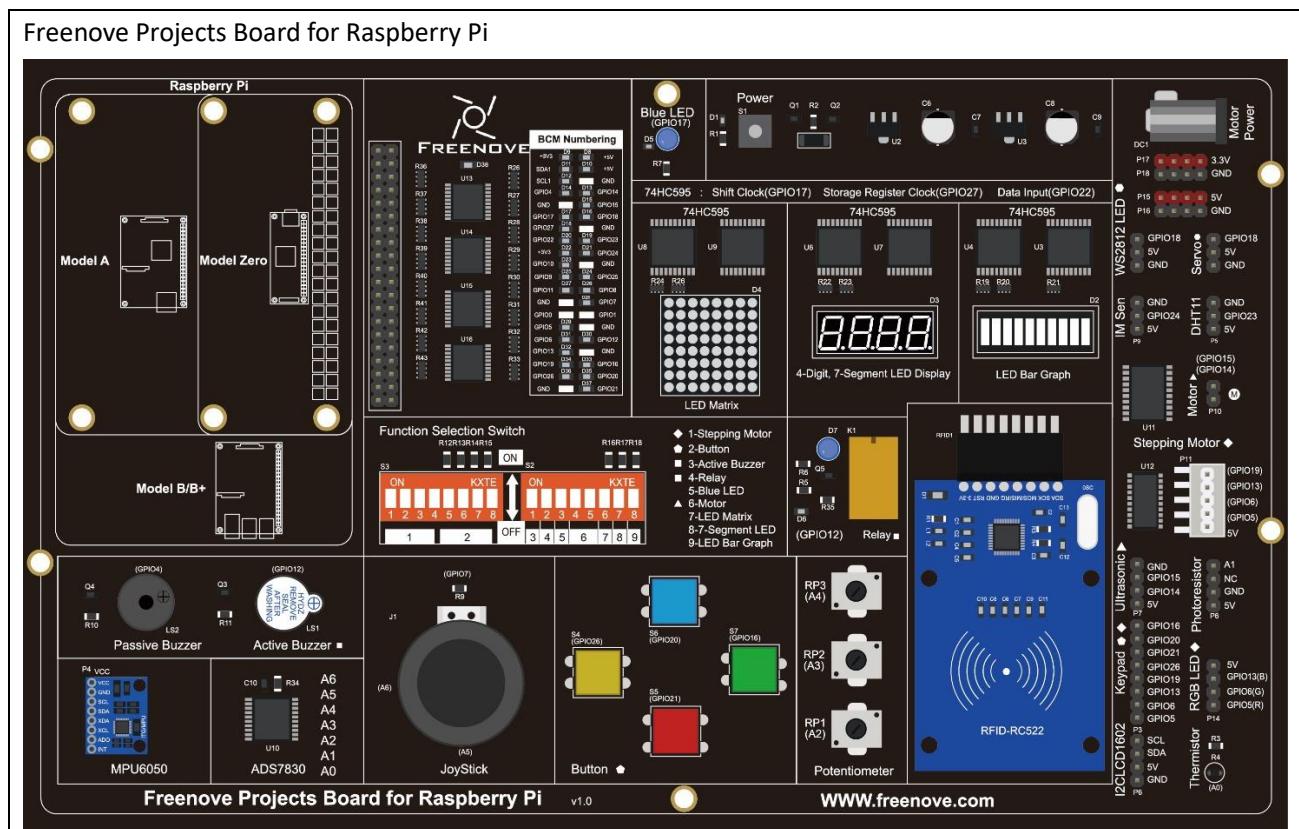


Circuit

Schematic diagram

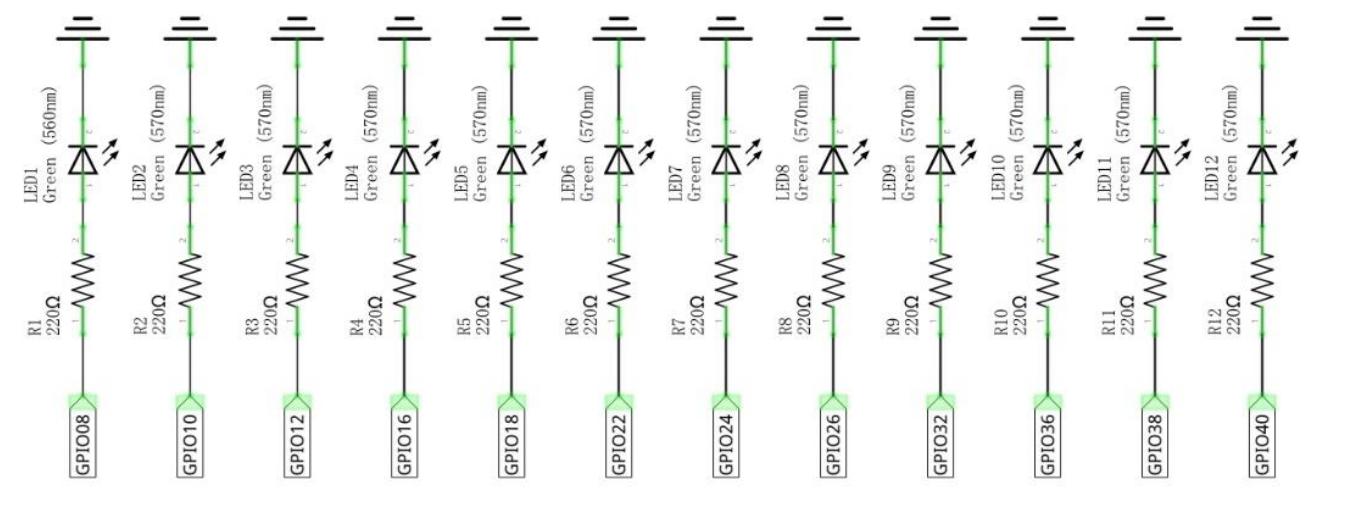

Hardware connection.

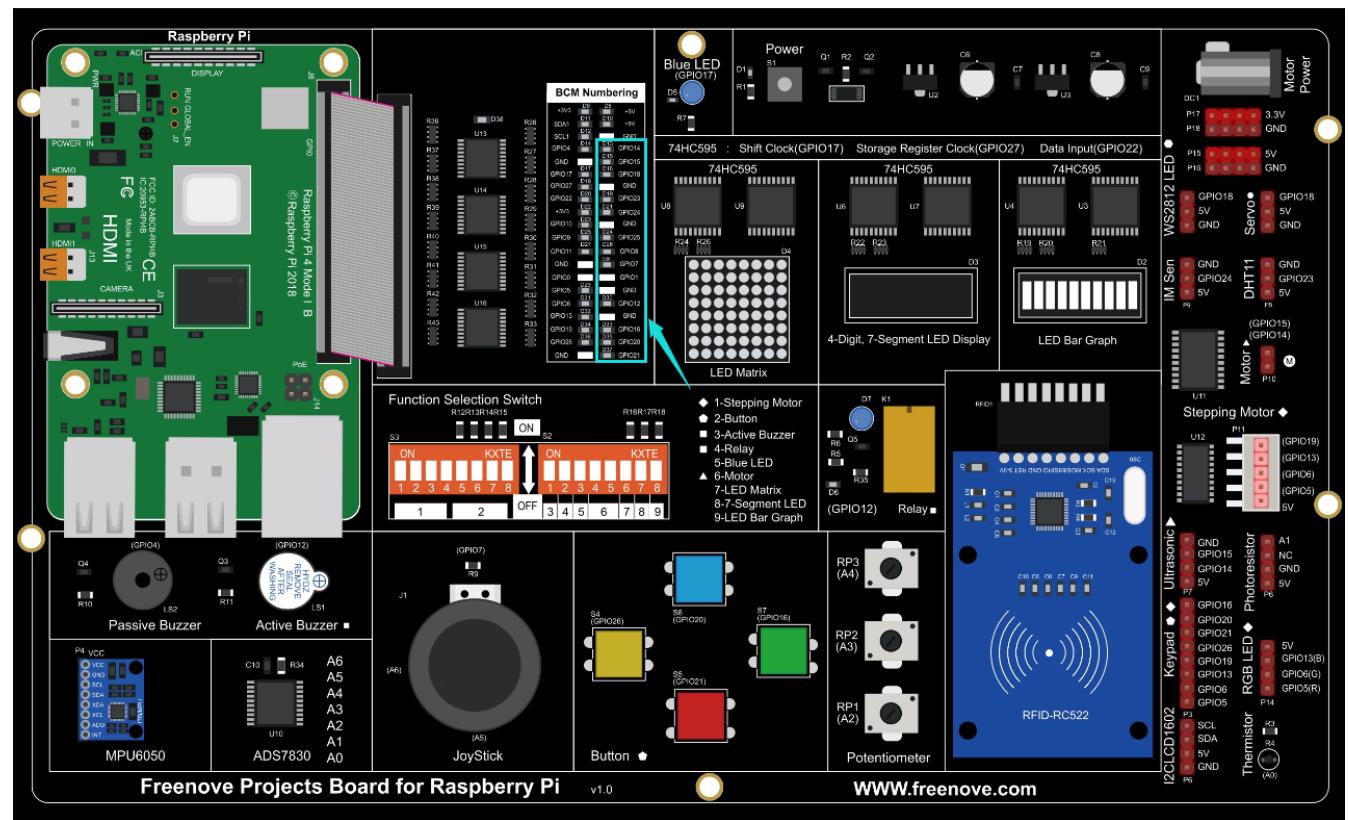

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 2.1.1 FollowLight

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_02_1_1_FollowLight
```


And then right-click to select Processing IDE

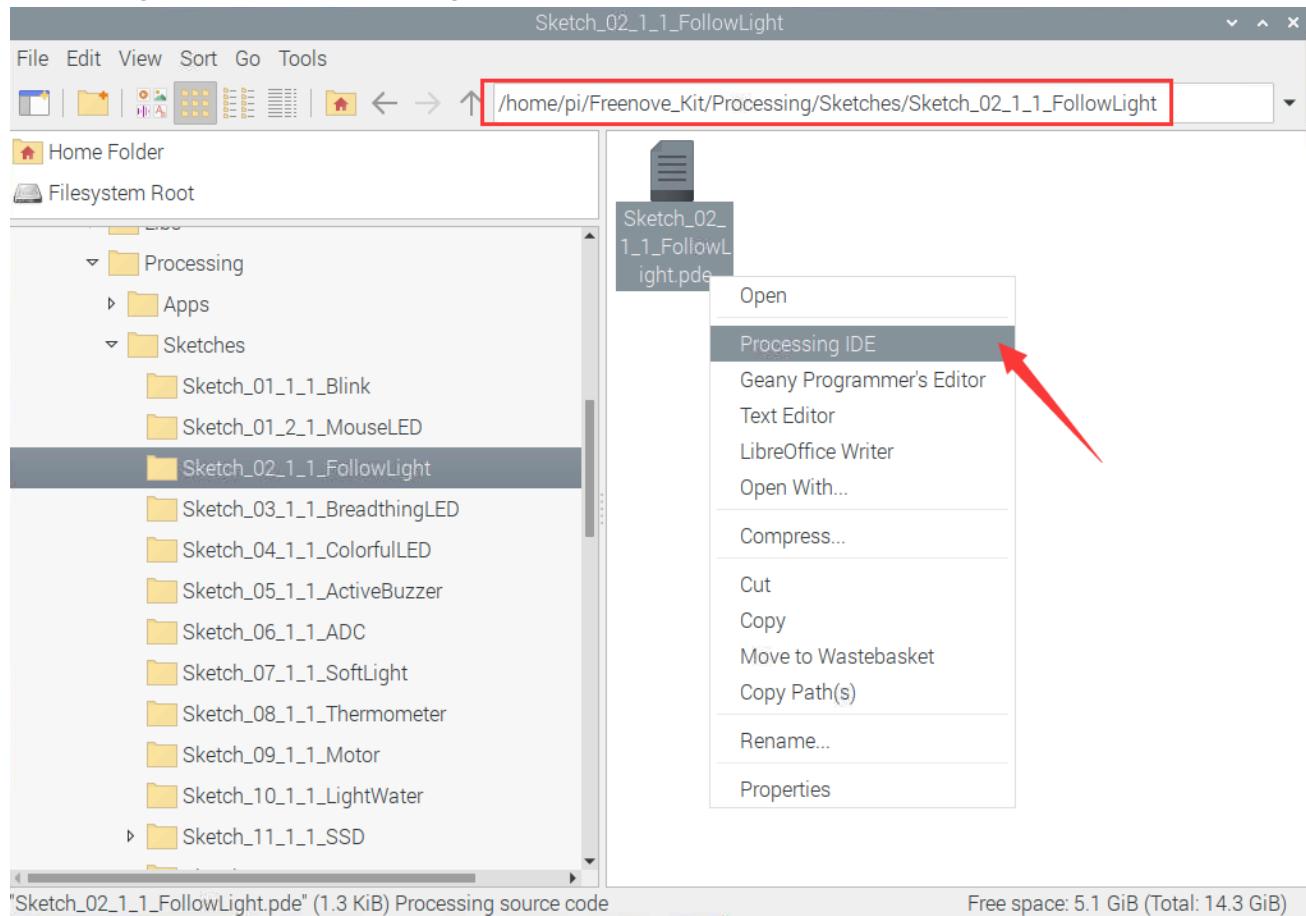

Or you can enter a command in the terminal to open the file Sketch_02_1_1_FollowLight. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_02_1_1_FollowLight/Sketch_02_1_1_FollowLight.pde
```


Open the Processing and click Run.

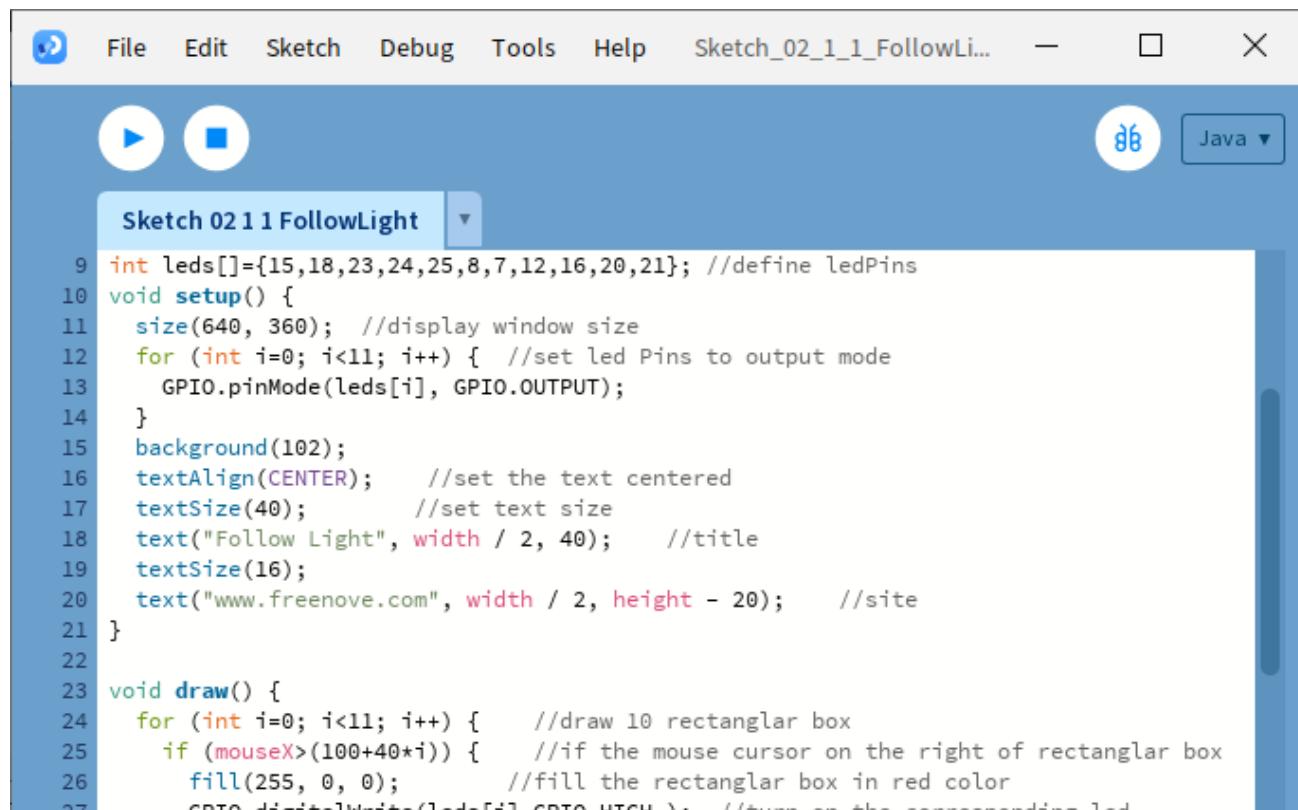

The screenshot shows the Processing IDE interface with the title bar "Sketch_02_1_1_FollowLi...". The code area contains the following Java code:

```
9 int leds[]={15,18,23,24,25,8,7,12,16,20,21}; //define ledPins
10 void setup() {
11     size(640, 360); //display window size
12     for (int i=0; i<11; i++) { //set led Pins to output mode
13         GPIO.pinMode(leds[i], GPIO.OUTPUT);
14     }
15     background(102);
16     textAlign(CENTER); //set the text centered
17     textSize(40); //set text size
18     text("Follow Light", width / 2, 40); //title
19     textSize(16);
20     text("www.freenove.com", width / 2, height - 20); //site
21 }
22
23 void draw() {
24     for (int i=0; i<11; i++) { //draw 10 rectangular box
25         if (mouseX>(100+40*i)) { //if the mouse cursor on the right of rectangular box
26             fill(255, 0, 0); //fill the rectangular box in red color
27             GOTO digitalWrite(1,leds[i]); GOTO HTRW }; //turn on the corresponding led
28     }
29 }
```

The result is as follows. The LED “touched” by the mouse cursor will be lit.

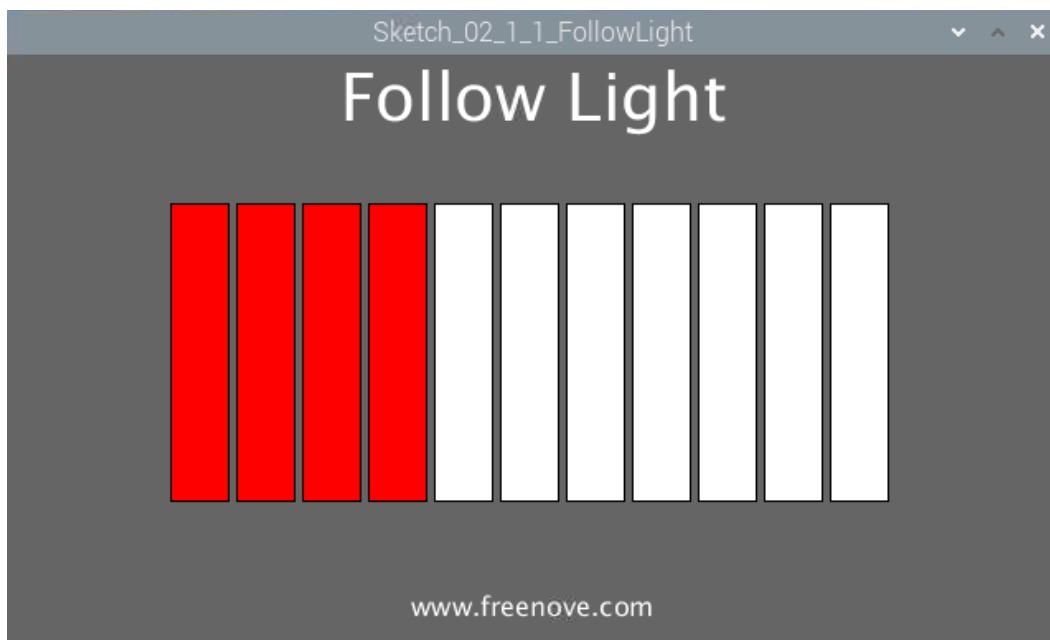

The following is program code:

```
1 import freenove.processing.io.*;
2
3 int leds[]={17, 27, 22, 10, 9, 11, 5, 6, 13, 19, 26}; //define ledPins
4
5 void setup() {
```

```

6   size(640, 360); //display window size
7   for (int i=0; i<11; i++) { //set led Pins to output mode
8     GPIO.pinMode(leds[i], GPIO.OUTPUT);
9   }
10  background(102);
11  textAlign(CENTER); //set the text centered
12  textSize(40); //set text size
13  text("Follow Light", width / 2, 40); //title
14  textSize(16);
15  text("www.freenove.com", width / 2, height - 20); //site
16 }
17
18 void draw() {
19   for (int i=0; i<11; i++) { //draw 10 rectangular box
20     if (mouseX>(100+40*i)) { //if the mouse cursor on the right of rectangular box
21       fill(255, 0, 0); //fill the rectangular box in red color
22       GPIO.digitalWrite(leds[i], GPIO.HIGH ); //turn on the corresponding led
23     } else {
24       fill(255, 255, 255); //else fill the rectangular box in white color and turn off the led
25       GPIO.digitalWrite(leds[i], GPIO.LOW);
26     }
27     rect(100+40*i, 90, 35, 180); //draw a rectangular box
28   }
29 }
```

In the function draw(), we draw 11 rectangles to represent 11 LEDs of LED Bar Graph. We make rectangles on the left of mouse filled with red, corresponding LEDs turned ON, and the rectangles on the right of mouse is white, corresponding LEDs turned OFF. In this way, when slide the mouse to right, the more LEDs on the left of mouse will be turned ON. When to the left, the reverse is the case.

```

void draw() {
  for (int i=0; i<11; i++) { //draw 10 rectangular box
    if (mouseX>(100+40*i)) { //if the mouse cursor on the right of rectangular box
      fill(255, 0, 0); //fill the rectangular box in red color
      GPIO.digitalWrite(leds[i], GPIO.HIGH ); //turn on the corresponding led
    } else {
      fill(255, 255, 255); //else fill the rectangular box in white color and turn off the led
      GPIO.digitalWrite(leds[i], GPIO.LOW);
    }
    rect(100+40*i, 90, 35, 180); //draw a rectangular box
  }
}
```

If you have any concerns, please send an email to: support@freenove.com

Chapter 3 PWM


In this chapter, we will learn how to use PWM.

Project 3.1 BreathingLED


In this project, we will make a breathing LED, which means that an LED that is OFF will then turn ON gradually and then gradually turn OFF like "breathing" and the Display Window will show a breathing LED pattern and a progress bar at the same time.

Component List


Freenove Projects Board for Raspberry Pi

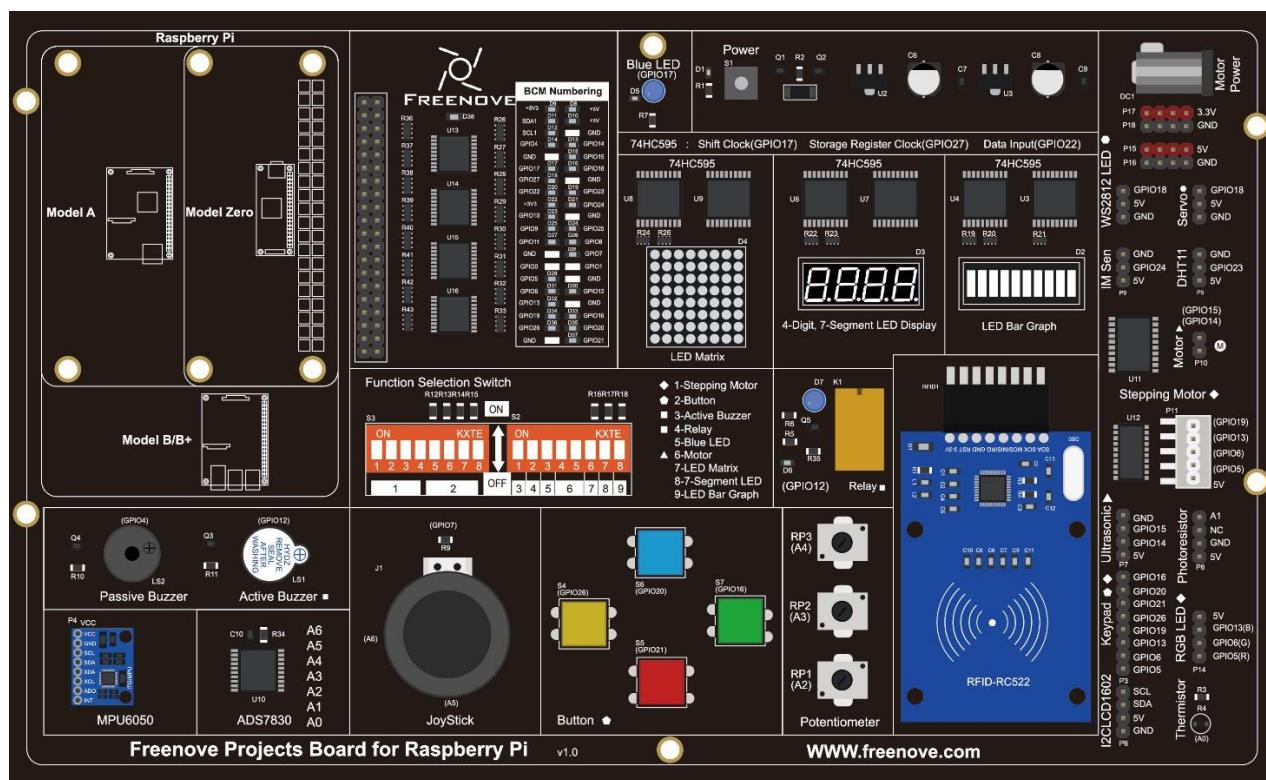

Raspberry Pi

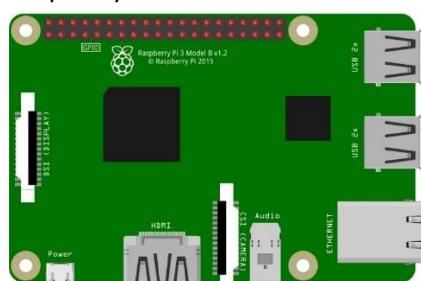


GPIO Ribbon Cable

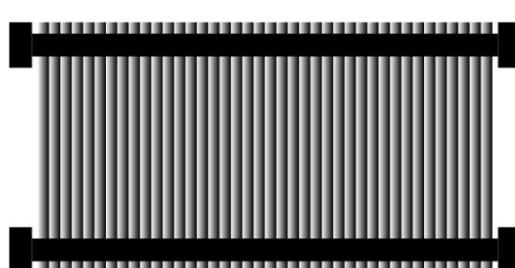


Circuit

Schematic diagram

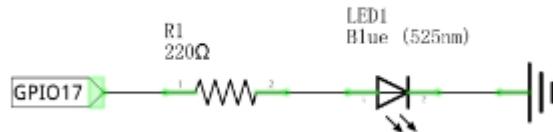

Hardware connection.

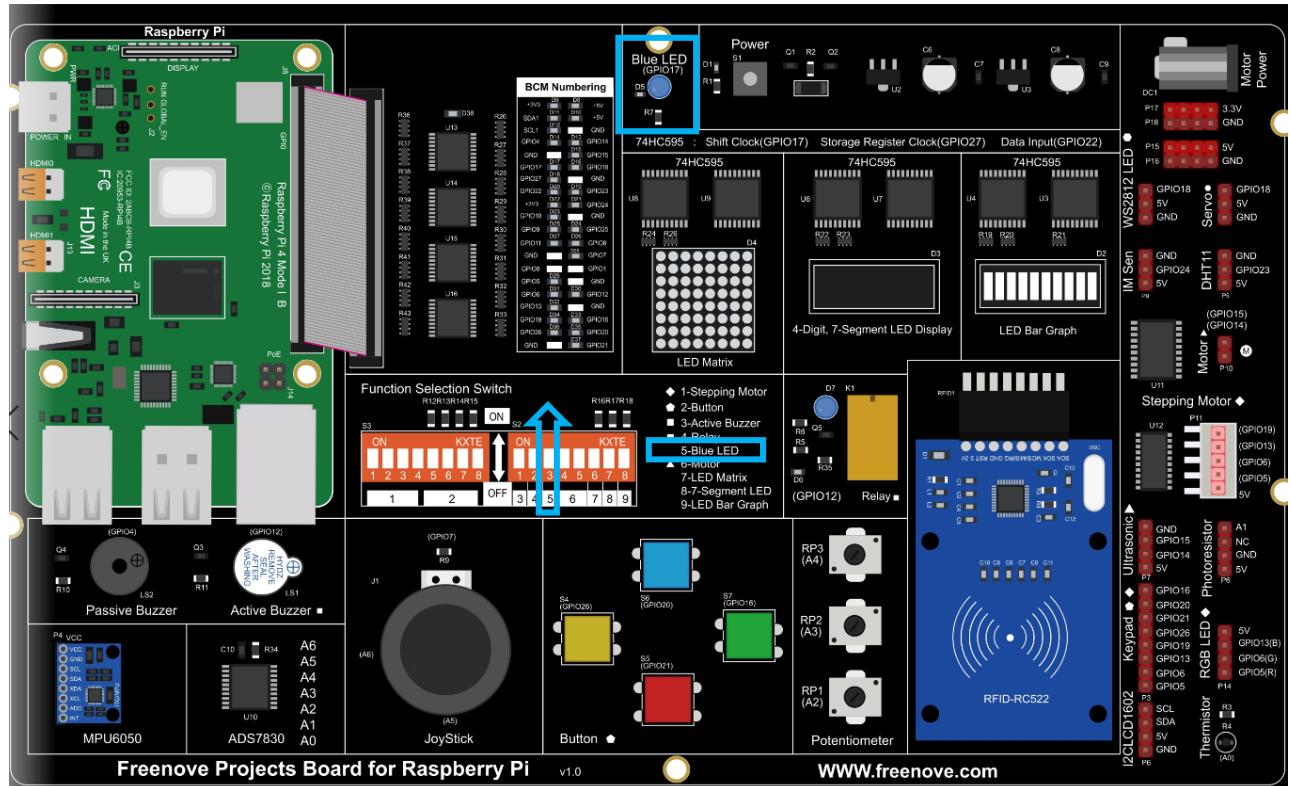

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 3.1.1 BreathingLED

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_03_1_1_BreadthingLED
```

And then right-click to select Processing IDE

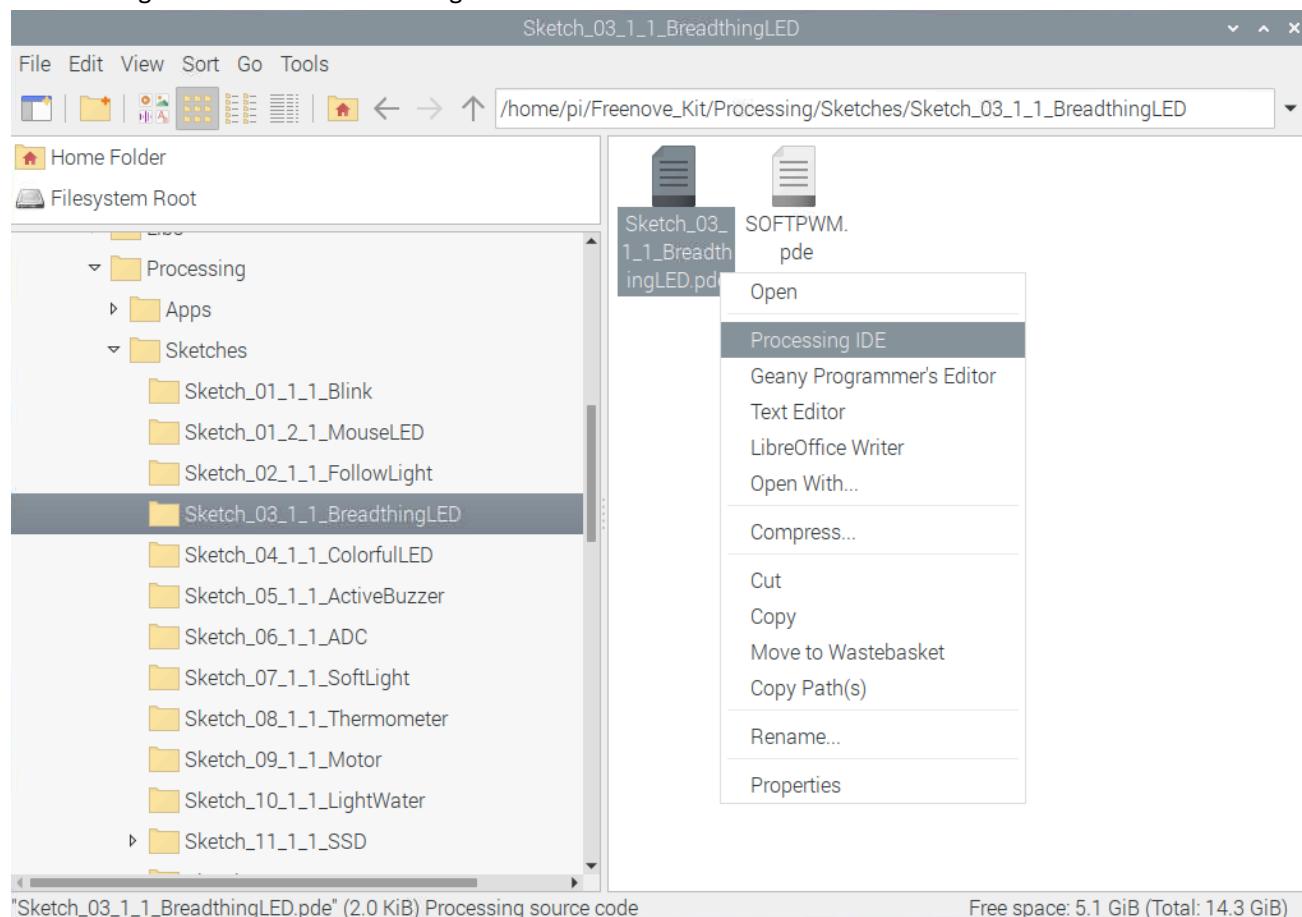

Or you can enter a command in the terminal to open the file Sketch_03_1_1_BreadthingLED. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_03_1_1_BreadthingLED/Sketch_03_1_1_BreadthingLED.pde
```

Open Processing and click Run.

The screenshot shows the Processing IDE interface. The title bar reads "Sketch_03_1_1_BreadthingLED". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh button. A status bar at the bottom shows "Console" and "Errors". The main code area contains the following Java code:

```
9 int ledPin = 17; //led Pin
10 int borderSize = 40;
11 float t = 0.0; //progress percent
12 float tStep = 0.004; // speed
13 SOFTPWM p = new SOFTPWM(ledPin, 10, 100); //Create a PWM pin,initialize the duty cycle
14 void setup() {
15   size(640, 360); //display window size
16   strokeWeight(4); //stroke Weight
17 }
18
19 void draw() {
20   // Show static value when mouse is pressed, animate otherwise
21   if (mousePressed) {
22     int a = constrain(mouseX, borderSize, width - borderSize);
23     t = map(a, borderSize, width - borderSize, 0.0, 1.0);
24   } else {
25     t += tStep;
26     if (t > 1.0) t = 0.0;
27   }
}
```

The result is as shown below. The LED will light up gradually, and then extinguish and light up again. You can control the brightness with the mouse.



The following is program code:

```
1 import freenove.processing.io.*;
2
3 int ledPin = 17;      //led Pin
4 int borderSize = 40;  //
5 float t = 0.0;        //progress percent
6 float tStep = 0.004;  // speed
7 SOFTPWM p = new SOFTPWM(ledPin, 10, 100);    //Create a PWM pin, initialize the duty cycle and
8 period
9 void setup() {
10   size(640, 360);  //display window size
11   strokeWeight(4); //stroke Weight
12 }
13
14 void draw() {
15   // Show static value when mouse is pressed, animate otherwise
16   if (mousePressed) {
17     int a = constrain(mouseX, borderSize, width - borderSize);
18     t = map(a, borderSize, width - borderSize, 0.0, 1.0);
19   } else {
20     t += tStep;
21     if (t > 1.0) t = 0.0;
```

```
22 }
23 p.softPwmWrite((int)(t*100)); //wirte the duty cycle according to t
24 background(255); //A white background
25 titleAndSiteInfo(); //title and Site infomation
26
27 fill(255-t*255, 255-t*255, 255); //cycle
28 ellipse(width/2, height/2, 100, 100);
29
30 pushMatrix();
31 translate(borderSize, height - 45);
32 int barLength = width - 2*borderSize;
33
34 barBgStyle(); //progressbar bg
35 line(0, 0, barLength, 0);
36 line(barLength, -5, barLength, 5);
37
38 barStyle(); //progressbar
39 line(0, -5, 0, 5);
40 line(0, 0, t*barLength, 0);
41
42 barLabelStyle(); //progressbar label
43 text("progress : "+nf(t*100, 2, 2), barLength/2, -25);
44 popMatrix();
45 }
46
47 void titleAndSiteInfo() {
48   fill(0);
49   textAlign(CENTER); //set the text centered
50   textSize(40); //set text size
51   text("Breathing Light", width / 2, 40); //title
52   textSize(16);
53   text("www. freenove. com", width / 2, height - 20); //site
54 }
55 void barBgStyle() {
56   stroke(220);
57   noFill();
58 }
59
60 void barStyle() {
61   stroke(50);
62   noFill();
63 }
64
65 void barLabelStyle() {
```

```

66   noStroke();
67   fill(120);
68 }
```

First, use SOFTPWM class to create a PWM pin, which is used to control the brightness of LED. Then define a variable “t” and a variable “tStep” to control the PWM duty cycle and the rate at which “t” increases.

```

float t = 0.0;      //progress percent
float tStep = 0.004; // speed
SOFTPWM p = new SOFTPWM(ledPin, 10, 100); //Create a PWM pin, initialize the duty cycle and
period
```

In the function draw, if there is a click detected, the coordinate in X direction of the mouse will be mapped into the duty cycle “t”; Otherwise, duty cycle “t” will be increased gradually and PWM with the duty cycle will be output.

```

if (mousePressed) {
    int a = constrain(mouseX, borderSize, width - borderSize);
    t = map(a, borderSize, width - borderSize, 0.0, 1.0);
} else {
    t += tStep;
    if (t > 1.0) t = 0.0;
}
p.softPwmWrite((int)(t*100)); //wirte the duty cycle according to t
```

The next code is designed to draw a circle filled with colors in different depth according to the “t” value, which is used to simulate LEDs with different brightness.

```

fill(255-t*255, 255-t*255, 255); //cycle
ellipse(width/2, height/2, 100, 100);
```

The last code is designed to draw the progress bar and the percentage of the progress.


```

barBgStyle(); //progressbar bg
line(0, 0, barLength, 0);
line(barLength, -5, barLength, 5);

barStyle(); //progressbar
line(0, -5, 0, 5);
line(0, 0, t*barLength, 0);

barLabelStyle(); //progressbar label
text("progress : "+nf(t*100, 2, 2), barLength/2, -25);
```

In processing software, you will see a tag page "SOFTPWM" in addition to the above code.

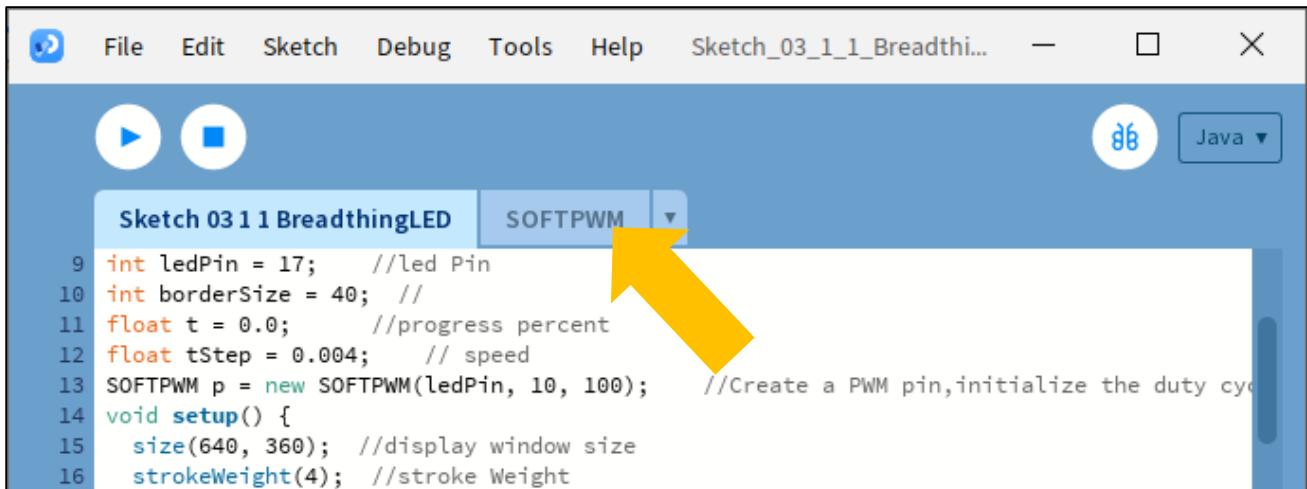

```
9 int ledPin = 17;      //led Pin
10 int borderSize = 40;   //
11 float t = 0.0;        //progress percent
12 float tStep = 0.004;   // speed
13 SOFTPWM p = new SOFTPWM(ledPin, 10, 100);    //Create a PWM pin,initialize the duty cycle
14 void setup() {
15     size(640, 360); //display window size
16     strokeWeight(4); //stroke Weight
```

Reference

class SOFTPWM

```
public SOFTPWM(int iPin, int dc, int pwmRange):
```

Constructor, used to create a PWM pin, set the pwmRange and initial duty cycle. The minimum of pwmRange is 0.1ms. So pwmRange=100 means that the PWM duty cycle is $0.1\text{ms} \times 100 = 10\text{ms}$.

```
public void softPwmWrite(int value)
```

Set PMW duty cycle.

```
public void softPwmStop()
```

Stop outputting PWM.

If you have any concerns, please send an email to: support@freenove.com

Chapter 4 RGBLED


In this chapter, we will learn how to use RGBLED.

Project 4.1 Multicolored LED


This project will make a Multicolored LED, namely, use Processing to control the color of RGBLED.

Component List


Freenove Projects Board for Raspberry Pi

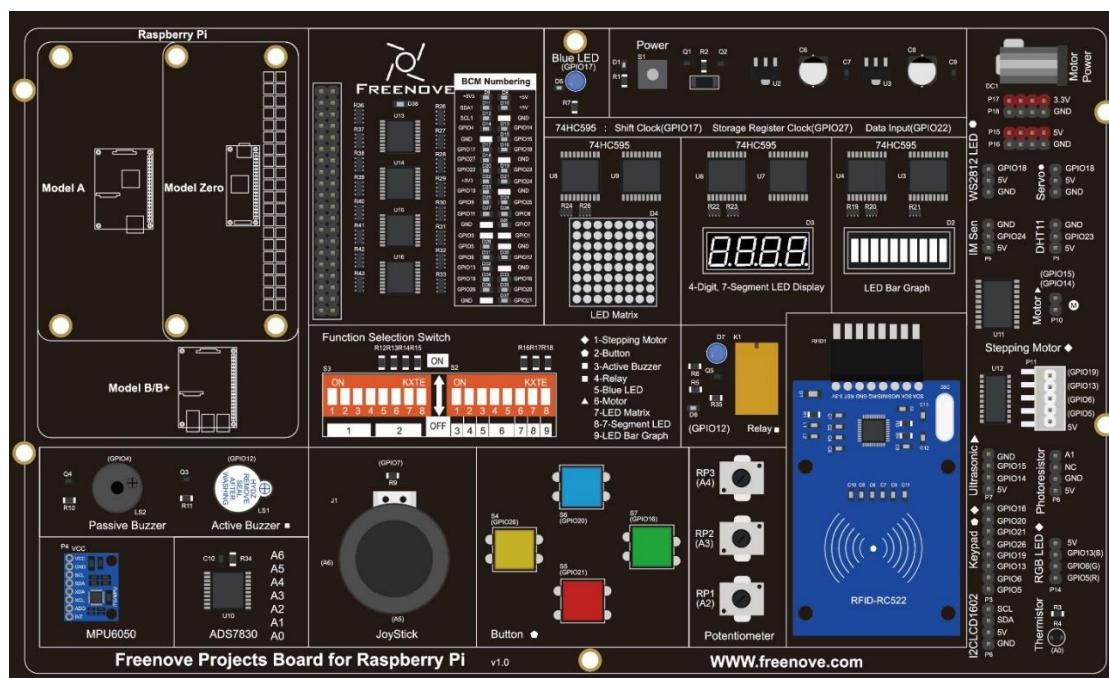

Raspberry Pi

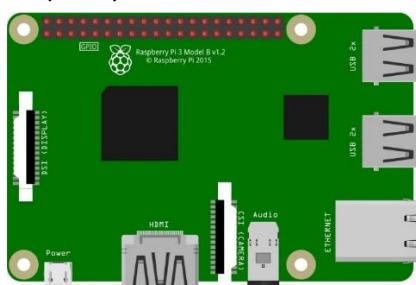


GPIO Ribbon Cable

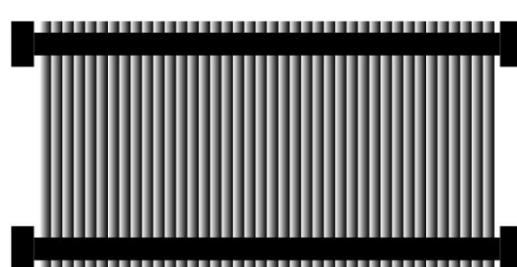

Jumper Wire




RGBLED Module

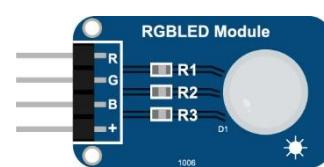


Circuit

Schematic diagram

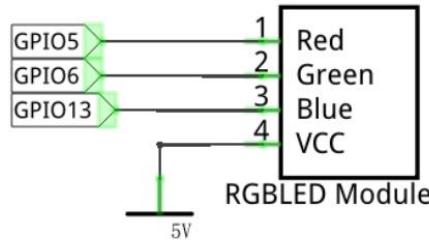

Hardware connection.

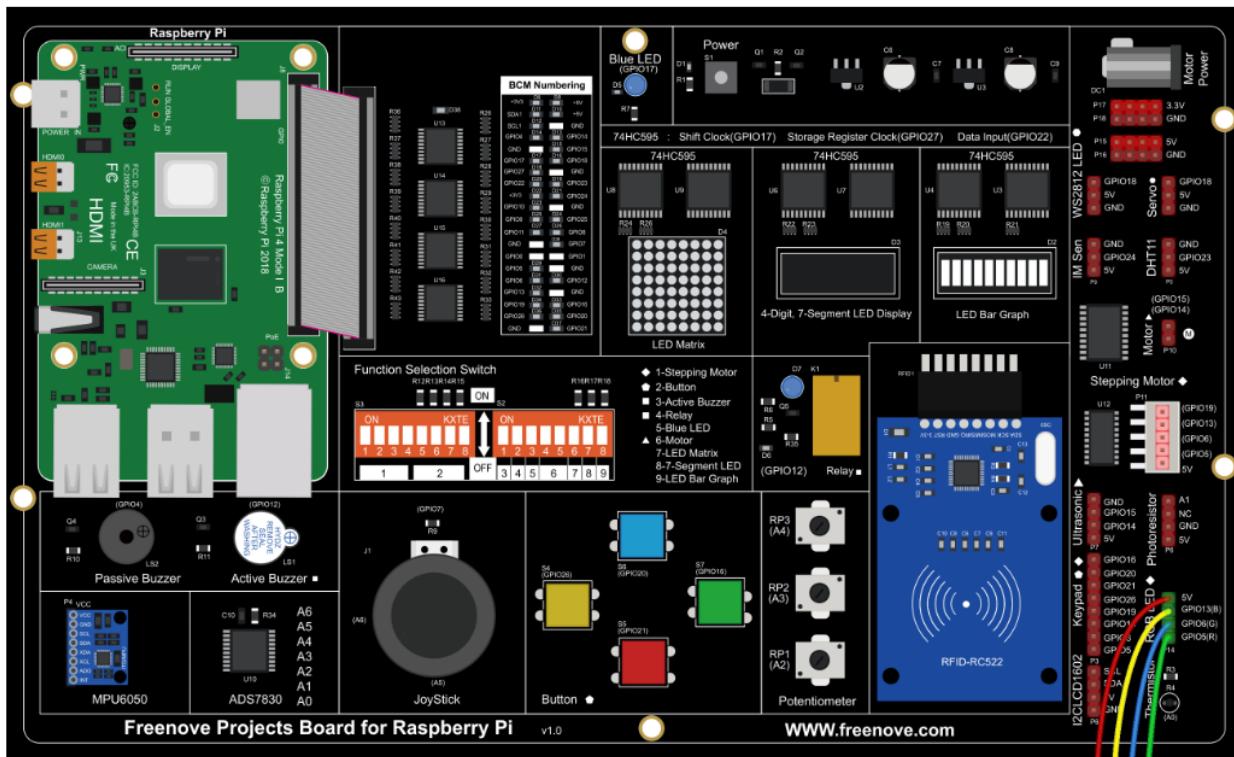

Stepper motor, keypad and RGBLED must NOT be used at the same time.

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 4.1.1 ColorfullLED

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_04_1_1_ColorfullLED
```

And then right-click to select Processing IDE

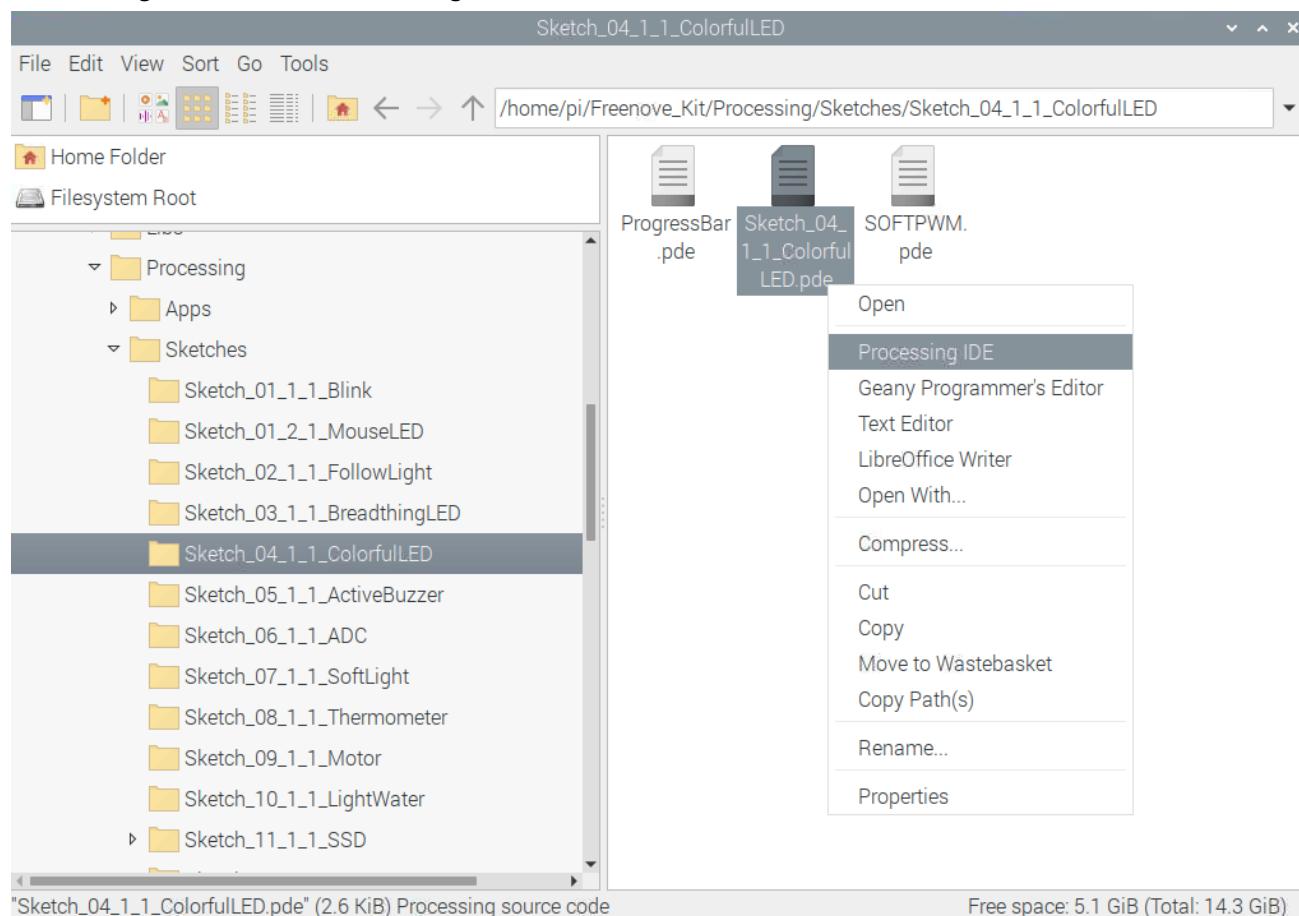

Or you can enter a command in the terminal to open the file Sketch_04_1_1_ColorfullLED. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_04_1_1_ColorfullLED/Sketch_04_1_1_ColorfullLED.pde
```


Open Processing and click Run.

The screenshot shows the Processing IDE interface. The title bar reads "Sketch_04_1_1_Colorful...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh button. The code editor tab is titled "Sketch 04 1 1 ColorfulLED" and is currently active. The code itself is as follows:

```
9 int bluePin = 13; //blue Pin
10 int greenPin = 6; //green Pin
11 int redPin = 5; //red Pin
12 int borderSize = 40; //picture border size
13 //Create a PWM pin,initialize the duty cycle and period
14 SOFTPWM pRed = new SOFTPWM(redPin, 100, 100);
15 SOFTPWM pGreen = new SOFTPWM(greenPin, 100, 100);
16 SOFTPWM pBlue = new SOFTPWM(bluePin, 100, 100);
17 //instantiate three ProgressBar Object
18 ProgressBar rBar, gBar, bBar;
19 boolean rMouse = false, gMouse = false, bMouse = false;
20 void setup() {
21   size(640, 360); //display window size
22   strokeWeight(4); //stroke Weight
23   //define the ProgressBar length
24   int barLength = width - 2*borderSize;
25   //Create ProgressBar Object
26   rBar = new ProgressBar(borderSize, height - 85, barLength);
27   gBar = new ProgressBar(borderSize, height - 65, barLength);
```

The bottom of the IDE shows tabs for "Console" and "Errors".

The result is as shown below. You can change the color of the LED by dragging the slider.

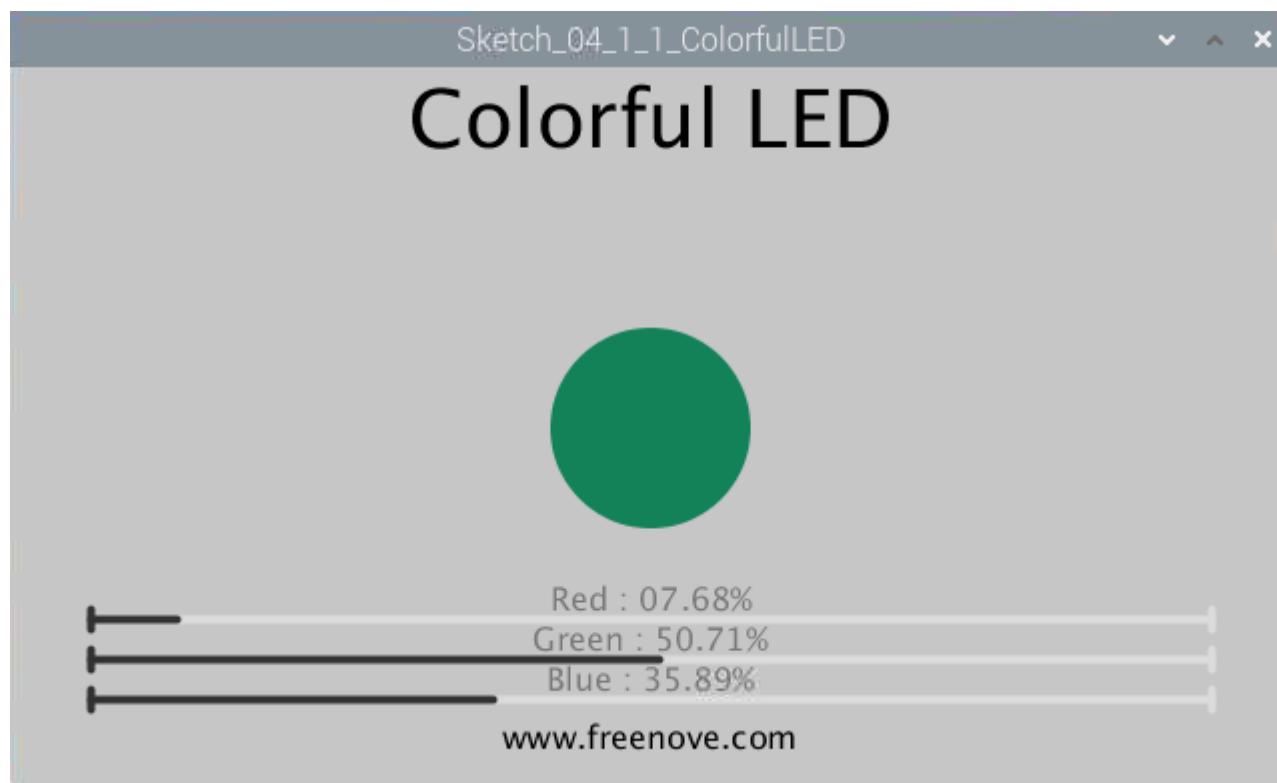

This project contains a lot of code files, and the core code is contained in the file Sketch_04_1_1_ColorfulLED. The other files only contain some custom classes.



The following is program code:

```
1 import freenove.processing.io.*;
2
3 int bluePin = 13; //blue Pin
4 int greenPin = 6; //green Pin
5 int redPin = 5; //red Pin
6 int borderSize = 40; //picture border size
7 //Create a PWM pin, initialize the duty cycle and period
8 SOFTPWM pRed = new SOFTPWM(redPin, 100, 100);
9 SOFTPWM pGreen = new SOFTPWM(greenPin, 100, 100);
10 SOFTPWM pBlue = new SOFTPWM(bluePin, 100, 100);
11 //instantiate three ProgressBar Object
12 ProgressBar rBar, gBar, bBar;
```



```
13 boolean rMouse = false, gMouse = false, bMouse = false;
14 void setup() {
15     size(640, 360); //display window size
16     strokeWeight(4); //stroke Weight
17     //define the ProgressBar length
18     int barLength = width - 2*borderSize;
19     //Create ProgressBar Object
20     rBar = new ProgressBar(borderSize, height - 85, barLength);
21     gBar = new ProgressBar(borderSize, height - 65, barLength);
22     bBar = new ProgressBar(borderSize, height - 45, barLength);
23     //Set ProgressBar's title
24     rBar.setTitle("Red");gBar.setTitle("Green");bBar.setTitle("Blue");
25 }
26
27 void draw() {
28     background(200); //A white background
29     titleAndSiteInfo(); //title and Site infomation
30
31     fill(rBar.progress*255, gBar.progress*255, bBar.progress*255); //cycle color
32     ellipse(width/2, height/2, 100, 100); //show cycle
33
34     rBar.create(); //Show progressBar
35     gBar.create();
36     bBar.create();
37 }
38
39 void mousePressed() {
40     if ( (mouseY< rBar.y+5) && (mouseY>rBar.y-5) ) {
41         rMouse = true;
42     } else if ( (mouseY< gBar.y+5) && (mouseY>gBar.y-5) ) {
43         gMouse = true;
44     } else if ( (mouseY< bBar.y+5) && (mouseY>bBar.y-5) ) {
45         bMouse = true;
46     }
47 }
48 void mouseReleased() {
49     rMouse = false;
50     bMouse = false;
51     gMouse = false;
52 }
53 void mouseDragged() {
54     int a = constrain(mouseX, borderSize, width - borderSize);
55     float t = map(a, borderSize, width - borderSize, 0.0, 1.0);
56     if (rMouse) {
```

```

57     pRed.softPwmWrite((int)(100-t*100)); //wirte the duty cycle according to t
58     rBar.setProgress(t);
59 } else if (gMouse) {
60     pGreen.softPwmWrite((int)(100-t*100)); //wirte the duty cycle according to t
61     gBar.setProgress(t);
62 } else if (bMouse) {
63     pBlue.softPwmWrite((int)(100-t*100)); //wirte the duty cycle according to t
64     bBar.setProgress(t);
65 }
66 }
67
68 void titleAndSiteInfo() {
69     fill(0);
70     textAlign(CENTER); //set the text centered
71     textSize(40); //set text size
72     text("Colorful LED", width / 2, 40); //title
73     textSize(16);
74     text("www. freenove. com", width / 2, height - 20); //site
75 }
```

In the code, first create three PWM pins and three progress bars to control RGBLED.

```

SOFTPWM pRed = new SOFTPWM(redPin, 100, 100);
SOFTPWM pGreen = new SOFTPWM(greenPin, 100, 100);
SOFTPWM pBlue = new SOFTPWM(bluePin, 100, 100);
//instantiate three ProgressBar Object
ProgressBar rBar, gBar, bBar;
```

And then in function setup(), define position and length of progress bar according to the size of Display Window, and set the name of each progress bar.

```

void setup() {
    size(640, 360); //display window size
    strokeWeight(4); //stroke Weight
    //define the ProgressBar length
    int barLength = width - 2*borderSize;
    //Create ProgressBar Object
    rBar = new ProgressBar(borderSize, height - 85, barLength);
    gBar = new ProgressBar(borderSize, height - 65, barLength);
    bBar = new ProgressBar(borderSize, height - 45, barLength);
    //Set ProgressBar's title
    rBar.setTitle("Red"); gBar.setTitle("Green"); bBar.setTitle("Blue");
}
```

In function draw(), first set background, header and other basic information. Then draw a circle and set its color according to the duty cycle of three channels of RGB. Finally draw three progress bars.

```

void draw() {
    background(200); //A white background
    titleAndSiteInfo(); //title and Site information

    fill(rBar.progress*255, gBar.progress*255, bBar.progress*255); //cycle color
    ellipse(width/2, height/2, 100, 100); //show cycle

    rBar.create(); //Show progressBar
    gBar.create();
    bBar.create();
}

```

System functions `mousePressed()`, `mouseReleased()` and `mouseDragged()` are used to determine whether the mouse drags the progress bar and set the schedule. If the mouse button is pressed in a progress bar, then the `mousePressed ()` sets the progress flag `rgbMouse` to true, `mouseDragged (mouseX)` maps progress value to set corresponding PWM. When the mouse is released, `mouseReleased()` sets the progress flag `rgbMouse` to false..

```

void mousePressed() {
    if ( (mouseY< rBar.y+5) && (mouseY>rBar.y-5) ) {
        rMouse = true;
    } else if ( (mouseY< gBar.y+5) && (mouseY>gBar.y-5) ) {
        gMouse = true;
    } else if ( (mouseY< bBar.y+5) && (mouseY>bBar.y-5) ) {
        bMouse = true;
    }
}

void mouseReleased() {
    rMouse = false;
    bMouse = false;
    gMouse = false;
}

void mouseDragged() {
    int a = constrain(mouseX, borderSize, width - borderSize);
    float t = map(a, borderSize, width - borderSize, 0.0, 1.0);
    if (rMouse) {
        pRed.softPwmWrite((int)(100-t*100)); //write the duty cycle according to t
        rBar.setProgress(t);
    } else if (gMouse) {
        pGreen.softPwmWrite((int)(100-t*100)); //write the duty cycle according to t
        gBar.setProgress(t);
    } else if (bMouse) {
        pBlue.softPwmWrite((int)(100-t*100)); //write the duty cycle according to t
        bBar.setProgress(t);
    }
}

```

Reference

class ProgressBar

This is a custom class that is used to create a progress bar.

```
public ProgressBar(int ix, int iy, int barlen)
```

Constructor, used to create ProgressBar, the parameters for coordinates X, Y and length of ProgressBar.

```
public void setTitle(String str)
```

Used to set the name of progress bar, which will be displayed in the middle of the progress bar.

```
public void setProgress(float pgress)
```

Used to set the progress of progress bar. The parameter: 0<pgress<1.0.

```
public void create() & public void create(float pgress)
```

Used to draw progress bar.

If you have any concerns, please send an email to: support@freenove.com

Chapter 5 Buzzer


In this chapter we will learn how to use a buzzer.

Project 5.1 ActiveBuzzer


In this project, we will use the mouse to control an active buzzer.

Component List


Freenove Projects Board for Raspberry Pi

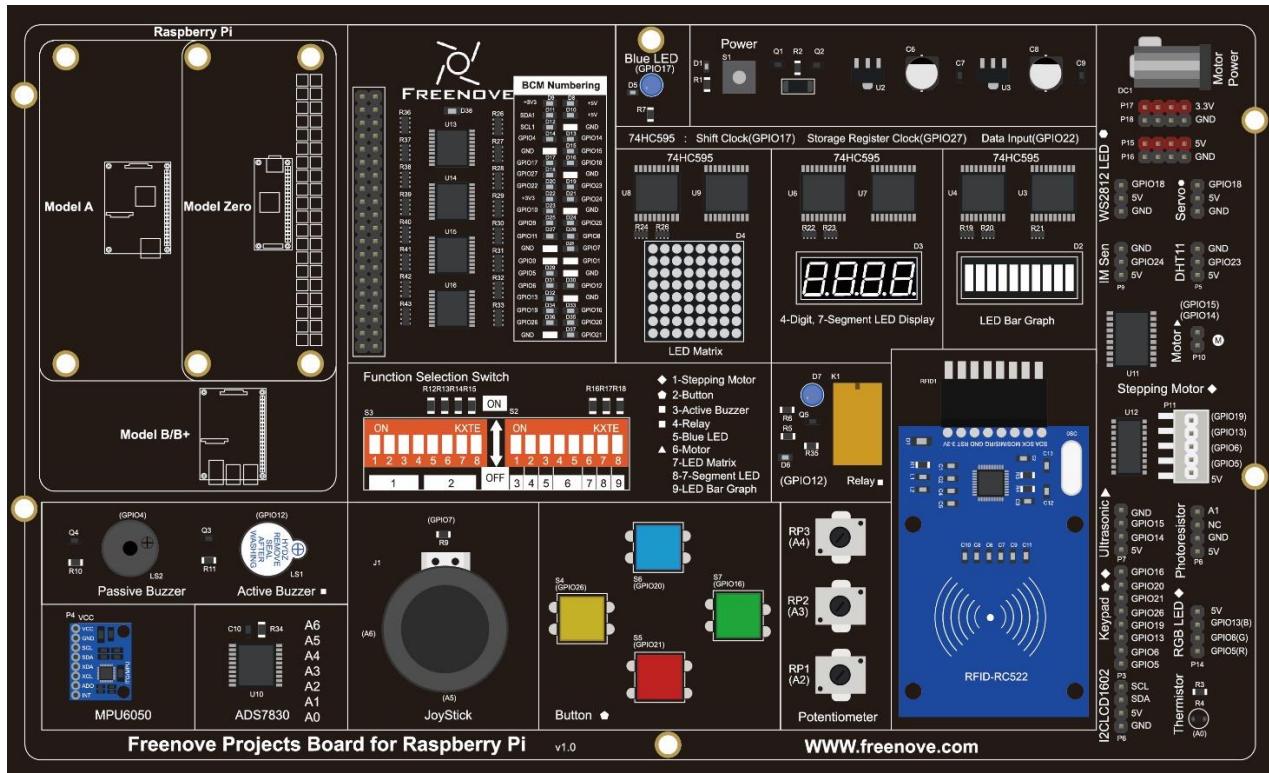

Raspberry Pi

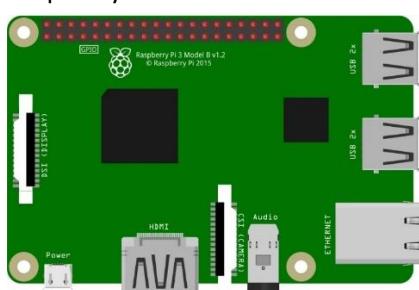


GPIO Ribbon Cable


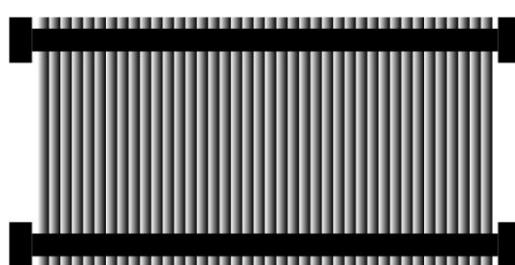


Circuit

Schematic diagram with RPi GPIO Extension Shield

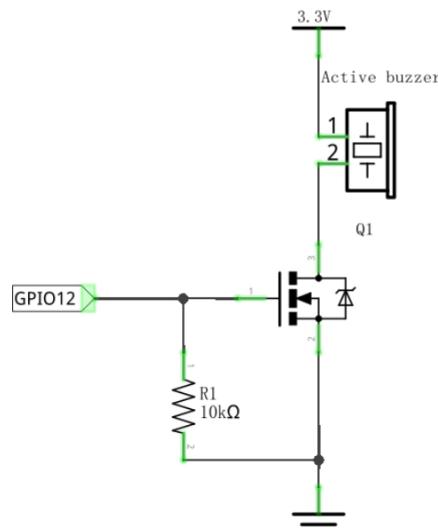

Hardware connection.

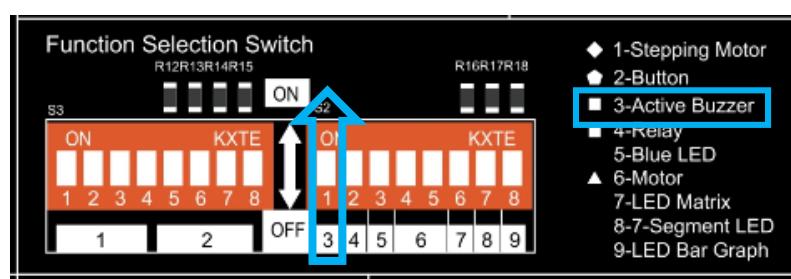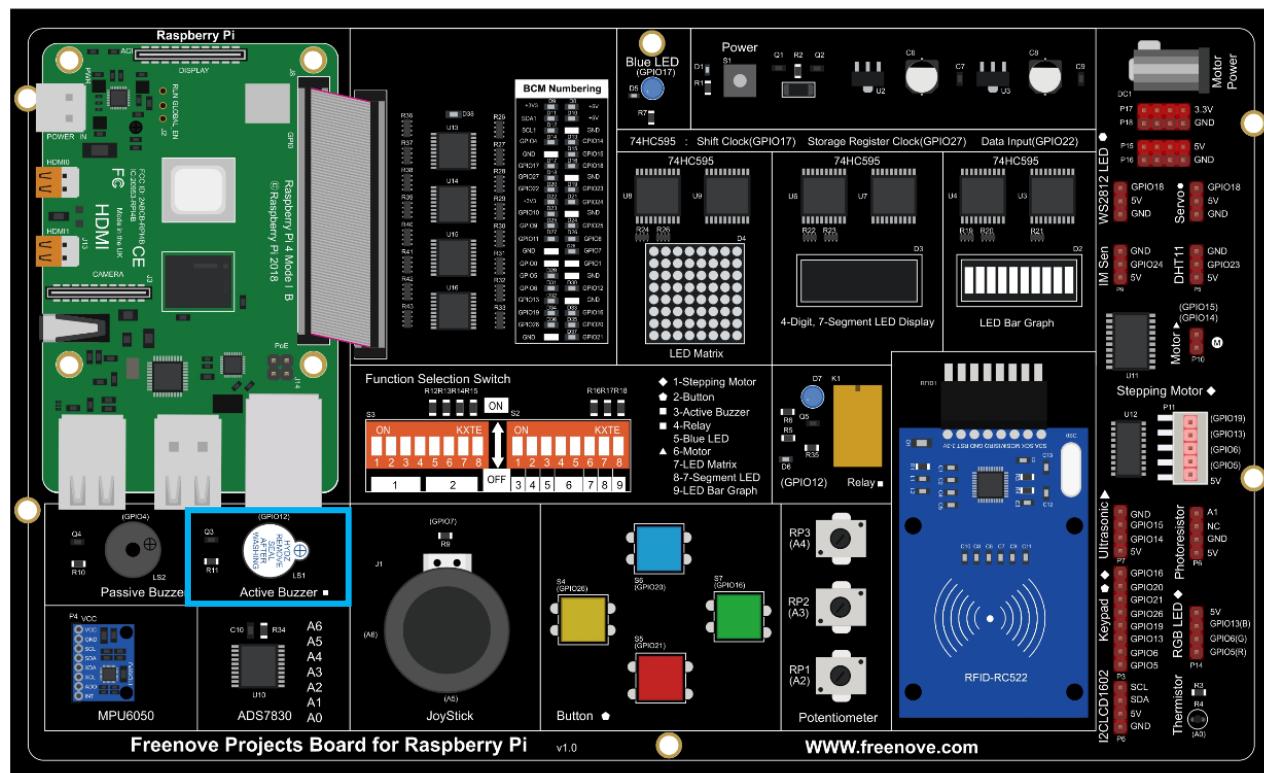


Sketch

Sketch 5.1.1 ActiveBuzzer

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_05_1_1_ActiveBuzzer
```

And then right-click to select Processing IDE

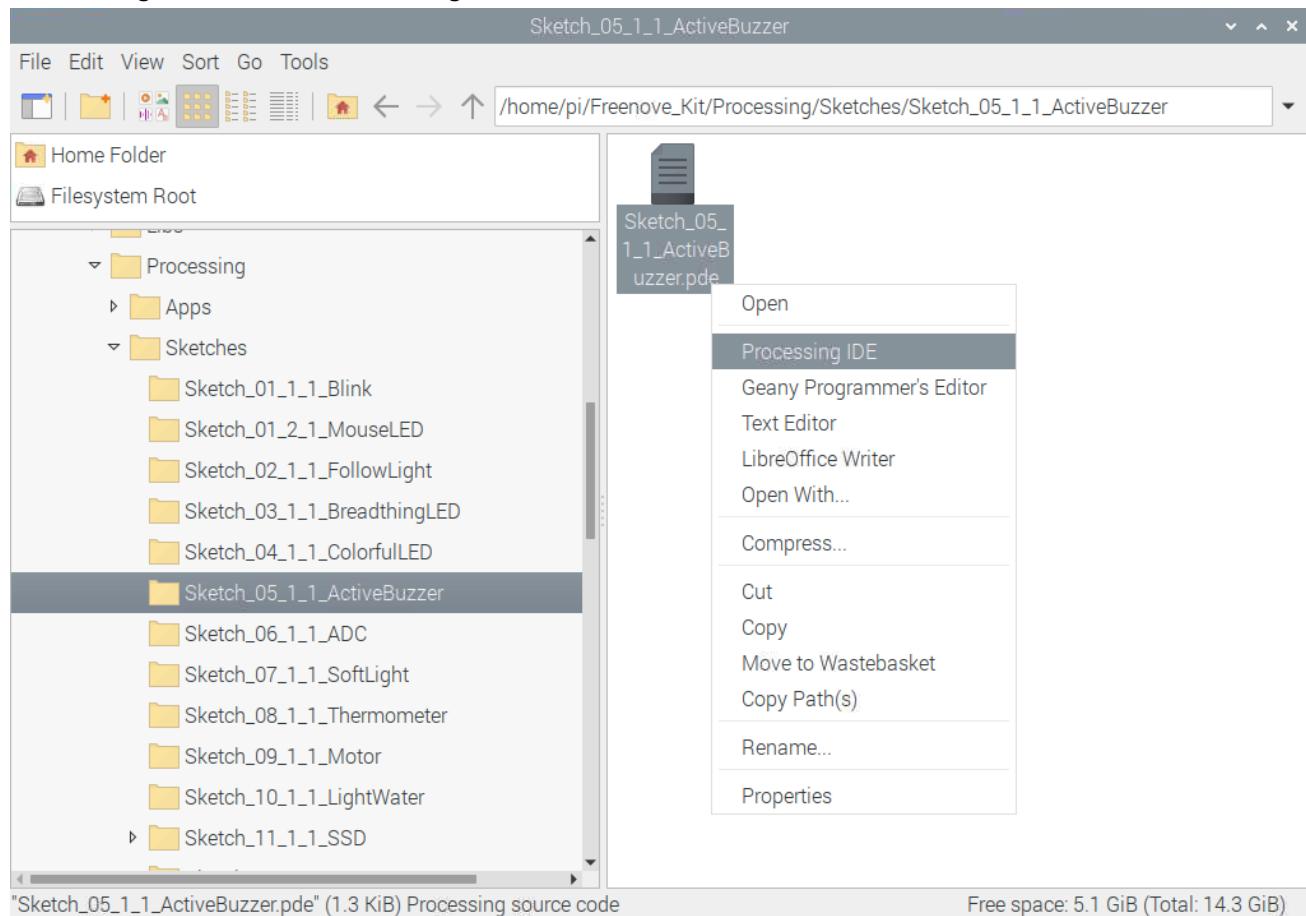

Or you can enter a command in the terminal to open the file Sketch_05_1_1_ActiveBuzzer. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_05_1_1_ActiveBuzzer/Sketch_05_1_1_ActiveBuzzer.pde
```

Open Processing and click Run.

The screenshot shows the Processing IDE interface. The title bar reads "Sketch_05_1_1_ActiveBu...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh icon. The main area displays the sketch code titled "Sketch 05 1 1 ActiveBuzzer". The code uses the Java language and includes imports for int, boolean, void, setup(), draw(), size(), GPIO, and digitalWrite(). It initializes a buzzer pin at 12 and sets its initial state to false. In the setup() function, it sets the size to 640x360 and configures the buzzer pin as an output. The draw() function handles the background, title, and site info. It also checks the current state of the buzzer (buzzerState) and toggles it between HIGH and LOW using digitalWrite(). Additionally, it draws an arc representing sound waves when the buzzer is active. The code is numbered from 9 to 27. At the bottom of the IDE, there are tabs for "Console" and "Errors".

```
9 int buzzerPin = 12;
10 boolean buzzerState = false;
11 void setup() {
12     size(640, 360);
13     GPIO.pinMode(buzzerPin, GPIO.OUTPUT);
14 }
15
16 void draw() {
17     background(255);
18     titleAndSiteInfo();      //title and site infomation
19     drawBuzzer();           //buzzer img
20     if (buzzerState) {
21         GPIO.digitalWrite(buzzerPin, GPIO.HIGH);
22         drawArc();          //Sounds waves img
23     } else {
24         GPIO.digitalWrite(buzzerPin, GPIO.LOW);
25     }
26 }
27 }
```

The result is as shown below. Click the buzzer, it will emit sounds. Click it again, it will stop sounding.



The following is program code:

```
1 import freenove.processing.io.*;
2
3 int buzzerPin = 12;
4 boolean buzzerState = false;
5 void setup() {
6     size(640, 360);
7     GPIO.pinMode(buzzerPin, GPIO.OUTPUT);
8 }
9
10 void draw() {
11     background(255);
12     titleAndSiteInfo();      //title and site infomation
13     drawBuzzer();           //buzzer img
14     if (buzzerState) {
15         GPIO.digitalWrite(buzzerPin, GPIO.HIGH);
16         drawArc();          //Sounds waves img
17     } else {
18         GPIO.digitalWrite(buzzerPin, GPIO.LOW);
19     }
20 }
21
22 void mouseClicked() { //if the mouse Clicked
```

```
23  buzzerState = !buzzerState; //Change the buzzer State
24 }
25 void drawBuzzer() {
26   strokeWeight(1);
27   fill(0);
28   ellipse(width/2, height/2, 50, 50);
29   fill(255);
30   ellipse(width/2, height/2, 10, 10);
31 }
32 void drawArc() {
33   noFill();
34   strokeWeight(8);
35   for (int i=0; i<3; i++) {
36     arc(width/2, height/2, 100*(1+i), 100*(1+i), -PI/4, PI/4, OPEN);
37   }
38 }
39 void titleAndSiteInfo() {
40   fill(0);
41   textAlign(CENTER); //set the text centered
42   textSize(40); //set text size
43   text("Active Buzzer", width / 2, 40); //title
44   textSize(16);
45   text("www.freenove.com", width / 2, height - 20); //site
46 }
```

Code in this project is logically the same as previous "MouseLED" project. And the difference is that this project needs to draw the buzzer pattern and arc graphics after the buzzer sounding.

If you have any concerns, please send an email to: support@freenove.com

Chapter 6 ADC Module


In this chapter we will learn how to use an ADC module.

Project 6.1 Voltmeter


This project uses an ADC module to read potentiometer voltage value and display the value on Display Window.

Component List


Freenove Projects Board for Raspberry Pi

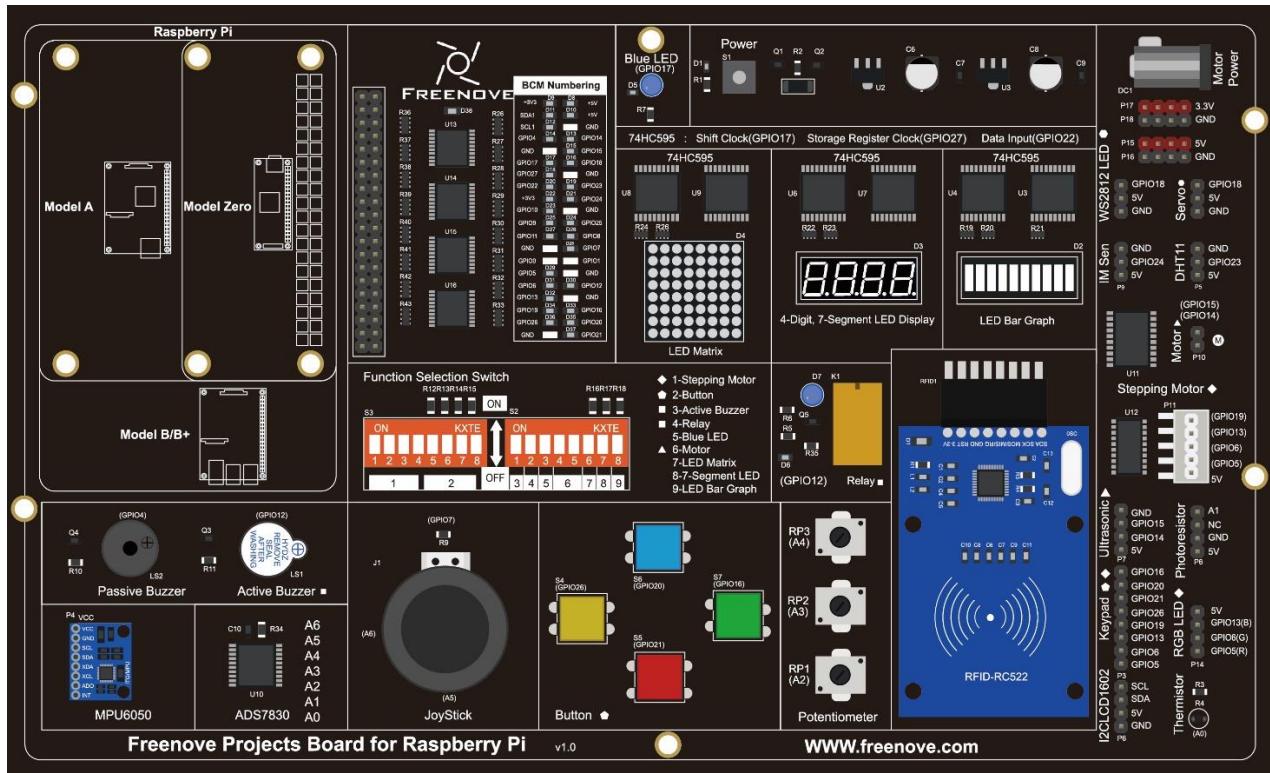

Raspberry Pi

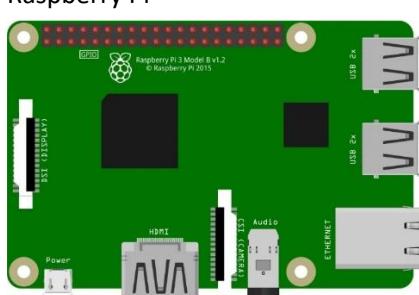


GPIO Ribbon Cable

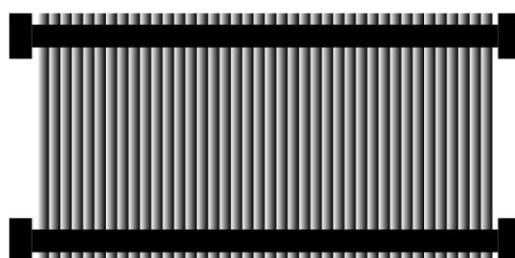


Circuit

Schematic diagram

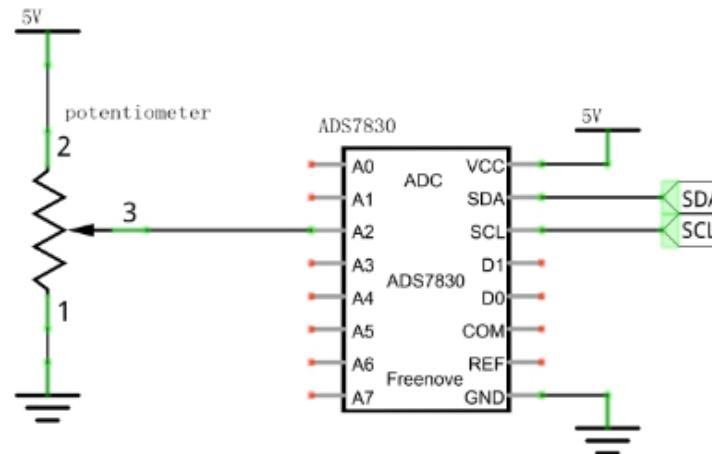

Hardware connection.

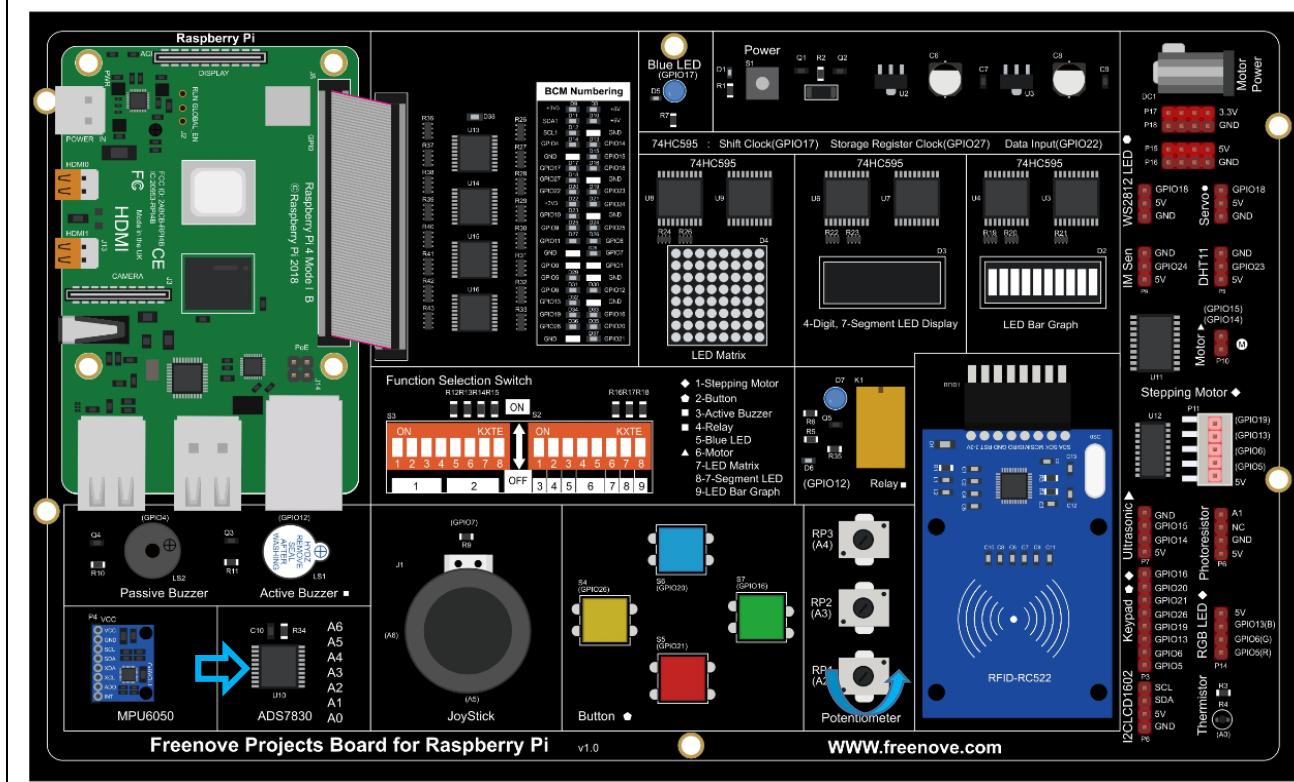

If you have any concerns, please send an email to: support@freenove.com

Sketch

Configure I2C (required)

If you have any concerns, please send an email to: support@freenove.com


Enable I2C

There are some I2C chips in this kit like ADC module. The I2C interface of Raspberry Pi is closed by default. You need to open it manually as follows:

Type command in the terminal:

```
sudo raspi-config
```

Then open the following dialog box:

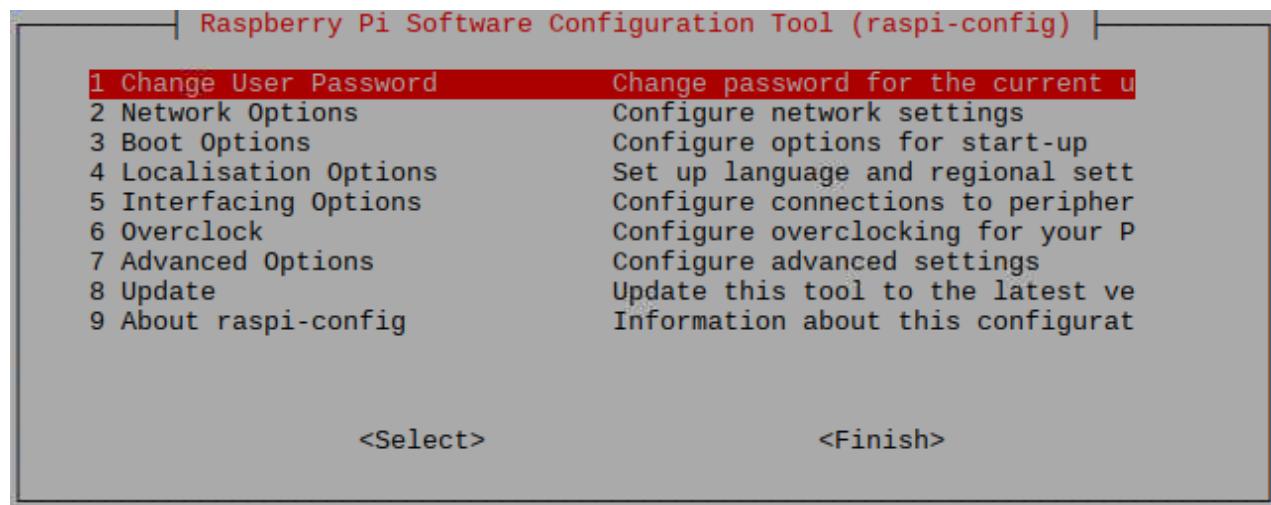

Choose “5 Interfacing Options” → “P5 I2C” → “Yes” → “Finish” in order and restart your RPi later. Then the I2C module is started.

Type a command to check whether the I2C module is started:

```
lsmod | grep i2c
```

If the I2C module has been started, the following content will be shown:

```
pi@raspberrypi:~ $ lsmod | grep i2c
i2c_bcm2708          4770  0
i2c_dev              5859  0
pi@raspberrypi:~ $
```

Install I2C-Tools

Type the command to install I2C-Tools.

```
sudo apt-get install i2c-tools
```

Detect the address of I2C device with the following command:

```
i2cdetect -y 1
```

When you are using ADS7830, the result is as below:

```
pi@raspberrypi:~ $ i2cdetect -y 1
      0  1  2  3  4  5  6  7  8  9  a  b  c  d  e  f
00: -----
10: -----
20: -----
30: -----
40:          - 48 -
50: -----
60: -----
70: -----
```


Here, 48 (HEX) is the I2C address of ADC Module(ADS7830).

Sketch 6.1.1 ADC

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_06_1_1_ADC
```


And then right-click to select Processing IDE

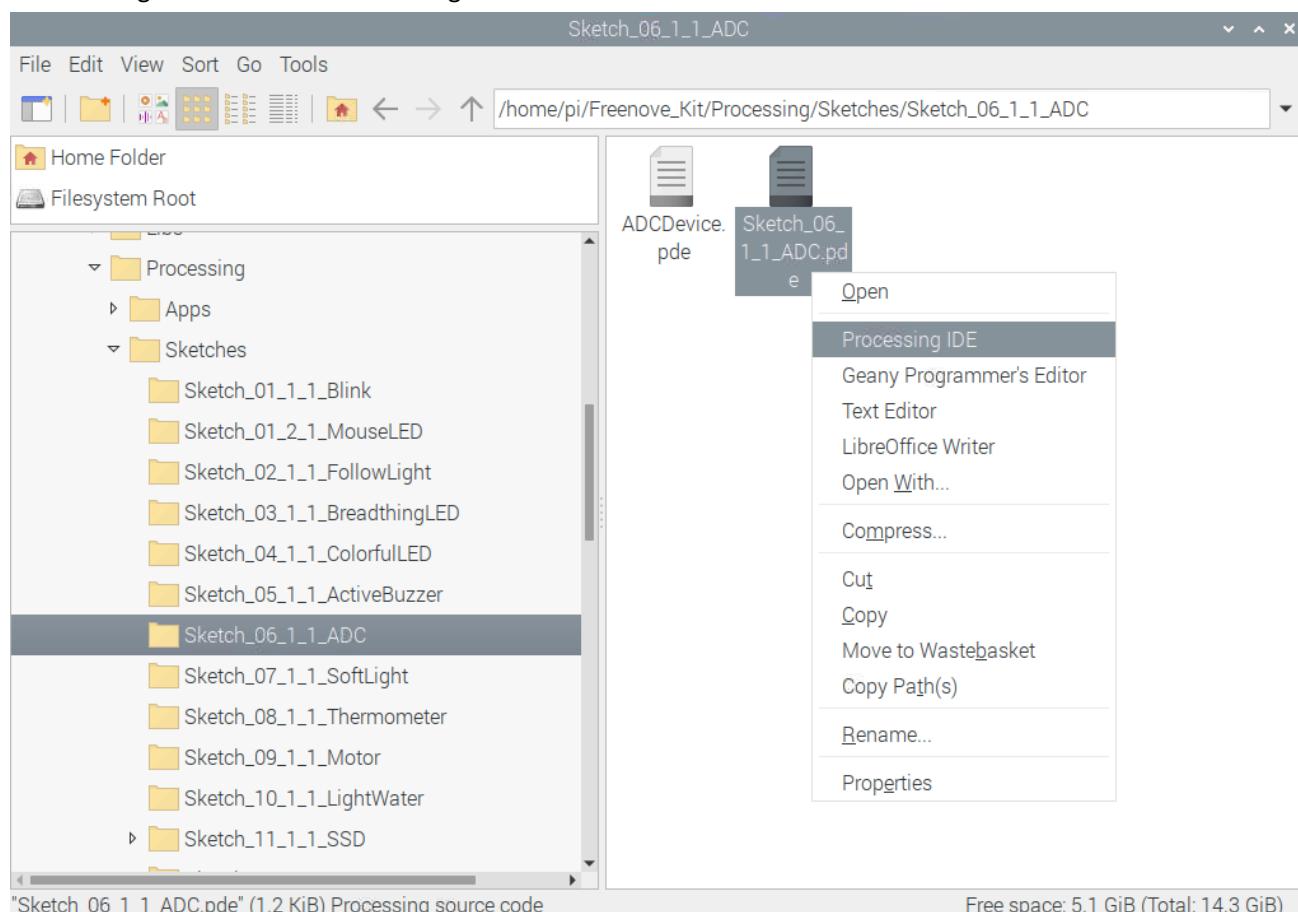

Or you can enter a command in the terminal to open the file Sketch_06_1_1_ADC. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_06_1_1_ADC/Sketch_06_1_1_ADC.pde
```

Open Processing and click Run.

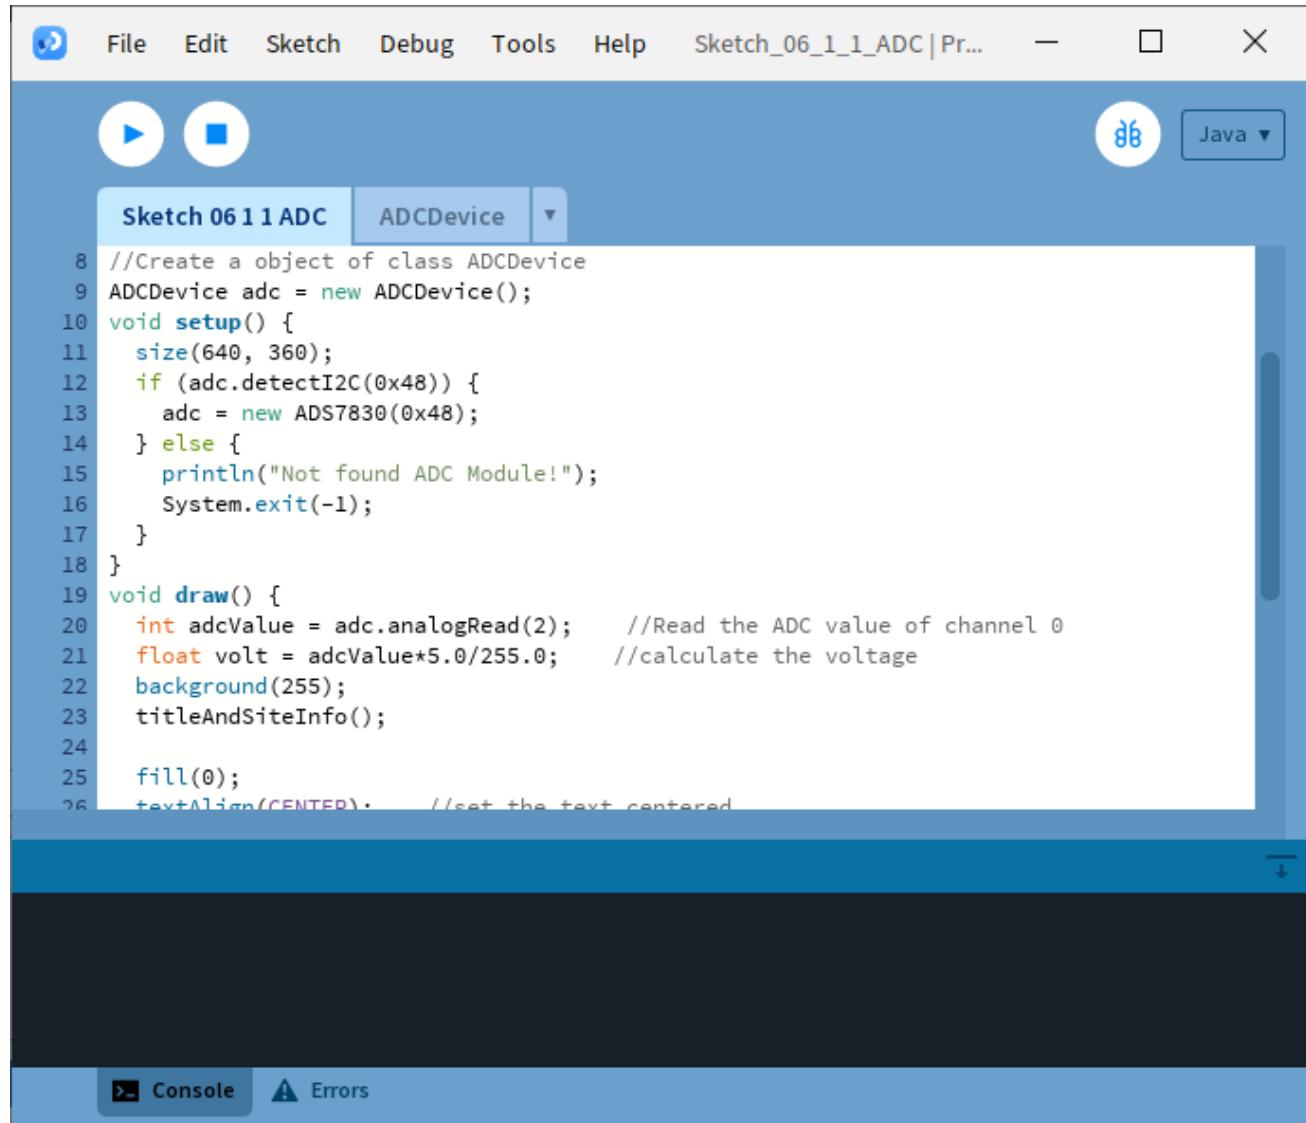


The screenshot shows the Processing IDE interface. The title bar reads "Sketch_06_1_1_ADC | Pr...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. The main code editor window displays the following sketch:


```
8 //Create a object of class ADCDevice
9 ADCDevice adc = new ADCDevice();
10 void setup() {
11     size(640, 360);
12     if (adc.detectI2C(0x48)) {
13         adc = new ADS7830(0x48);
14     } else {
15         println("Not found ADC Module!");
16         System.exit(-1);
17     }
18 }
19 void draw() {
20     int adcValue = adc.analogRead(2);      //Read the ADC value of channel 0
21     float volt = adcValue*5.0/255.0;      //calculate the voltage
22     background(255);
23     titleAndSiteInfo();
24
25     fill(0);
26     textAlign(CENTER);      //set the text centered
```

The bottom of the screen shows tabs for "Console" and "Errors".

The result is as shown below. Rotate RP1 potentiometer, the reading will change accordingly.

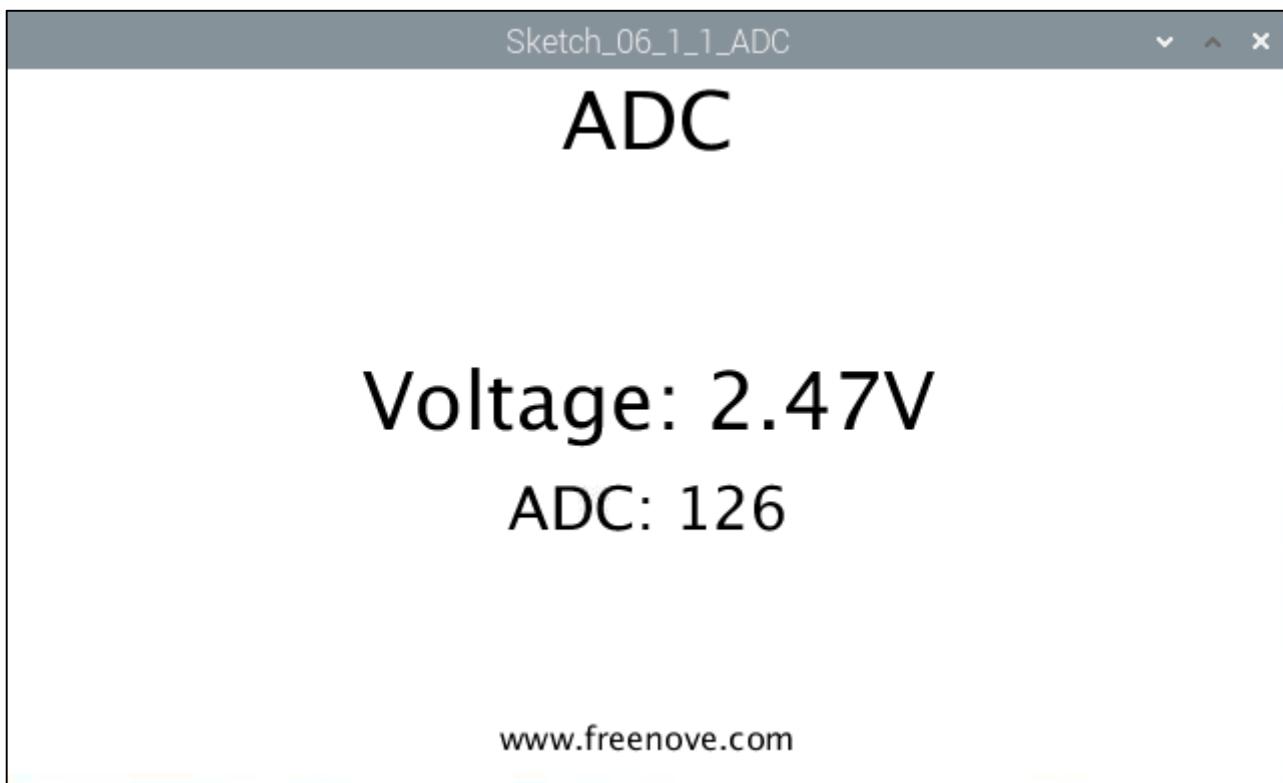

This project contains a lot of code files, and the core code is contained in the file Sketch_06_1_1_ADC. The other files only contain some custom classes.

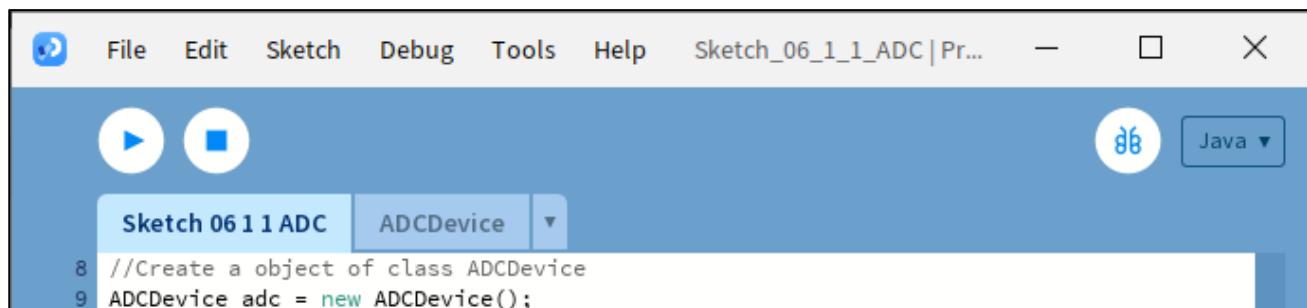

The following is program code:

```
1 import freenove.processing.io.*;
2 //Create a object of class ADCDevice
3 ADCDevice adc = new ADCDevice();
4 void setup() {
5     size(640, 360);
6     if (adc.detectI2C(0x48)) {
7         adc = new ADS7830(0x48);
8     } else {
9         println("Not found ADC Module!");
10        System.exit(-1);
11    }
12 }
13 void draw() {
14     int adcValue = adc.analogRead(2);      //Read the ADC value of channel 0
15     float volt = adcValue*5.0/255.0;      //calculate the voltage
16     background(255);
17     titleAndSiteInfo();
18
19     fill(0);
20     textAlign(CENTER);      //set the text centered
21     textSize(30);
22     text("ADC: "+nf(adcValue, 3, 0), width / 2, height/2+50);
23     textSize(40);          //set text size
24     text("Voltage: "+nf(volt, 0, 2)+"V", width / 2, height/2);      //
25 }
26 void titleAndSiteInfo() {
27     fill(0);
28     textAlign(CENTER);      //set the text centered
29     textSize(40);          //set text size
30     text("ADC", width / 2, 40);      //title
31     textSize(16);
32     text("www. freenove. com", width / 2, height - 20);      //site
33 }
```

The code of this project mainly uses PCF8591 class member function analogRead() to read ADC.

```
int adcValue = adc.analogRead(2);      //Read the ADC value of channel 0
float volt = adcValue*5.0/255.0;      //calculate the voltage
```

About class ADCDevice, PCF8591, ADS7830:

class ADCDevice

This is a base class, and all ADC module classes are subclasses of it. It provides two basic member functions.

```
public int analogRead(int chn)
```

This is a unified function name. Different chips have different implement methods. Therefore, specific method is implemented in subclasses.

```
public boolean detectI2C(int addr)
```

Used to detect I2C device with a given address. If it exists, it returns true, otherwise it returns false.

class ADS7830 extends ADCDevice

This is a custom class that is used to operate the ADC of ADS7830.

```
public ADS7830(int addr)
```

Constructor, used to create a ADS7830 class object, parameters for the I2C ADS7830 device address.

```
public int analogRead(int chn)
```

Used to read ADC value of one channel of ADS7830, the parameter CHN indicates the channel number: 0,1,2,3,4,5,6,7.

If you have any concerns, please send an email to: support@freenove.com

Chapter 7 ADC & LED


In this chapter, we will combine ADC and PWM to control the brightness of LED.

Project 7.1 SoftLight


In this project, we will make a softlight, which uses a potentiometer to control the brightness of LED.

Component List


Freenove Projects Board for Raspberry Pi

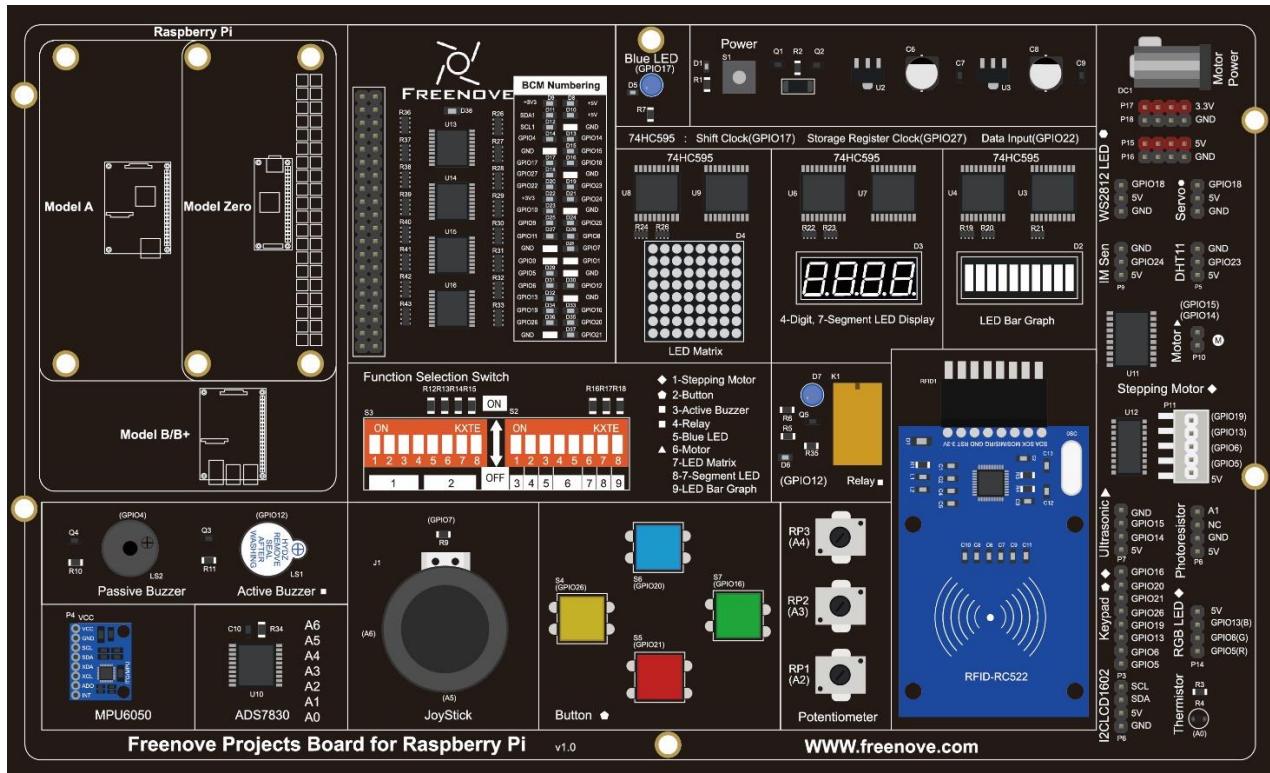

Raspberry Pi

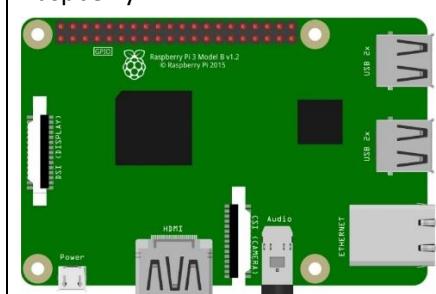


GPIO Ribbon Cable

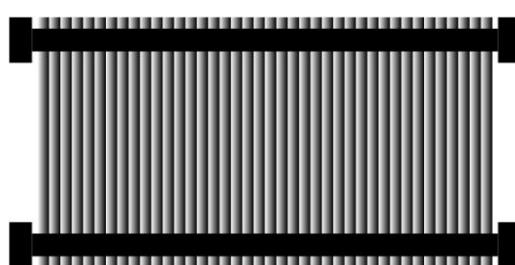


Circuit

Schematic diagram

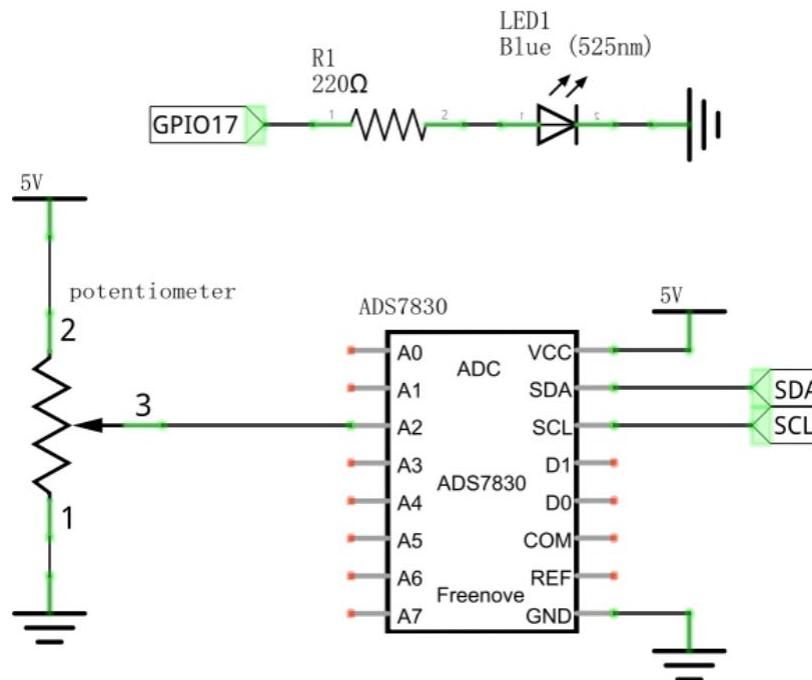

Hardware connection

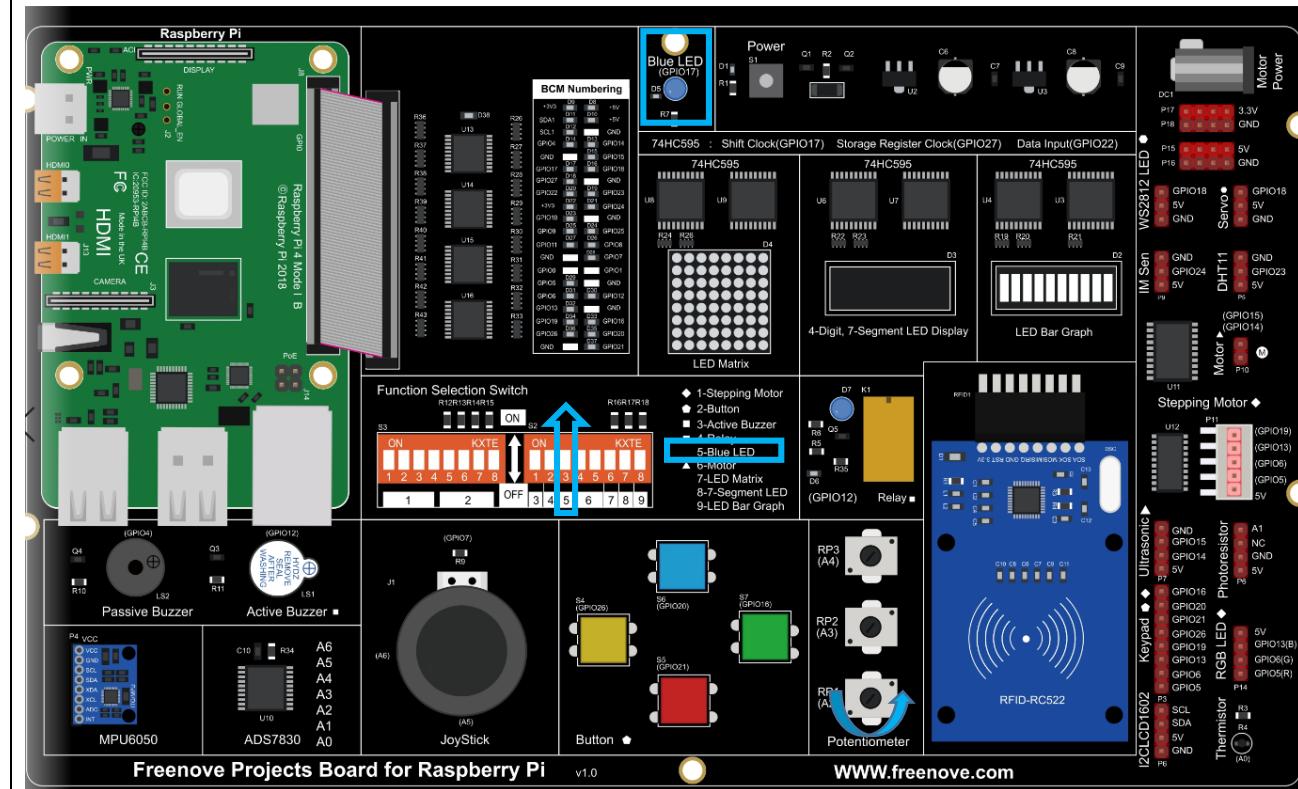

If you have any concerns, please send an email to: support@freenove.com



Sketch

If you haven't configured I2C, please refer to Chapter 6. If you've done it, please move on.


If you have any concerns, please send an email to: support@freenove.com

Sketch 7.1.1 SoftLight

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_07_1_1_SoftLight
```

And then right-click to select Processing IDE

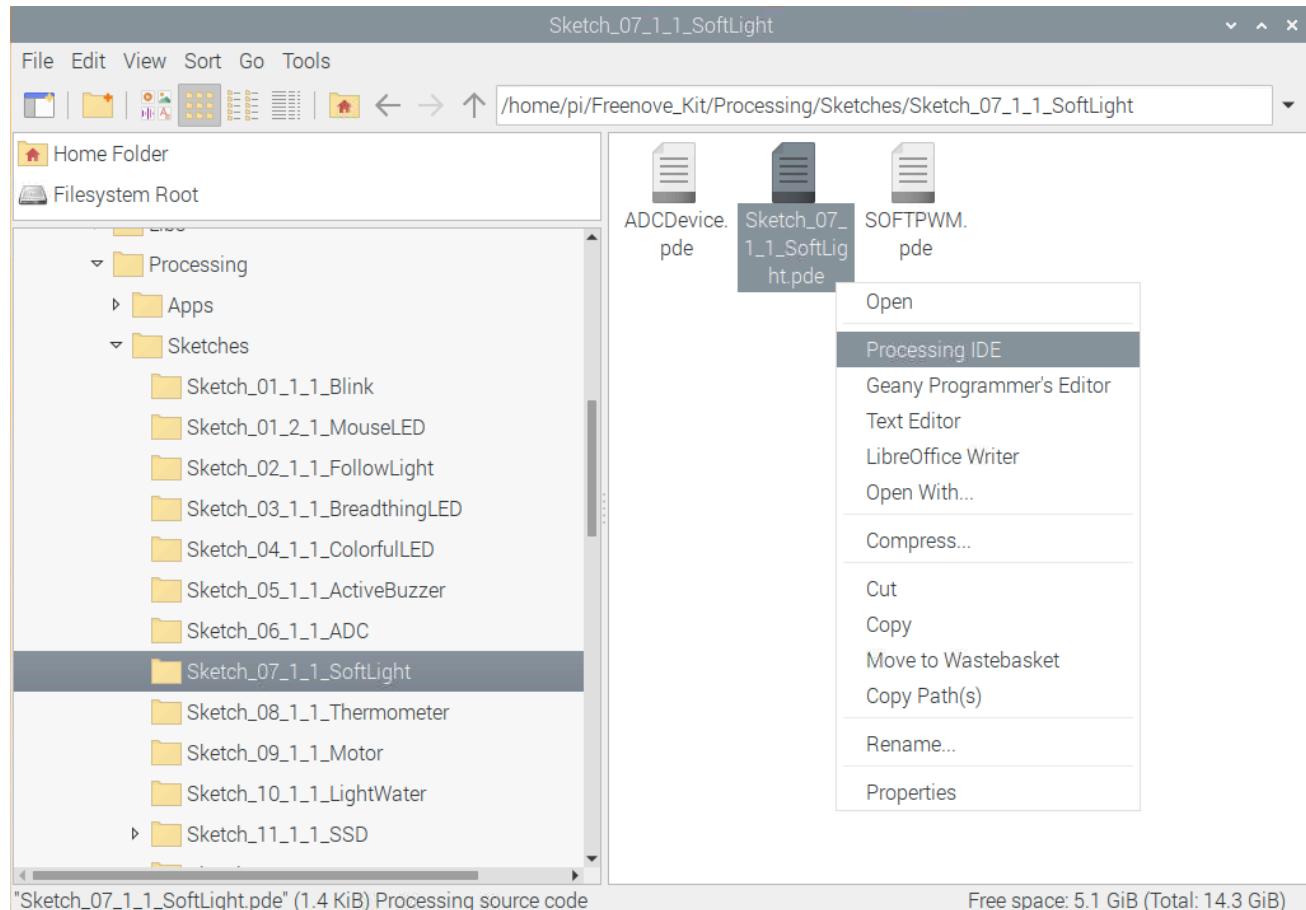

Or you can enter a command in the terminal to open the file Sketch_07_1_1_SoftLight. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_07_1_1_SoftLight/Sketch_07_1_1_SoftLight.pde
```


Open Processing and click Run

The screenshot shows the Processing IDE interface. The title bar reads "Sketch_07_1_1_SoftLight...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh icon. The code editor window displays the following sketch:

```
9 int ledPin = 17;      //led
10 //Create a object of class ADCDevice
11 ADCDevice adc = new ADCDevice();
12 SOFTPWM p = new SOFTPWM(ledPin, 0, 100);
13 void setup() {
14     size(640, 360);
15     if (adc.detectI2C(0x48)) {
16         adc = new ADS7830(0x48);
17     } else {
18         println("Not found ADC Module!");
19         System.exit(-1);
20     }
21 }
22 void draw() {
23     int adcValue = adc.analogRead(2);    //Read the ADC value of channel 0
24     float volt = adcValue*5.0/255.0;    //calculate the voltage
25     float dt = adcValue/255.0;
26     p.softPwmWrite((int)(dt*100));   //output the pwm
27     background(255);
```

The sketch uses the SOFTPWM library to control a PWM output based on an ADC reading from channel 2. It prints an error message if no ADC module is found and exits. The background is set to white.

The result is as shown below. Rotate the RP1 potentiometer, and the brightness of the blue LED will change accordingly.

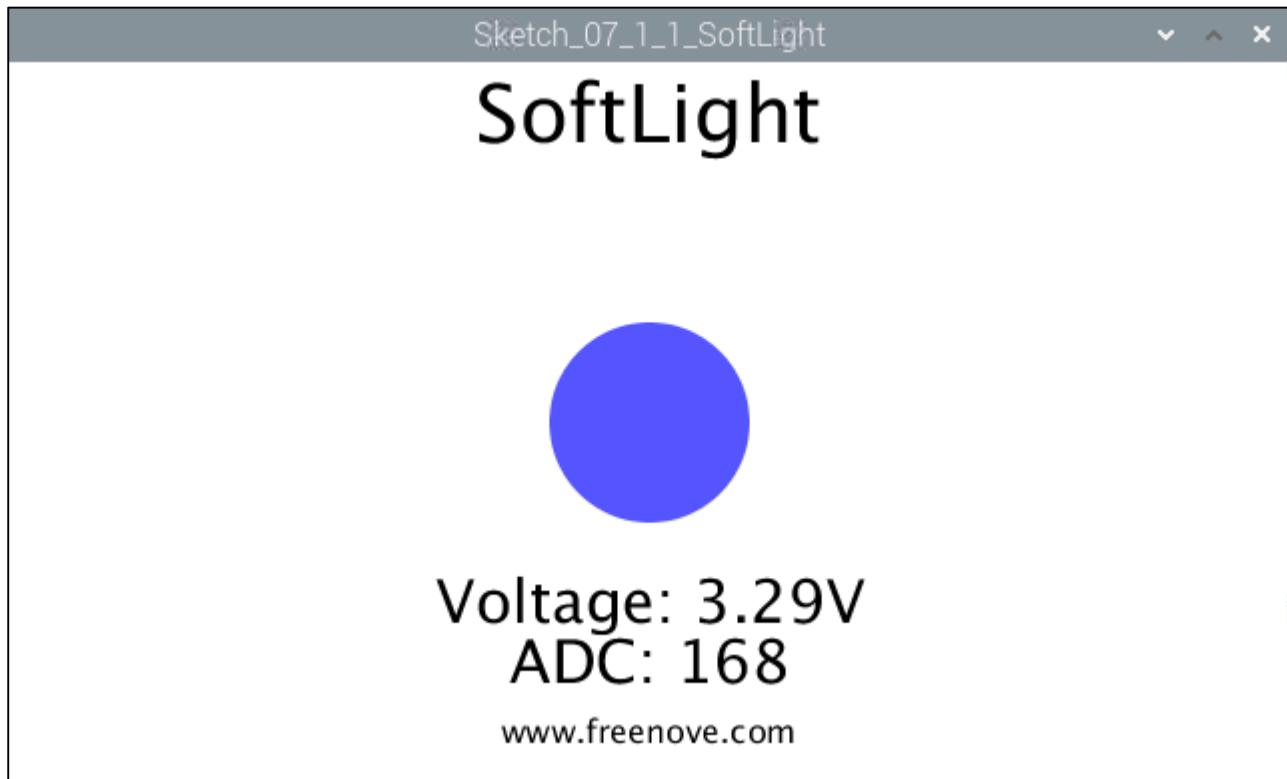

This project contains a lot of code files, and the core code is contained in the file Sketch_07_1_1_SoftLight. The other files only contain some custom classes.



The following is program code:

```

1 import freenove.processing.io.*;
2
3 int ledPin = 17;    //led
4 //Create a object of class ADCDevice
5 ADCDevice adc = new ADCDevice();
6 SOFTPWM p = new SOFTPWM(ledPin, 0, 100);
7 void setup() {
8     size(640, 360);

```

```

9   if (adc.detectI2C(0x48)) {
10     adc = new ADS7830(0x48);
11   } else {
12     println("Not found ADC Module!");
13     System.exit(-1);
14   }
15 }
16 void draw() {
17   int adcValue = adc.analogRead(2);      //Read the ADC value of channel 0
18   float volt = adcValue*5.0/255.0;       //calculate the voltage
19   float dt = adcValue/255.0;
20   p.softPwmWrite((int)(dt*100)); //output the pwm
21   background(255);
22   titleAndSiteInfo();
23
24   fill(255-dt*255, 255-dt*255, 255); //cycle
25   noStroke(); //no border
26   ellipse(width/2, height/2, 100, 100);
27
28   fill(0);
29   textAlign(CENTER); //set the text centered
30   textSize(30);
31   text("ADC: "+nf(adcValue, 3, 0), width / 2, height/2+130);
32   text("Voltage: "+nf(volt, 0, 2)+"V", width / 2, height/2+100); ////
33 }
34 void titleAndSiteInfo() {
35   fill(0);
36   textAlign(CENTER); //set the text centered
37   textSize(40); //set text size
38   text("SoftLight", width / 2, 40); //title
39   textSize(16);
40   text("www.freenove.com", width / 2, height - 20); //site
41 }
```

In this project code, get the ADC value of the potentiometer, then map it into the PWM duty cycle of LED to control its brightness. In Display Window, the color filled in LED pattern changes to simulate the change of LED brightness.

```

int adcValue = adc.analogRead(2); //Read the ADC value of channel 0
float volt = adcValue*5.0/255.0; //calculate the voltage
float dt = adcValue/255.0;
p.softPwmWrite((int)(dt*100)); //output the pwm
```

If you have any concerns, please send an email to: support@freenove.com

Chapter 8 Thermistor

In this chapter, we will learn how to use a thermistor.


Project 8.1 Thermometer

In this project, we will use a thermistor to make a thermometer.

Component knowledge

Thermistor

Thermistor is a temperature sensitive resistor. When it senses a change in temperature, the resistance of the Thermistor will change. We can take advantage of this characteristic by using a Thermistor to detect temperature intensity. A Thermistor and its electronic symbol are shown below.

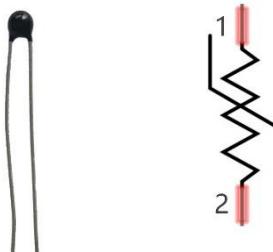

The relationship between resistance value and temperature of a thermistor is:

$$R_t = R \cdot \exp[B \cdot (1/T_2 - 1/T_1)]$$

Where:

R_t is the thermistor resistance under T₂ temperature;

R is the nominal resistance of thermistor under T₁ temperature;


EXP[n] is nth power of e;

B is for thermal index;

T₁, T₂ is Kelvin temperature (absolute temperature). Kelvin temperature=273.15 + Celsius temperature.

For the parameters of the Thermistor, we use: B=3950, R=10k, T1=25.

The circuit connection method of the Thermistor is similar to photoresistor, as the following:

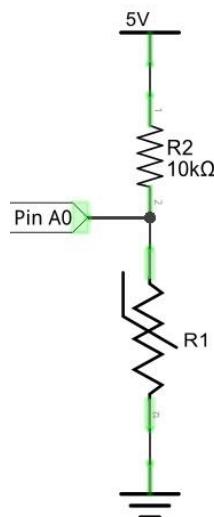


We can use the value measured by the ADC converter to obtain the resistance value of Thermistor, and then we can use the formula to obtain the temperature value.

Therefore, the temperature formula can be derived as:


$$T_2 = 1/(1/T_1 + \ln(R_t/R)/B)$$

Component List


Freenove Projects Board for Raspberry Pi

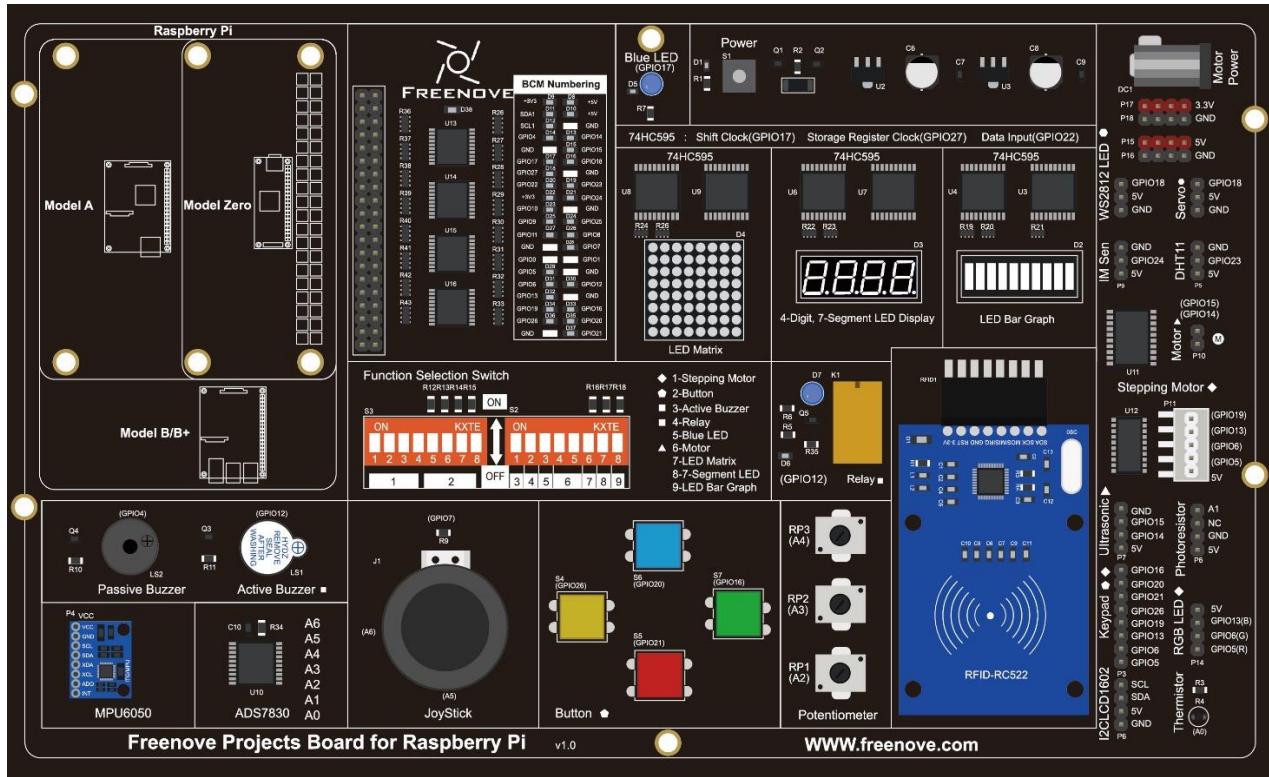

Raspberry Pi

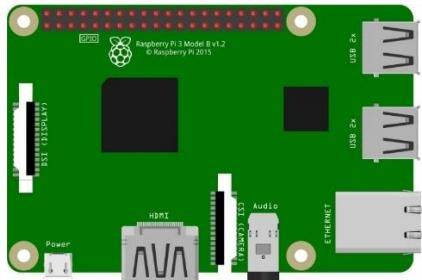


GPIO Ribbon Cable

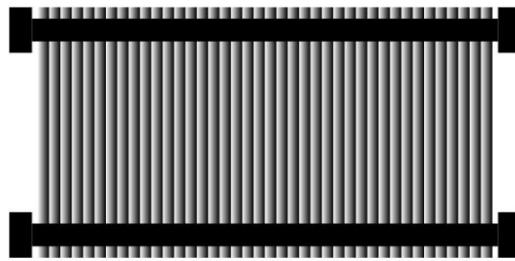


Circuit

Schematic diagram

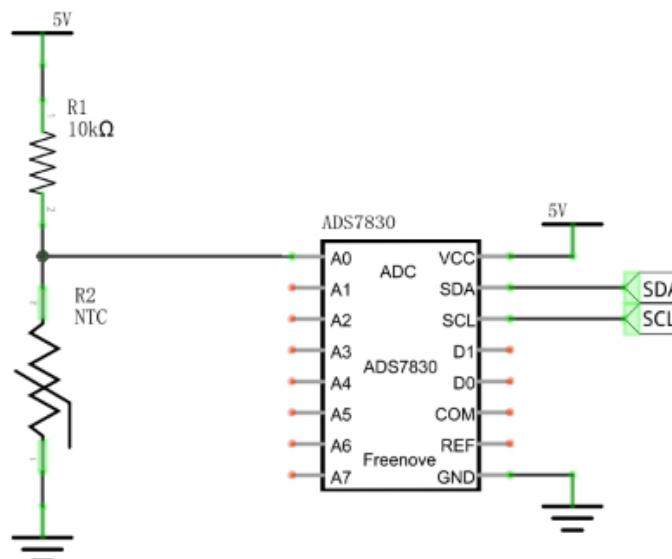

Hardware connection.

After running the program, pinch the Thermometer with your finger and observe the changes.

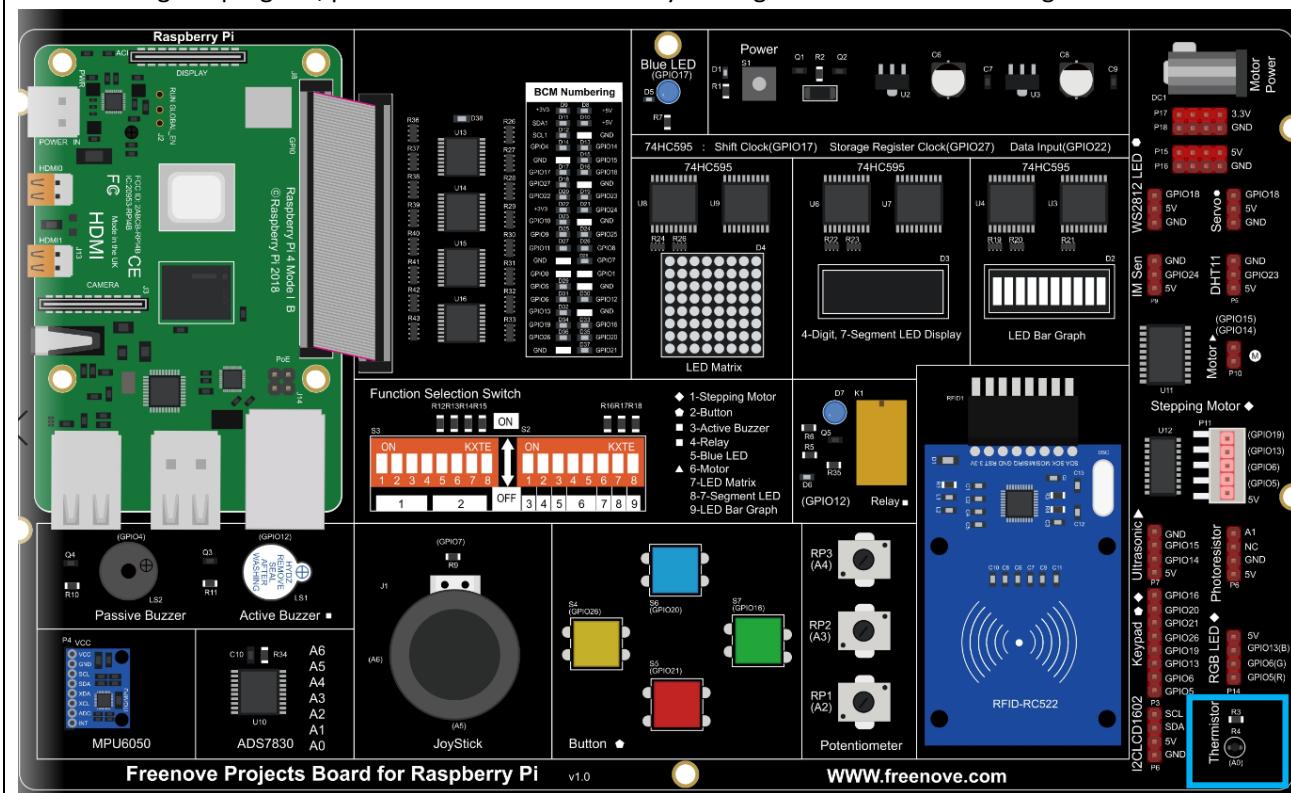

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 8.1.1 Thermometer

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_08_1_1_Termometer
```

And then right-click to select Processing IDE

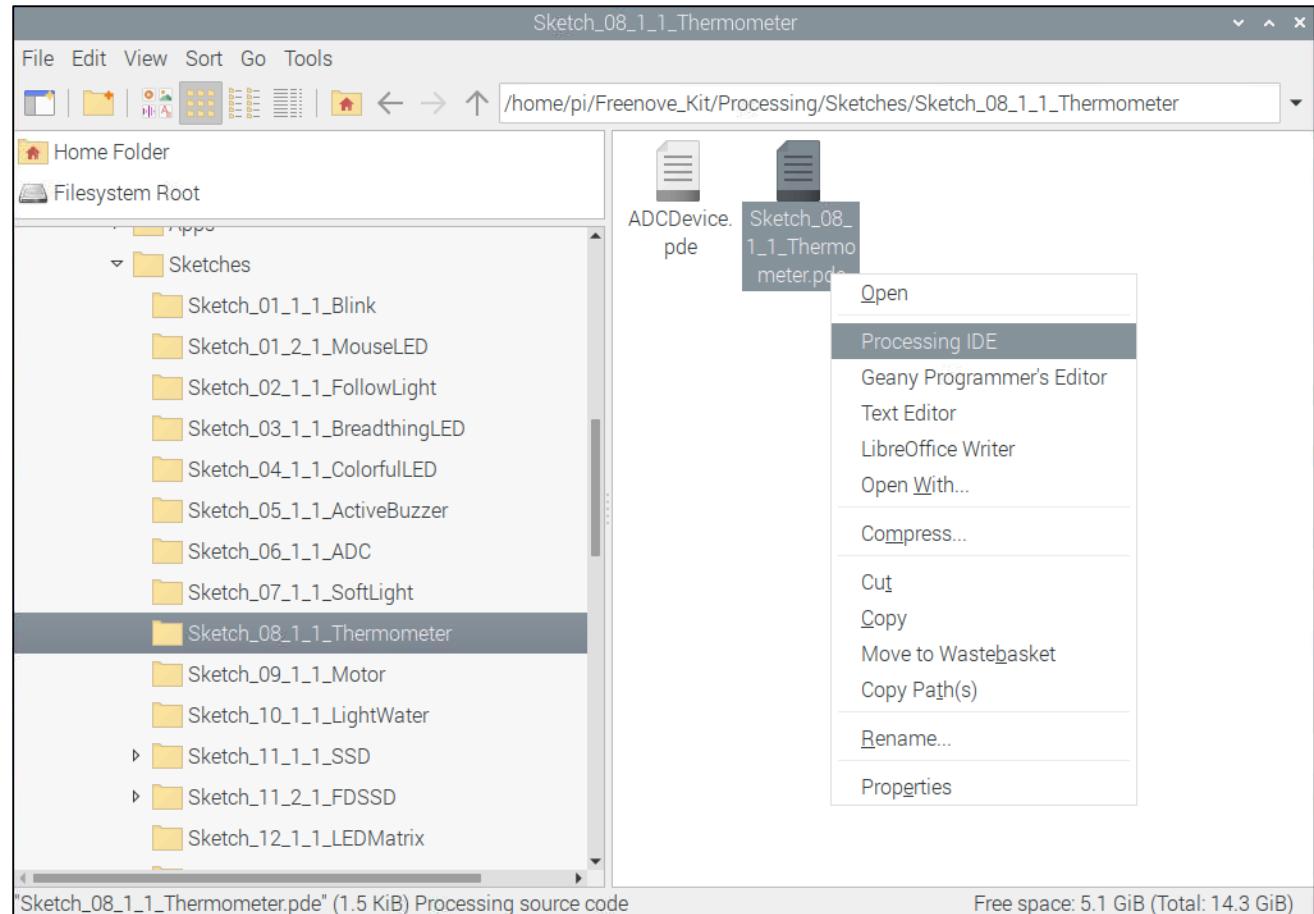

Or you can enter a command in the terminal to open the file Sketch_08_1_1_Termometer. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_08_1_1_Termometer/Sketch_08_1_1_Termometer.pde
```

Open Processing and click Run


The screenshot shows the Processing IDE interface. The title bar reads "Sketch_08_1_1_Thermo...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh button. The code editor window contains the following sketch:

```
9 ADCDevice adc = new ADCDevice();
10 void setup() {
11     size(640, 360);
12     if (adc.detectI2C(0x48)) {
13         adc = new ADS7830(0x48);
14     } else {
15         println("Not found ADC Module!");
16         System.exit(-1);
17     }
18 }
19 void draw() {
20     int adcValue = adc.analogRead(0);      //Read the ADC value of channel 0
21     float volt = adcValue*5.0/255.0;      //calculate the voltage
22     float tempK,tempC,Rt;                //
23     Rt = 10*volt / (5.0-volt);          //calculate the resistance value of thermistor
24     tempK = 1/(1/(273.15+25) + log(Rt/10)/3950); //calaulate temperature(Kelvin)
25     tempC = tempK - 273.15;              //calaulate temperature(Celsius)
26
27     background(255);
```


At the bottom of the IDE, there are tabs for "Console" and "Errors".



The result is as shown below. The thermometer will detect the current temperature.

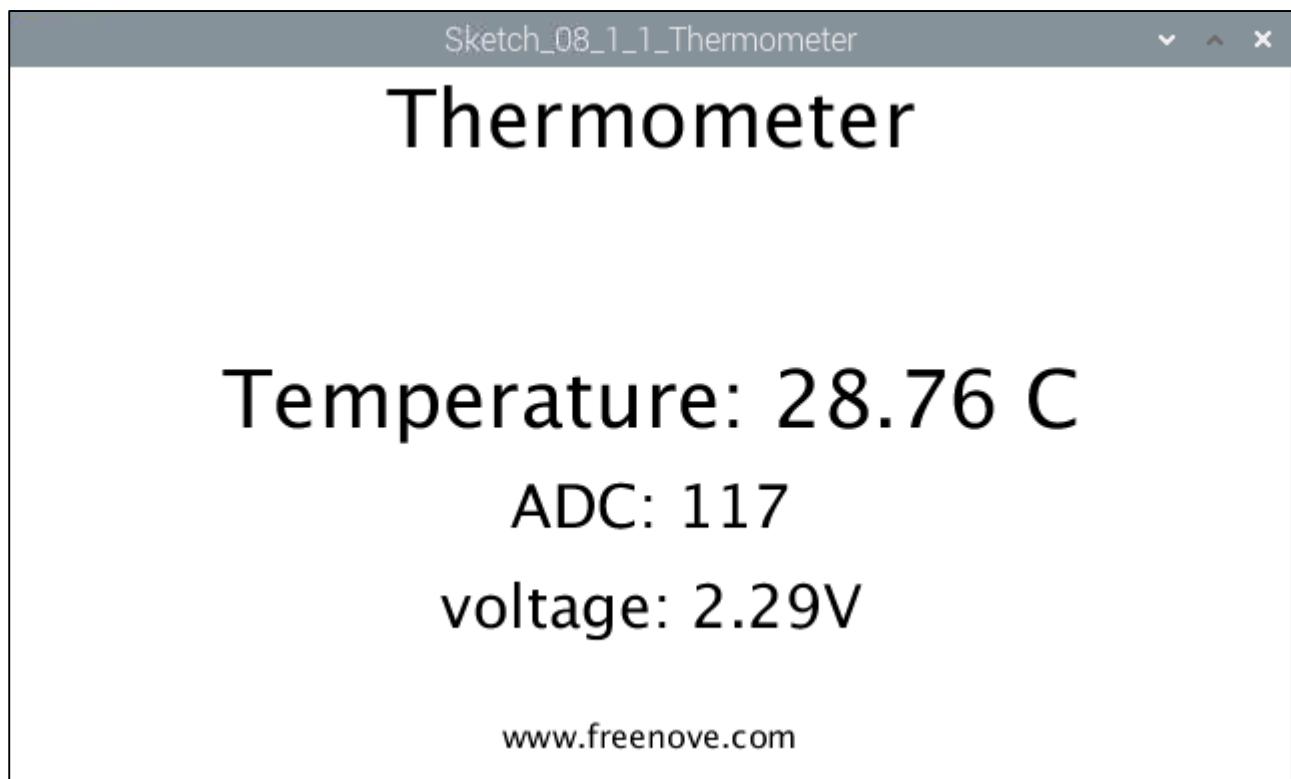

This project contains a lot of code files, and the core code is contained in the file Sketch_08_1_1_Termometer. The other files only contain some custom classes.

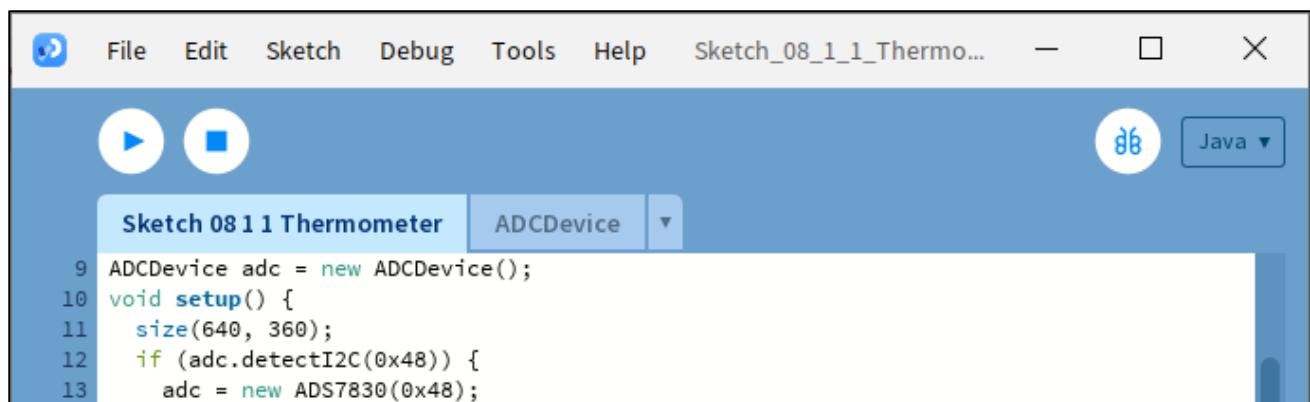

The following is program code:

```
1 import freenove.processing.io.*;
2 //Create a object of class ADCDevice
3 ADCDevice adc = new ADCDevice();
4 void setup() {
5     size(640, 360);
6     if (adc.detectI2C(0x48)) {
7         adc = new ADS7830(0x48);
8     } else {
9         println("Not found ADC Module!");
10        System.exit(-1);
11    }
12 }
13 void draw() {
14     int adcValue = adc.analogRead(0);      //Read the ADC value of channel 0
15     float volt = adcValue*5.0/255.0;      //calculate the voltage
16     float tempK, tempC, Rt;           //
17     Rt = 10*volt / (5.0-volt);      //calculate the resistance value of thermistor
18     tempK = 1/(1/(273.15+25) + log(Rt/10)/3950); //calaulate temperature(Kelvin)
19     tempC = tempK - 273.15;          //calaulate temperature(Celsius)
20
21     background(255);
22     titleAndSiteInfo();
23
24     fill(0);
25     textAlign(CENTER);      //set the text centered
26     textSize(30);
27     text("ADC: "+nf(adcValue, 0, 0), width / 2, height/2+50);
28     textSize(30);
29     text("voltage: "+nf(volt, 0, 2)+"V", width / 2, height/2+100);
30     textSize(40);           //set text size
31     text("Temperature: "+nf(tempC, 0, 2)+" C", width / 2, height/2);   //
32 }
33 void titleAndSiteInfo() {
34     fill(0);
35     textAlign(CENTER);      //set the text centered
36     textSize(40);           //set text size
37     text("Thermometer", width / 2, 40);    //title
38     textSize(16);
39     text("www.freenove.com", width / 2, height - 20);    //site
40 }
```

In this project code, first read ADC, and then calculate the current temperature according to the Ohm's law and temperature formula mentioned before, finally display them on Display Window.

```
int adcValue = adc.analogRead(0);      //Read the ADC value of channel 0
float volt = adcValue*5.0/255.0;       //calculate the voltage
float tempK, tempC, Rt;                //
Rt = 10*volt / (5.0-volt);           //calculate the resistance value of thermistor
tempK = 1/(1/(273.15+25) + log(Rt/10)/3950); //calaulate temperature(Kelvin)
tempC = tempK - 273.15;               //calaulate temperature(Celsius)
```

If you have any concerns, please send an email to: support@freenove.com

Chapter 9 Motor & Driver


In this chapter, we will learn how to use a DC motor, including how to control the speed and direction of the motor.

Project 9.1 Motor


In this project, we use L293D to drive the DC motor. We can click on the button in the Processing Display Window to control motor direction, and drag the progress bar to control the motor speed.

Component List


Freenove Projects Board for Raspberry Pi

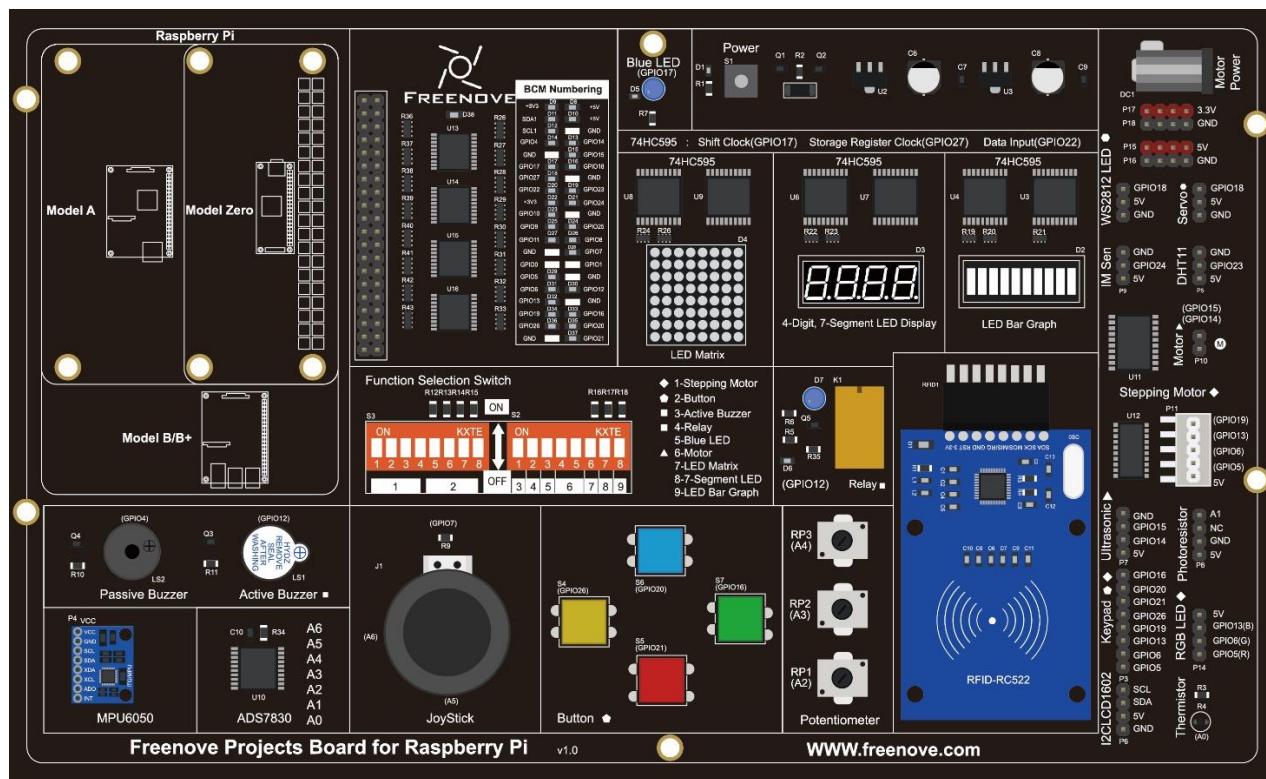


Raspberry Pi

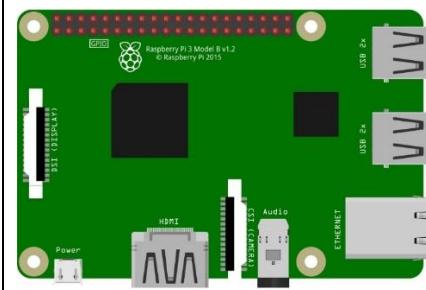


GPIO Ribbon Cable

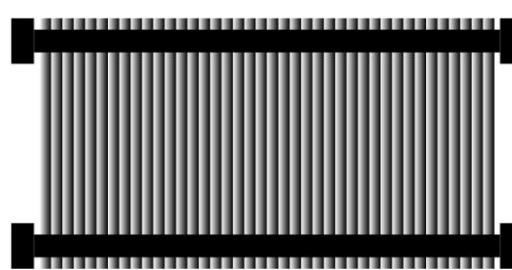


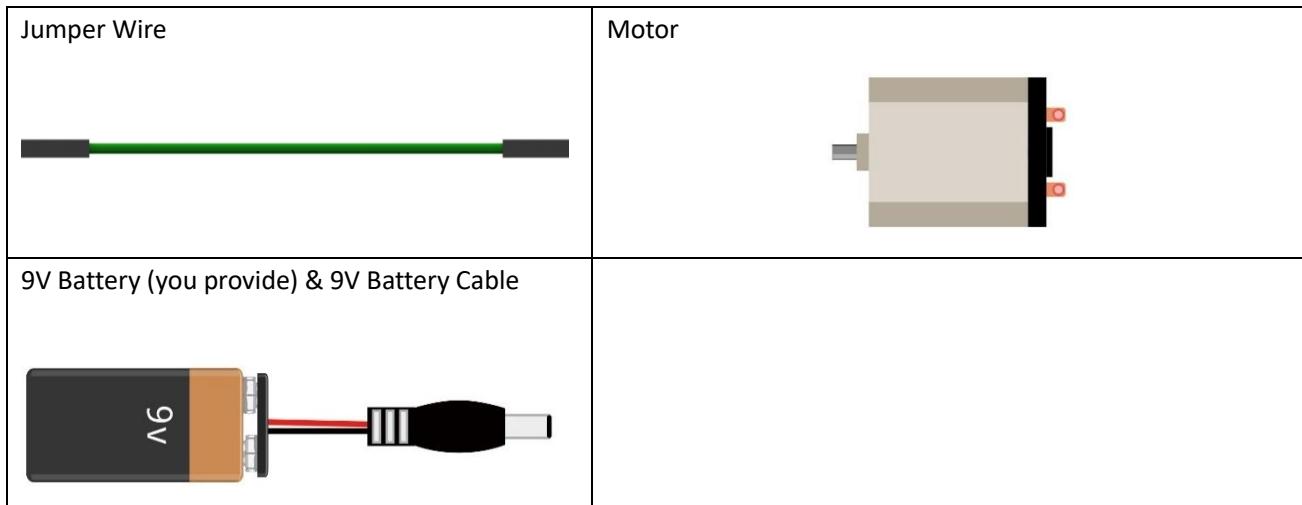


Circuit

Schematic diagram

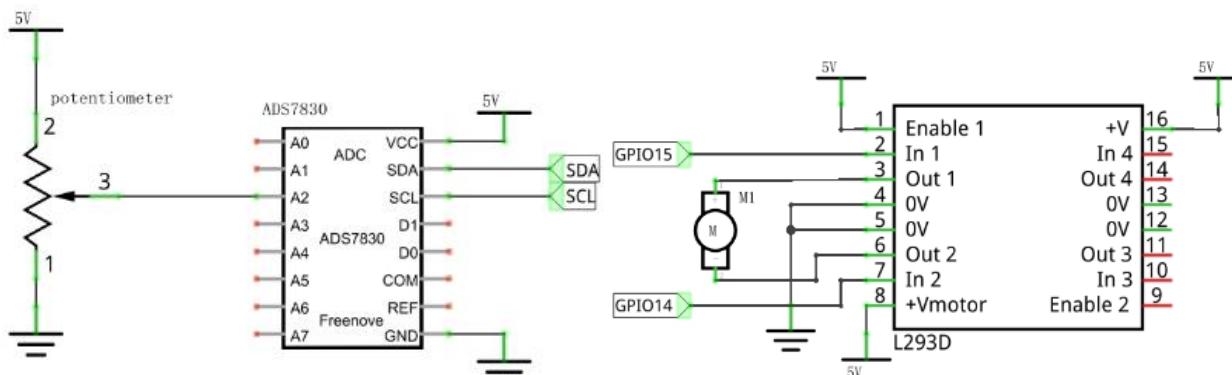

Hardware connection.

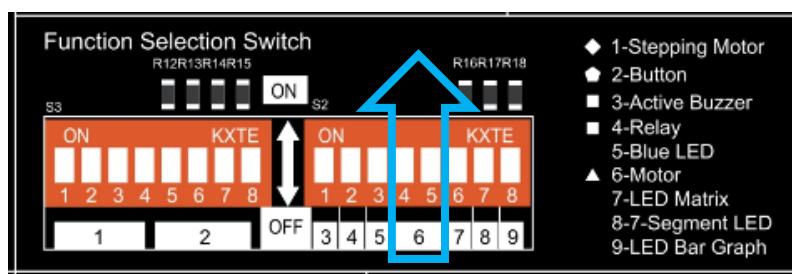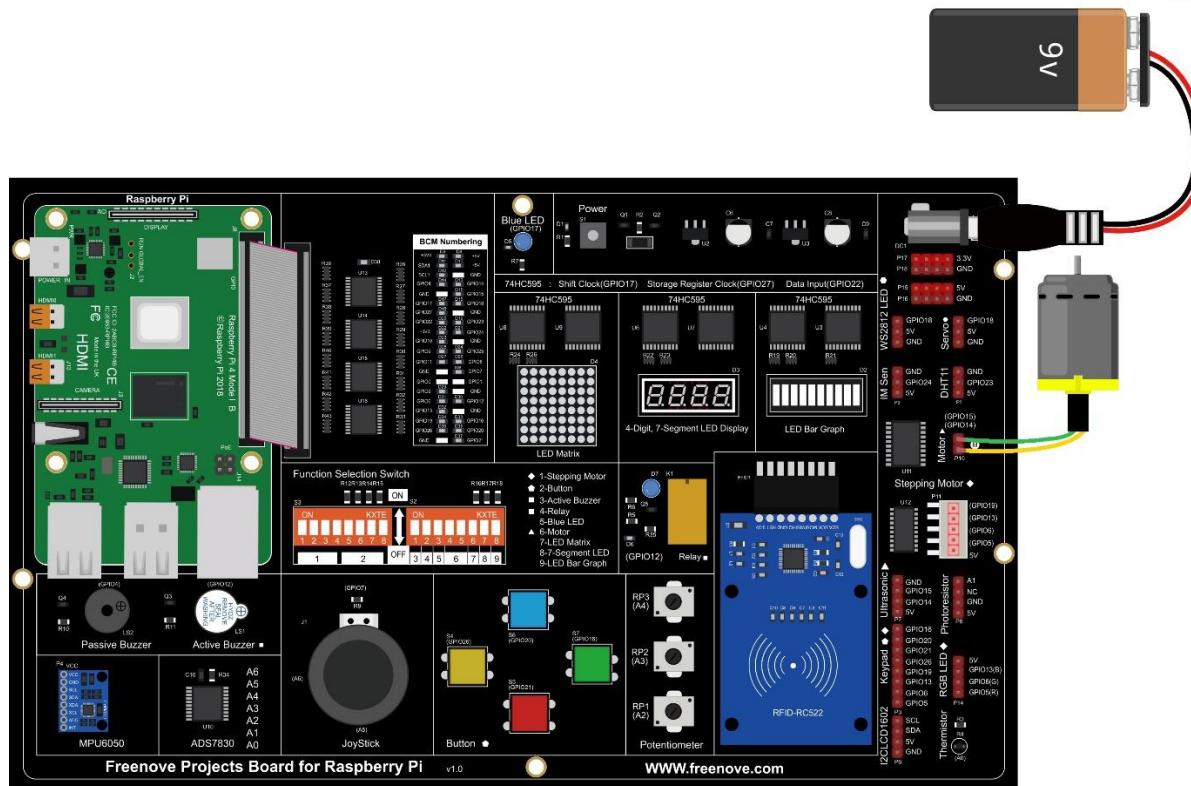

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 9.1.1 Motor

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_09_1_1_Motor
```

And then right-click to select Processing IDE

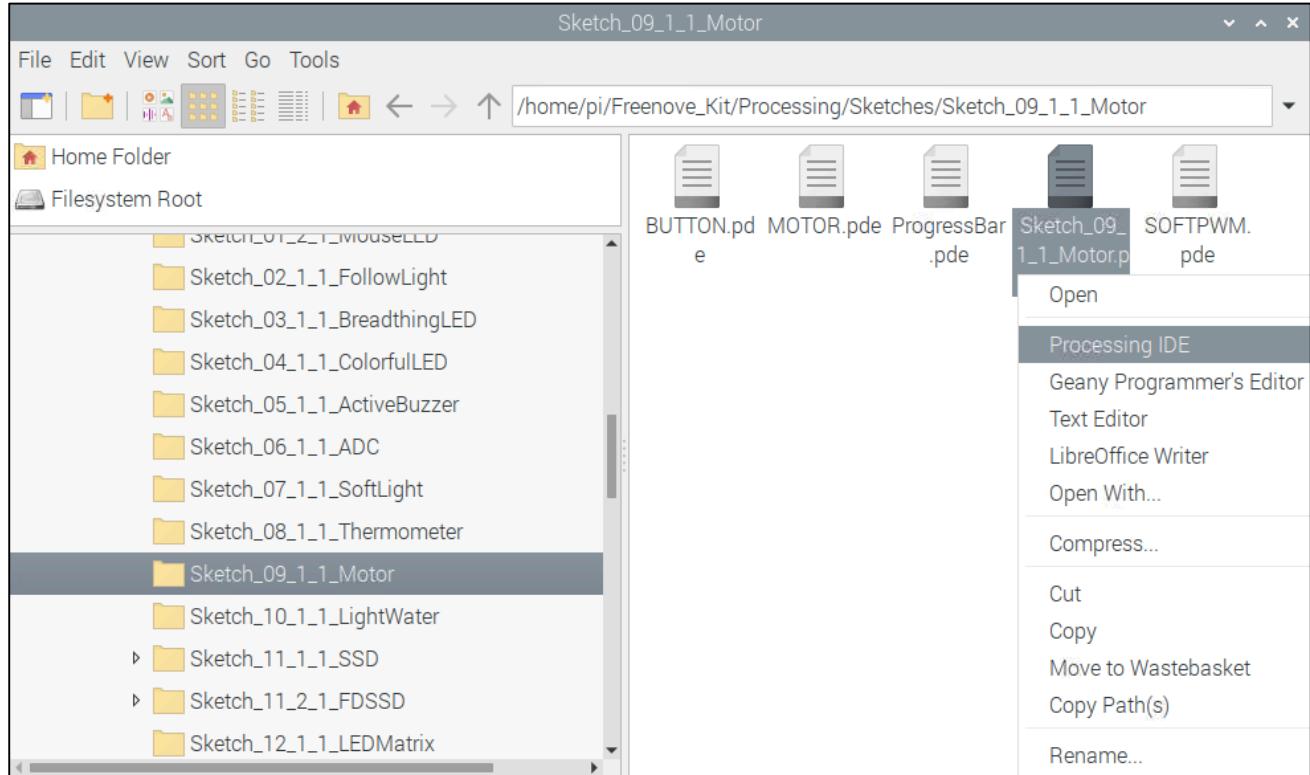

Or you can enter a command in the terminal to open the file Sketch_09_1_1_Motor. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_09_1_1_Motor/Sketch_09_1_1_Motor.pde
```

Open Processing and click Run


The screenshot shows the Processing IDE interface. The title bar reads "Sketch_09_1_1_Motor | P...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh icon. A dropdown menu is open, showing categories: Sketch 09 1 1 Motor, BUTTON, MOTOR, ProgressBar, SOFTPWM, and a dropdown arrow. The main code area contains the following Java code:

```
9 int motorPin1 = 14;      //connect to the L293D
10 int motorPin2 = 15;
11 final int borderSize = 45;    //border size
12 //MOTOR Object
13 MOTOR motor = new MOTOR(motorPin1, motorPin2);
14 ProgressBar mBar;        //ProgressBar Object
15 boolean mMouse = false;   //determined whether a mouse click the ProgressBar
16 BUTTON btn;             //BUTTON Object, For controlling the direction of motor
17 int motorDir = motor.CW; //motor direction
18 float rotaSpeed = 0, rotaPosition = 0; //motor speed
19 void setup() {
20     size(640, 360);
21     mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
22     mBar.setTitle("Duty Cycle"); //set the ProgressBar's title
23     btn = new BUTTON(45, height - 90, 50, 30); //define the button
24     btn.setBgColor(0, 255, 0); //set button color
25     btn.setText("CW"); //set button text
26 }
27
```


At the bottom of the code area, there is a horizontal scrollbar. The bottom panel of the IDE has tabs for "Console" and "Errors".



The result is as shown below. The duty cycle can be changed by dragging the slider. Clicking the button will change the rotating direction.

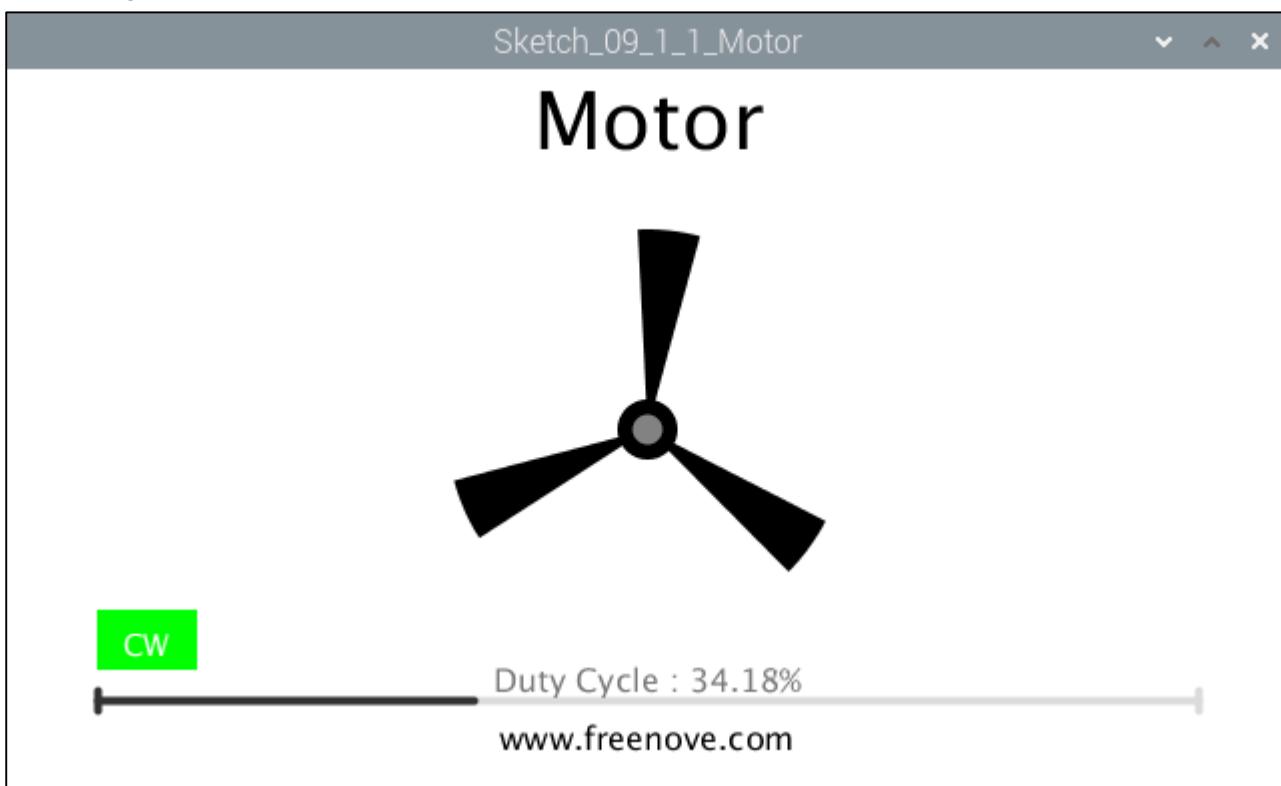

This project contains a lot of code files, and the core code is contained in the file Sketch_09_1_1_Motor. The other files only contain some custom classes.

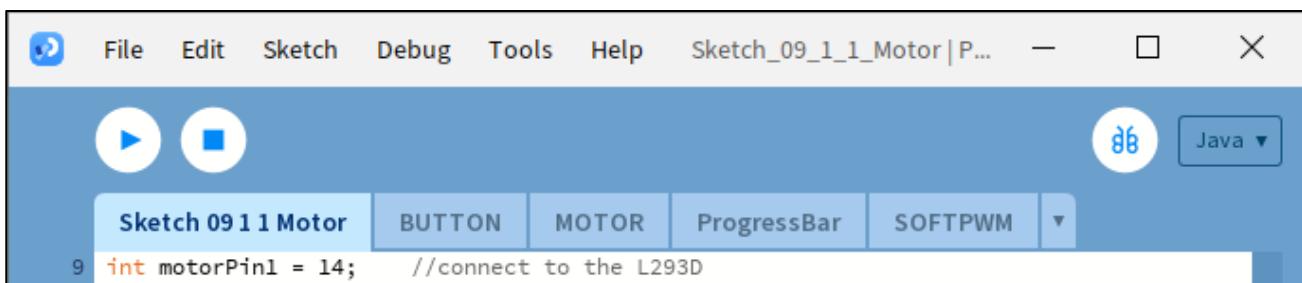

The following is program code:

```

1 import freenove.processing.io.*;
2
3 int motorPin1 = 14;      //connect to the L293D
4 int motorPin2 = 15;
5 final int borderSize = 45;    //border size
//MOTOR Object
6 MOTOR motor = new MOTOR(motorPin1, motorPin2);
7 ProgressBar mBar;      //ProgressBar Object
8 boolean mMouse = false;    //determined whether a mouse click the ProgressBar
9 BUTTON btn;      //BUTTON Object, For controlling the direction of motor
10 int motorDir = motor.CW;    //motor direction
11 float rotaSpeed = 0, rotaPosition = 0; //motor speed
12 void setup() {
13

```

```
14    size(640, 360);
15    mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
16    mBar.setTitle("Duty Cycle"); //set the ProgressBar's title
17    btn = new BUTTON(45, height - 90, 50, 30); //define the button
18    btn.setBgColor(0, 255, 0); //set button color
19    btn.setText("CW"); //set button text
20 }
21
22 void draw() {
23     background(255);
24     titleAndSiteInfo(); //title and site information
25     strokeWeight(4); //border weight
26     mBar.create(); //create the ProgressBar
27     motor.start(motorDir, (int)(mBar.progress*100)); //control the motor starts to rotate
28     btn.create(); //create the button
29     rotaSpeed = mBar.progress * 0.02 * PI; //virtual fan's rotating speed
30     if (motorDir == motor.CW) {
31         rotaPosition += rotaSpeed;
32         if (rotaPosition >= 2*PI) {
33             rotaPosition = 0;
34         }
35     } else {
36         rotaPosition -= rotaSpeed;
37         if (rotaPosition <= -2*PI) {
38             rotaPosition = 0;
39         }
40     }
41     drawFan(rotaPosition); //show the virtual fan in Display window
42 }
43 //Draw a clover fan according to the stating angle
44 void drawFan(float angle) {
45     constrain(angle, 0, 2*PI);
46     fill(0);
47     for (int i=0; i<3; i++) {
48         arc(width/2, height/2, 200, 200, 2*i*PI/3+angle, (2*i+0.3)*PI/3+angle, PIE);
49     }
50     fill(0);
51     ellipse(width/2, height/2, 30, 30);
52     fill(128);
53     ellipse(width/2, height/2, 15, 15);
54 }
55
56 void mousePressed() {
57     if ( (mouseY< mBar.y+5) && (mouseY>mBar.y-5) ) {
```

```

58     mMou se = true; //the mouse click the progressBar
59 } else if ((mouseY< btn.y+btn.h) && (mouseY>btn.y)
60     && (mouseX< btn.x+btn.w) && (mouseX>btn.x)) { // the mouse click the button
61     if (motorDir == motor.CW) { //change the direction of rotation of motor
62         motorDir = motor.CCW;
63         btn.setBgColor(255, 0, 0);
64         btn.setText("CCW");
65     } else if (motorDir == motor.CCW) {
66         motorDir = motor.CW;
67         btn.setBgColor(0, 255, 0);
68         btn.setText("CW");
69     }
70 }
71 }
72 void mouseReleased() {
73     mMou se = false;
74 }
75 void mouseDragged() {
76     int a = constrain(mouseX, borderSize, width - borderSize);
77     float t = map(a, borderSize, width - borderSize, 0.0, 1.0);
78     if (mMou se) {
79         mBar.setProgress(t);
80     }
81 }
82 void titleAndSiteInfo() {
83     fill(0);
84     textAlign(CENTER); //set the text centered
85     textSize(40); //set text size
86     text("Motor", width / 2, 40); //title
87     textSize(16);
88     text("www.freenove.com", width / 2, height - 20); //site
89 }

```

First define the GPIO pin connected to the Motor, motor class object, the L293D class object, the ProgressBar class object, the Button class object, and some variables.

```

int motorPin1 = 14; //connect to the L293D
int motorPin2 = 15;
final int borderSize = 45; //border size
//MOTOR Object
MOTOR motor = new MOTOR(motorPin1, motorPin2);
ProgressBar mBar; //ProgressBar Object
boolean mMou se = false; //determined whether a mouse click the ProgressBar
BUTTON btn; //BUTTON Object, For controlling the direction of motor
int motorDir = motor.CW; //motor direction
float rotaSpeed = 0, rotaPosition = 0; //motor speed

```

Initialize the ProgressBar and Button in setup().

```
mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
mBar.setTitle("Duty Cycle"); //set the ProgressBar's title
btn = new BUTTON(45, height - 90, 50, 30); //define the button
btn.setBgColor(0, 255, 0); //set button color
btn.setText("CW"); //set button text
```

In function draw(), draw all the contents to be displayed. Then set the motor speed, as well as the speed of virtual fan according to the progress of progress bar. And set the motor direction according to the button flag.

```
void draw() {
    background(255);
    titleAndSiteInfo(); //title and site information
    strokeWeight(4); //border weight
    mBar.create(); //create the ProgressBar
    motor.start(motorDir, (int)(mBar.progress*100)); //control the motor starts to rotate
    btn.create(); //create the button
    rotaSpeed = mBar.progress * 0.02 * PI; //virtual fan's rotating speed
    if (motorDir == motor.CW) {
        rotaPosition += rotaSpeed;
        if (rotaPosition >= 2*PI) {
            rotaPosition = 0;
        }
    } else {
        rotaPosition -= rotaSpeed;
        if (rotaPosition <= -2*PI) {
            rotaPosition = 0;
        }
    }
    drawFan(rotaPosition); //show the virtual fan in Display window
}
```

In the mousePressed(), determine whether the Button is clicked on. If the mouse clicks on the Button, then change the motor direction and the text and color of Button. We have learned how to drag ProgressBar before, so here is no introduction.

```
else if ((mouseY< btn.y+btn.h) && (mouseY>btn.y)
&& (mouseX< btn.x+btn.w) && (mouseX>btn.x)) { // the mouse click the button
    if (motorDir == motor.CW) { //change the direction of rotation of motor
        motorDir = motor.CCW;
        btn.setBgColor(255, 0, 0);
        btn.setText("CCW");
    } else if (motorDir == motor.CCW) {
        motorDir = motor.CW;
        btn.setBgColor(0, 255, 0);
        btn.setText("CW");
    }
}
```

Subfunction `drawFan(float angle)` is used to draw a three-blade fan, based on an initial angle. And the angle between each two blades is 120°. Changing the value of “angle” can make the fan rotate to different angles.

```
void drawFan(float angle) {
    constrain(angle, 0, 2*PI);
    fill(0);
    for (int i=0; i<3; i++) {
        arc(width/2, height/2, 200, 200, 2*i*PI/3+angle, (2*i+0.3)*PI/3+angle, PIE);
    }
    fill(0);
    ellipse(width/2, height/2, 30, 30);
    fill(128);
    ellipse(width/2, height/2, 15, 15);
}
```

Reference

class MOTOR

This is a custom class that is used to operate the motor controlled by L293D.

```
public MOTOR(int pin1, int pin2, int enablePin)
```

Constructor, the first two parameters are GPIO pins connected to the L293D pin, and the enablePin is used to create a PWM pin within the range of 0-100 and with frequency of 100Hz.

```
public void start(int dir, int speed)
```

Used to drive motor. Parameter dir represents the rotation direction, whose value is CW, CCW, STOP. Parameter speed is used to decide the duty cycle of PWM. Its value is within the range of 0-100.

About class BUTTON:

class BUTTON

This is a custom class that is used to create a Button.

```
public BUTTON(int ix, int iy, int iw, int ih)
```

Constructor, used to create a BUTTON class object. The parameters are for the location and size of the button to be created.

```
public void create()
```

Used to draw Button.

```
public void setBgColor(int ir, int ig, int ib)
```

Used to set Button color.

```
public void setText(String str)
```

Used to set Button text.

```
public void setTextColor(int ir, int ig, int ib)
```

Used to set text color.

If you have any concerns, please send an email to: support@freenove.com



Chapter 10 74HC595 & LED Bar Graph

In this chapter, we will learn how to use 74HC595 chip to control Graph LED Bar.

Project 10.1 FollowLight


In this chapter, we will use 74HC595 chip and LED Bar Graph to recreate a FollowLight.

Component List

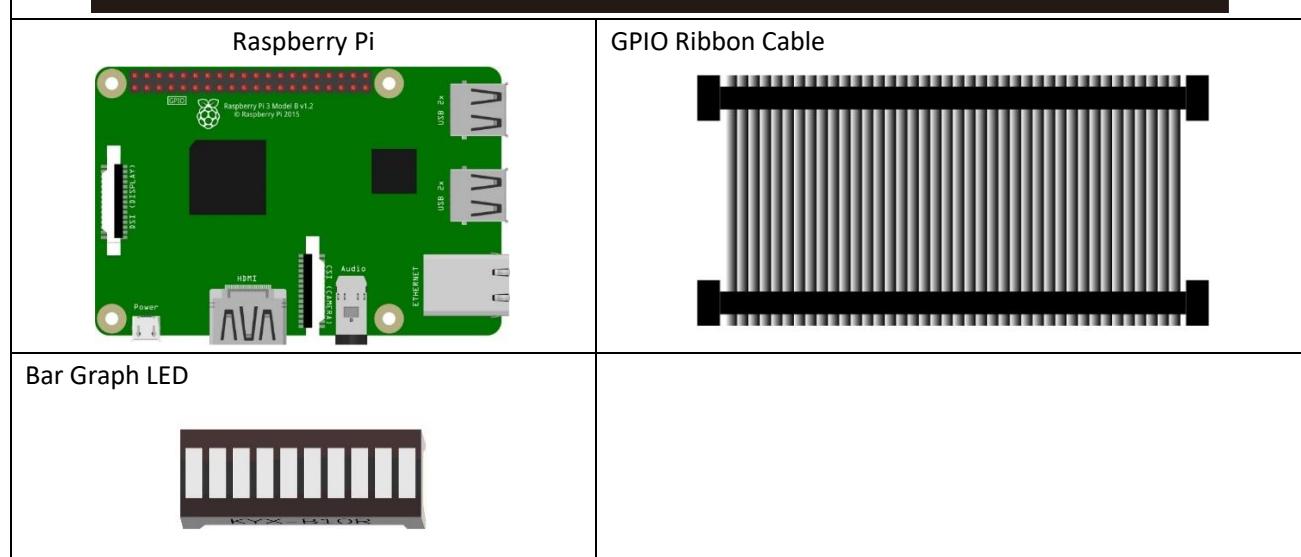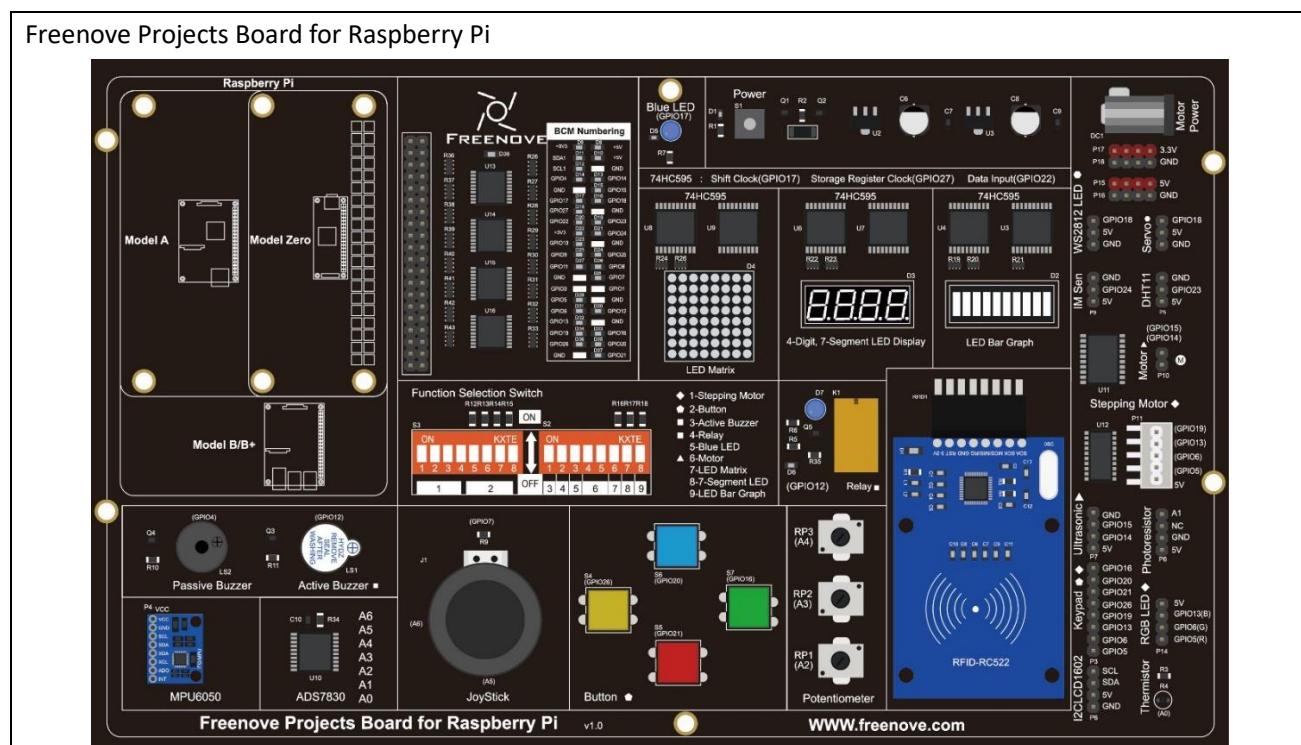



Circuit

Schematic diagram

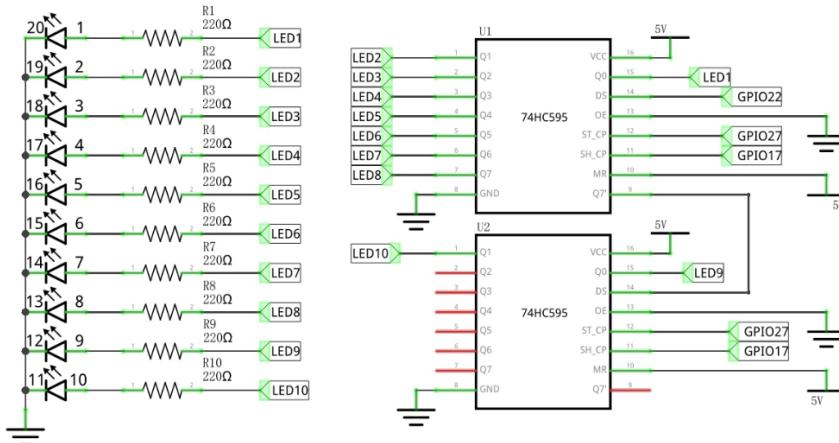

Hardware connection.

If it doesn't work, rotate LED bar graph for 180° .

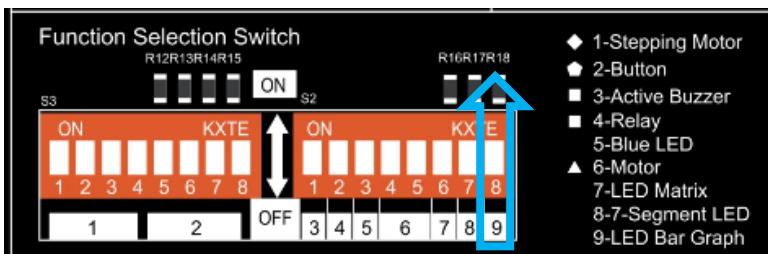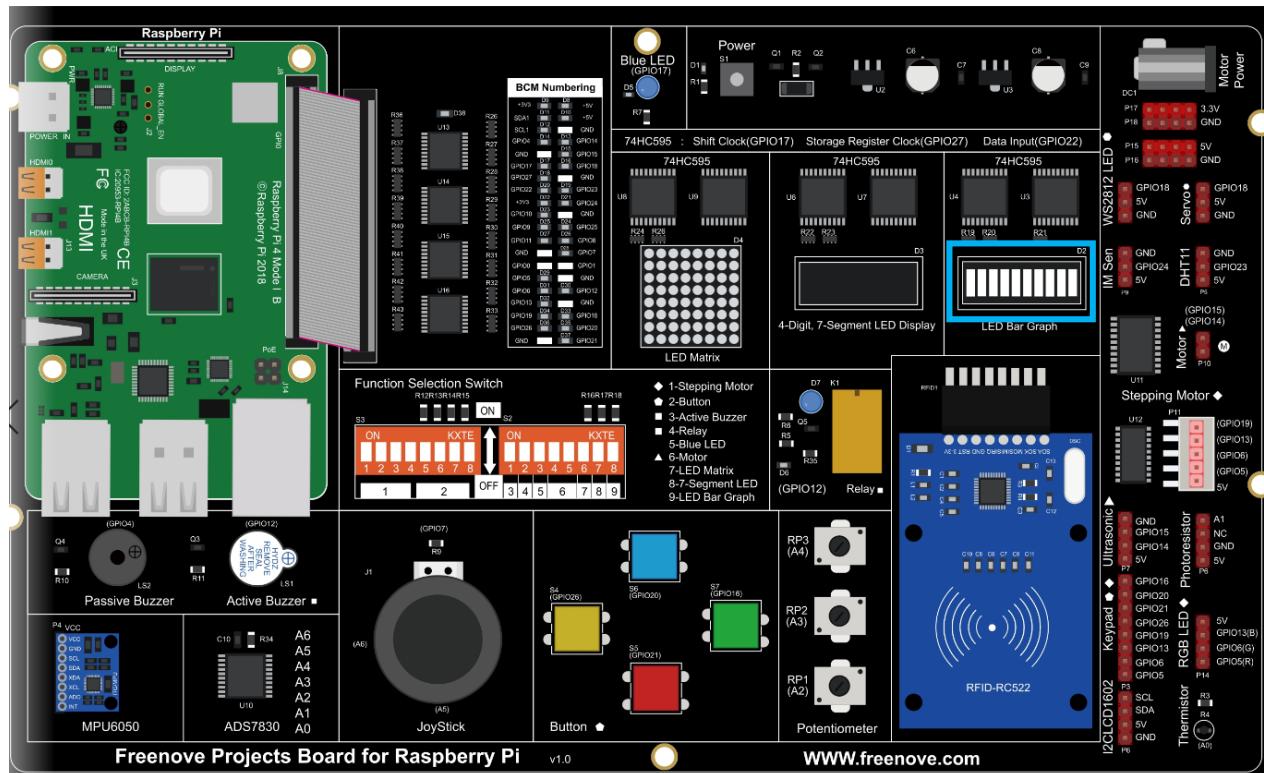

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 10.1.1 LightWater

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_10_1_1_LightWater
```

And then right-click to select Processing IDE

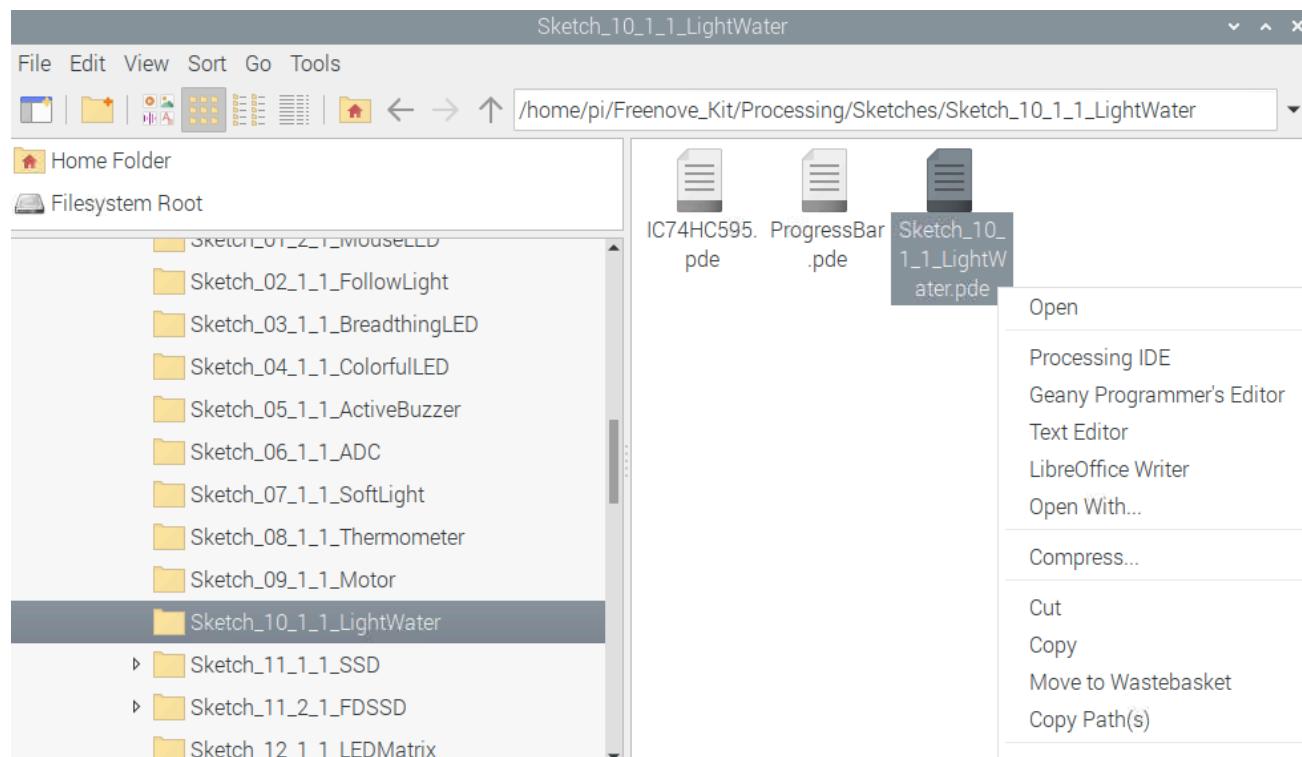

Or you can enter a command in the terminal to open the file Sketch_10_1_1_LightWater. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_10_1_1_LightWater/Sketch_10_1_1_LightWater.pde
```


Open Processing and click Run.

The screenshot shows the Processing IDE interface. The title bar reads "Sketch_10_1_1_LightWat...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. The code editor window displays the following Java code:

```
9 int dataPin = 22;      //connect to the 74HC595
10 int latchPin = 27;
11 int clockPin = 17;
12 final int borderSize = 45;    //border size
13 ProgressBar mBar;        //ProgressBar Object
14 IC74HC595 ic;          //IC74HC595 Object
15 boolean mMouse = false;   //determined whether a mouse click the ProgressBar
16 int leds = 0x0001;        //number of led on
17 int lastMoveTime = 0;     //led last move time point
18 void setup() {
19     size(640, 360);
20     mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
21     mBar.setTitle("Speed");    //set the ProgressBar's title
22     ic = new IC74HC595(dataPin, latchPin, clockPin);
23 }
24
25 void draw() {
26     background(255);
27     titleAndSiteInfo(); //title and site information
```

The bottom of the IDE shows tabs for "Console" and "Errors".

The result is as shown below. LED bars will light up in turn. The speed can be controlled through the slider.

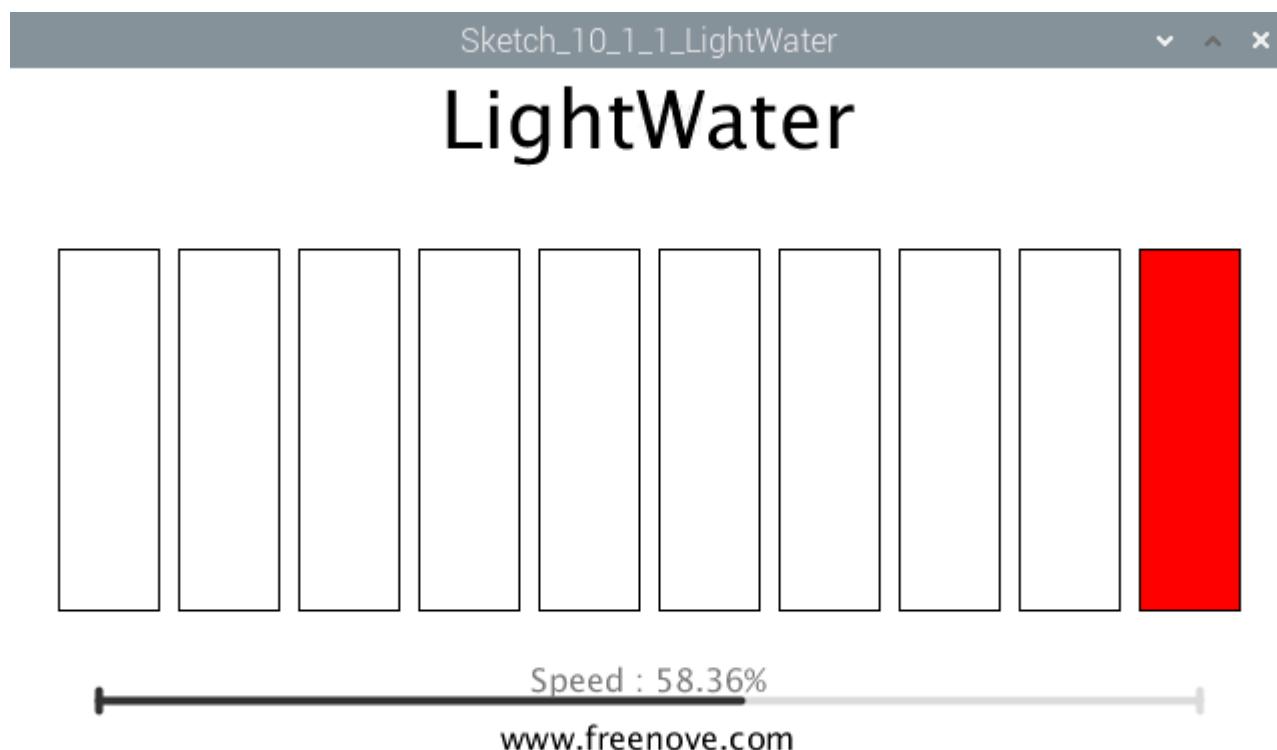

This project contains a lot of code files, and the core code is contained in the file Sketch_10_1_1_LightWater. The other files only contain some custom classes.

The screenshot shows the Processing IDE interface. The title bar says "Sketch_10_1_1_LightWat...". The toolbar includes File, Edit, Sketch, Debug, Tools, Help, and a Java dropdown. The sketch name "Sketch 10 1 1 LightWater" is highlighted in the title bar. The code editor displays the following code:

```

9 int dataPin = 22;      //connect to the 74HC595
10 int latchPin = 27;
11 int clockPin = 17;
12 final int borderSize = 45;    //border size
13 ProgressBar mBar;    //ProgressBar Object
14 IC74HC595 ic;       //IC74HC595 Object

```

The following is program code:

```

1 import freenove.processing.io.*;
2
3 int dataPin = 22;      //connect to the 74HC595
4 int latchPin = 27;
5 int clockPin = 17;
6 final int borderSize = 45;    //border size
7 ProgressBar mBar;    //ProgressBar Object
8 IC74HC595 ic;       //IC74HC595 Object

```



```
9  boolean mMou se = false; //determined whether a mouse click the ProgressBar
10 int leds = 0x01; //number of led on
11 int lastMoveTime = 0; //led last move time point
12 void setup() {
13     size(640, 360);
14     mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
15     mBar.setTitle("Speed"); //set the ProgressBar's title
16     ic = new IC74HC595(dataPin, latchPin, clockPin);
17 }
18
19 void draw() {
20     background(255);
21     titleAndSiteInfo(); //title and site information
22     strokeWeight(4); //border weight
23     mBar.create(); //create the ProgressBar
24     //control the speed of lightwater
25     if (millis() - lastMoveTime > 50/(0.05+mBar.progress)) {
26         lastMoveTime = millis();
27         leds<<=1;
28         if (leds == 0x0400)
29             leds = 0x0001;
30     }
31     ic.write(ic.LSBFIRST, leds); //write 74HC595
32
33     stroke(0);
34     strokeWeight(1);
35     for (int i=0; i<10; i++) { //draw 10 rectangular box
36         if (leds == (1<<i)) { //
37             fill(255, 0, 0); //fill the rectangular box in red color
38         } else {
39             fill(255, 255, 255); //else fill the rectangular box in white color
40         }
41         rect(575-60*i, 90, 50, 180); //draw a rectangular box
42     }
43 }
44
45 void mousePressed() {
46     if ( (mouseY< mBar.y+5) && (mouseY>mBar.y-5) ) {
47         mMou se = true; //the mouse click the progressBar
48     }
49 }
50 void mouseReleased() {
51     mMou se = false;
52 }
```

```

53 void mouseDragged() {
54     int a = constrain(mouseX, borderSize, width - borderSize);
55     float t = map(a, borderSize, width - borderSize, 0.0, 1.0);
56     if (mMouse) {
57         mBar.setProgress(t);
58     }
59 }
60 void titleAndSiteInfo() {
61     fill(0);
62     textAlign(CENTER);      //set the text centered
63     textSize(40);          //set text size
64     text("LightWater", width / 2, 40);    //title
65     textSize(16);
66     text("www. freenove. com", width / 2, height - 20);   //site
67 }
```

First define the GPIO pin connected to 74HC595, the ProgressBar class object, IC74HC595 class object, and some other variables.

```

int dataPin = 22;      //connect to the 74HC595
int latchPin = 27;
int clockPin = 17;
final int borderSize = 45;      //border size
ProgressBar mBar;      //ProgressBar Object
IC74HC595 ic;          //IC74HC595 Object
boolean mMouse = false;    //determined whether a mouse click the ProgressBar
int leds = 0x01;          //number of led on
int lastMoveTime = 0;      //led last move time point
```

In the function setup(), instantiate ProgressBar class object and IC74HC595 class object.

```

mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
mBar.setTitle("Speed");    //set the ProgressBar's title
ic = new IC74HC595(dataPin, latchPin, clockPin);
```

In the function draw(), set the background, text, and other information and draw the progress bar.

```

background(255);
titleAndSiteInfo(); //title and site information
strokeWeight(4);    //border weight
mBar.create();       //create the ProgressBar
```

Then according to the speed of followlight, calculate the data “leds” for 74HC595, and write it to 74HC595, then LEDBar Graph is turned on.

```
if (millis() - lastMoveTime > 50/(0.05+mBar.progress)) {
    lastMoveTime = millis();
    leds<<=1;
    if (leds == 0x0400)
        leds = 0x0001;
}
ic.write(ic.LSBFIRST, leds); //write 74HC595
```

Finally, according to the variable leds, draw the virtual LEDBar Graph on Display Window.

```
stroke(0);
strokeWeight(1);
for (int i=0; i<10; i++) { //draw 10 rectangular box
    if (leds == (1<<i)) { //
        fill(255, 0, 0); //fill the rectangular box in red color
    } else {
        fill(255, 255, 255); //else fill the rectangular box in white color
    }
    rect(25+60*i, 90, 50, 180); //draw a rectangular box
}
```

About class IC74HC595:

class IC74HC595

This is a custom class that is used to operate integrated circuit 74HC595.

```
public IC74HC595(int dPin, int lPin, int cPin)
```

Constructor. The parameters are for the GPIO pins connected to 74HC595.

```
public void write(int order,int value)
```

Used to write data to 74HC595, and the 74HC595 output port will output these data immediately.

If you have any concerns, please send an email to: support@freenove.com



Chapter 11 74HC595 & Seven-segment display.

In this chapter, we will learn a new component, Seven-segment display (SSD).

Project 11.1 Seven -segment display.


We will control the 4-digit 7-segment display to display number 0-9 through 74HC595.

Component List

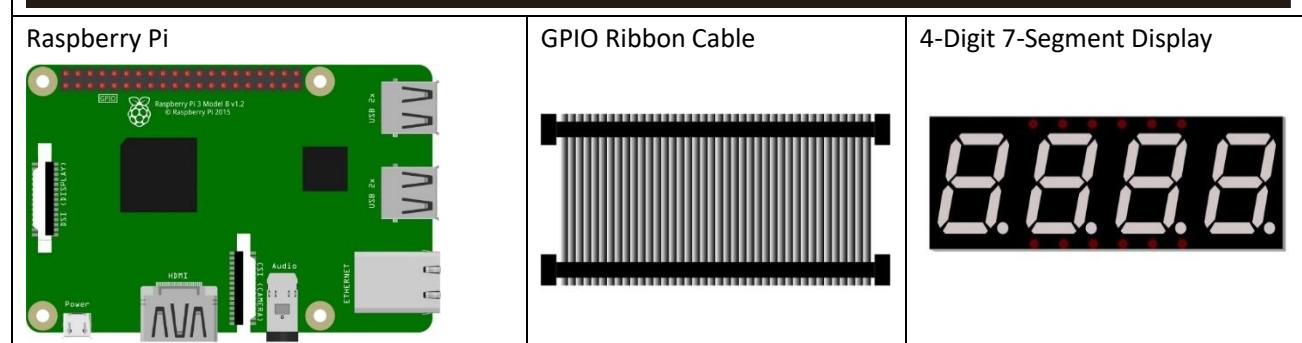
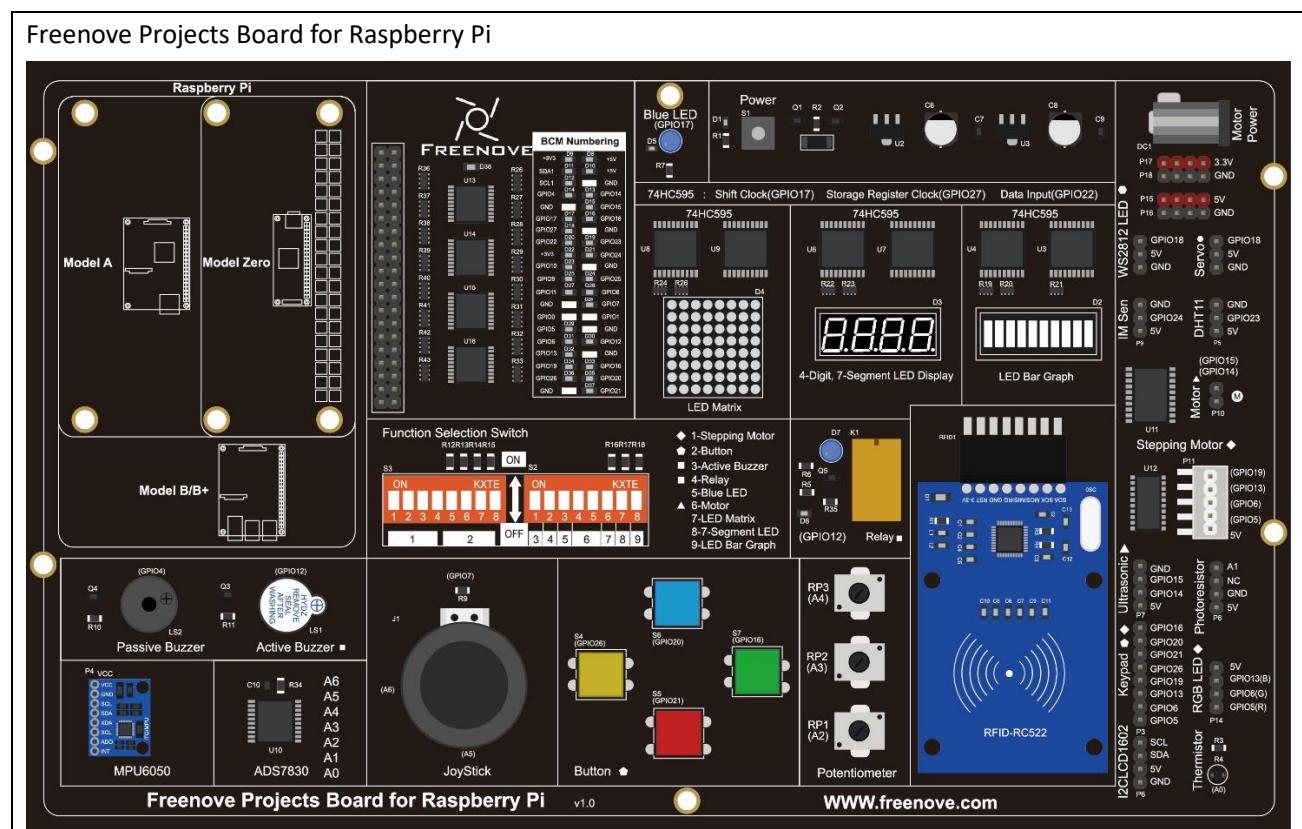


Circuit

Schematic diagram

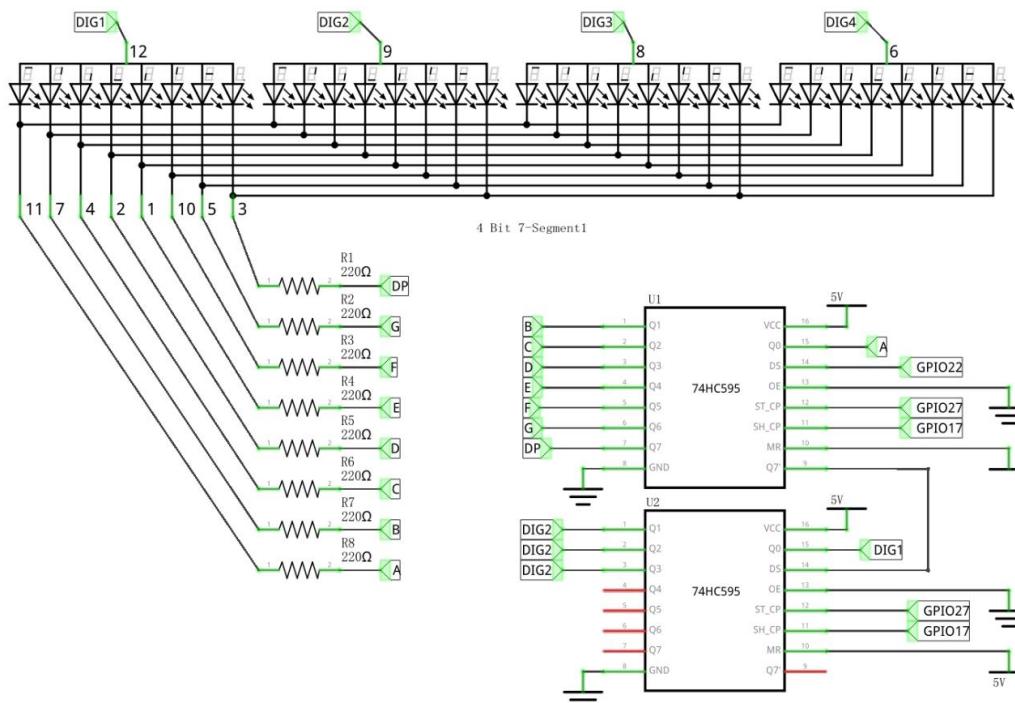

Hardware connection.

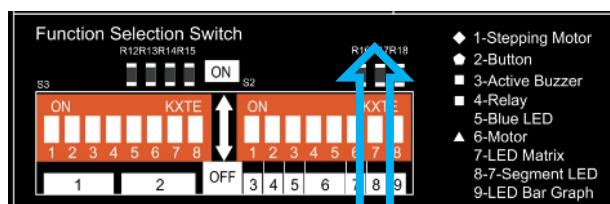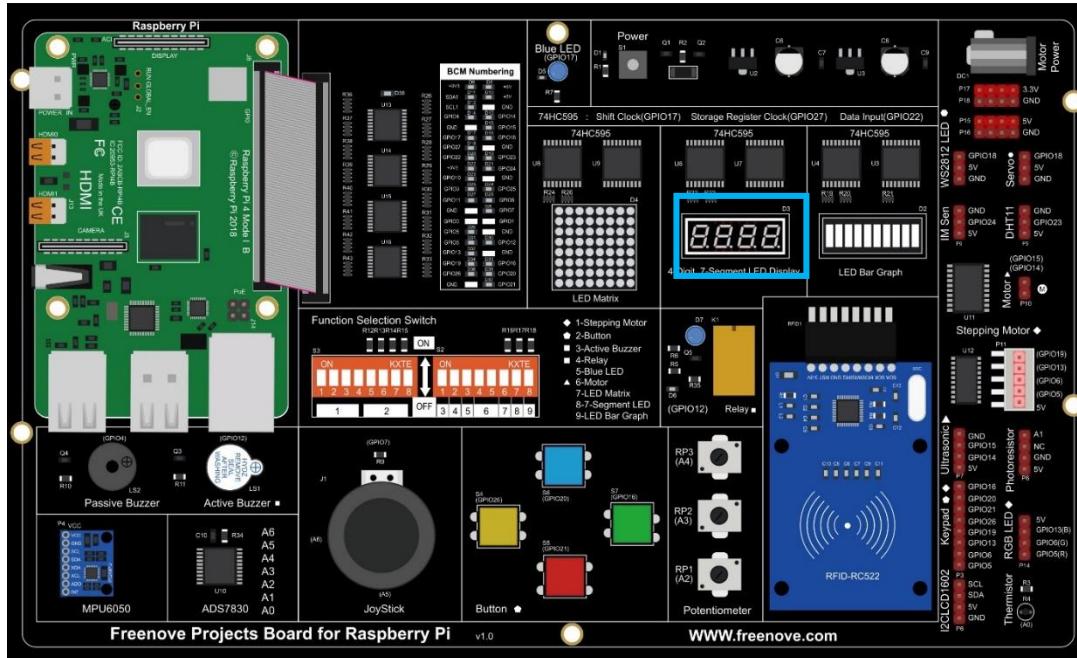

Sketch

In this project, open an independent thread to control the FDSSD. The uncertainty of the system time slice allocation may lead FDSSD to flash on the display, which is a normal phenomenon. For details about display principle of FDSSD, please refer to our C and Python manual.


Sketch 11.1.1 SSD

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_11_1_1_FDSSD
```

And then right-click to select Processing IDE

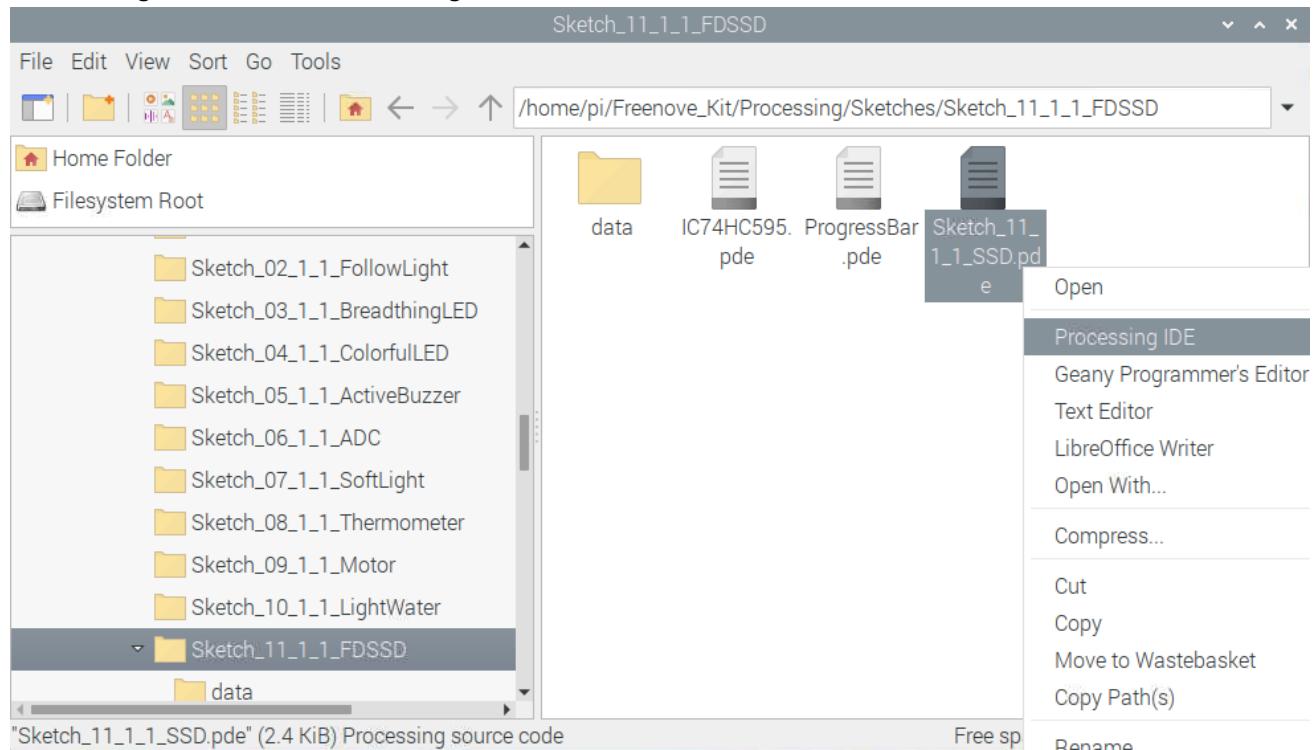

Or you can enter a command in the terminal to open the file Sketch_11_1_1_FDSSD. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_11_1_1_FDSSD/Sketch_11_1_1_FDSSD.pde
```

Open Processing and click Run


The screenshot shows the Processing IDE interface. The title bar reads "Sketch_11_1_1_FDSSD | ...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. The code editor window displays the following Java code:

```
9 int dataPin = 22;      //connect to the 74HC595
10 int latchPin = 27;
11 int clockPin = 17;
12 final int borderSize = 45;    //border size
13 ProgressBar mBar;        //ProgressBar Object
14 IC74HC595 ic;          //IC74HC595 Object
15 boolean mMouse = false;   //determined whether a mouse click the ProgressBar
16 int index = 0;           // index of number
17 int lastMoveTime = 0;     //led last move time point
18 //encoding for character 0-9 of common anode SevenSegmentDisplay
19 final int[] numCode = {0xffc0, 0xffff9, 0xffa4, 0xffb0, 0xff99, 0xff92, 0xff82, 0xffff8,
20 PFont mFont;
21
22 void setup() {
23     size(640, 360);
24     mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
25     mBar.setTitle("Speed");    //set the ProgressBar's title
26     ic = new IC74HC595(dataPin, latchPin, clockPin);
27     mFont = loadFont("DigifaceWide-100.vlw"); //create DigifaceWide font
```


The code defines variables for pins, a progress bar, an IC74HC595 object, and a font. It sets up the sketch by creating a progress bar and initializing the IC74HC595 object. The font is loaded from a file named "DigifaceWide-100.vlw".

At the bottom of the IDE, there are tabs for "Console" and "Errors".

The result is as shown below. It will display 0-9 in circle. The speed can be changed by dragging the slider.

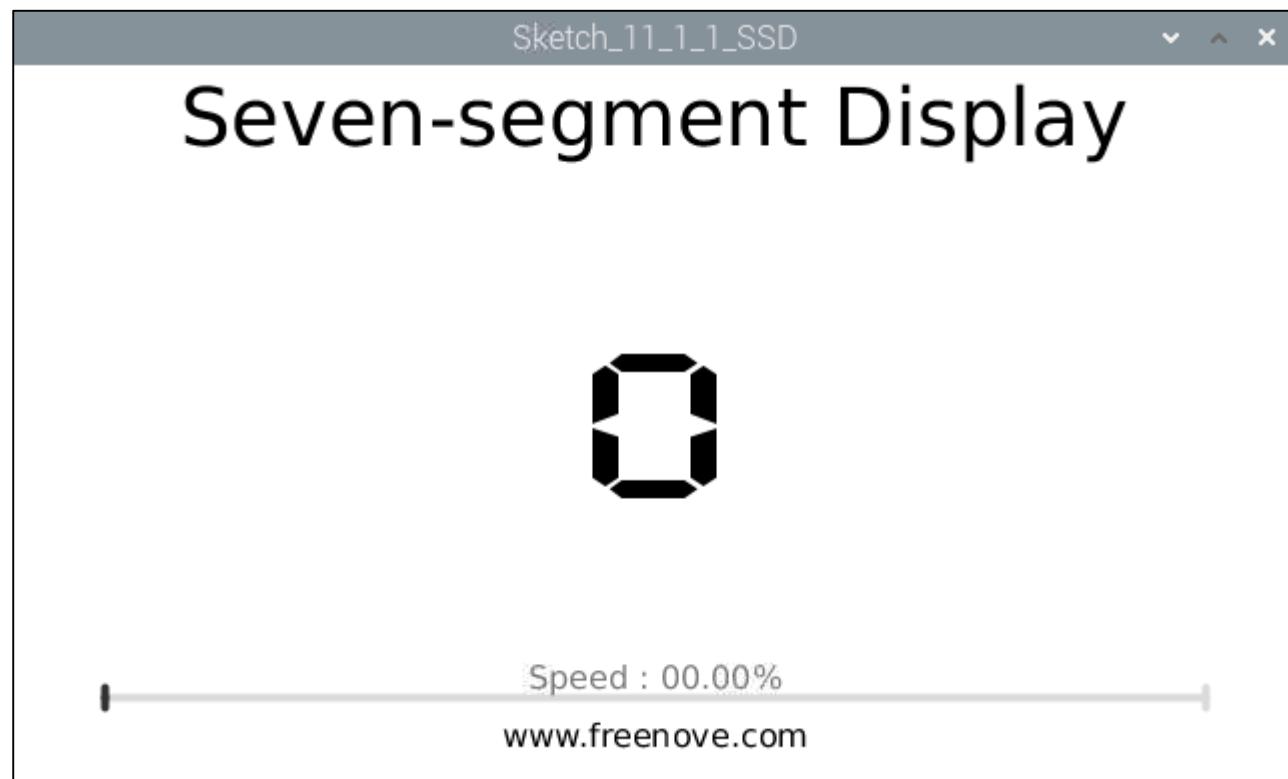

This project contains a lot of code files, and the core code is contained in the file Sketch_11_1_1_SSD. The other files only contain some custom classes.

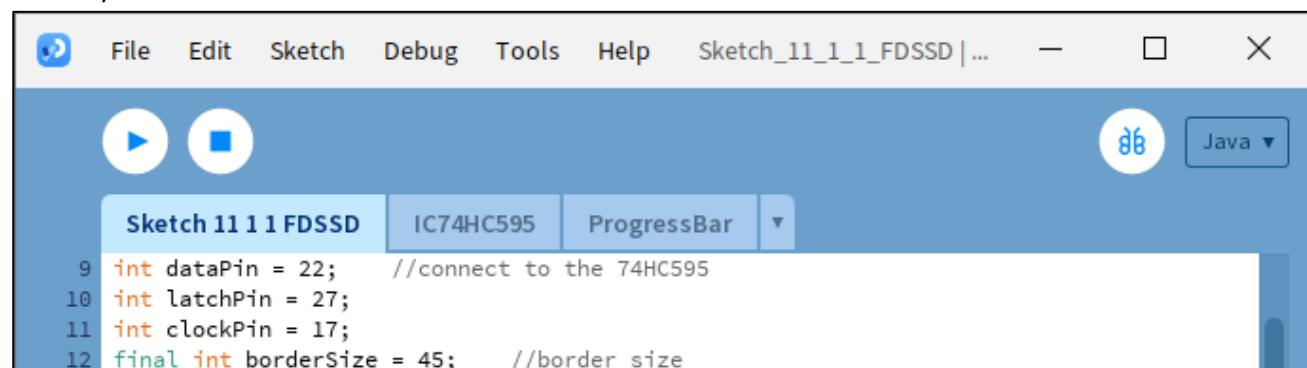

The following is program code:

```

1 import freenove.processing.io.*;
2
3 int dataPin = 22; //connect to the 74HC595
4 int latchPin = 27;
5 int clockPin = 17;
6 final int borderSize = 45; //border size
7 ProgressBar mBar; //ProgressBar Object
8 IC74HC595 ic; //IC74HC595 Object
9 boolean mMouse = false; //determined whether a mouse click the ProgressBar
10 int index = 0; // index of number
11 int lastMoveTime = 0; //led last move time point
12 //encoding for character 0~9 of common anode SevenSegmentDisplay

```

```
13 final int[] numCode = {0xffffc0, 0xffff9, 0xfffa4, 0xffffb0, 0xffff99, 0xffff92, 0xffff82, 0xffff8, 0xffff80,
14 0xffff90};
15 PFont mFont;
16
17 void setup() {
18     size(640, 360);
19     mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
20     mBar.setTitle("Speed"); //set the ProgressBar's title
21     ic = new IC74HC595(dataPin, latchPin, clockPin);
22     mFont = loadFont("DigifaceWide-100.vlw"); //create DigifaceWide font
23 }
24
25 void draw() {
26     background(255);
27     titleAndSiteInfo(); //title and site information
28     strokeWeight(4); //border weight
29     mBar.create(); //create the ProgressBar
30     //control the speed of number change
31     if (millis() - lastMoveTime > 50/(0.05+mBar.progress)) {
32         lastMoveTime = millis();
33         index++;
34         if (index > 9) {
35             index = 0;
36         }
37     }
38     ic.write(ic.MSBFIRST, numCode[index]); //write 74HC595
39     showNum(index); //show the number in dispaly window
40 }
41 void showNum(int num) {
42     fill(0);
43     textSize(100);
44     textAlign(CENTER, CENTER);
45     text(num, width/2, height/2);
46 }
47
48 void mousePressed() {
49     if ( (mouseY< mBar.y+5) && (mouseY>mBar.y-5) ) {
50         mMous
51     }
52 }
53 void mouseReleased() {
54     mMous
55 }
56 void mouseDragged() {
```

```

57     int a = constrain(mouseX, borderSize, width - borderSize);
58     float t = map(a, borderSize, width - borderSize, 0.0, 1.0);
59     if (mMouse) {
60         mBar.setProgress(t);
61     }
62 }
63 void titleAndSiteInfo() {
64     fill(0);
65     textAlign(CENTER); //set the text centered
66     textSize(40); //set text size
67     text("Seven-segment Display", width / 2, 40); //title
68     textSize(16);
69     text("www. freenove. com", width / 2, height - 20); //site
70 }
71 }
```

The project code is similar to that of the previous chapter. The difference is that in this project the data output by 74HC595 is the fixed coding information of FSSD. First, the character "0-9" is defined as code of common anode FSSD.

```
final int[] numCode = {0xffc0, 0xffff9, 0xffa4, 0xffb0, 0xff99, 0xff92, 0xff82, 0xffff8, 0xff80, 0xff90};
```

In the function draw(), the data is output at a certain speed. At the same time the Display Window outputs the same character.

```

if (millis() - lastMoveTime > 50/(0.05+mBar.progress)) {
    lastMoveTime = millis();
    index++;
    if (index > 9) {
        index = 0;
    }
    ic.write(ic.MSBFIRST, numCode[index]); //write 74HC595
    showNum(index); //show the number in dispaly window
}
```

By creating the font "mFont", we change the font of the characters on Display Window. The font ".vlw" file is created by clicking the "Create Font" on the menu bar, which is saved in the data folder of current Sketch.

```
PFont mFont;
.....
mFont = loadFont("DigifaceWide-100.vlw"); //create DigifaceWide font
```

For more details about loadFont(), please refer to "Help→Reference→loadFont()" or the official website:

https://processing.org/reference/loadFont_.html

By creating an empty font, you can reset the font to default font.

```
textFont(createFont("", 100)); //default font
```


If you have any concerns, please send an email to: support@freenove.com

Project 11.2 4-digit Seven-segment display.


Now, let's learn to use 4-digit 7-segment display(FDSSD).

Component List


Freenove Projects Board for Raspberry Pi

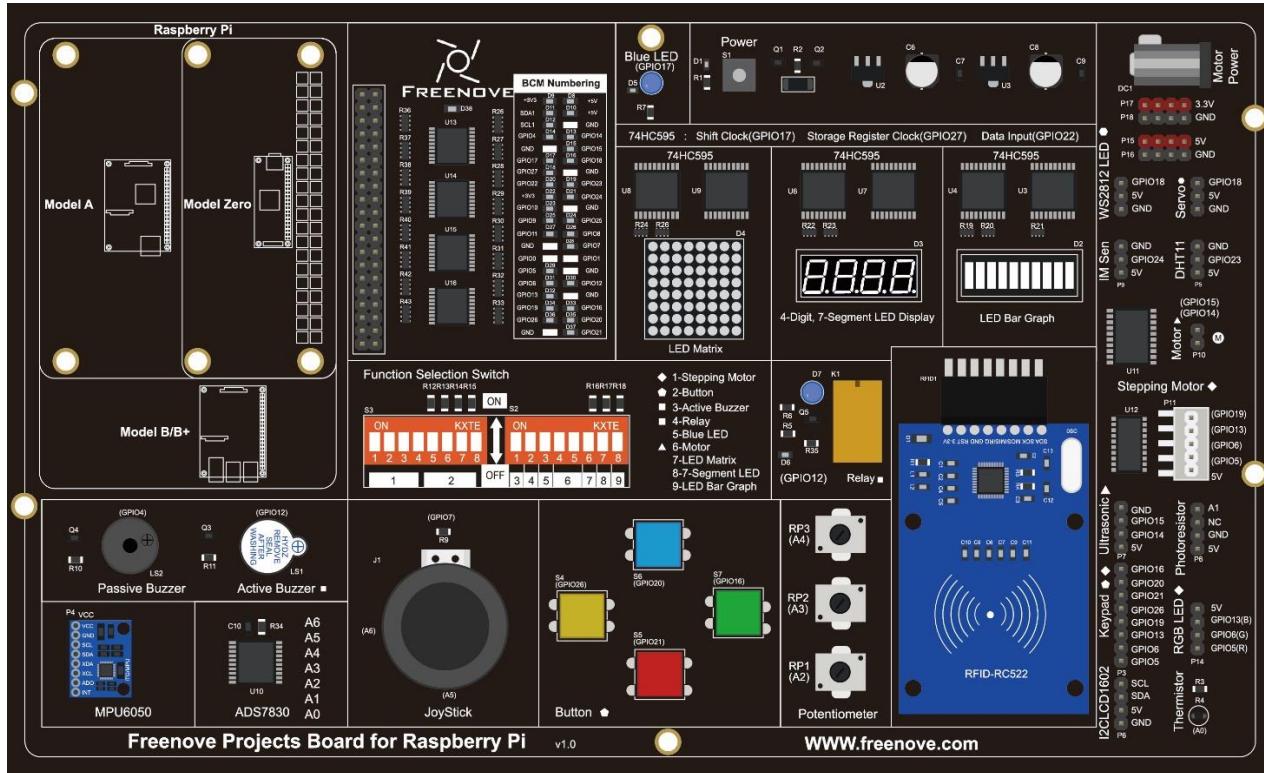

Raspberry Pi

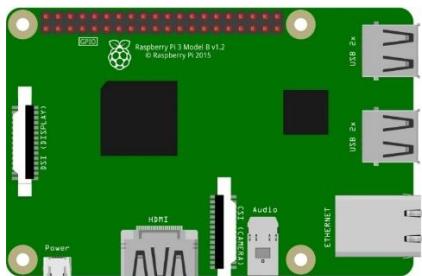

GPIO Ribbon Cable

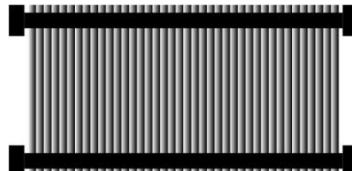

4-Digit 7-Segment Display



Circuit

Schematic diagram

The same as 17.1.

Hardware connection

The same as 17.1.

If you have any concerns, please send an email to: support@freenove.com

Sketch

In this project, open an independent thread to control the FDSSD. The uncertainty of the system time slice allocation may lead FDSSD to flash on the display, which is a normal phenomenon. For details about display principle of FDSSD, please refer to our C and Python manual.


Sketch 11.2.1 FDSSD

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_11_2_1_FDSSD
```

And then right-click to select Processing IDE

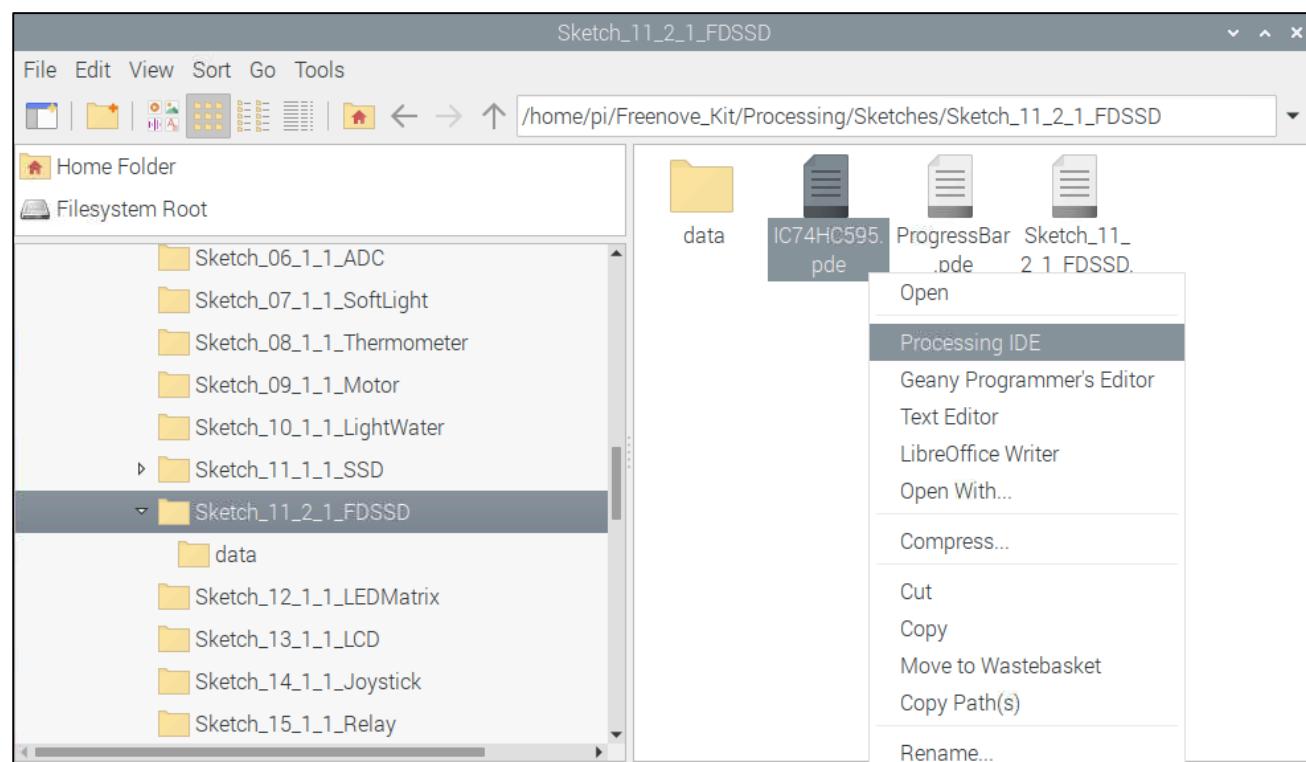

Or you can enter a command in the terminal to open the file Sketch_11_2_1_FDSSD. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_11_2_1_FDSSD/Sketch_11_2_1_FDSSD.pde
```

Open Processing and click Run

The screenshot shows the Processing IDE interface. The title bar reads "Sketch_11_2_1_FDSSD | ...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh button. The code editor tab is titled "Sketch 11 2 1 FDSSD". The code itself is as follows:


```
9 int dataPin = 22;      //connect to the 74HC595
10 int latchPin = 27;
11 int clockPin = 17;
12 final int borderSize = 45;    //border size
13 ProgressBar mBar;        //ProgressBar Object
14 IC74HC595 ic;          //IC74HC595 Object
15 boolean mMouse = false;   //determined whether a mouse click the ProgressBar
16 int index = 0;           // index of number
17 int lastMoveTime = 0;     //led last move time point
18 //encoding for character 0-9 of common anode SevenSegmentDisplay
19 final int[] numCode = {0xc0, 0xf9, 0xa4, 0xb0, 0x99, 0x92, 0x82, 0xf8, 0x80, 0x90};
20 PFont mFont;
21 int digit;
22 void setup() {
23     size(640, 360);
24     mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
25     mBar.setTitle("Speed");    //set the ProgressBar's title
26     ic = new IC74HC595(dataPin, latchPin, clockPin);
27     mFont = loadFont("DigifaceWide-100.vlw"); //create DigifaceWide font
```

The bottom of the screen shows tabs for "Console" and "Errors".

The result is as shown below. It will count from 0 to 9999. The speed can be changed by dragging the slider.



This project contains several code files, as shown below:

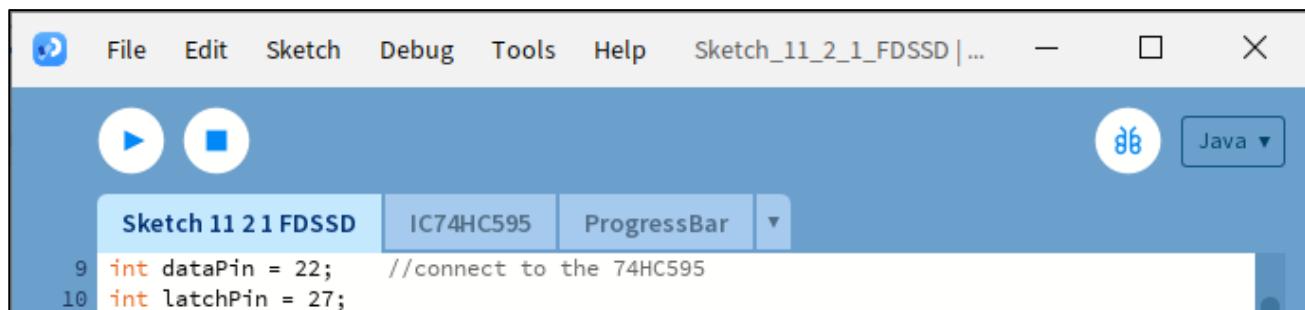

The following is program code:

```
1 import freenove.processing.io.*;
2
3 int dataPin = 22;      //connect to the 74HC595
4 int latchPin = 27;
5 int clockPin = 17;
6 final int borderSize = 45;      //border size
7 ProgressBar mBar;      //ProgressBar Object
8 IC74HC595 ic;      //IC74HC595 Object
9 boolean mMouse = false;      //determined whether a mouse click the ProgressBar
10 int index = 0;          // index of number
11 int lastMoveTime = 0;      //led last move time point
12 //encoding for character 0~9 of common anode SevenSegmentDisplay
```

```
13 final int[] numCode = {0xc0, 0xf9, 0xa4, 0xb0, 0x99, 0x92, 0x82, 0xf8, 0x80, 0x90};  
14 PFont mFont;  
15 int digit;  
16 void setup() {  
17     size(640, 360);  
18     mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);  
19     mBar.setTitle("Speed"); //set the ProgressBar's title  
20     ic = new IC74HC595(dataPin, latchPin, clockPin);  
21     mFont = loadFont("DigifaceWide-100.vlw"); //create DigifaceWide font  
22     thread("displaySSD");  
23 }  
24  
25 void draw() {  
26     background(255);  
27     titleAndSiteInfo(); //title and site information  
28     strokeWeight(4); //border weight  
29     mBar.create(); //create the ProgressBar  
30     //control the speed of number change  
31     if (millis() - lastMoveTime > 50/(0.05+mBar.progress)) {  
32         lastMoveTime = millis();  
33         index++;  
34         if (index > 9999) {  
35             index = 0;  
36         }  
37     }  
38     //showNum(index); //show the number in dispaly window  
39 }  
40 void showNum(int num) {  
41     fill(0);  
42     textSize(100);  
43     textAlign(CENTER, CENTER);  
44     text(nf(num, 4, 0), width/2, height/2);  
45 }  
46  
47 void displaySSD() {  
48     while (true) {  
49         display(index);  
50     }  
51 }  
52  
53 int selectDigit(int digit) {  
54     if (digit==0x01){  
55         return (0x08<<8);  
56     }  
57 }
```

```
57     else if (digit==0x02) {
58         return (0x04<<8);
59     }
60     else if (digit==0x04) {
61         return (0x02<<8);
62     }
63     else if (digit==0x08) {
64         return (0x01<<8);
65     }
66     else{
67         return (0xf0<<8);
68     }
69 }
70 void display(int dec) {
71
72     digit=selectDigit(0x01); //select the first, and display the single digit
73     ic.write(ic.MSBFIRST, numCode[dec%10]|digit);
74     delay(1); //display duration
75
76     digit=selectDigit(0x02); //select the second, and display the tens digit
77     ic.write(ic.MSBFIRST, numCode[dec%100/10]|digit);
78     delay(1);
79
80     digit=selectDigit(0x04); //select the third, and display the hundreds digit
81     ic.write(ic.MSBFIRST, numCode[dec%1000/100]|digit);
82     delay(1);
83
84     digit=selectDigit(0x08); //select the fourth, and display the thousands digit
85     ic.write(ic.MSBFIRST, numCode[dec%10000/1000]|digit);
86     delay(1);
87 }
88 void mousePressed() {
89     if ( (mouseY< mBar.y+5) && (mouseY>mBar.y-5) ) {
90         mMous
91     }
92 }
93 void mouseReleased() {
94     mMous
95 }
96 void mouseDragged() {
97     int a = constrain(mouseX, borderSize, width - borderSize);
98     float t = map(a, borderSize, width - borderSize, 0.0, 1.0);
99     if (mMouse) {
100         mBar.setProgress(t);
```

```
101    }
102 }
103 void titleAndSiteInfo() {
104     fill(0);
105     textAlign(CENTER);      //set the text centered
106     textStyle(createFont("", 100)); //default font
107     textSize(40);          //set text size
108     text("4-Digit 7-Segment Display", width / 2, 40); //title
109     textSize(16);
110     text("www.freenove.com", width / 2, height - 20); //site
111 }
```

In a separate thread, make the FDSSD display numbers in scan mode. Subfunction `display()` is used to make FDSSD display a four-digit number.

```
thread("displaySSD");
.....
void displaySSD() {
    while (true) {
        display(index);
    }
}
```

Other contents of the program are the same as the previous section "SSD".

If you have any concerns, please send an email to: support@freenove.com

Chapter 12 74HC595 & LED Matrix



In this chapter, we will learn how to use 74HC595 to control more LEDs, LED Matrix.

Project 12.1 LED Matrix

In this project, we will use two 74HC595 chips to control a monochrome LEDMatrix (8*8) to make it display some graphics and characters.


Component List

Freenove Projects Board for Raspberry Pi x1

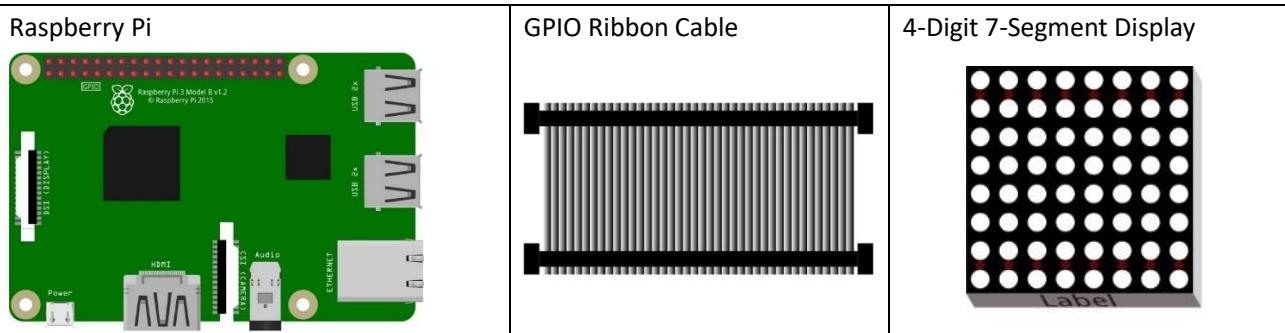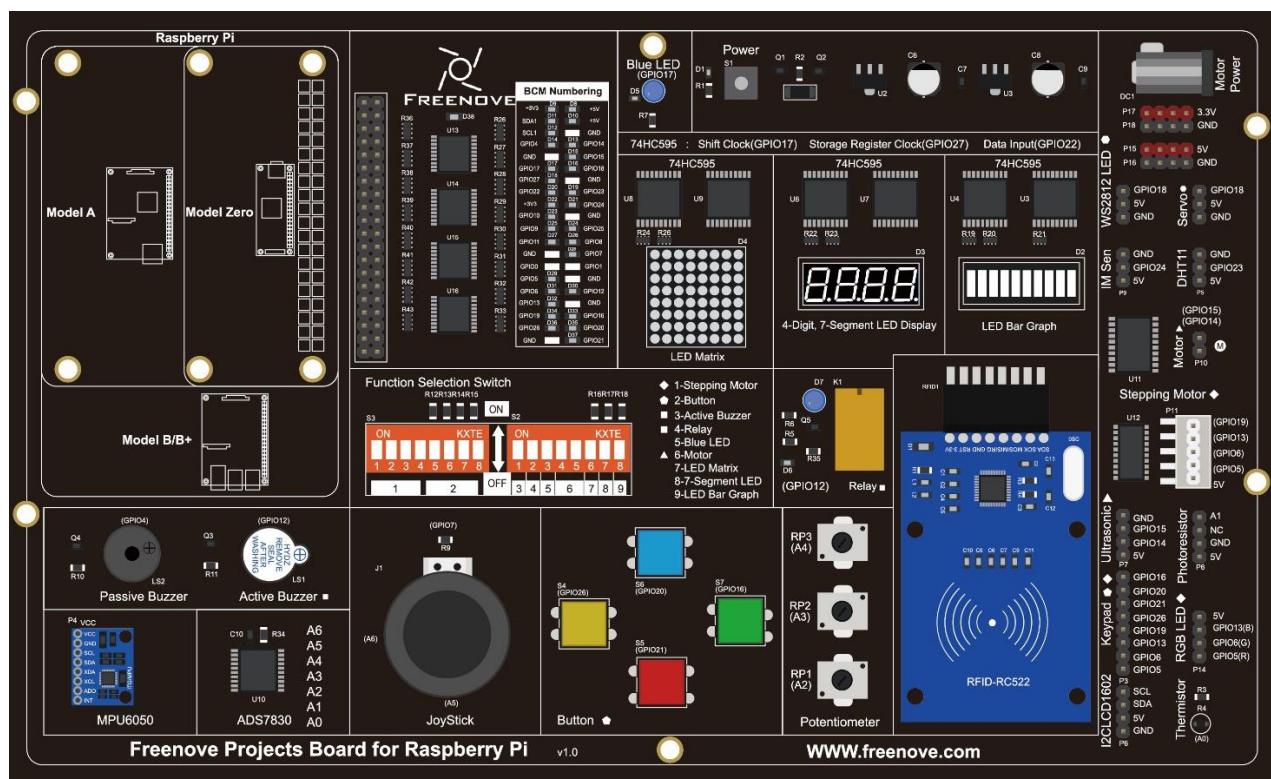


Circuit


Schematic diagram

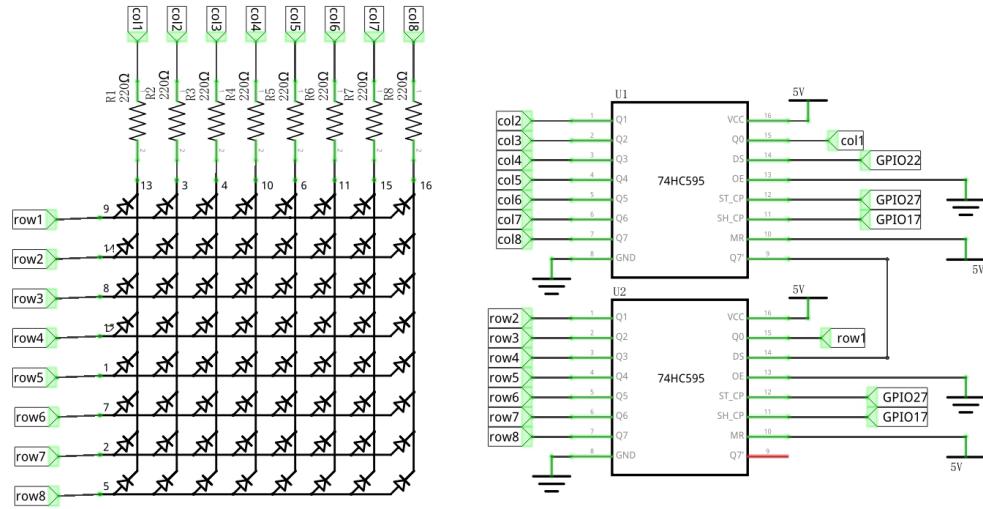

Hardware connection.

If it doesn't work, rotate the LED matrix for 180° .

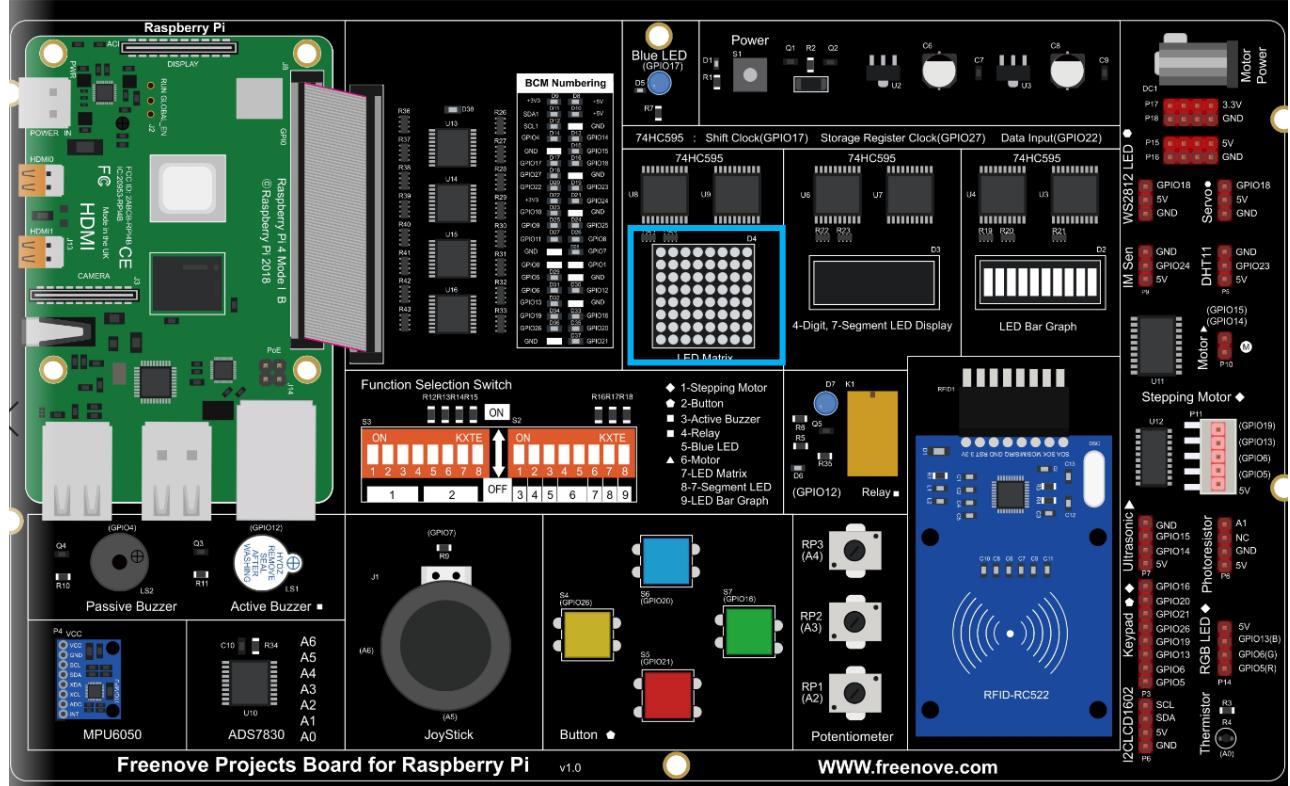

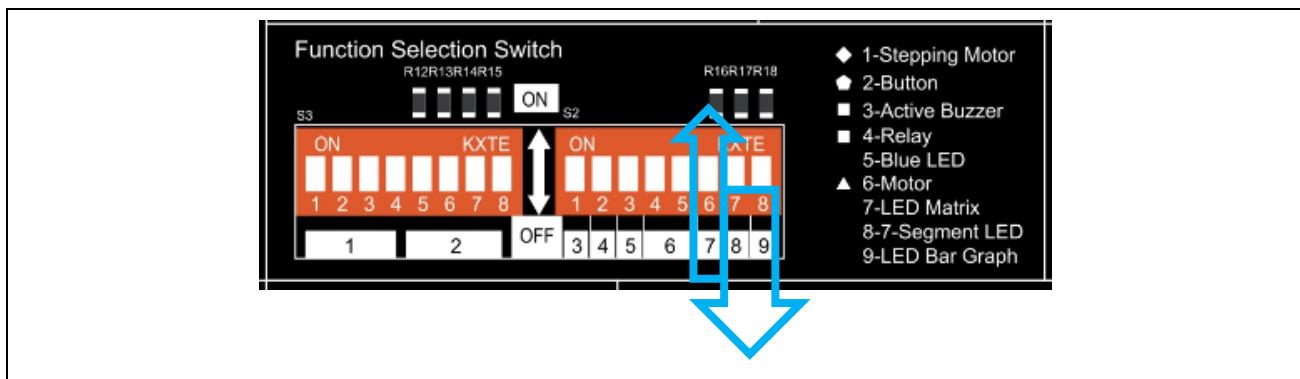

If you have any concerns, please send an email to: support@freenove.com


Sketch

Sketch 12.1.1 LEDMatrix

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_12_1_1_LEDMatrix
```


And then right-click to select Processing IDE

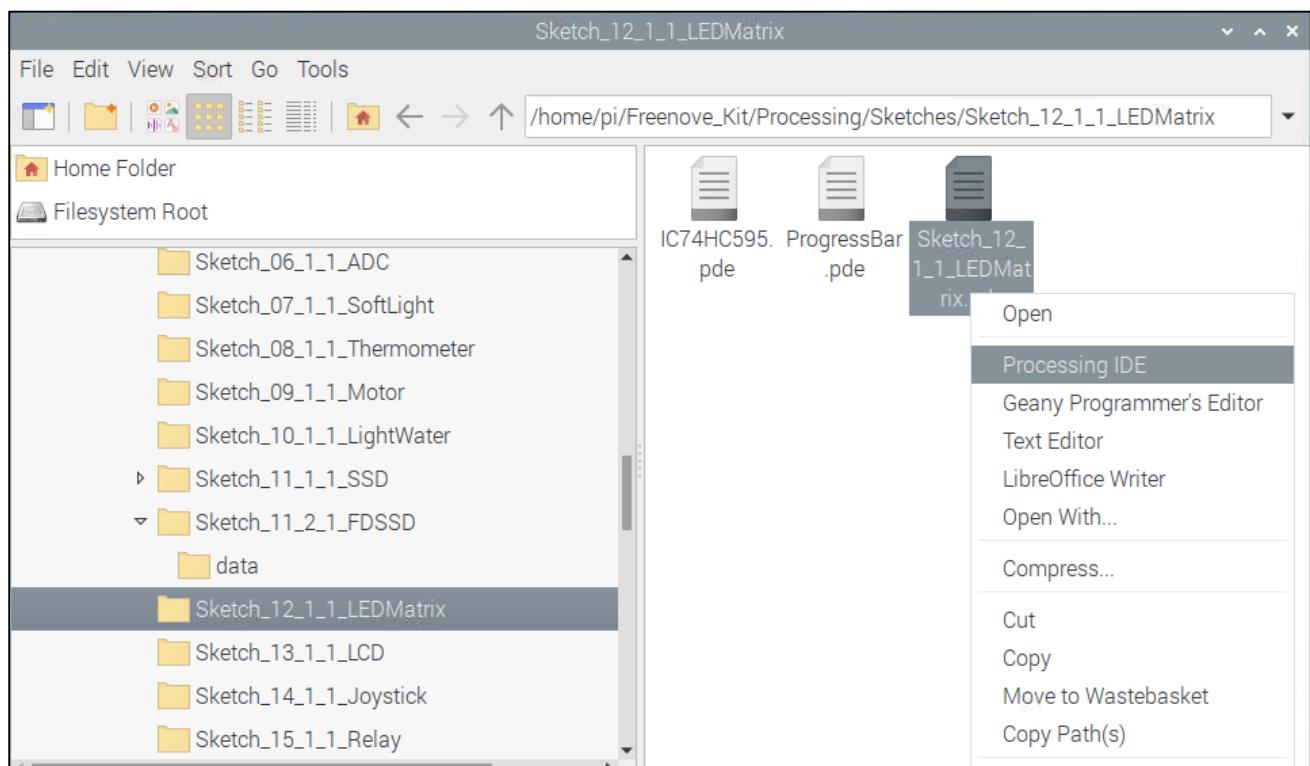

Or you can enter a command in the terminal to open the file Sketch_12_1_1_LEDMatrix. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_12_1_1_LEDMatrix/Sketch_12_1_1_LEDMatrix.pde
```

Open Processing and click Run

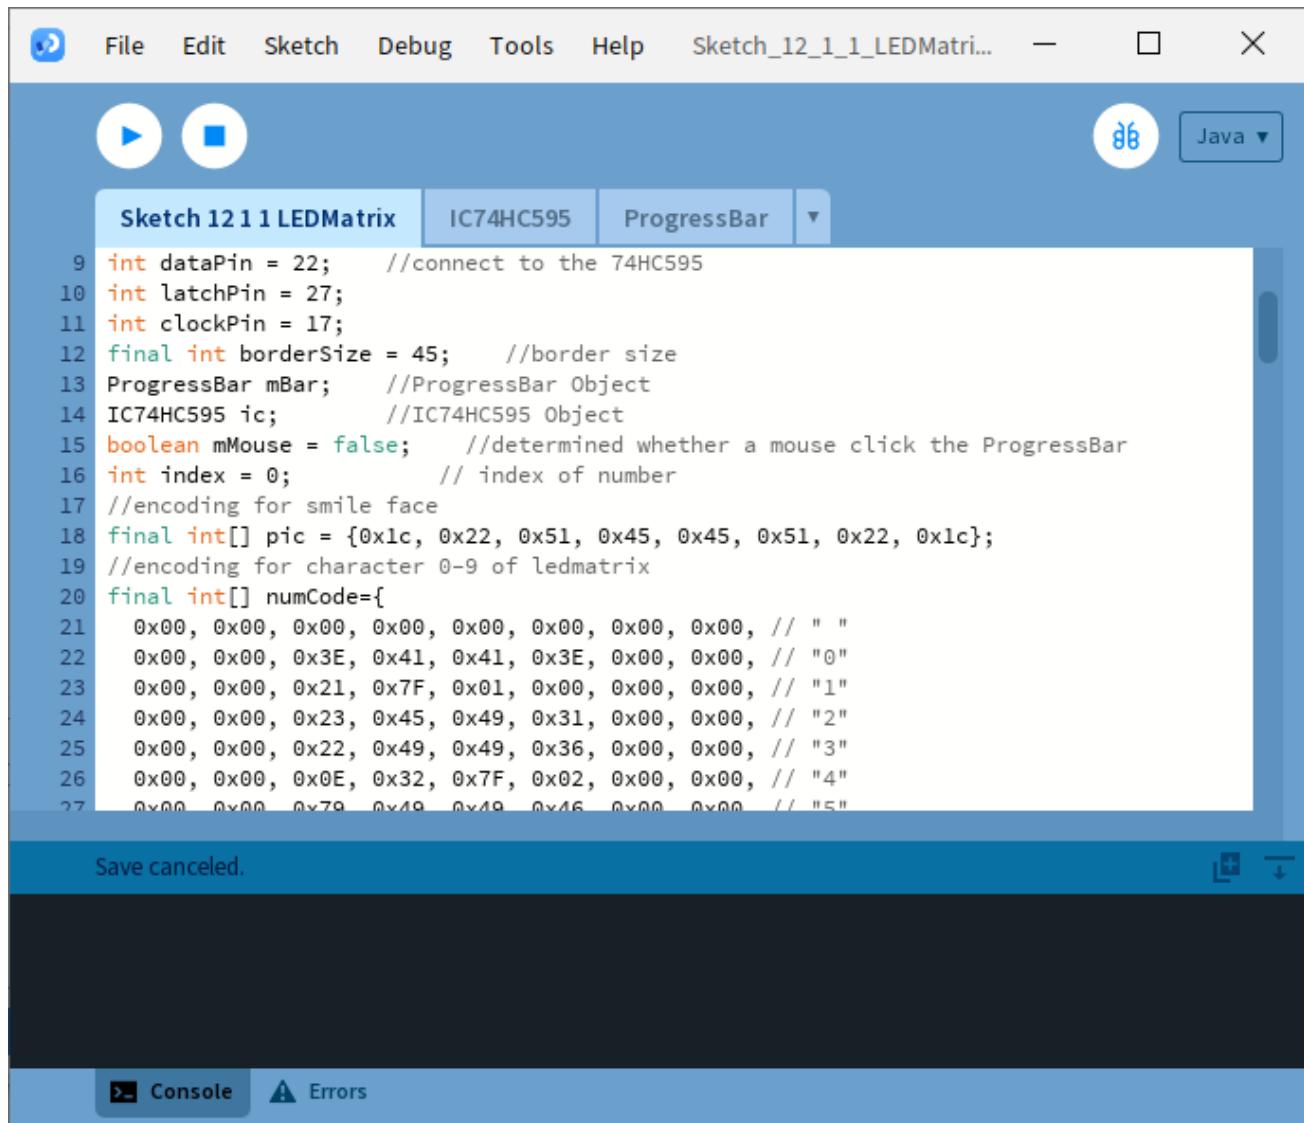

```
Sketch 12 1 1 LEDMatrix  IC74HC595  ProgressBar  ▾
9 int dataPin = 22;      //connect to the 74HC595
10 int latchPin = 27;
11 int clockPin = 17;
12 final int borderSize = 45;    //border size
13 ProgressBar mBar;        //ProgressBar Object
14 IC74HC595 ic;          //IC74HC595 Object
15 boolean mMouse = false;   //determined whether a mouse click the ProgressBar
16 int index = 0;           // index of number
17 //encoding for smile face
18 final int[] pic = {0x1c, 0x22, 0x51, 0x45, 0x45, 0x51, 0x22, 0x1c};
19 //encoding for character 0-9 of ledmatrix
20 final int[] numCode={
21     0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, // " "
22     0x00, 0x00, 0x3E, 0x41, 0x41, 0x3E, 0x00, 0x00, // "0"
23     0x00, 0x00, 0x21, 0x7F, 0x01, 0x00, 0x00, 0x00, // "1"
24     0x00, 0x00, 0x23, 0x45, 0x49, 0x31, 0x00, 0x00, // "2"
25     0x00, 0x00, 0x22, 0x49, 0x49, 0x36, 0x00, 0x00, // "3"
26     0x00, 0x00, 0x0E, 0x32, 0x7F, 0x02, 0x00, 0x00, // "4"
27     0x00, 0x00, 0x79, 0x19, 0x49, 0x46, 0x00, 0x00, // "5"
}

Save canceled.
```


The screenshot shows the Processing IDE interface. The title bar says "Sketch 12 1 1 LEDMatrix". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh button. The code editor contains the provided sketch code. In the bottom status bar, there are tabs for "Console" and "Errors", and a message "Save canceled." is displayed.

The result is as shown below. LED matrix will display a smiling face first and then character 0-F.

The speed can be changed by dragging the slider.



This project contains a lot of code files, and the core code is contained in the file Sketch_12_1_1_LEDMatrix. The other files only contain some custom classes.

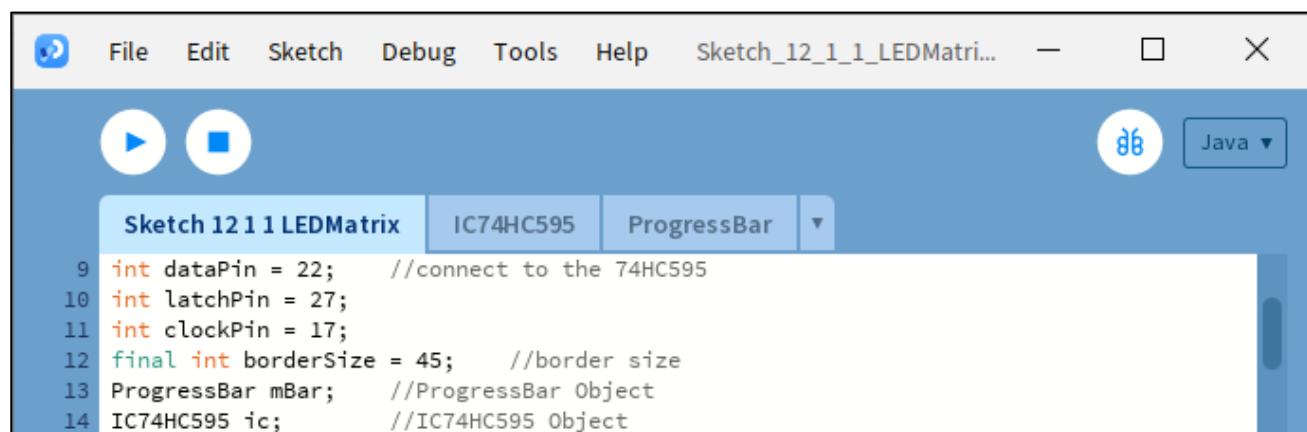

The following is program code:

```

1 import freenove.processing.io.*;
2
3 int dataPin = 22; //connect to the 74HC595
4 int latchPin = 27;
5 int clockPin = 17;
6 final int borderSize = 45; //border size
7 ProgressBar mBar; //ProgressBar Object
  
```

```
8  IC74HC595 ic;      //IC74HC595 Object
9  boolean mMouse = false;    //determined whether a mouse click the ProgressBar
10 int index = 0;           // index of number
11 //encoding for smile face
12 final int[] pic = {0x1c, 0x22, 0x51, 0x45, 0x45, 0x51, 0x22, 0x1c};
13 //encoding for character 0-9 of ledmatrix
14 final int[] numCode={
15     0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, // "
16     0x00, 0x00, 0x3E, 0x41, 0x41, 0x3E, 0x00, 0x00, // "0"
17     0x00, 0x00, 0x21, 0x7F, 0x01, 0x00, 0x00, 0x00, // "1"
18     0x00, 0x00, 0x23, 0x45, 0x49, 0x31, 0x00, 0x00, // "2"
19     0x00, 0x00, 0x22, 0x49, 0x49, 0x36, 0x00, 0x00, // "3"
20     0x00, 0x00, 0x0E, 0x32, 0x7F, 0x02, 0x00, 0x00, // "4"
21     0x00, 0x00, 0x79, 0x49, 0x49, 0x46, 0x00, 0x00, // "5"
22     0x00, 0x00, 0x3E, 0x49, 0x49, 0x26, 0x00, 0x00, // "6"
23     0x00, 0x00, 0x60, 0x47, 0x48, 0x70, 0x00, 0x00, // "7"
24     0x00, 0x00, 0x36, 0x49, 0x49, 0x36, 0x00, 0x00, // "8"
25     0x00, 0x00, 0x32, 0x49, 0x49, 0x3E, 0x00, 0x00, // "9"
26     0x00, 0x00, 0x3F, 0x44, 0x44, 0x3F, 0x00, 0x00, // "A"
27     0x00, 0x00, 0x7F, 0x49, 0x49, 0x36, 0x00, 0x00, // "B"
28     0x00, 0x00, 0x3E, 0x41, 0x41, 0x22, 0x00, 0x00, // "C"
29     0x00, 0x00, 0x7F, 0x41, 0x41, 0x3E, 0x00, 0x00, // "D"
30     0x00, 0x00, 0x7F, 0x49, 0x49, 0x41, 0x00, 0x00, // "E"
31     0x00, 0x00, 0x7F, 0x48, 0x48, 0x40, 0x00, 0x00, // "F"
32     0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, // "
33 };
34 myThread t = new myThread();    //create a new thread for ledmatrix
35 void setup() {
36     size(640, 360);
37     mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);
38     mBar.setTitle("Speed");    //set the ProgressBar's title
39     ic = new IC74HC595(dataPin, latchPin, clockPin);
40     t.start();    //thread start
41 }
42
43 void draw() {
44     background(255);
45     titleAndSiteInfo(); //title and site information
46     strokeWeight(4);    //border weight
47     mBar.create();    //create the ProgressBar
48     displayNum(hex(index, 1)); //show the number in dispaly window
49 }
50 class myThread extends Thread {
51     public void run() {
```

```
52     while (true) {
53         showMatrix();      //show smile picture
54         showNum();        //show the character "0-F"
55     }
56 }
57 }
58 void showMatrix() {
59     for (int j=0; j<100; j++) {    //picture show time
60         int x=0x80;
61         for (int i=0; i<8; i++) {    //display a frame picture
62             GPIO.digitalWrite(latchPin, GPIO.LOW);
63             ic.shiftOut(ic.MSBFIRST, pic[i]);
64             ic.shiftOut(ic.MSBFIRST, ~x);
65             GPIO.digitalWrite(latchPin, GPIO.HIGH);
66             x>>=1;
67         }
68     }
69 }
70 void showNum() {
71     for (int j=0; j<numCode.length-8; j++) { //where to start showing
72         index = j/8;
73         for (int k = 0; k<10*(1.2-mBar.progress); k++) {    //speed
74             int x=0x80;
75             for (int i=0; i<8; i++) {    //display a frame picture
76                 GPIO.digitalWrite(latchPin, GPIO.LOW);
77                 ic.shiftOut(ic.MSBFIRST, numCode[j+i]);
78                 ic.shiftOut(ic.MSBFIRST, ~x);
79                 GPIO.digitalWrite(latchPin, GPIO.HIGH);
80                 x>>=1;
81             }
82         }
83     }
84 }
85 void displayNum(String num) {
86     fill(0);
87     textSize(100);
88     textAlign(CENTER, CENTER);
89     text(num, width/2, height/2);
90 }
91 void mousePressed() {
92     if ( (mouseY< mBar.y+5) && (mouseY>mBar.y-5) ) {
93         mMouse = true;    //the mouse click the progressBar
94     }
95 }
```

```

96 void mouseReleased() {
97     mMouse = false;
98 }
99 void mouseDragged() {
100    int a = constrain(mouseX, borderSize, width - borderSize);
101    float t = map(a, borderSize, width - borderSize, 0.0, 1.0);
102    if (mMouse) {
103        mBar.setProgress(t);
104    }
105 }
106 void titleAndSiteInfo() {
107     fill(0);
108     textAlign(CENTER); //set the text centered
109     textStyle(createFont("", 100)); //default font
110     textSize(40); //set text size
111     text("LEDMatrix Display", width / 2, 40); //title
112     textSize(16);
113     text("www. freenove. com", width / 2, height - 20); //site
114 }
```

In the code, first define the data of the smiling face and characters "0-F".

```

//encoding for smile face
final int[] pic = {0x1c, 0x22, 0x51, 0x45, 0x45, 0x51, 0x22, 0x1c};
//encoding for character 0-9 of ledmatrix
final int[] numCode={
.....
};
```

Then create a new thread t. LEDMatrix scan display code will be executed in run() of this thread.

```

myThread t = new myThread(); //create a new thread for ledmatrix
.....
class myThread extends Thread {
    public void run() {
        while (true) {
            showMatrix(); //show smile picture
            showNum(); //show the character "0-F"
        }
    }
}
```

The function `setup()`, defines size of Display Window, `ProgressBar` class objects and `IC75HC595` class object, and starts the thread `t`.

```
void setup() {  
    size(640, 360);  
    mBar = new ProgressBar(borderSize, height-borderSize, width-borderSize*2);  
    mBar.setTitle("Speed"); //set the ProgressBar's title  
    ic = new IC75HC595(dataPin, latchPin, clockPin);  
    t.start(); //thread start  
}
```

In `draw()`, draw the relevant information and the current number to display.

```
void draw() {  
    background(255);  
    titleAndSiteInfo(); //title and site information  
    strokeWeight(4); //border weight  
    mBar.create(); //create the ProgressBar  
    displayNum(hex(index, 1)); //show the number in display window  
}
```

Subfunction `showMatrix()` makes `LEDMatrix` display a smiling face pattern, which lasts for a period of time.

```
void showMatrix() {  
    for (int j=0; j<100; j++) { //picture show time  
        int x=0x80;  
        for (int i=0; i<8; i++) { //display a frame picture  
            GPIO.digitalWrite(latchPin, GPIO.LOW);  
            ic.shiftOut(ic.MSBFIRST, pic[i]);  
            ic.shiftOut(ic.MSBFIRST, ~x);  
            GPIO.digitalWrite(latchPin, GPIO.HIGH);  
            x>>=1;  
        }  
    }  
}
```

Subfunction showNum() makes LEDMatrix scroll displaying character "0-F", in which the variable k is used to adjust the scrolling speed.

```
void showNum() {  
    for (int j=0; j<numCode.length-8; j++) { //where to start showing  
        index = j/8;  
        for (int k =0; k<10*(1.2-mBar.progress); k++) { //speed  
            int x=0x80;  
            for (int i=0; i<8; i++) { //display a frame picture  
                GPIO.digitalWrite(latchPin, GPIO.LOW);  
                ic.shiftOut(ic.MSBFIRST, numCode[j+i]);  
                ic.shiftOut(ic.MSBFIRST, ~x);  
                GPIO.digitalWrite(latchPin, GPIO.HIGH);  
                x>>=1;  
            }  
        }  
    }  
}
```

If you have more interests in LED matrix, you can download an interesting app to explore.

<https://play.google.com/store/apps/details?id=com.vitogusmano.arduinoledmatrixanimator>

If you have any concerns about the app, please contact with Vito Gusmano (vigus9000@gmail.com).

If you have any concerns, please send an email to: support@freenove.com



Chapter 13 I2C-LCD1602


In this chapter, we will learn a display screen, LCD1602.

Project 13.1 LCD

In the project, the current time and date will be displayed on the LCD1602 and Display Window.

Component List

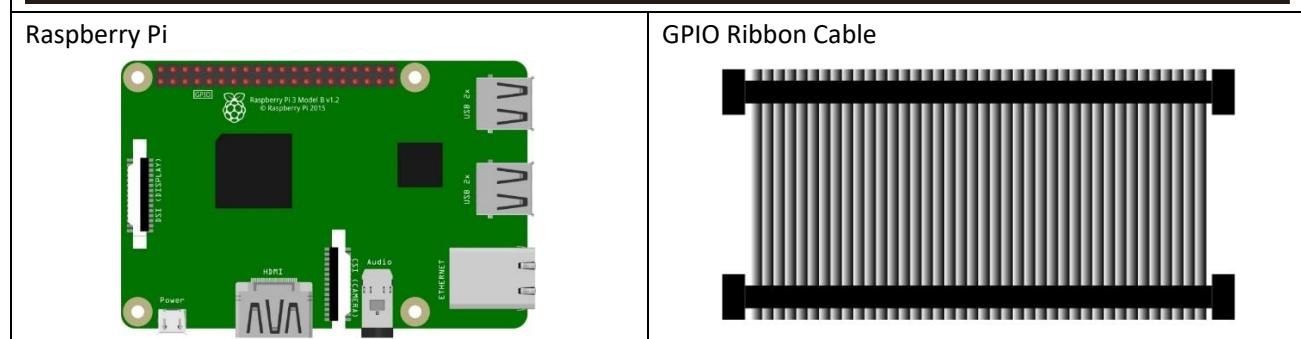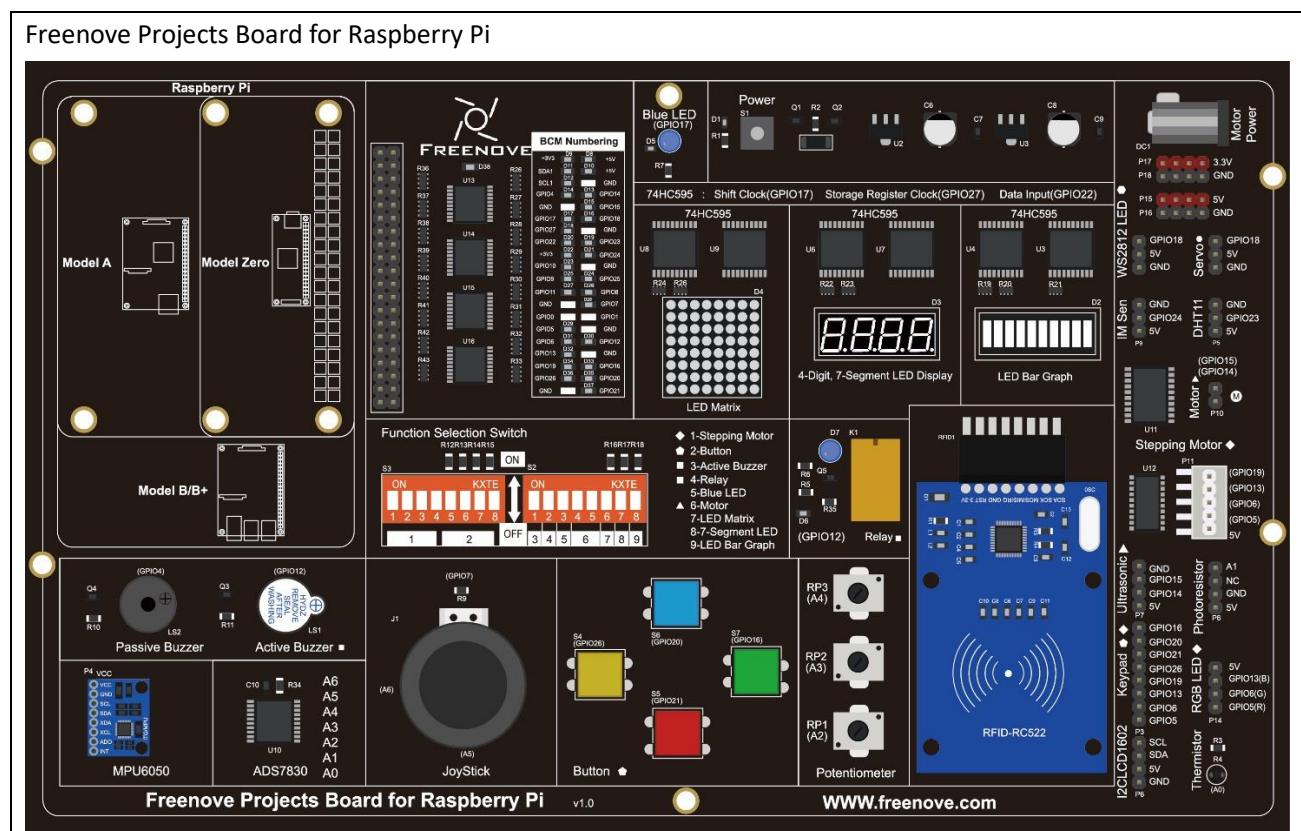


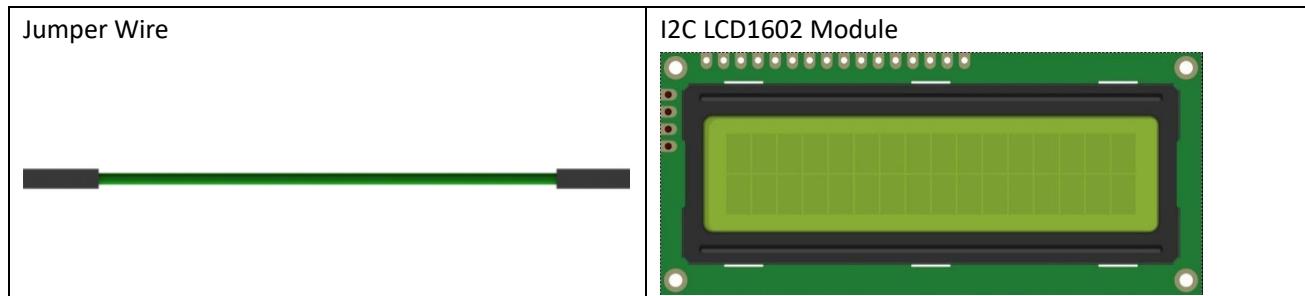


Circuit

Note that the power supply for I2C LCD1602 in this circuit is 5V.

Schematic diagram

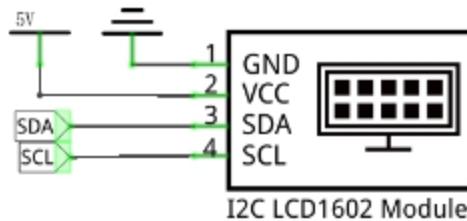

Hardware connection.

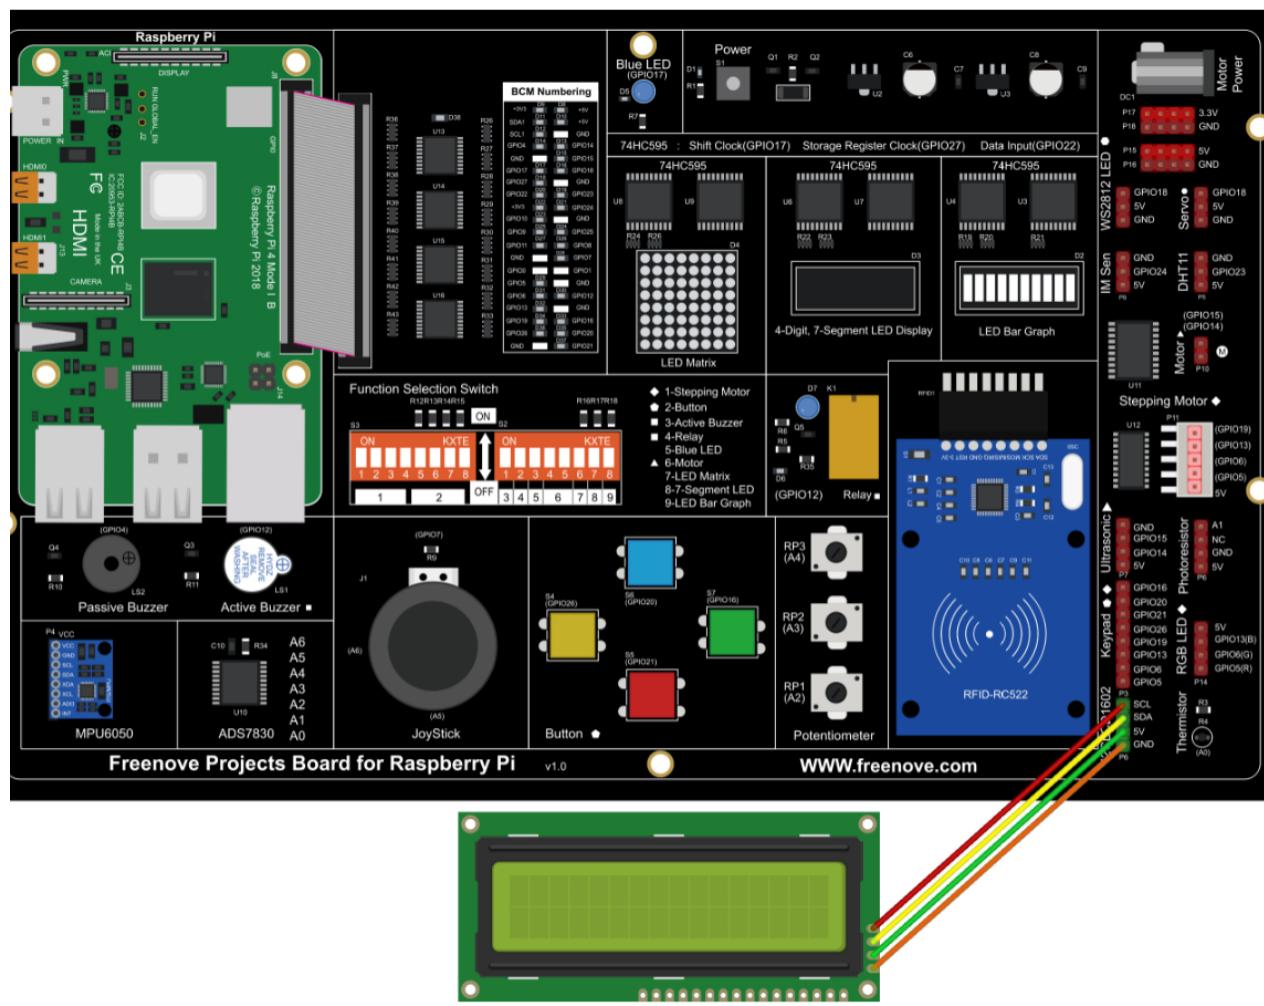

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 13.1.1 LCD

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_13_1_1_LCD
```

And then right-click to select Processing IDE

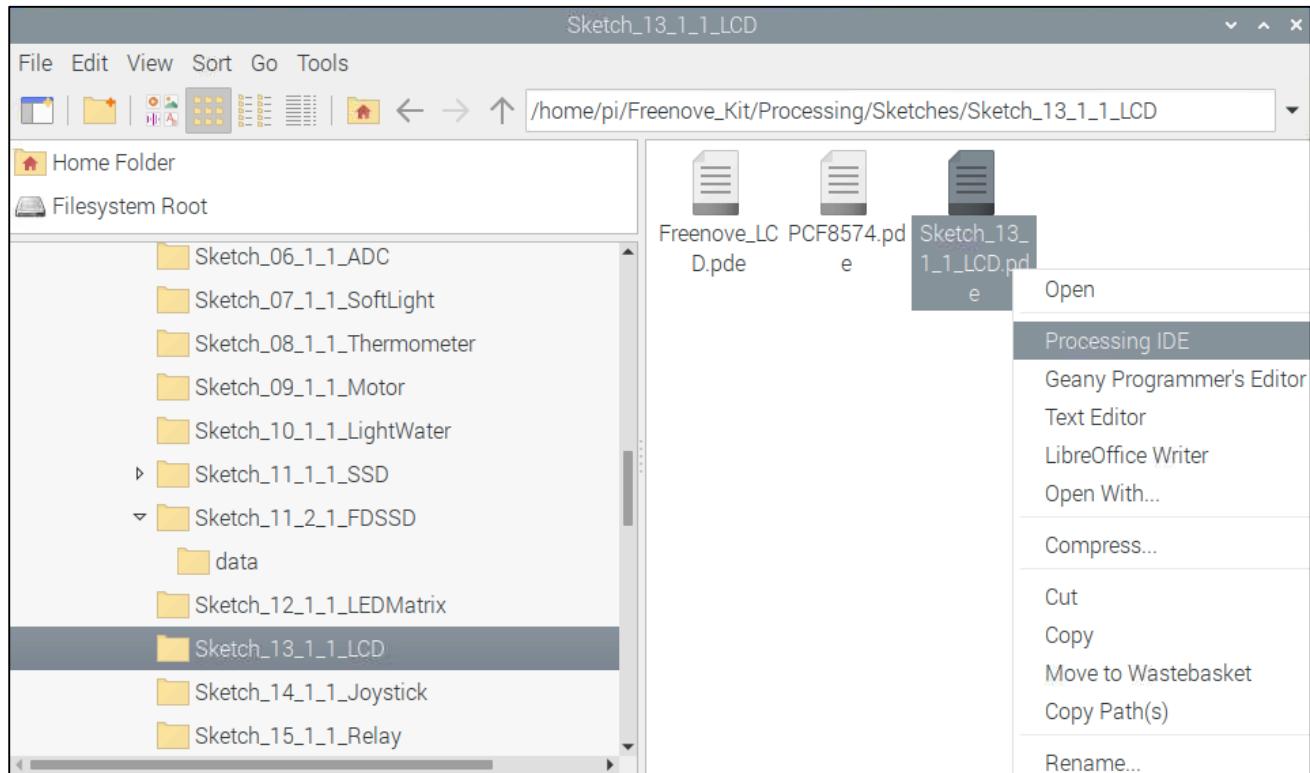

Or you can enter a command in the terminal to open the file Sketch_13_1_1_LCD. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_13_1_1_LCD/Sketch_13_1_1_LCD.pde
```


Open Processing and click Run

The screenshot shows the Processing IDE interface. The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and a tab labeled "Sketch_13_1_1_LCD | Pro...". Below the menu is a toolbar with a play button, a stop button, and a refresh icon. A dropdown menu shows "Sketch 13 1 1 LCD", "Freenove LCD", and "PCF8574". On the right side, there's a "Java" dropdown and a status bar with a battery icon and "86". The main code area contains the following sketch:


```
8 //Create a object of class PCF8574
9 PCF8574 pcf = new PCF8574(0x27);
10 Freenove_LCD1602 lcd; //Create a lcd object
11 String time = "";
12 String date = "";
13 void setup() {
14   size(640, 360);
15   lcd = new Freenove_LCD1602(pcf);
16   frameRate(2); //set display window frame rate for 2 HZ
17 }
18 void draw() {
19   background(255);
20   titleAndSiteInfo();
21   //get current time
22   time = nf(hour(), 2, 0) + ":" + nf(minute(), 2, 0) + ":" + nf(second(), 2, 0);
23   //get current date
24   date = nf(day(), 2, 0)+"/"+nf(month(), 2, 0)+"/"+nf(year(), 2, 0);
25   lcd.position(4, 0); //show time on the lcd display
26   lcd.puts(time);
```

At the bottom, there are tabs for "Console" and "Errors".

The result is as shown below. You can see the time and date on the pop-up window and LCD1602 screen.

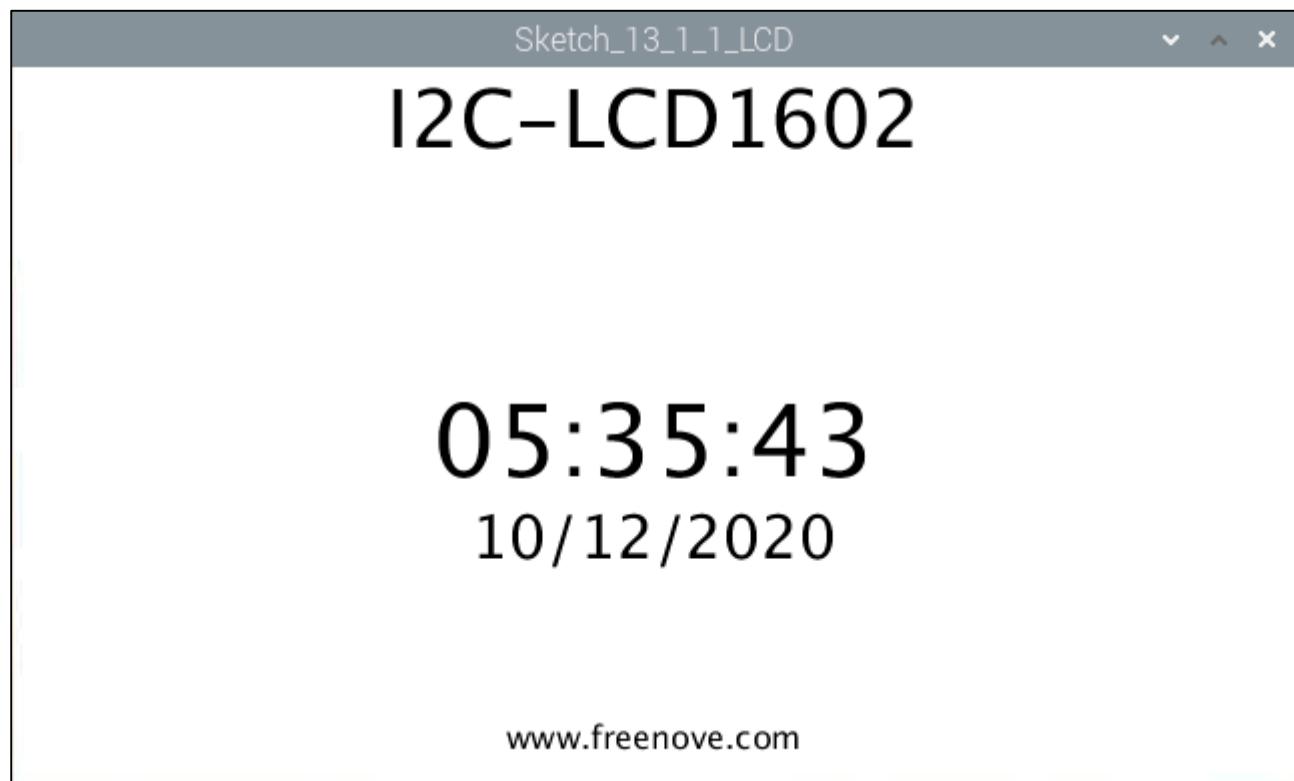

NOTE: If you cannot see anything on the display or the display is not clear, try rotating the white knob on back of LCD1602 slowly, which adjusts the contrast, until the screen can display the Time and Data clearly.

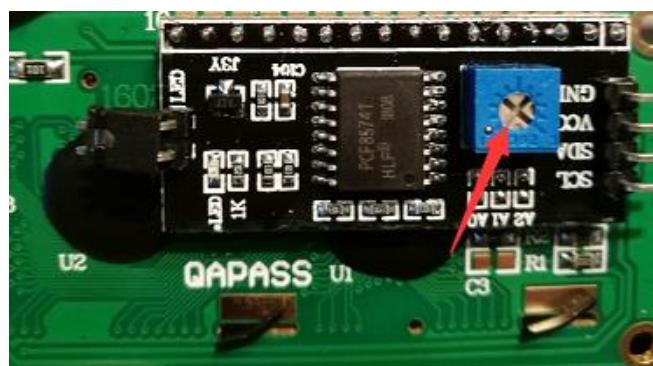

This project contains a lot of code files, and the core code is contained in the file Sketch_13_1_1_LCD. The other files only contain some custom classes.

```

File Edit Sketch Debug Tools Help Sketch_13_1_1_LCD | Pro... - X
Sketch 13 1 1 LCD Freenove LCD PCF8574 ▾
8 //Create a object of class PCF8574
9 PCF8574 pcf = new PCF8574(0x27);
10 Freenove_LCD1602 lcd; //Create a lcd object
11 String time = "";

```

The following is program code:

```
1 import freenove.processing.io.*;
2 //Create a object of class PCF8574
3 PCF8574 pcf = new PCF8574(0x27);
4 Freenove_LCD1602 lcd; //Create a lcd object
5 String time = "";
6 String date = "";
7 void setup() {
8     size(640, 360);
9     lcd = new Freenove_LCD1602(pcf);
10    frameRate(2); //set display window frame rate for 2 HZ
11 }
12 void draw() {
13     background(255);
14     titleAndSiteInfo();
15     //get current time
16     time = nf(hour(), 2, 0) + ":" + nf(minute(), 2, 0) + ":" + nf(second(), 2, 0);
17     //get current date
18     date = nf(day(), 2, 0)+"/"+nf(month(), 2, 0)+"/"+nf(year(), 2, 0);
19     lcd.position(4, 0); //show time on the lcd display
20     lcd.puts(time);
21     lcd.position(3, 1); //show date on the lcd display
22     lcd.puts(date);
23     showTime(time, date); //show time/date on the display window
24 }
25 void showTime(String time, String date) {
26     fill(0);
27     textAlign(CENTER, CENTER);
28     textSize(50);
29     text(time, width/2, height/2);
30     textSize(30);
31     text(date, width/2, height/2+50);
32 }
33 void titleAndSiteInfo() {
34     fill(0);
35     textAlign(CENTER); //set the text centered
36     textSize(40); //set text size
37     text("I2C-LCD1602", width / 2, 40); //title
38     textSize(16);
39     text("www. freenove. com", width / 2, height - 20); //site
40 }
```



First create a PCF8574 class object “pcf”, and take “pcf” as a parameter to create an LCD1602 class object. And then define the variable “time” to store date and time. Display window needs not refresh frequently. Therefore, the frame rate can be set to 1Hz or 2Hz.

```
PCF8574 pcf = new PCF8574(0x27);
Freenove_LCD1602 lcd; //Create a lcd object
String time = "";
String date = "";
void setup() {
    size(640, 360);
    lcd = new Freenove_LCD1602(pcf);
    frameRate(2); //set display window frame rate for 2 HZ
}
```

In the function draw(), get the current time and date, and display them on the LCD1602 and Display Window.

```
void draw() {
    background(255);
    titleAndSiteInfo();
    //get current time
    time = nf(hour(), 2, 0) + ":" + nf(minute(), 2, 0) + ":" + nf(second(), 2, 0);
    //get current date
    date = nf(day(), 2, 0) + "/" + nf(month(), 2, 0) + "/" + nf(year(), 2, 0);
    lcd.position(4, 0); //show time on the lcd display
    lcd.puts(time);
    lcd.position(3, 1); //show date on the lcd display
    lcd.puts(date);
    showTime(time, date); //show time/date on the display window
}
```

Reference

class PCF8574

This is a custom class that is used to control the integrated circuit PCF8574.

```
public PCF8574(int addr)
```

Constructor, used to create a PCF8574 class object. The parameter represents the I2C device address of PCF8574.

```
public int digitalRead(int pin)
```

Used to read the value(HIGH/LOW) of one of the ports.

```
public int readByte()
```

Used to read values of all ports.

```
public void digitalWrite(int pin, int val)
```

Write data(HIGH/LOW) to a port.

```
public void writeByte(int data)
```

Write data to all ports.

class Freenove_LCD

This is a custom class that is currently only used to control the I2C-LCD1602 connected to PCF8574.

```
public Freenove_LCD1602(PCF8574 ipcf)
```

Constructor, used to create Freenove_LCD1602 class object. The parameter is for PCF8574 class object.

```
public void putChar(char data)
```

Write a character to the LCD screen.

```
public void puts(String str)
```

Write a string to the LCD screen.

```
public void display(boolean state)
```

Turn on/off LCD.

```
public void lcdCursor(boolean state)
```

Turn on/off Cursor.

```
public void cursorBlink(boolean state)
```

Turn on/off Cursor Blink.

```
public void position(int x, int y)
```

Set the location of Cursor.

```
public void home()
```

Set the Cursor to home.

```
public void lcdClear()
```

Clear the screen.

```
public void backLightON() & public void backLightOFF()
```

Turn on/off the backlight.

```
public void scrollDisplayLeft() & public void scrollDisplayRight()
```

Shift screen of a unit to left/right.

```
public void leftToRight() & public void rightToLeft()
```

Set text direction to be from left to right / from right to left.

```
public void autoScroll() & public void noAutoScroll()
```

Automatic shifting screen/turn off automatic shifting screen.

If you have any concerns, please send an email to: support@freenove.com

Chapter 14 Joystick


In the previous chapter, we have learned how to use a rotary potentiometer. Now, let's learn a new electronic module Joystick which works on the same principle as the rotary potentiometer.

Project 14 Joystick


In this project, we will read the data of the joystick, and draw its coordinates position and Z axis state on the Display window.

Component List


Freenove Projects Board for Raspberry Pi

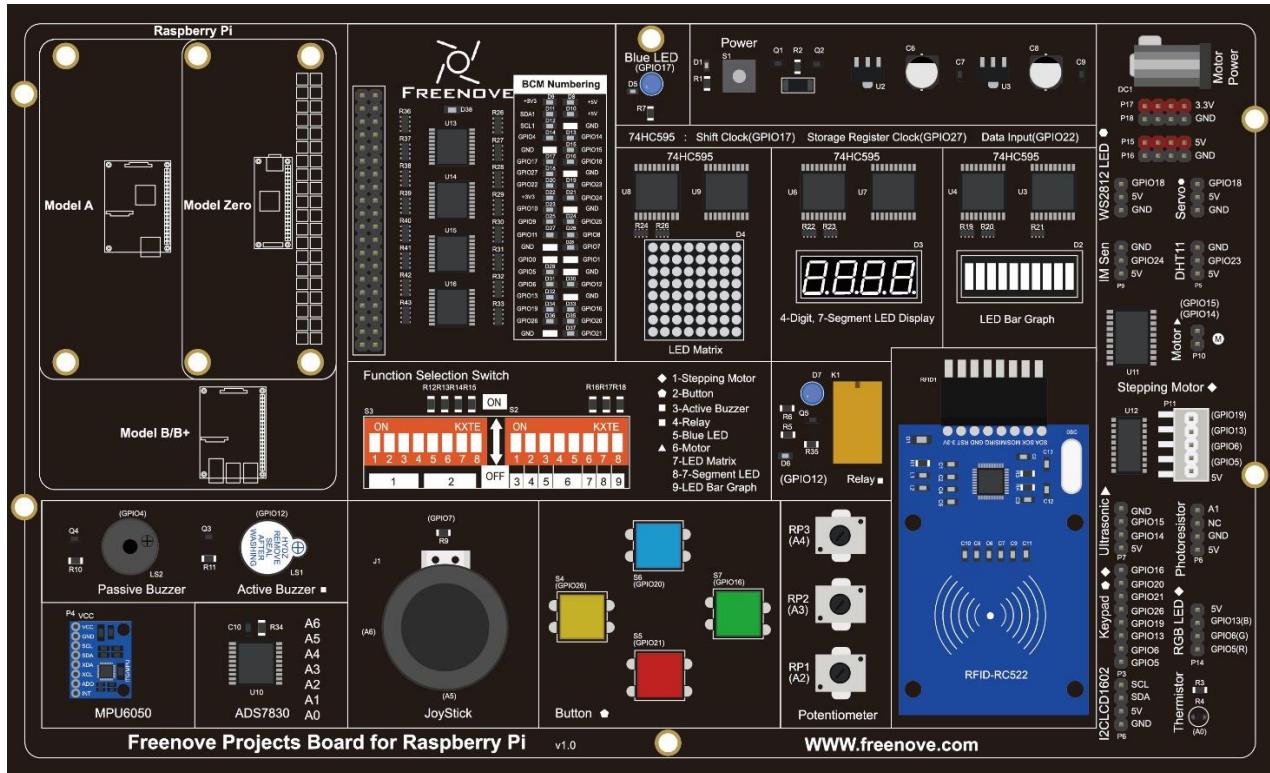

Raspberry Pi

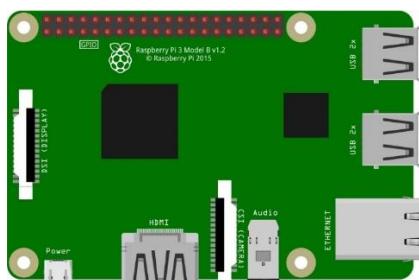


GPIO Ribbon Cable

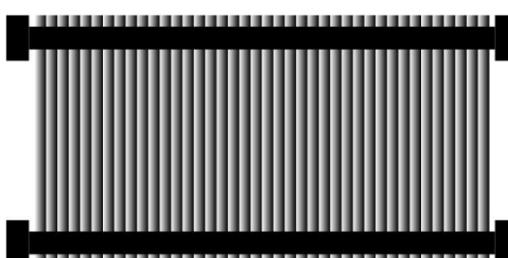


Circuit

Schematic diagram

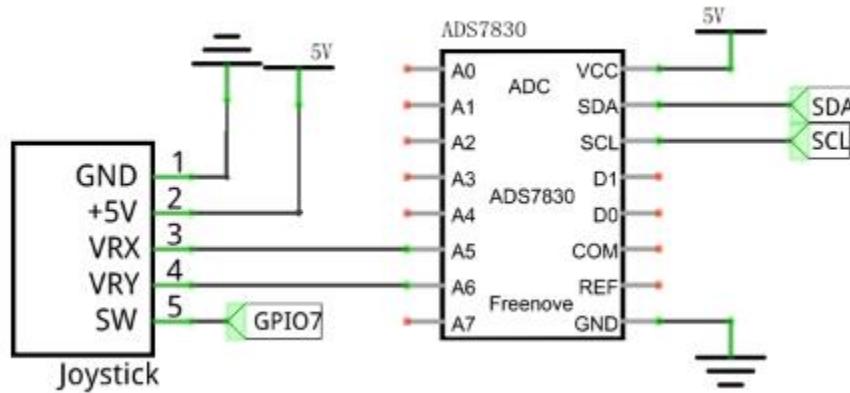

Hardware connection.

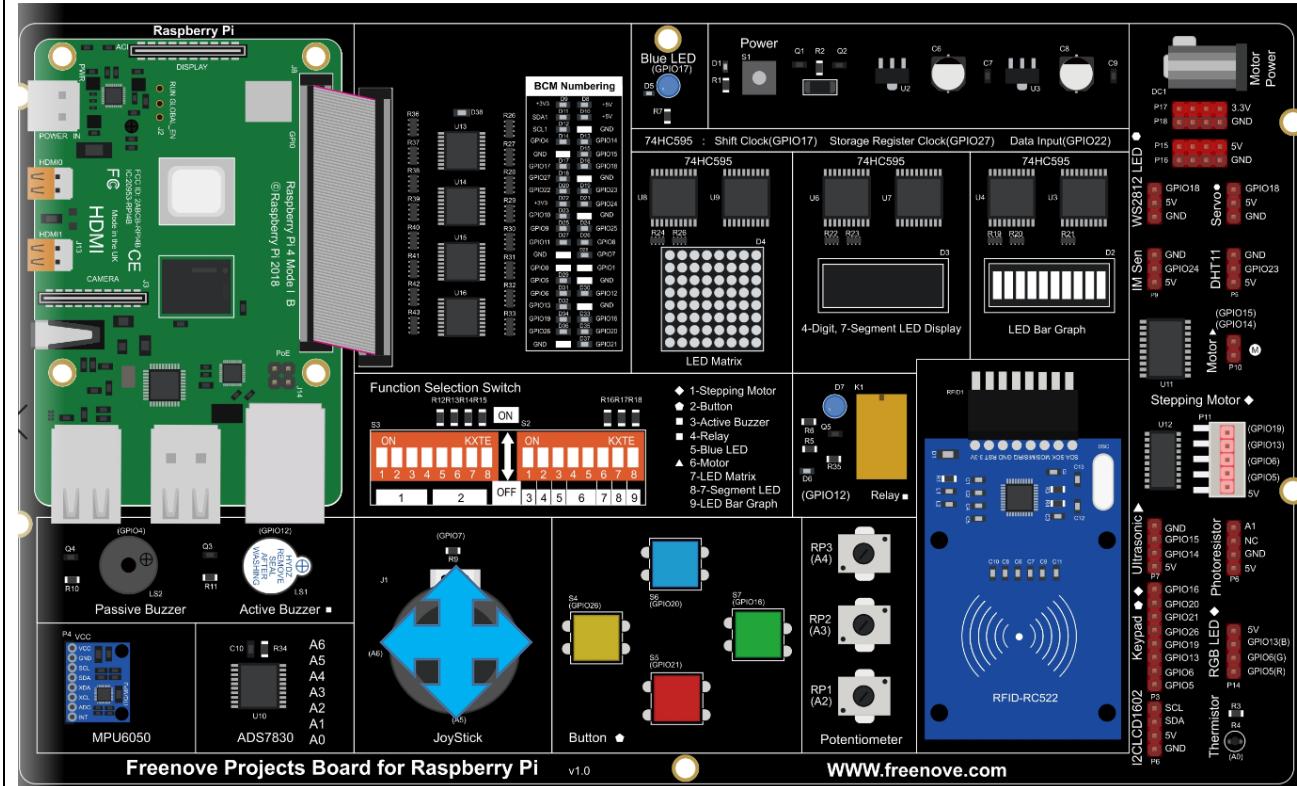

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 14.1.1 Joystick

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_14_1_1_Joystick
```

And then right-click to select Processing IDE

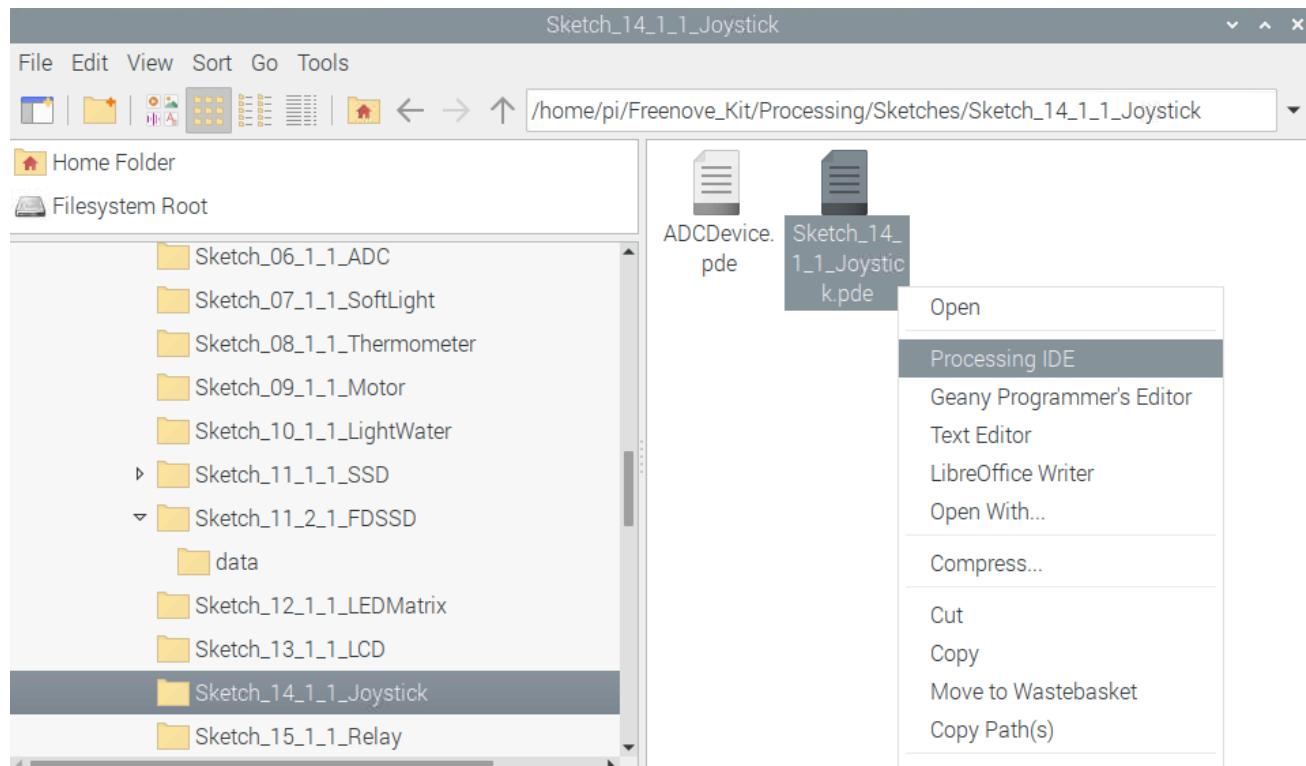

Or you can enter a command in the terminal to open the file Sketch_14_1_1_Joystick. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_14_1_1_Joystick/Sketch_14_1_1_Joystick.pde
```

Open Processing and click Run.


The screenshot shows the Processing IDE interface. The title bar reads "Sketch_14_1_1_Joystick ...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. The code editor window displays the following sketch:

```
8 //Create a object of class ADCDevice
9 ADCDevice adc = new ADCDevice();
10 int cx, cy, cd, cr;      //define the center point,side length & half.
11 void setup() {
12   size(640, 360);
13   if (adc.detectI2C(0x48)) {
14     adc = new ADS7830(0x48);
15   } else {
16     println("Not found ADC Module!");
17     System.exit(-1);
18   }
19   cx = width/2;      //center of the display window
20   cy = height/2;    //
21   cd = (int)(height/1.5);
22   cr = cd /2;
23 }
24 void draw() {
25   int x=0, y=0;
26   x = adc.analogRead(5);  //read the ADC of joystick
```


The sketch uses the `ADCDevice` library to read the value from pin 5 of the ADC module. It defines variables for center coordinates and circle dimensions, and sets up the sketch to read the analog value from the joystick and draw it on the screen.



The result is as shown below. The movement of the circle can be controlled through the joystick.

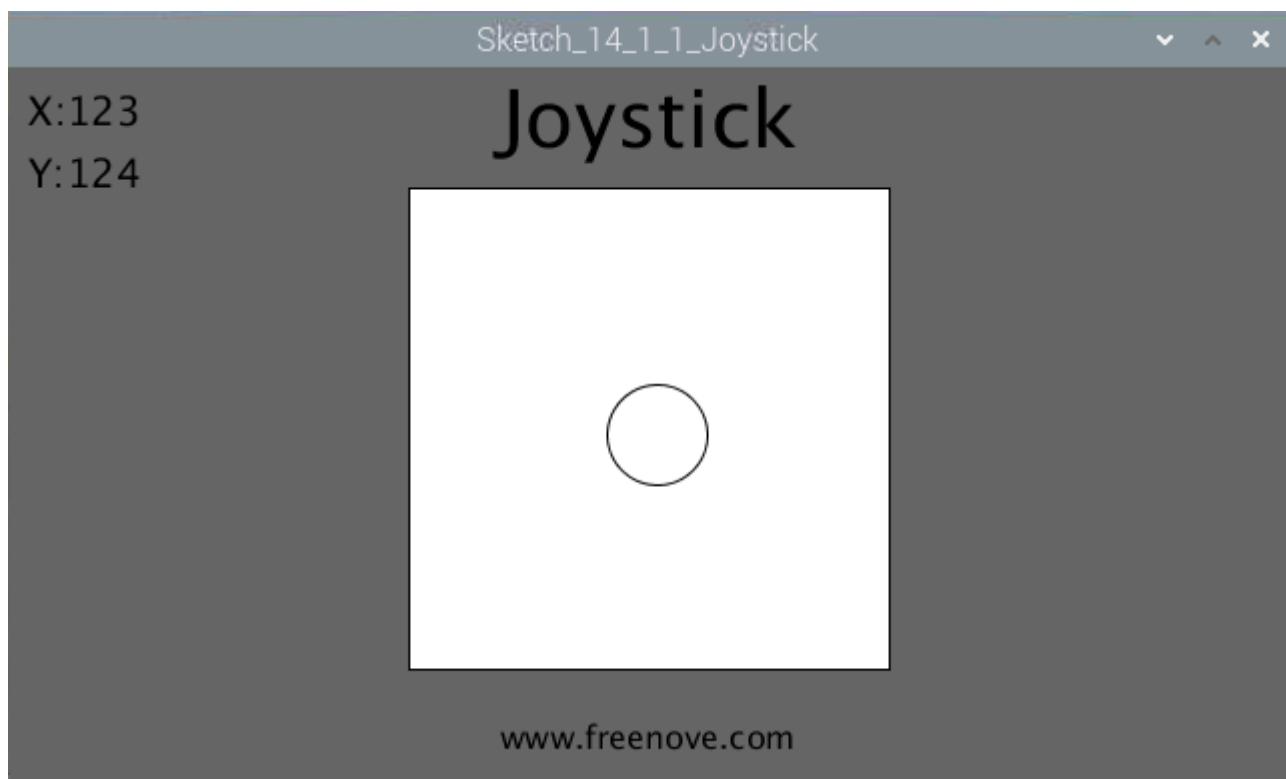

This project contains several code files, as shown below:

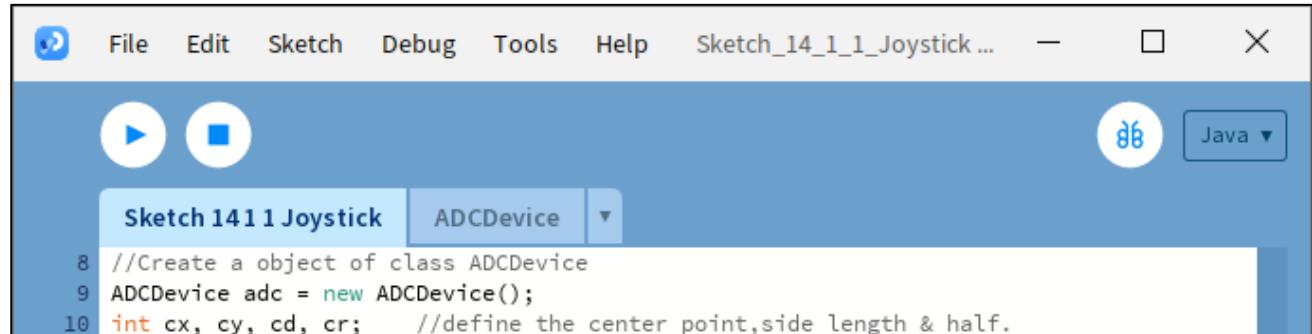

The following is program code:

```

1 import freenove.processing.io.*;
2 //Create an object of class ADCDevice
3 ADCDevice adc = new ADCDevice();
4 int cx, cy, cd, cr; //define the center point, side length & half.
5
6 void setup() {
7   size(640, 360);
8   if (adc.detectI2C(0x48)) {
9     adc = new PCF8591(0x48);
10 } else if (adc.detectI2C(0x4b)) {
11   adc = new ADS7830(0x4b);

```

```
12 } else {
13     println("Not found ADC Module!");
14     System.exit(-1);
15 }
16 cx = width/2;    //center of the display window
17 cy = height/2;   //
18 cd = (int)(height/1.5);
19 cr = cd /2;
20 }
21 void draw() {
22     int x=0, y=0, z=0;
23     x = adc.analogRead(0); //read the ADC of joystick
24     y = adc.analogRead(1); //
25     z = adc.analogRead(2);
26     background(102);
27     titleAndSiteInfo();
28     fill(0);
29     textSize(20);
30     textAlign(LEFT, TOP);
31     text("X:"+x+"\nY:"+y+"\nZ:"+z, 10, 10);
32
33     fill(255); //wall color
34     rect(cx-cr, cy-cr, cd, cd);
35     ellipse(map(x, 0, 255, cx-cr, cx+cr), map(y, 0, 255, cy-cr, cy+cr), 50, 50);
36 }
37 void titleAndSiteInfo() {
38     fill(0);
39     textAlign(CENTER); //set the text centered
40     textSize(40); //set text size
41     text("Joystick", width / 2, 40); //title
42     textSize(16);
43     text("www. freenove. com", width / 2, height - 20); //site
44 }
```

In function draw(), the ADC value of three axes Joystick is read. And the ADC value of X and Y directions are mapped into the position of the circle, and the ADC value of Z axis is mapped into the filled color of the circle.

```
void draw() {  
    int x=0, y=0, z=0;  
    x = pcf.analogRead(2); //read the ADC of joystick  
    y = pcf.analogRead(1); //  
    z = pcf.analogRead(0);  
    background(102);  
    titleAndSiteInfo();  
    fill(0);  
    textSize(20);  
    textAlign(LEFT, TOP);  
    text("X:"+x+"\nY:"+y+"\nZ:"+z, 10, 10);  
  
    fill(255); //wall color  
    rect(cx-cr, cy-cr, cd, cd);  
    fill(constrain(z, 255, 0)); //joystick color  
    ellipse(map(x, 0, 255, cx-cr, cx+cr), map(y, 0, 255, cy-cr, cy+cr), 50, 50);  
}
```

If you have any concerns, please send an email to: support@freenove.com

Chapter 15 Relay


In this chapter, we will learn how to use a relay.

Project 15.1 Relay & LED


In the project, the relay is used to control the LED.

Component List

Freenove Projects Board for Raspberry Pi

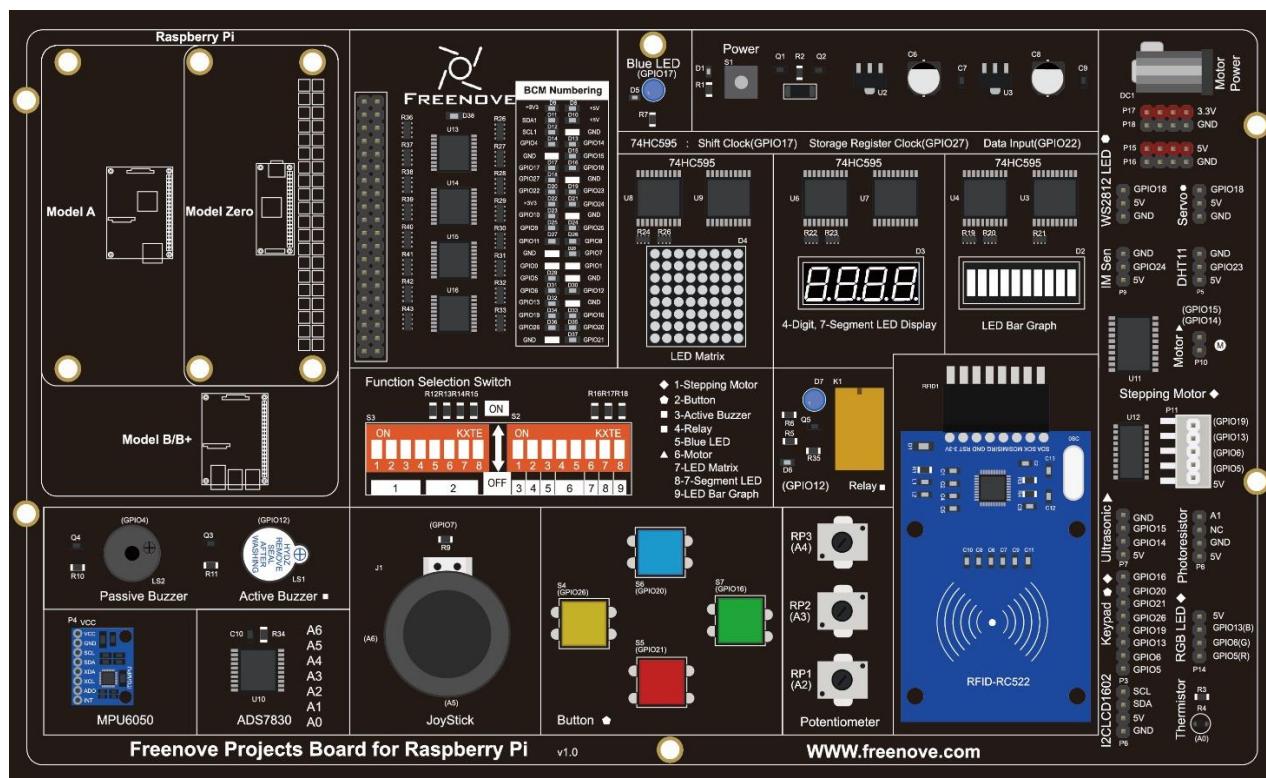


Raspberry Pi


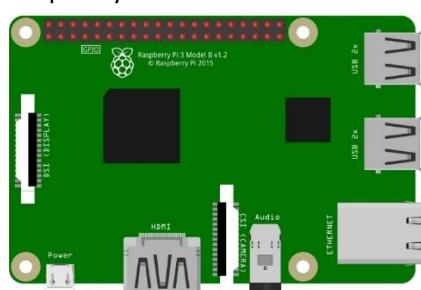


Circuit

Schematic diagram

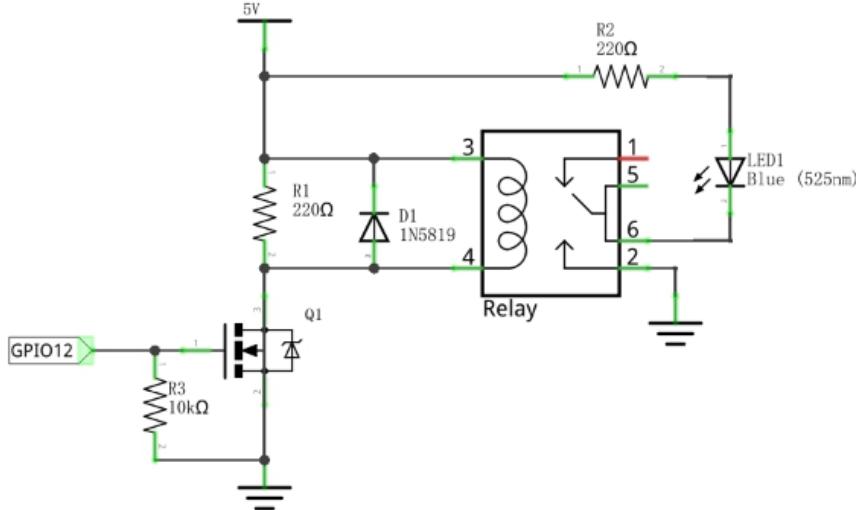

Hardware connection.

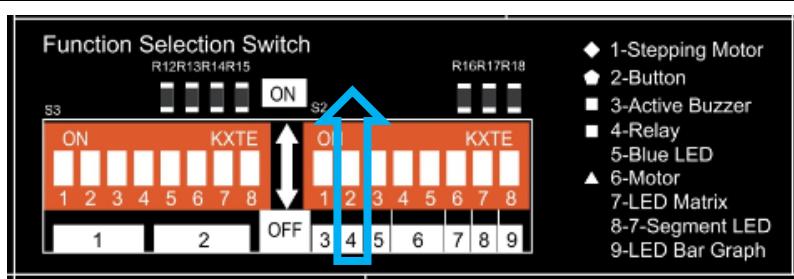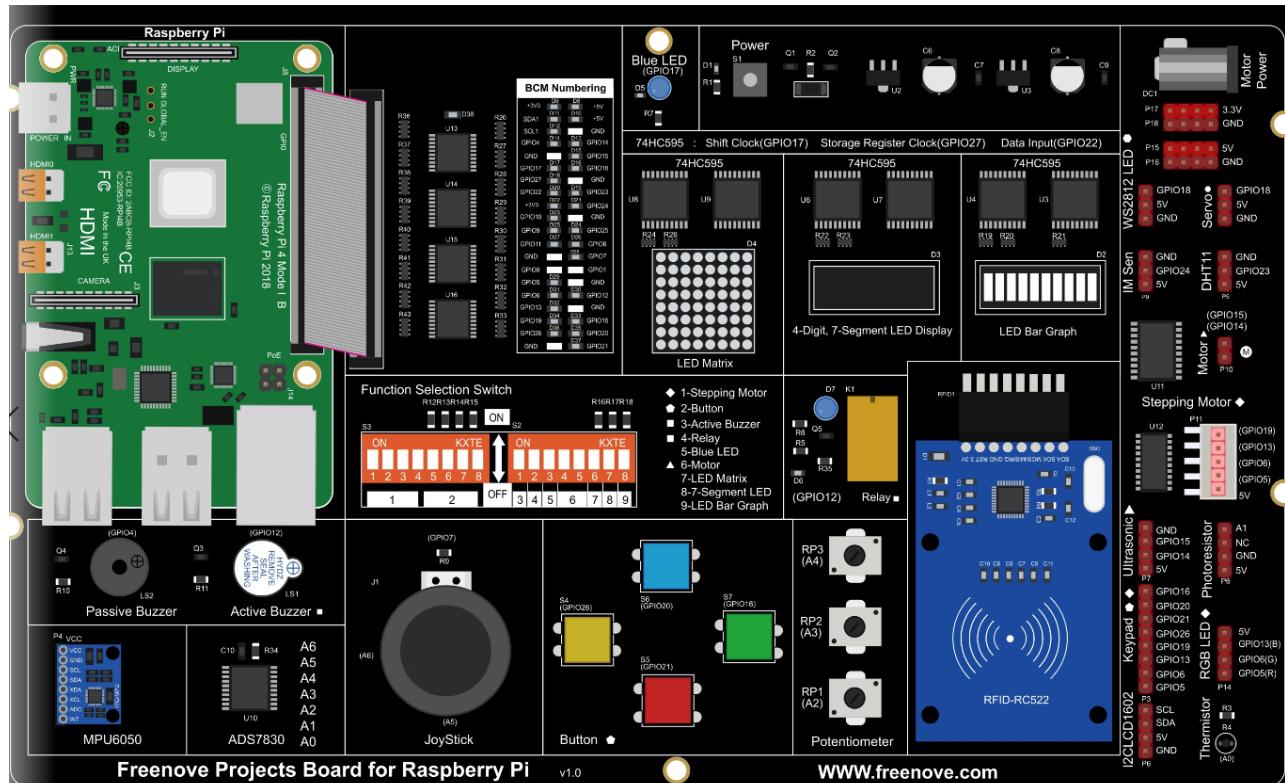

If you have any concerns, please send an email to: support@freenove.com


Sketch

Sketch 15.1.1 Relay

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_15_1_1_Relay
```

And then right-click to select Processing IDE

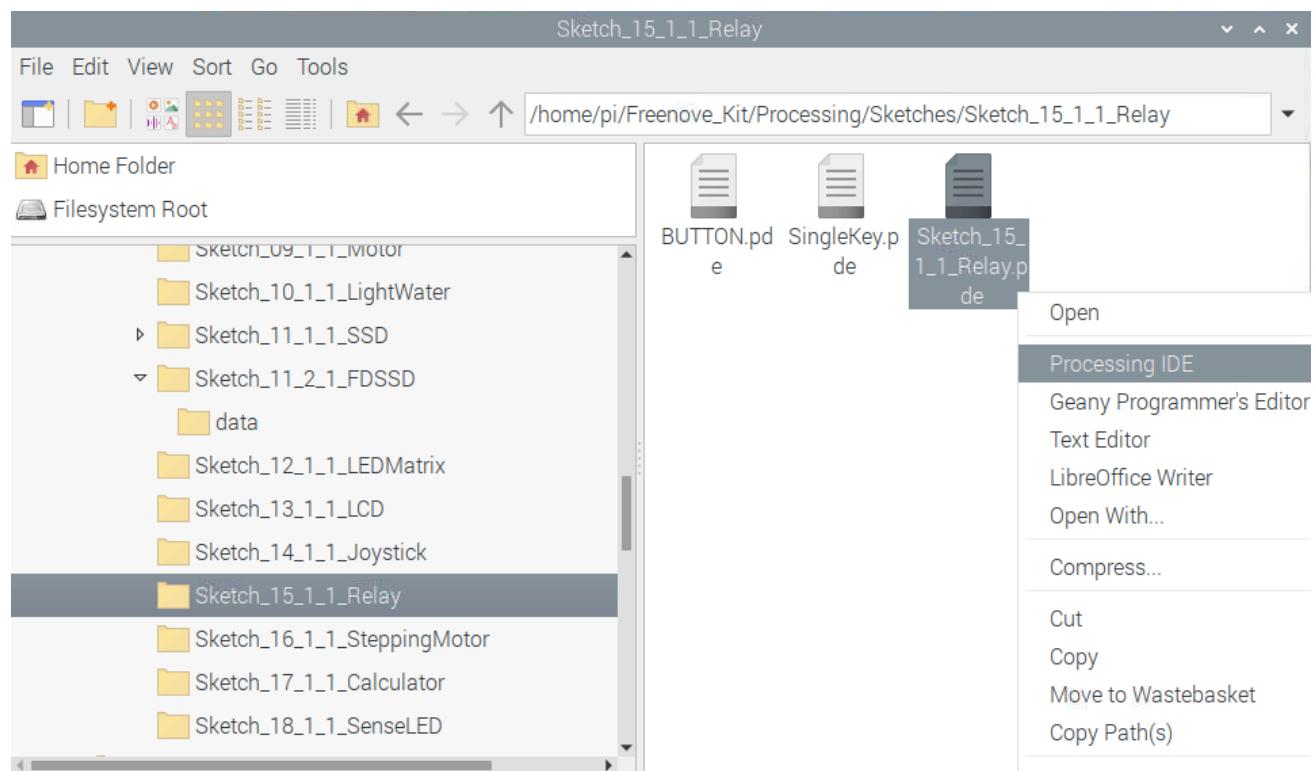

Or you can enter a command in the terminal to open the file Sketch_15_1_1_Relay. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_15_1_1_Relay/Sketch_15_1_1_Relay.pde
```


Open Processing and click Run.

The screenshot shows the Processing IDE interface. The title bar reads "Sketch_15_1_1_Relay | P...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh icon. The sketch name "Sketch 15 1 1 Relay" is displayed above the code area. The code itself is as follows:


```
9 int relayPin = 12;
10 int buttonPin = 26;
11 SingleKey skey = new SingleKey(buttonPin);
12 boolean relayState = false;
13 BUTTON btn;
14 float rotaSpeed = 0.02 * PI; //virtual fan's rotating speed,
15 float rotaPosition = 0; //motor position
16 void setup() {
17     size(640, 360);
18     GPIO.pinMode(relayPin, GPIO.OUTPUT);
19     btn = new BUTTON(90, height - 90, 50, 30); //define the button
20     btn.setBgColor(0, 255, 0); //set button color
21     btn.setText("OFF"); //set button text
22 }
23
24 void draw() {
25     background(255);
26     titleAndSiteInfo(); //title and site information
27 }
```

At the bottom of the IDE, there are two tabs: "Console" and "Errors".

The result is as shown below. Clicking the button will light up the LED and clicking it again will turn the LED OFF.

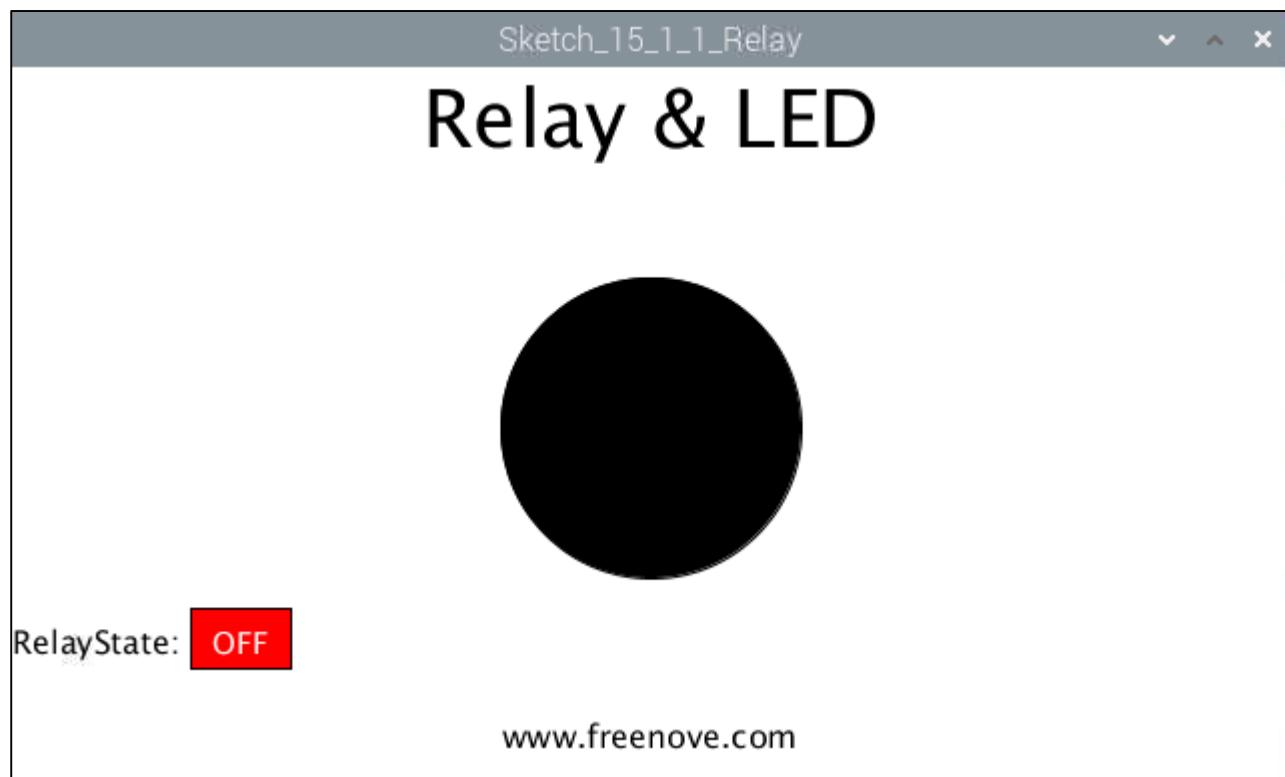

This project contains several code files, as shown below:

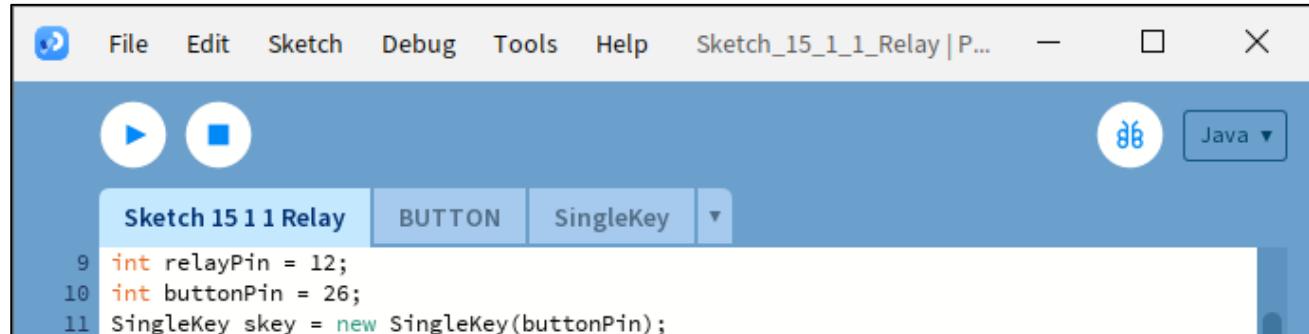

The following is program code:

```
1 import freenove.processing.io.*;
2
3 int relayPin = 17;
4 int buttonPin = 18;
5 SingleKey skey = new SingleKey(buttonPin);
6 boolean relayState = false;
7 BUTTON btn;
8 float rotaSpeed = 0.02 * PI; //virtual fan's rotating speed,
9 float rotaPosition = 0; //motor position
10 void setup() {
11     size(640, 360);
```



```
12  GPIO.pinMode(relayPin, GPIO.OUTPUT);
13  btn = new BUTTON(90, height - 90, 50, 30); //define the button
14  btn.setBgColor(0, 255, 0); //set button color
15  btn.setText("OFF"); //set button text
16 }
17
18 void draw() {
19   background(255);
20   titleAndSiteInfo(); //title and site information
21
22   skey.keyScan(); //key scan
23   if (skey.isPressed) { //key is pressed?
24     relayAction();
25   }
26   textAlign(RIGHT, CENTER);
27   text("RelayState: ", btn.x, btn.y+btn.h/2);
28   btn.create(); //create the button
29   if (relayState) {
30     rotaPosition += rotaSpeed;
31   }
32   if (rotaPosition >= 2*PI) {
33     rotaPosition = 0;
34   }
35   drawFan(rotaPosition); //show the virtual fan in Display window
36 }
37 //Draw a clover fan according to the stating angle
38 void drawFan(float angle) {
39   constrain(angle, 0, 2*PI);
40   fill(0);
41   for (int i=0; i<3; i++) {
42     arc(width/2, height/2, 200, 200, 2*i*PI/3+angle, (2*i+0.3)*PI/3+angle, PIE);
43   }
44   fill(0);
45   ellipse(width/2, height/2, 30, 30);
46   fill(128);
47   ellipse(width/2, height/2, 15, 15);
48 }
49 void relayAction() {
50   if (relayState) {
51     GPIO.digitalWrite(relayPin, GPIO.LOW);
52     relayState = false;
53     btn.setBgColor(255, 0, 0);
54     btn.setText("OFF");
55   } else {
```

```

56     GPIO.digitalWrite(relayPin, GPIO.HIGH);
57     relayState = true;
58     btn.setBgColor(0, 255, 0);
59     btn.setText("ON");
60   }
61 }
62 void mousePressed() {
63   if ((mouseY < btn.y+btn.h) && (mouseY>btn.y)
64     && (mouseX < btn.x+btn.w) && (mouseX>btn.x)) { // the mouse clicks the button
65     relayAction();
66   }
67 }
68 void titleAndSiteInfo() {
69   fill(0);
70   textAlign(CENTER);    //set the text centered
71   textSize(40);        //set text size
72   text("Relay & Motor", width / 2, 40);    //title
73   textSize(16);
74   text("www. freenove. com", width / 2, height - 20);    //site
75 }
```

First define pins corresponding to the key and relay.

```

int relayPin = 17;
int buttonPin = 18;
SingleKey skey = new SingleKey(buttonPin);
boolean relayState = false;
BUTTON btn;
```

In the function setup(), Display Window and virtual button are initialized.

```

void setup() {
  size(640, 360);
  GPIO.pinMode(relayPin, GPIO.OUTPUT);
  btn = new BUTTON(90, height - 90, 50, 30);    //define the button
  btn.setBgColor(0, 255, 0);    //set button color
  btn.setText("OFF");          //set button text
}
```

In the function draw(), scan entity buttons. If the button is pressed, then execute the subfunction relayAction(), in which the state of Relay and virtual buttons will be changed. And then draw the virtual buttons and fan blades.

```

void draw() {
  background(255);
  titleAndSiteInfo(); //title and site information

  skey.keyScan();    //key scan
```

```
if (skey.isPressed) { //key is pressed?  
    relayAction();  
}  
textAlign(RIGHT, CENTER);  
text("RelayState: ", btn.x, btn.y+btn.h/2);  
btn.create(); //create the button  
if (relayState) {  
    rotaPosition += rotaSpeed;  
}  
if (rotaPosition >= 2*PI) {  
    rotaPosition = 0;  
}  
drawFan(rotaPosition); //show the virtual fan in Display window  
}
```

Reference

class SingleKey

This is a custom class that is used to control the state of an independent single key.

`public SingleKey(int Pin)`

Constructor, used to create a SingleKey class object. The parameter represents the GPIO pin number connected to the key.

`void keyScan()`

Used to detect key state. If the key is pressed, the member variable `isPressed` will be turned to true, and corresponding GPIO pin number will be assigned to the global variable `keyValue`. Otherwise, `isPressed` is false, `keyValue` is -1.

If you have any concerns, please send an email to: support@freenove.com



Chapter 16 Stepper Motor

In this chapter, we will learn how to use Stepper Motor.

Project 16.1 Stepper Motor


In this project, we will learn to control the speed, turning and step number of Stepper Motor.

Component List

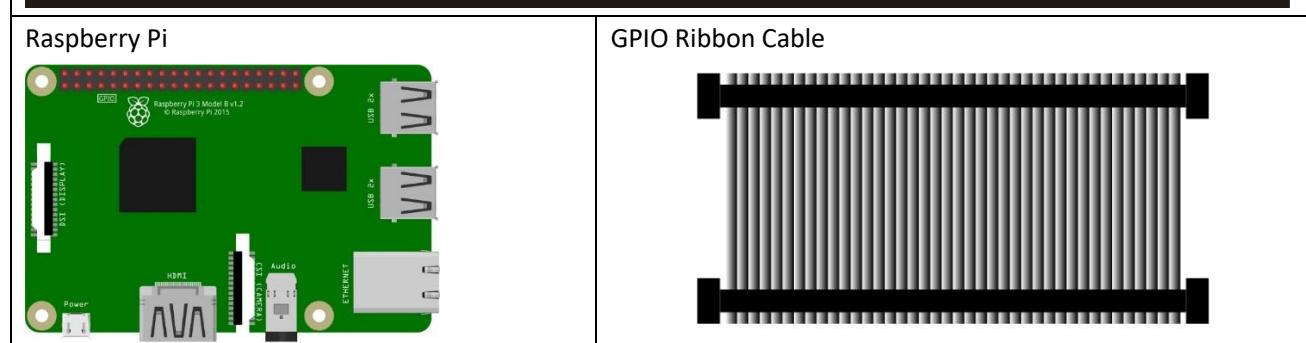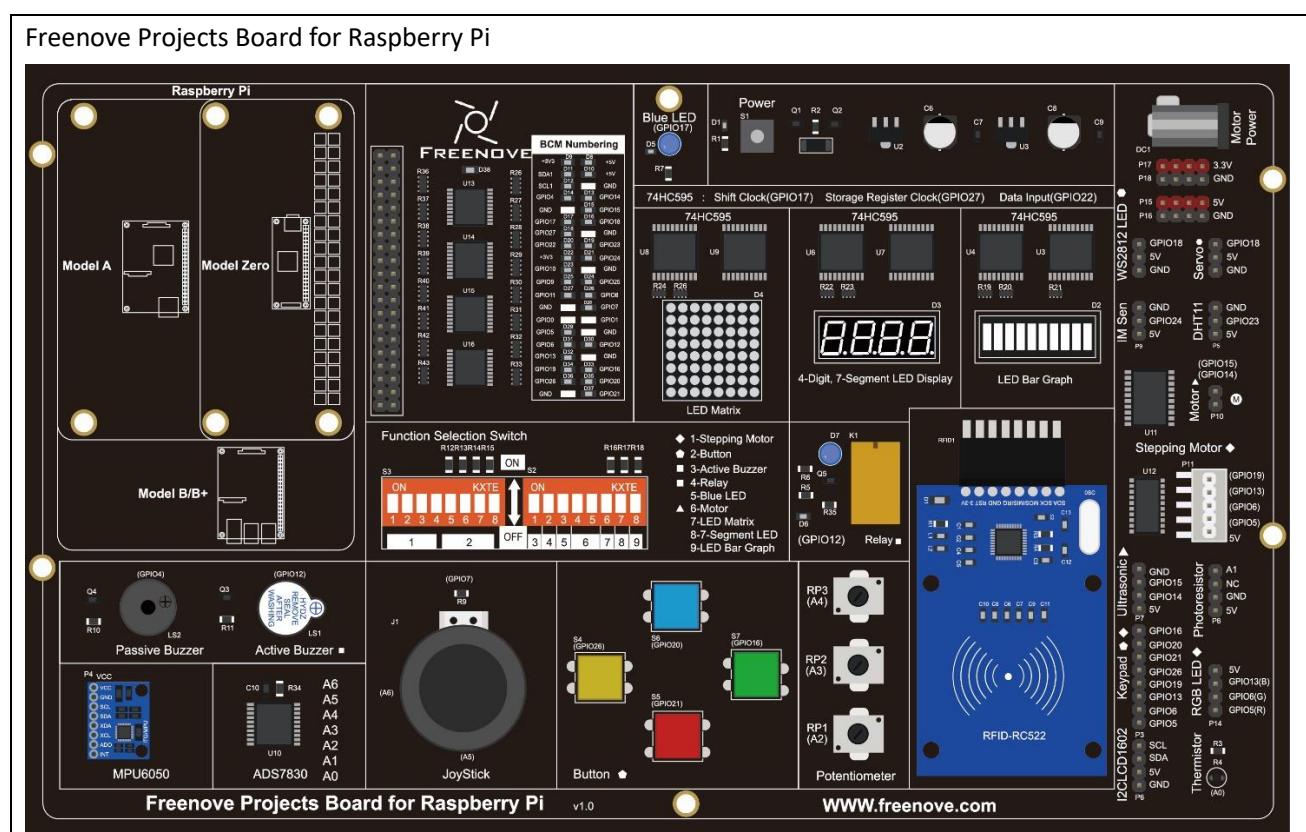




Stepper Motor


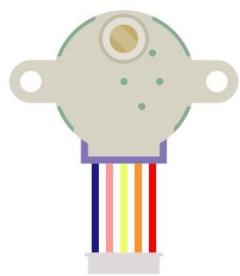


Circuit

Schematic diagram

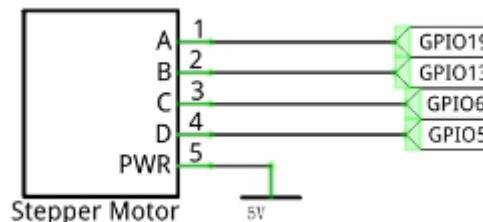

Hardware connection.

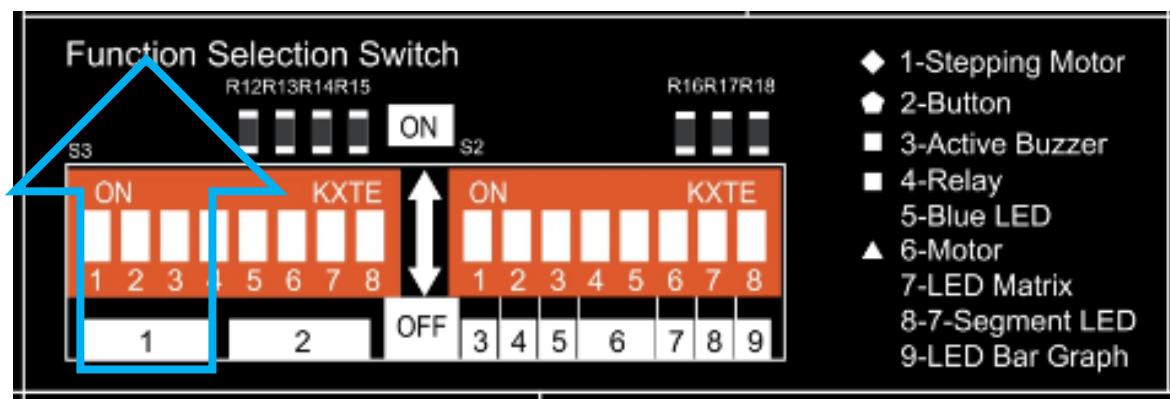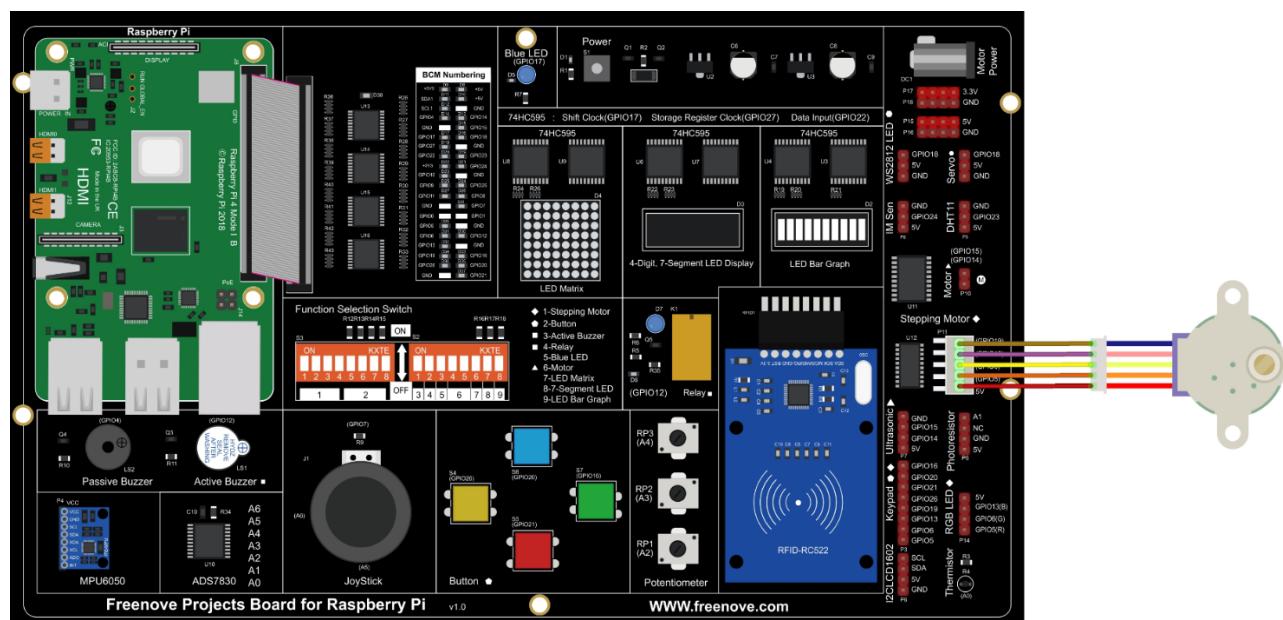

Stepper motor, keypad and RGBLED must NOT be used at the same time.

If you have any concerns, please send an email to: support@freenove.com

Sketch

In this project, a separate thread is opened to control the stepper motor. The uncertainty of the system time slice allocation may lead to the running of the stepper motor not smooth, which is a normal phenomenon.


Sketch 16.1.1 SteppingMotor

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_16_1_1_SteppingMotor
```

And then right-click to select Processing IDE

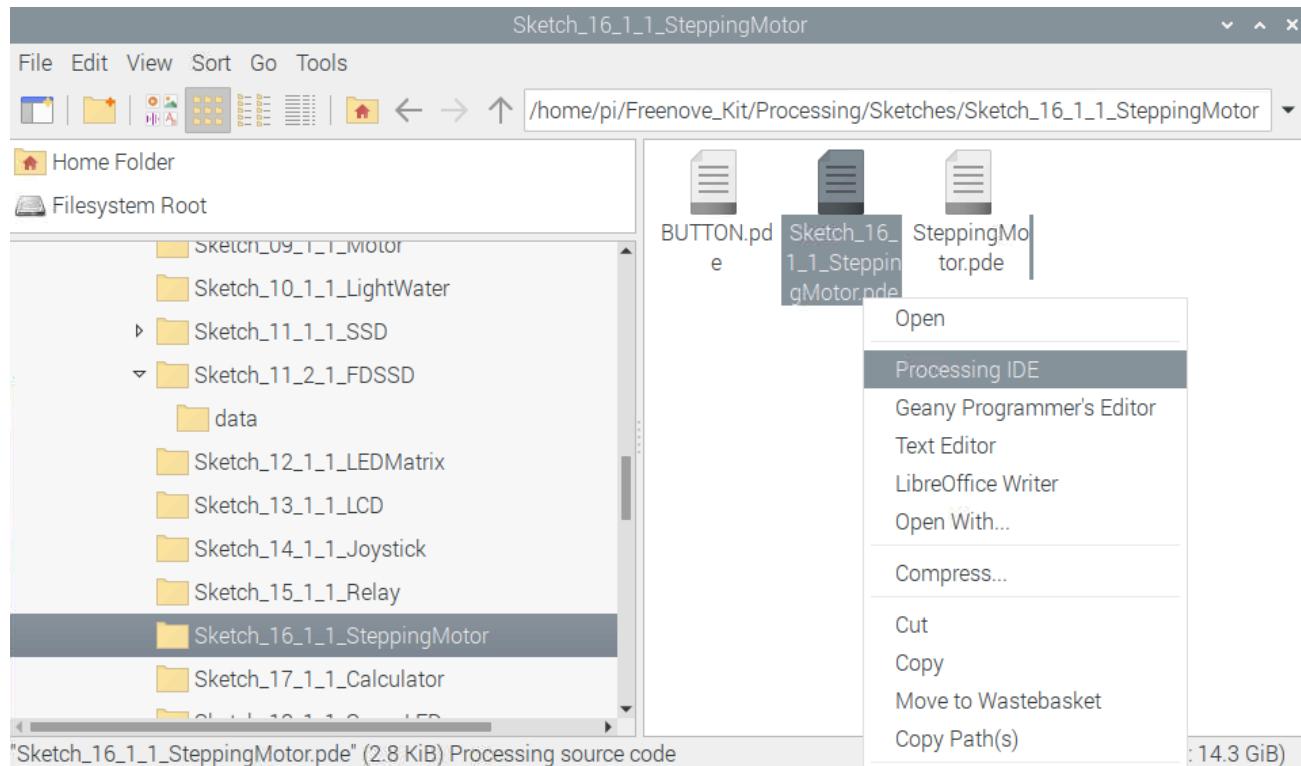

Or you can enter a command in the terminal to open the file Sketch_16_1_1_SteppingMotor. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_16_1_1_SteppingMotor/Sketch_16_1_1_SteppingMotor.pde
```

Open Processing and click Run


The screenshot shows the Processing IDE interface. The title bar reads "Sketch_16_1_1_Stepping...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh icon. The code editor tab is titled "Sketch 16 1 1 SteppingMotor". The code itself is as follows:

```
9 int[] pins = {5, 6, 13, 19}; //connect to motor phase A,B,C,D pins
10 BUTTON btn; //BUTTON Object, For controlling the direction of motor
11 SteppingMotor m = new SteppingMotor(pins);
12 float rotaSpeed = 0, rotaPosition = 0; //motor speed
13 boolean isMotorRun = true; //motor run/stop flag
14
15 void setup() {
16     size(640, 360);
17     btn = new BUTTON(45, height - 90, 50, 30); //define the button
18     btn.setBgColor(0, 255, 0); //set button color
19     btn.setText("RUN"); //set button text
20     m.motorStart(); //start motor thread
21     rotaSpeed = 0.002 * PI; //virtual fan's rotating speed
22 }
23
24 void draw() {
25     background(255);
26     titleAndSiteInfo(); //title and site information
27     btn.create(); //create the button
}
```


At the bottom of the IDE, there are tabs for "Console" and "Errors".



The result is as shown below. Clicking the button will start or stop the stepper motor.

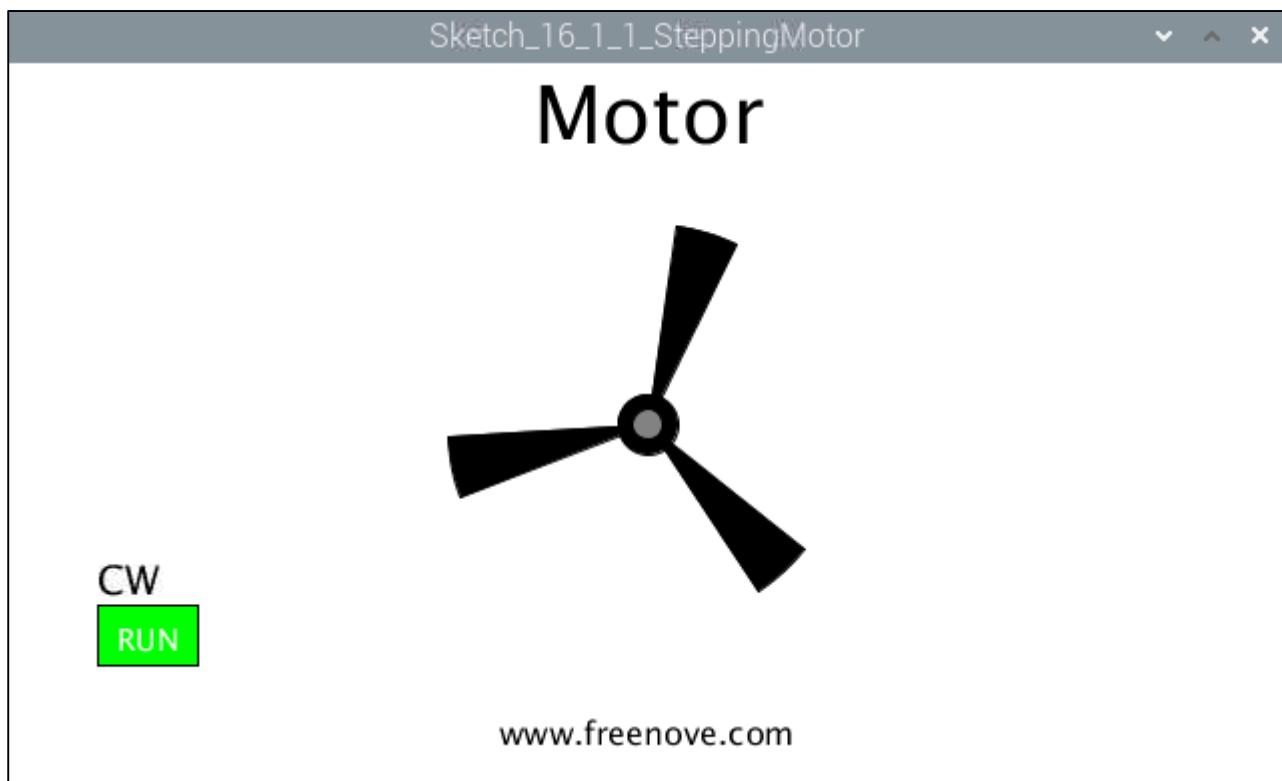

This project contains several code files, as shown below:

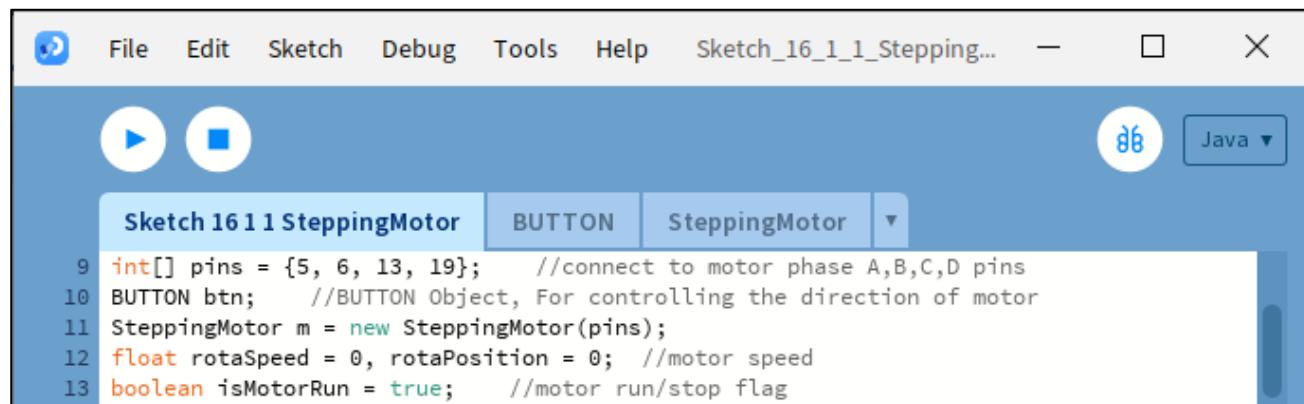

The screenshot shows the Arduino IDE interface with the following details:

- File menu: File, Edit, Sketch, Debug, Tools, Help.
- Sketch name: Sketch_16_1_1_SteppingMotor.
- Tool palette: A button labeled "BUTTON" and a motor icon labeled "SteppingMotor".
- Code area:

```
9 int[] pins = {5, 6, 13, 19};      //connect to motor phase A,B,C,D pins
10 BUTTON btn;        //BUTTON Object, For controlling the direction of motor
11 SteppingMotor m = new SteppingMotor(pins);
12 float rotaSpeed = 0, rotaPosition = 0; //motor speed
13 boolean isMotorRun = true;      //motor run/stop flag
```
- Language selection: Java ▾.

The following is program code:

```
1 import freenove.processing.io.*;
2
3 int[] pins = {18, 23, 24, 25};      //connect to motor phase A,B,C,D pins
4 BUTTON btn;        //BUTTON Object, For controlling the direction of motor
5 SteppingMotor m = new SteppingMotor(pins);
6 float rotaSpeed = 0, rotaPosition = 0; //motor speed
7 boolean isMotorRun = true;      //motor run/stop flag
8
9 void setup() {
10   size(640, 360);
11   btn = new BUTTON(45, height - 90, 50, 30);    //define the button
12   btn.setBgColor(0, 255, 0); //set button color
13   btn.setText("RUN");        //set button text
14   m.motorStart();          //start motor thread
15   rotaSpeed = 0.002 * PI; //virtual fan's rotating speed
16 }
17
18 void draw() {
19   background(255);
20   titleAndSiteInfo(); //title and site information
21   btn.create();       //create the button
22   if (isMotorRun) { //motor is running
23     fill(0);
24     textAlign(LEFT, BOTTOM);
25     textSize(20);
26     if (m.dir == m.CW) {
27       text("CW", btn.x, btn.y); //text "CW"
28       rotaPosition+=rotaSpeed;
29       if (rotaPosition>=TWO_PI) {
30         rotaPosition = 0;
31       }
32     }
33   }
34 }
```

```
32 } else if (m.dir == m.CCW) {
33     text("CCW", btn.x, btn.y); //text "CCW"
34     rotaPosition-=rotaSpeed;
35     if (rotaPosition<=0) {
36         rotaPosition = TWO_PI;
37     }
38 }
39
40 if (m.steps<=0) { //if motor has stopped,
41     if (m.dir == m.CCW) { //change the direction, restart.
42         m.moveSteps(m.CW, 1, 512);
43     } else if (m.dir == m.CW) {
44         m.moveSteps(m.CCW, 1, 512);
45     }
46 }
47 drawFan(rotaPosition); //show the virtual fan in Display window
48 }
49 //Draw a clover fan according to the stating angle
50 void drawFan(float angle) {
51     constrain(angle, 0, 2*PI);
52     fill(0);
53     for (int i=0; i<3; i++) {
54         arc(width/2, height/2, 200, 200, 2*i*PI/3+angle, (2*i+0.3)*PI/3+angle, PIE);
55     }
56     fill(0);
57     ellipse(width/2, height/2, 30, 30);
58     fill(128);
59     ellipse(width/2, height/2, 15, 15);
60 }
61
62 void exit() {
63     m.motorStop();
64     println("exit");
65     System.exit(0);
66 }
67 void mousePressed() {
68     if ((mouseY< btn.y+btn.h) && (mouseY>btn.y)
69     && (mouseX< btn.x+btn.w) && (mouseX>btn.x)) { // the mouse clicks the button
70         if (isMotorRun) {
71             isMotorRun = false;
72             btn.setBgColor(255, 0, 0);
73             btn.setText("STOP");
74             m.motorStop();
75         } else {
```

```

76     isMotorRun = true;
77     btn.setBgColor(0, 255, 0);
78     btn.setText("RUN");
79     m.motorRestart();
80   }
81 }
82 }
83 void titleAndSiteInfo() {
84   fill(0);
85   textAlign(CENTER); //set the text centered
86   textSize(40); //set text size
87   text("Motor", width / 2, 40); //title
88   textSize(16);
89   text("www. freenove. com", width / 2, height - 20); //site
90 }
```

First define 4 GPIOs connected to the motor, the BUTTON class object and SteppingMotor class object.

```

int[] pins = {18, 23, 24, 25}; //connect to motor phase A,B,C,D pins
BUTTON btn; //BUTTON Object, For controlling the direction of motor
SteppingMotor m = new SteppingMotor(pins);
```

In the function setup(), initialize the Button, start thread of stepping motor, and set the rotating speed of the virtual motor.

```

void setup() {
  size(640, 360);
  btn = new BUTTON(45, height - 90, 50, 30); //define the button
  btn.setBgColor(0, 255, 0); //set button color
  btn.setText("RUN"); //set button text
  m.motorStart(); //start motor thread
  rotaSpeed = 0.002 * PI; //virtual fan's rotating speed
}
```

In the function draw(), first draw the button, and calculate the position of the virtual motor and show the current rotating direction.

```

background(255);
titleAndSiteInfo(); //title and site information
btn.create(); //create the button
if (isMotorRun) { //motor is running
  fill(0);
  textAlign(LEFT, BOTTOM);
  textSize(20);
  if (m.dir == m.CW) {
    text("CW", btn.x, btn.y); //text "CW"
```

```

    rotaPosition+=rotaSpeed;
    if (rotaPosition>=TWO_PI) {
        rotaPosition = 0;
    }
} else if (m.dir == m.CCW) {
    text("CCW",btn.x,btn.y); //text "CCW"
    rotaPosition-=rotaSpeed;
    if (rotaPosition<=0) {
        rotaPosition = TWO_PI;
    }
}
}

```

And then determine whether the stepper motor is in stopping state according to the value of “m.steps”. If it is true, change the rotating direction of motor, and drive the motor to rotate a circle.

```

if (m.steps<=0) { //if motor has stopped,
    if (m.dir == m.CCW) { //change the direction , restart.
        m.moveSteps(m.CW, 1, 512);
    } else if (m.dir == m.CW) {
        m.moveSteps(m.CCW, 1, 512);
    }
}

```

Finally draws the virtual fan.

```
drawFan(rotaPosition);
```

Reference

class SteppinMotor

This is a custom class that defines some methods to drive the four-phase stepper motor.

```
public SteppingMotor(int[] mPins)
```

Constructor. The parameter represents the GPIO pin connected to the stepper motor.

```
public void motorStart()
```

Start a stepper motor thread, then the thread is in the state of waiting, waiting for a notification to wake it up.

```
public void moveSteps(int idir, int ims, int isteps)
```

Used to drive stepper motor to rotate, the parameter “idir” indicates the direction that can be set as CW/CCW.

The parameter “ims” is the delay (with unit ms) between each two steps of stepper motor. The higher the value of “ims”, the lower the speed of stepper motor. Parameter “isteps” specifies the number of rotating steps of the stepper motor. As for four-phase stepper motor, four steps make a cycle, if set isteps=1, which means to specify the stepping motor to rotate four steps.

```
public void motorStop()
```

Stop stepper motor.

```
public void motorRestart()
```

Restart to drive stepper motor.

If you have any concerns, please send an email to: support@freenove.com

Chapter 17 Matrix Keypad

In this chapter, we will learn how to use matrix keyboard.


Project 17.1 Calculator

In this project, we will use a matrix keyboard to make a calculator.

Component knowledge


4x4 Matrix Keypad

First, review the matrix keyboard sequence to facilitate building circuit.

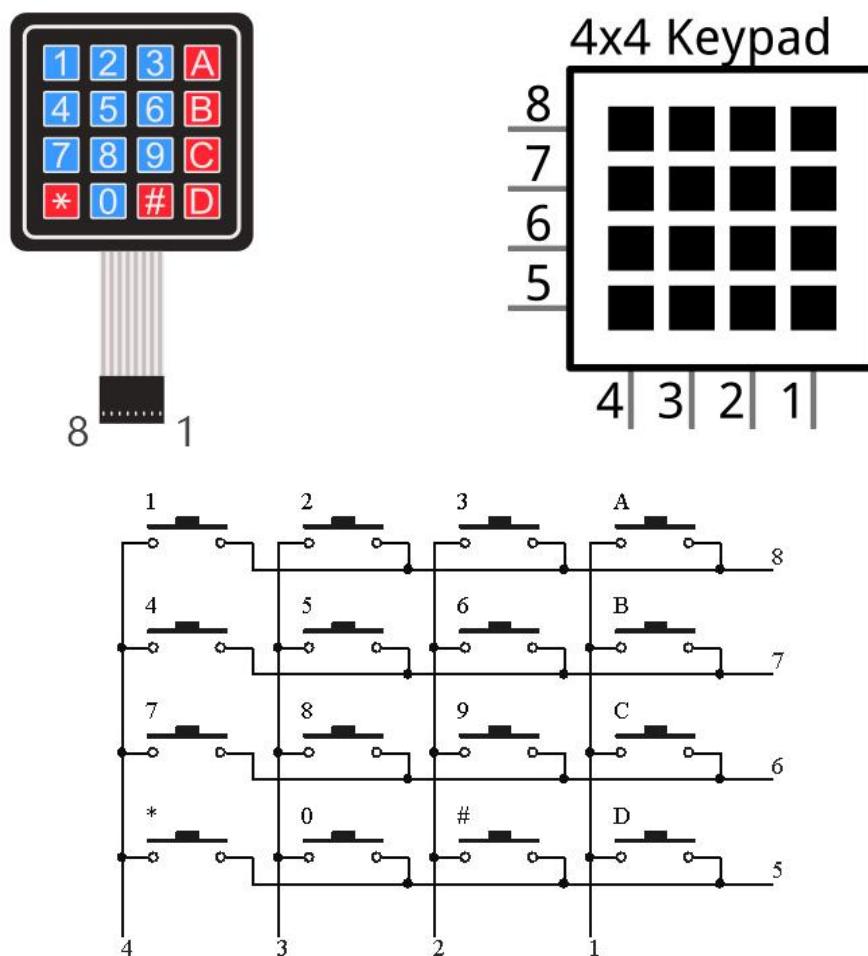


Component List


Freenove Projects Board for Raspberry Pi

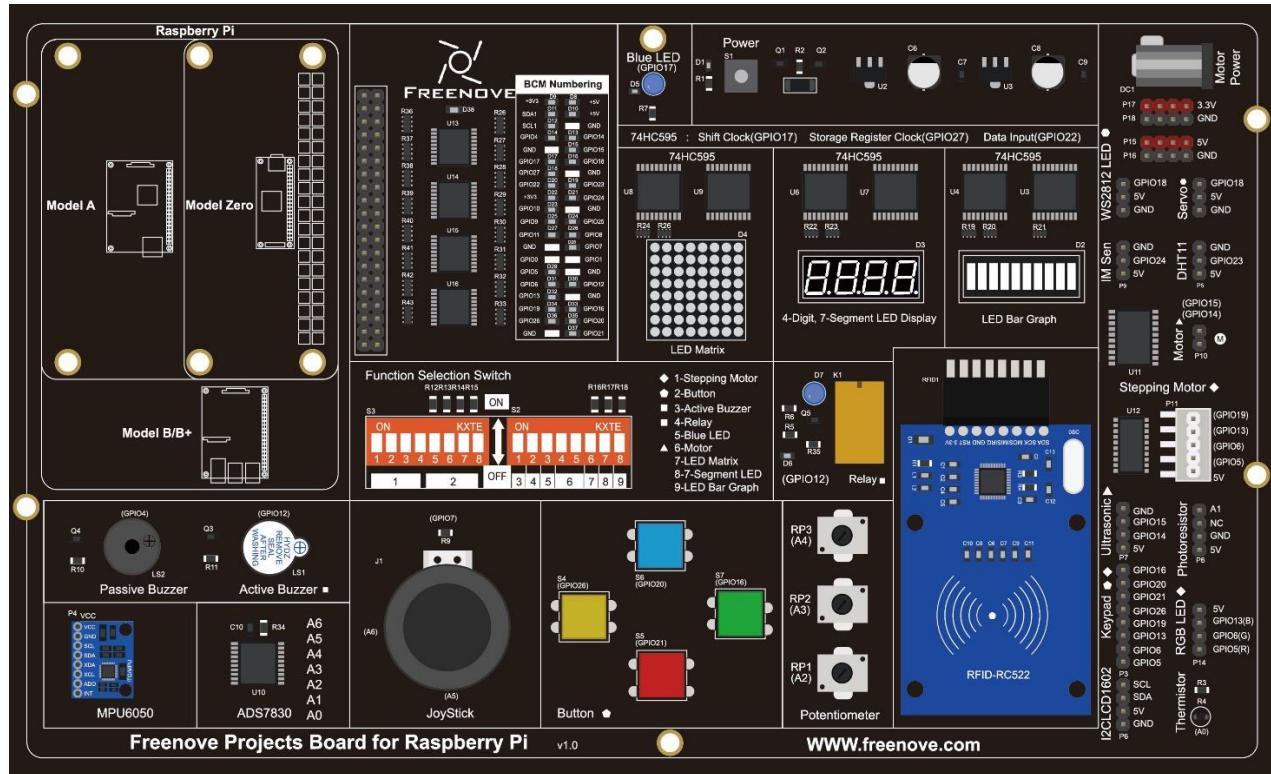


Raspberry Pi

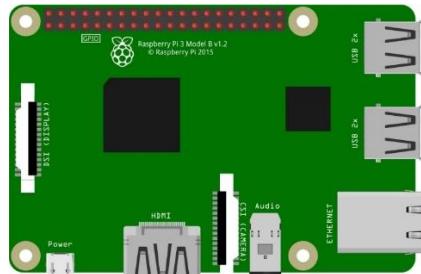

GPIO Ribbon Cable

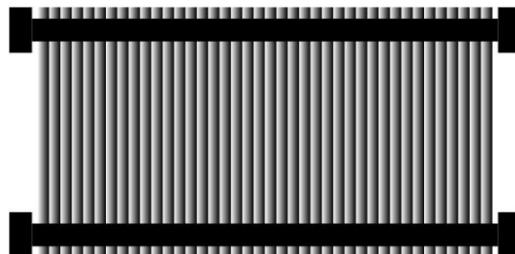


4x4 Matrix Keypad

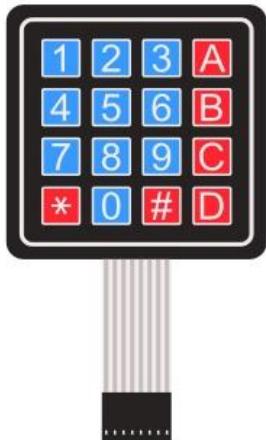


Circuit

Schematic diagram

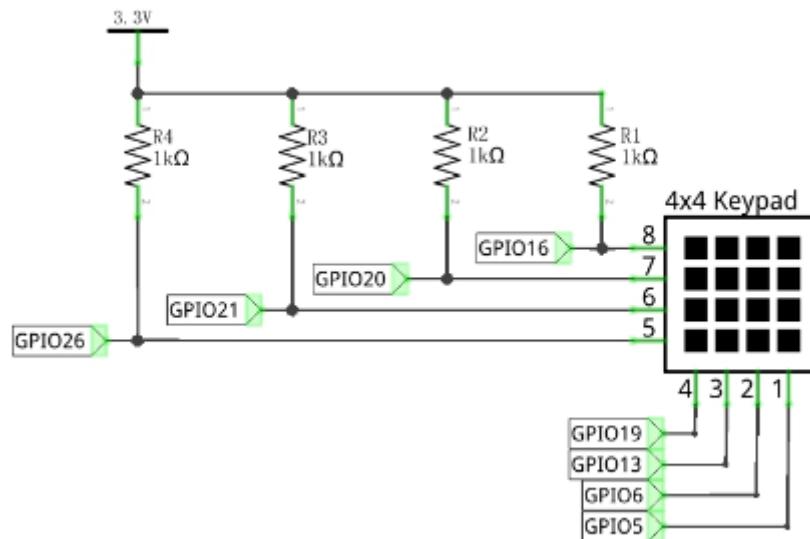

Hardware connection.

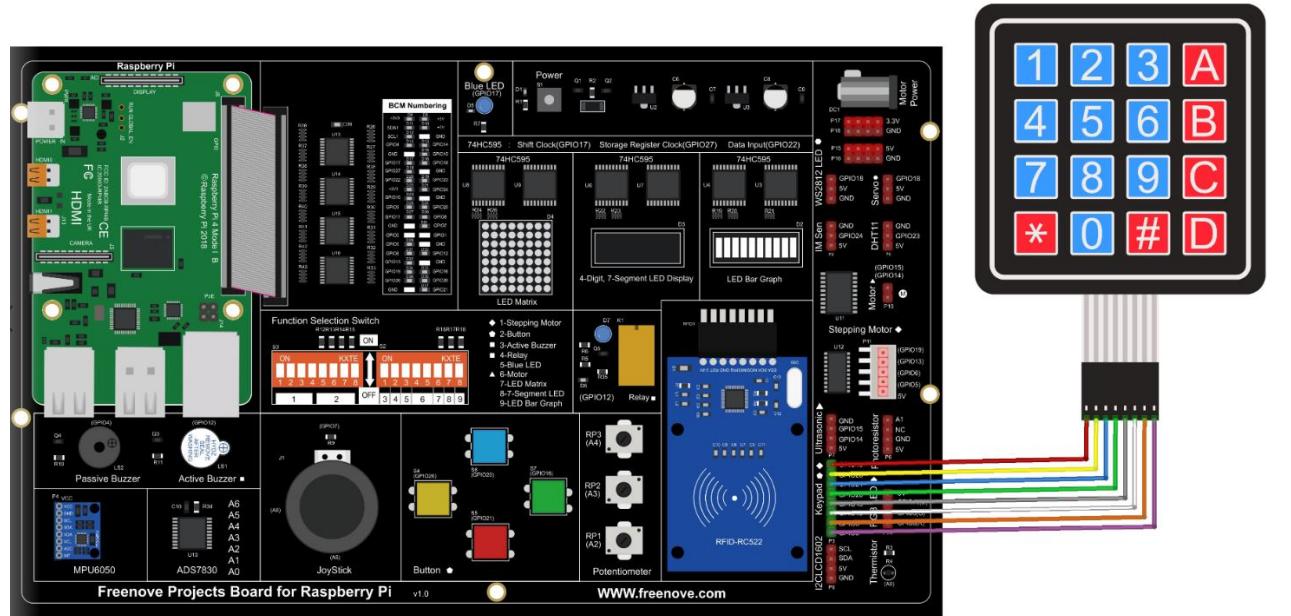

Stepper motor, keypad and RGBLED must NOT be used at the same time.

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 17.1.1 Calculator

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_17_1_1_Calculator
```

And then right-click to select Processing IDE

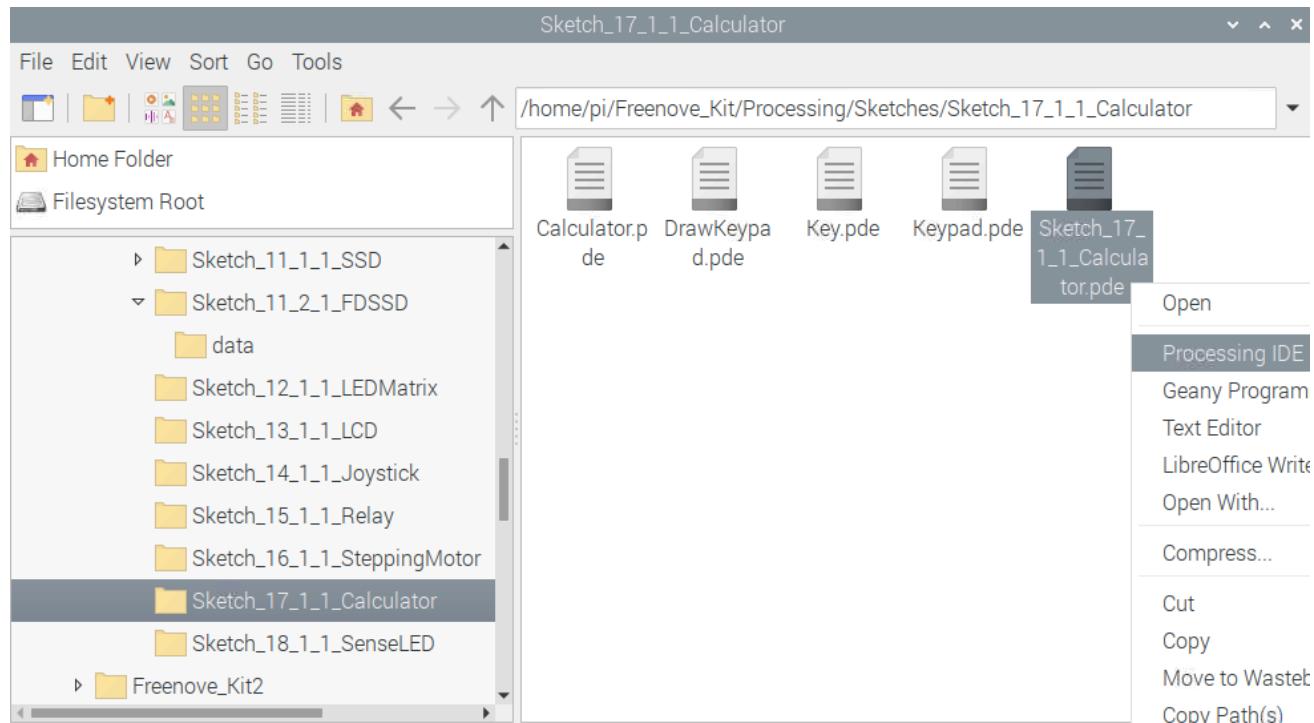

Or you can enter a command in the terminal to open the file Sketch_17_1_1_Calculator. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_17_1_1_Calculator/Sketch_17_1_1_Calculator.pde
```

Open Processing and click Run


The screenshot shows the Processing IDE interface. The title bar reads "Sketch_17_1_1_Calculat...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh button. The main area displays the following Java code:

```
9 final static char[] keys = { //key code
10   '1', '2', '3', '+',
11   '4', '5', '6', '-',
12   '7', '8', '9', '*',
13   'C', '0', '=', '/' };
14 final int[] rowsPins = {16, 20, 21, 26}; //Connect to the row pinouts of the keypad
15 final int[] colsPins = {19, 13, 6, 5}; //Connect to the column pinouts of the keypad
16 Keypad kp = new Keypad(keys, rowsPins, colsPins); //class Object
17 Calculator cc = new Calculator(kp); //class Object
18 void setup() {
19   size(640, 360);
20 }
21 void draw() {
22   background(102);
23   titleAndSiteInfo(); //Tile and site information
24   cc.process(); //Get key and processing
25   drawDisplay(cc.contentStr); //Draw display area and content
26   drawKeypad(width-kpSize, 70); //draw virtual Keypad
27 }
```

At the bottom of the IDE, there are tabs for "Console" and "Errors".




The result is as shown below. Pressing the matrix keypad can make calculation. (Clicking the windows doesn't work.)

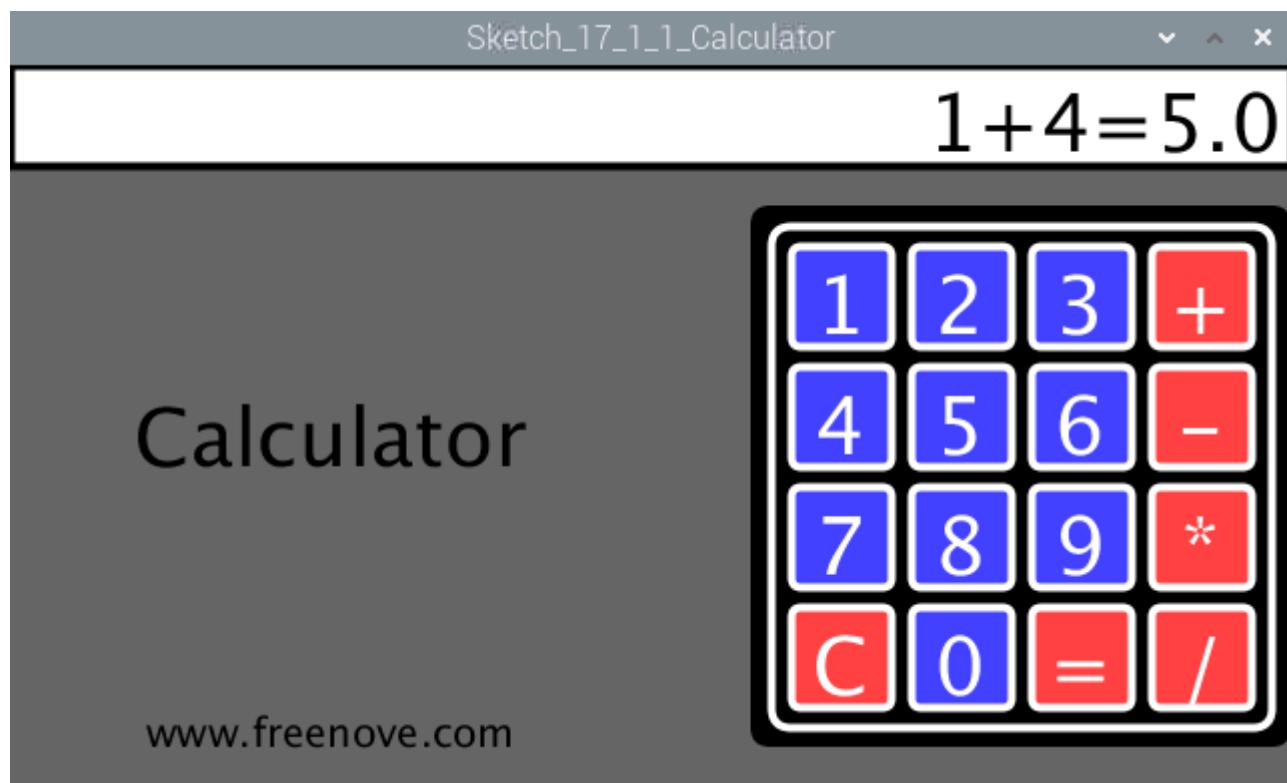


www.freenove.com

Calculator achieves the basic operation of add, subtract, multiply and divide. Button "C" means Clear, namely, clear the current content. When a button is pressed, the color of the corresponding button on the virtual keyboard will be turned into green, which indicates that the button is pressed.

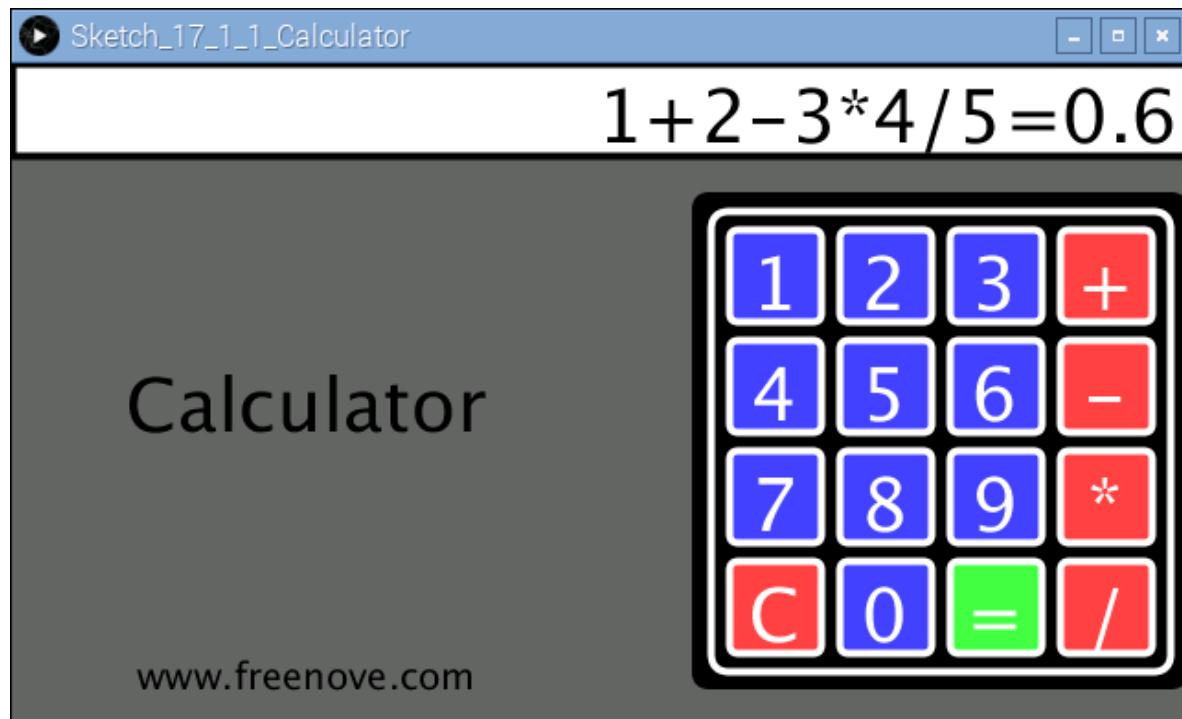

This project contains several code files, as shown below:

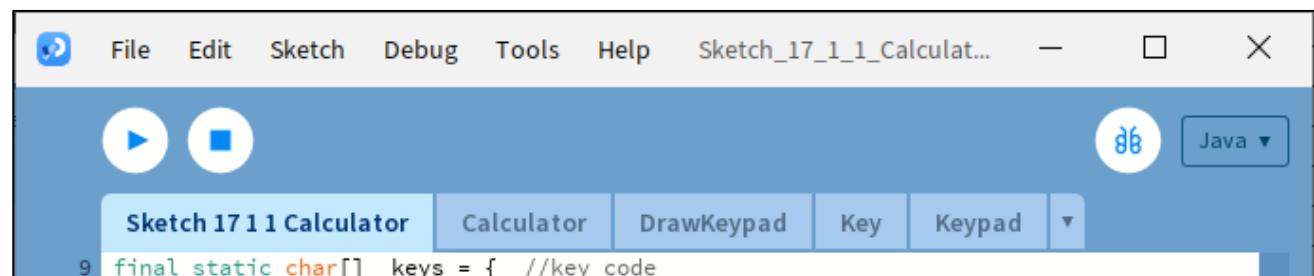

The following is program code:

```

1 import freenove.processing.io.*;
2
3 final static char[] keys = { //key code
4   '1', '2', '3', '+',
5   '4', '5', '6', '-',
6   '7', '8', '9', '*',
7   'C', '0', '=', '/' };
8 final int[] rowsPins = {18, 23, 24, 25}; //Connect to the row pinouts of the keypad
9 final int[] colsPins = {10, 22, 27, 17}; //Connect to the column pinouts of the keypad
10 Keypad kp = new Keypad(keys, rowsPins, colsPins); //class object
11 Calculator cc = new Calculator(kp); //class Object
12 void setup() {

```

```

13     size(640, 360);
14 }
15 void draw() {
16     background(102);
17     titleAndSiteInfo(); //Tile and site information
18     cc.process(); //Get key and processing
19     drawDisplay(cc.contentStr); //Draw display area and content
20     drawKeypad(width-kpSize, 70); //draw virtual Keypad
21 }
22 void titleAndSiteInfo() {
23     fill(0);
24     textAlign(CENTER); //set the text centered
25     textSize(40); //set text size
26     text("Calculator", width / 4, 200); //title
27     textSize(20);
28     text("www. freenove. com", width / 4, height - 20); //site
29 }
```

In the code, first define key code of the Keypad, and the GPIO connected to the Keypad. Then create a Keypad class object based on the information, and finally create a Calculator class object according to the Keypad class object.

```

final static char[] keys = { //key code
    '1', '2', '3', '+',
    '4', '5', '6', '-',
    '7', '8', '9', '*',
    'C', '0', '=', '/',
};

final int[] rowsPins = {18, 23, 24, 25}; //Connect to the row pinouts of the keypad
final int[] colsPins = {10, 22, 27, 17}; //Connect to the column pinouts of the keypad
Keypad kp = new Keypad(keys, rowsPins, colsPins); //class object
Calculator cc = new Calculator(kp); //class object
```

In draw(), use cc.process() to obtain the key code of Keypad and for processing. And then draw the display area and virtual Keypad.

```

void draw() {
    background(102);
    titleAndSiteInfo(); //Tile and site information
    cc.process(); //Get key and processing
    drawDisplay(cc.contentStr); //Draw display area and content
    drawKeypad(width-kpSize, 70); //draw virtual Keypad
}
```

Reference

void drawKeypad(int x, int y)

Used to draw a Keypad with (x, y) on the upper left corner.

void drawDisplay(String content)

The function at the top of the window to draw a calculator display area, and in the area of the right alignment display content.

class Key

This is a custom class that defines the associated attribute owned by a key. There are only some member variables and a constructor in this class.

class Keypad

This is a custom class that defines the methods to use keypad.

```
public Keypad(char[] usrKeyMap, int[] row_Pins, int[] col_Pins)
```

Constructor, the parameters are: key code of keyboard, row pins, column pins.

```
public char getKey()
```

Get the key code of the pressed key. If no key is pressed, the return value is '\0'.

```
public void setDebounceTime(int ms)
```

Set the debounce time. And the default time is 10ms.

```
public void setHoldTime(int ms)
```

Set the time when the key holds stable state after pressed.

```
public boolean isPressed(char keyChar)
```

Judge whether the key with code "keyChar" is pressed.

```
public char waitForKey()
```

Wait for a key to be pressed, and return key code of the pressed key.

```
public int getState()
```

Get state of the keys.

```
boolean keyStateChanged()
```

Judge whether there is a change of key state, then return True or False.

class Calculator

This is a custom class that defines the rules and calculating methods of the calculator.

```
String contentStr = "";
```

Member variable that saves the current processing results of the calculator, which will be directly displayed in the display area.

```
public Calculator(Keypad kp)
```

Constructor. the parameter is for the Keypad class object.

```
public void process()
```

Gets the key code of the key, and makes the corresponding judgment and processing. The Processing results are stored in the member variable "contentStr".

```
public double parse(String content)
```

This is the core of the calculator. It is to parse a string of four fundamental operations and return its double-precision floating-point number equivalent. For example, enter a string "1+2-3*4/5", then return value of 0.6.

If you have any concerns, please send an email to: support@freenove.com

Chapter 18 Infrared Motion Sensor


In this chapter, we will learn a widely used sensor, Infrared Motion Sensor.

Project 18.1 Sense LED


In this project, we will make a sense LED.

Component List


Freenove Projects Board for Raspberry Pi

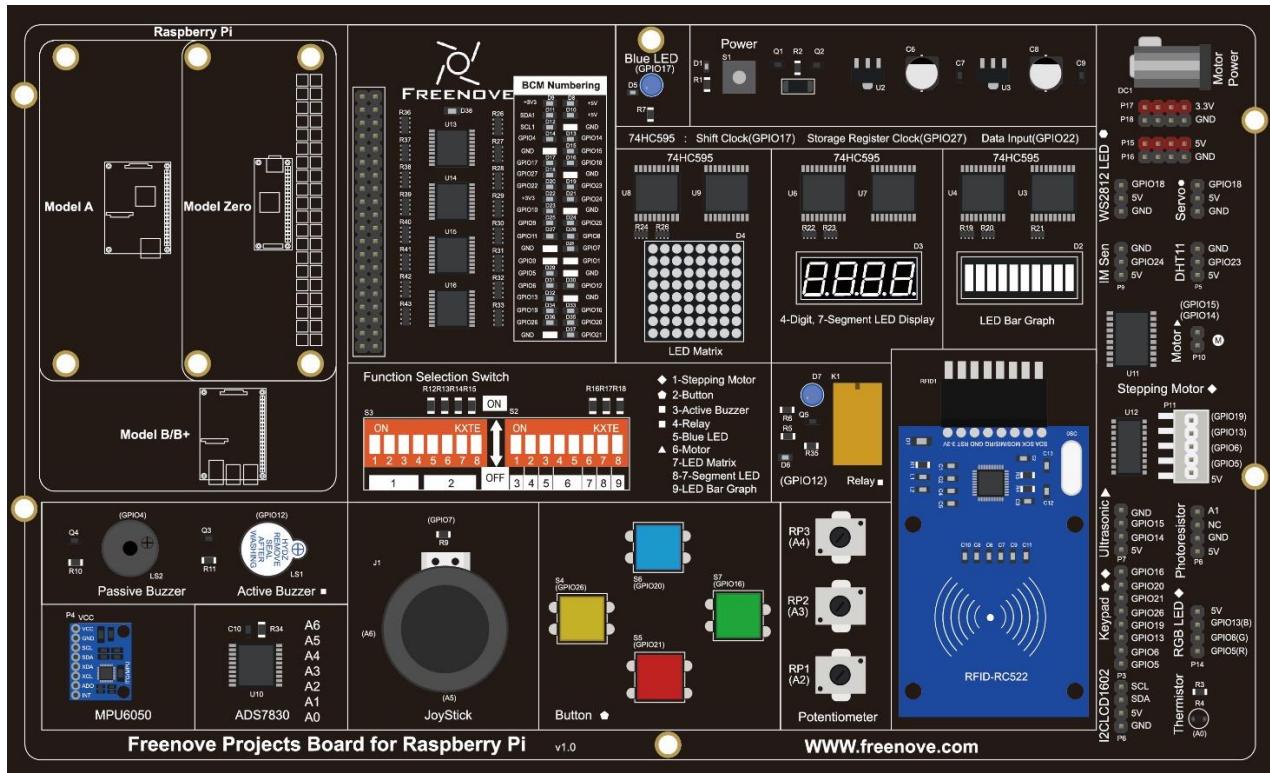


Raspberry Pi

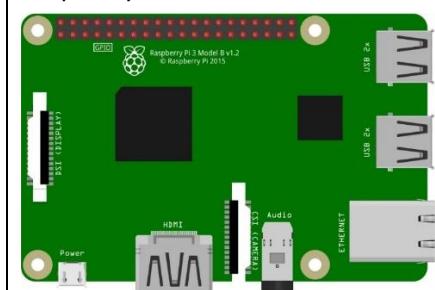


GPIO Ribbon Cable

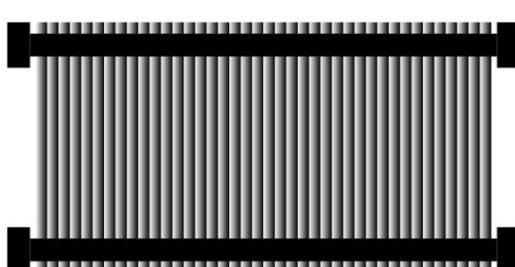

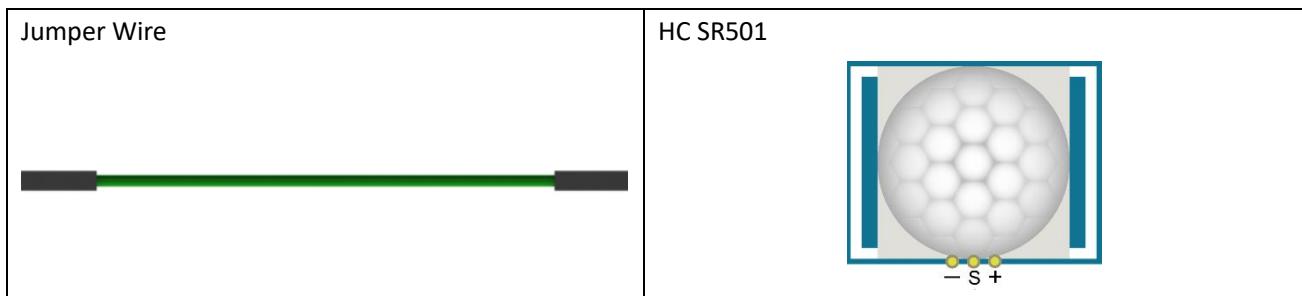


Circuit


Schematic diagram

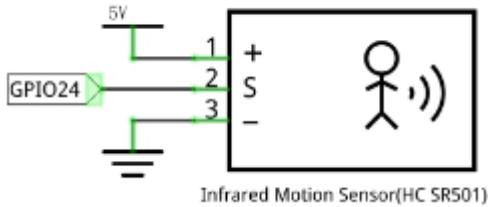

Hardware connection.

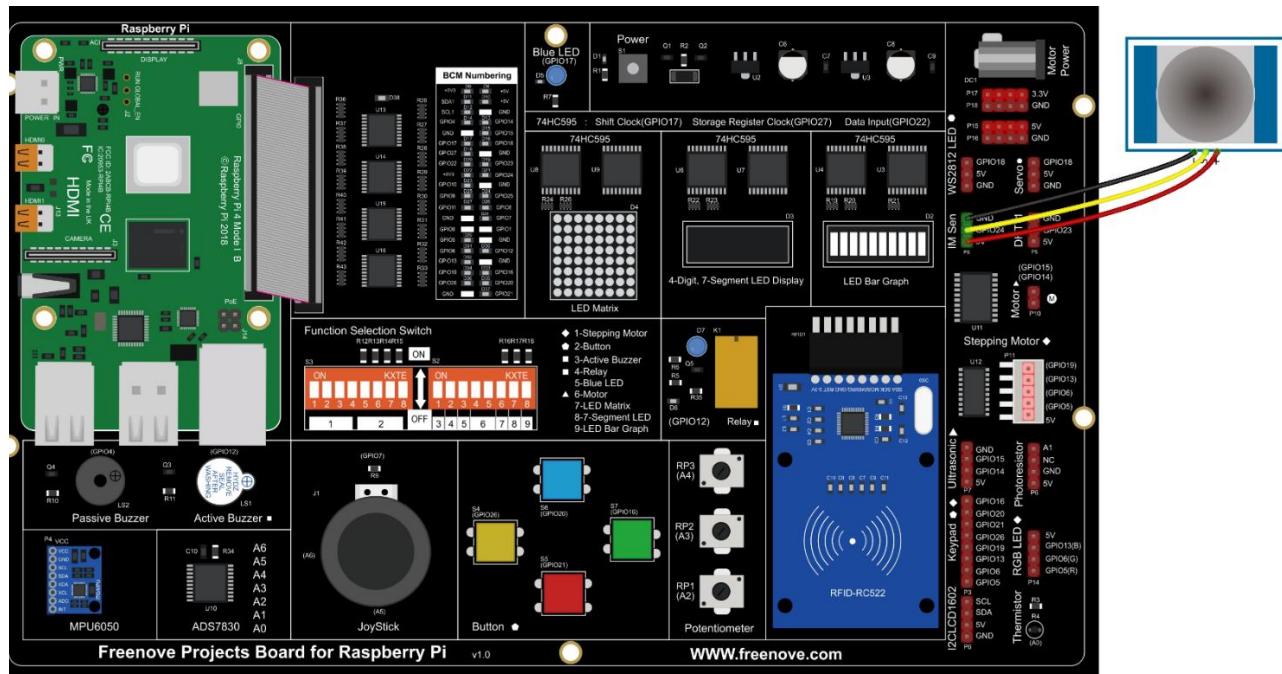

How to use this sensor?

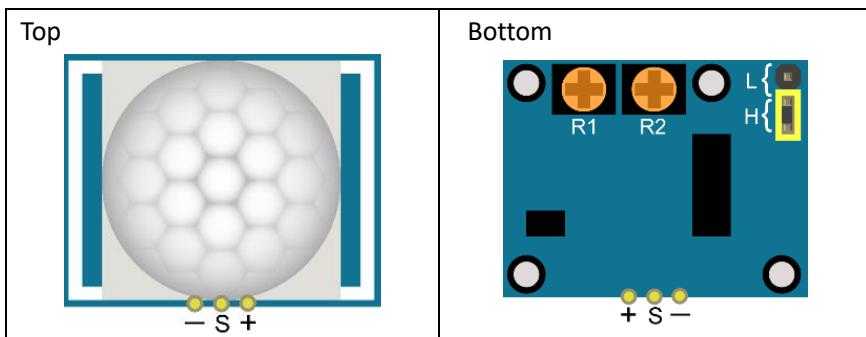

Description:

1. You can choose non-repeatable trigger modes or repeatable modes.

L: non-repeatable trigger mode. The module outputs high level after sensing a body, then when the delay time is over, the module will output low level. During high level time, the sensor no longer actively senses bodies.

H: repeatable trigger mode. The distinction from the L mode is that it can sense a body until that body leaves.


After this, it starts to time and output low level after delaying T time.

2. R1 is used to adjust HIGH level lasting time when sensor detects human motion, 1.2s-320s.
3. R2 is used to adjust the maximum distance the sensor can detect, 3~5m.

Here we connect L and adjust R1 and R2 like below to do this project.

Put your hand close and away from the sensor slowly. Observe the LED in previous circuit.

It needs some time between two detections.

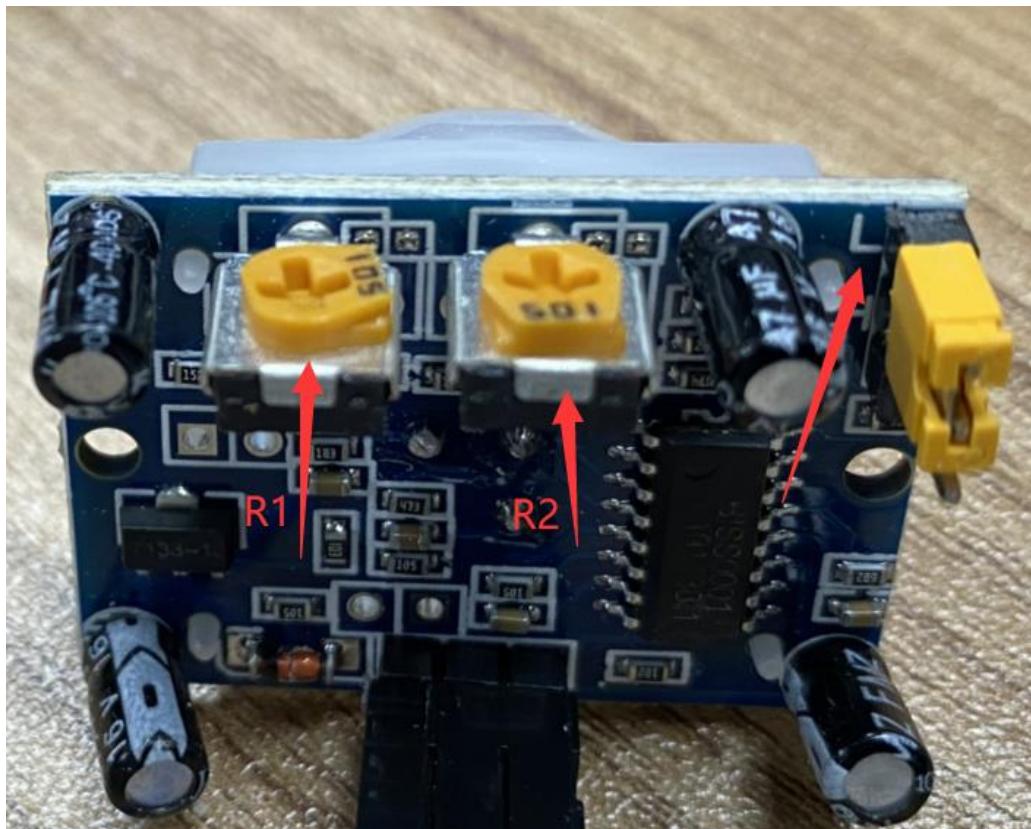

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 18.1.1 SenseLED

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Sketches/Sketch_18_1_1_SenseLED
```

And then right-click to select Processing IDE

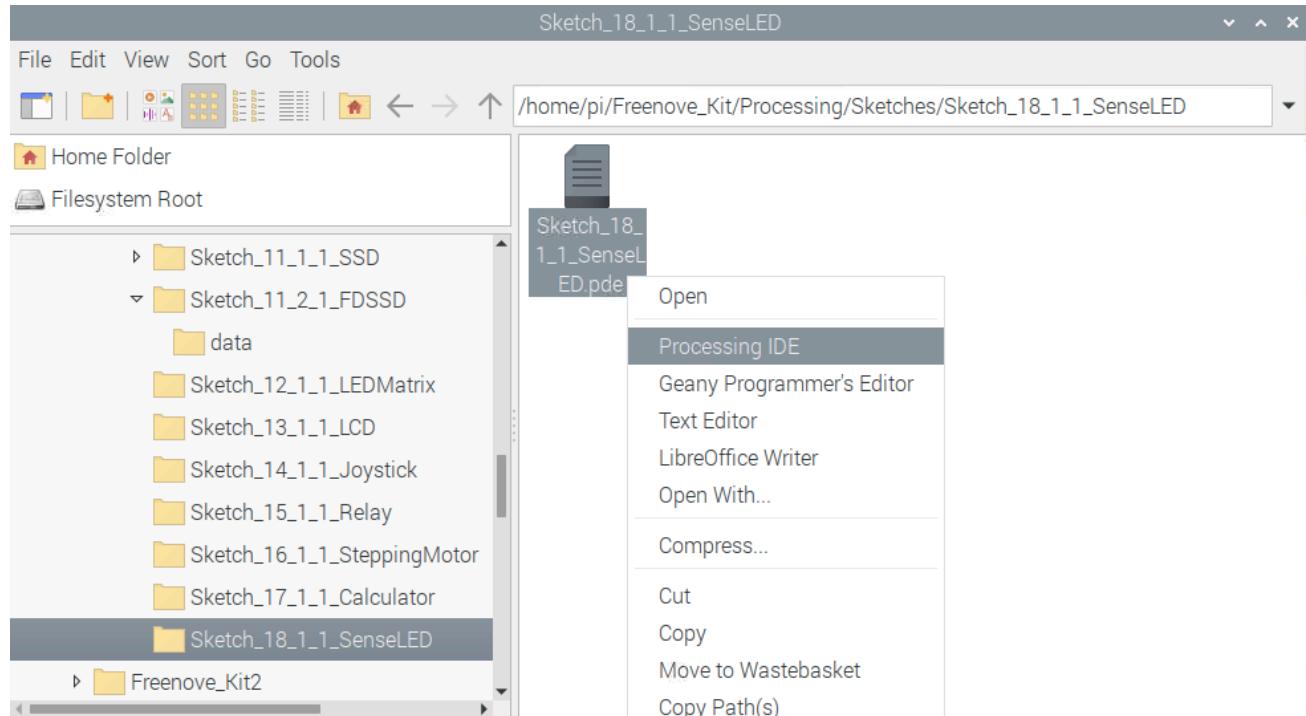

Or you can enter a command in the terminal to open the file Sketch_18_1_1_SenseLED. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Sketches/Sketch_18_1_1_SenseLED/Sketch_18_1_1_SenseLED.pde
```

Open Processing and click Run


The screenshot shows the Processing IDE interface. The title bar reads "Sketch_18_1_1_SenseLE...". The main window displays the following Java code:

```
9 final int sensorPin = 24; //connect to sensor pin
10 final int ledPin = 17; //connect to led pin
11 void setup() {
12     size(640,360); //window size
13     GPIO.pinMode(sensorPin, GPIO.INPUT);
14     GPIO.pinMode(ledPin, GPIO.OUTPUT);
15 }
16
17 void draw() {
18     background(102);
19     titleAndSiteInfo();
20     //if read sensor for high level
21     if (GPIO.digitalRead(sensorPin) == GPIO.HIGH) {
22         GPIO.digitalWrite(ledPin, GPIO.HIGH); //led on
23         fill(64,255,64); //fill in green
24     } else {
25         GPIO.digitalWrite(ledPin, GPIO.LOW); //led off
26         fill(255); //fill in white
27     }
}
```

The bottom of the IDE shows tabs for "Console" and "Errors".



The result is as shown below. When the sensor detects a person's movement, it will light up LED.

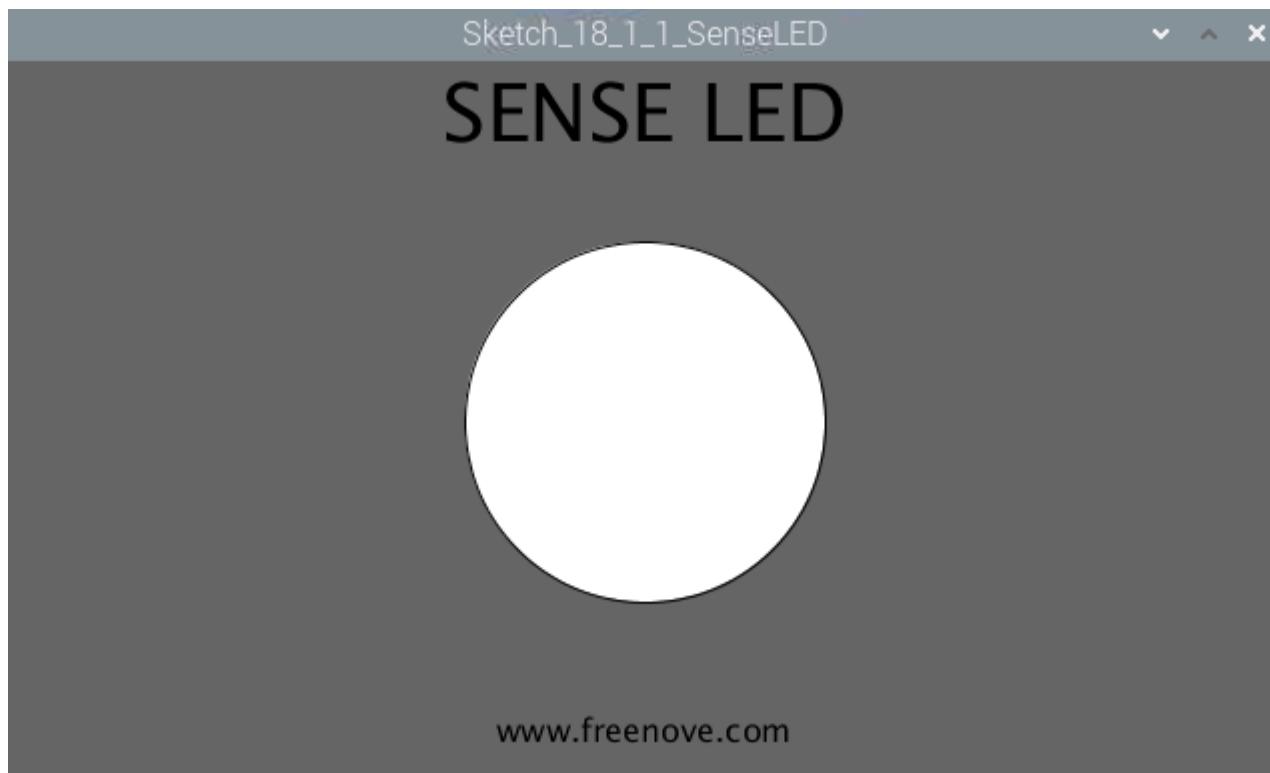

The following is program code:

```
1 import freenove.processing.io.*;
2
3 final int sensorPin = 17; //connect to sensor pin
4 final int ledPin = 18; //connect to led pin
5 void setup() {
6     size(640, 360); //window size
7     GPIO.pinMode(sensorPin, GPIO.INPUT);
8     GPIO.pinMode(ledPin, GPIO.OUTPUT);
9 }
10
11 void draw() {
12     background(102);
13     titleAndSiteInfo();
14     //if read sensor for high level
15     if (GPIO.digitalRead(sensorPin) == GPIO.HIGH) {
16         GPIO.digitalWrite(ledPin, GPIO.HIGH); //led on
17         fill(64, 255, 64); //fill in green
18     } else {
19         GPIO.digitalWrite(ledPin, GPIO.LOW); //led off
20         fill(255); //fill in white
21     }
22     ellipse(width/2, height/2, height/2, height/2);
```

```
23 }
24
25 void titleAndSiteInfo() {
26     fill(0);
27     textAlign(CENTER);    //set the text centered
28     textSize(40);        //set text size
29     text("SENSE LED", width / 2, 40);    //title
30     textSize(16);
31     text("www. freenove. com", width / 2, height - 20);    //site
32 }
```

In this project, the code is relatively simple. In the function draw(), read level of sensor pin. When it is a high level, LED is turned on. At the same time the filled color will be changed to green. When the level is low, LED turns off and the filled color turns white. Finally, it draws a circle.

```
void draw() {
background(102);
titleAndSiteInfo();
//if read sensor for high level
if (GPIO.digitalRead(sensorPin) == GPIO.HIGH) {
    GPIO.digitalWrite(ledPin, GPIO.HIGH); //led on
    fill(64, 255, 64);    //fill in green
} else {
    GPIO.digitalWrite(ledPin, GPIO.LOW); //led off
    fill(255);        //fill in white
}
ellipse(width/2, height/2, height/2, height/2);
}
```

If you have any concerns, please send an email to: support@freenove.com



App 1 Oscilloscope

We have used the ADC module to read the voltage of potentiometer to achieve the function of a voltmeter before. In this chapter, we will make a more complex virtual instrument, oscilloscope. Oscilloscope is a widely used electronic measuring instrument. It can get the electrical signals that cannot be observed directly into visible images to facilitate the analysis and study of various electrical signals changing process.

App 1.1 Oscilloscope


Now, let's make an oscilloscope.

Component List

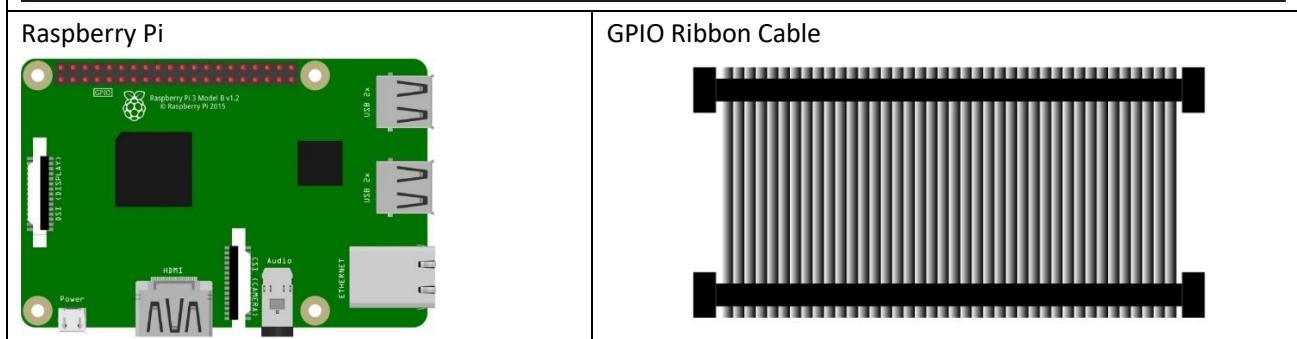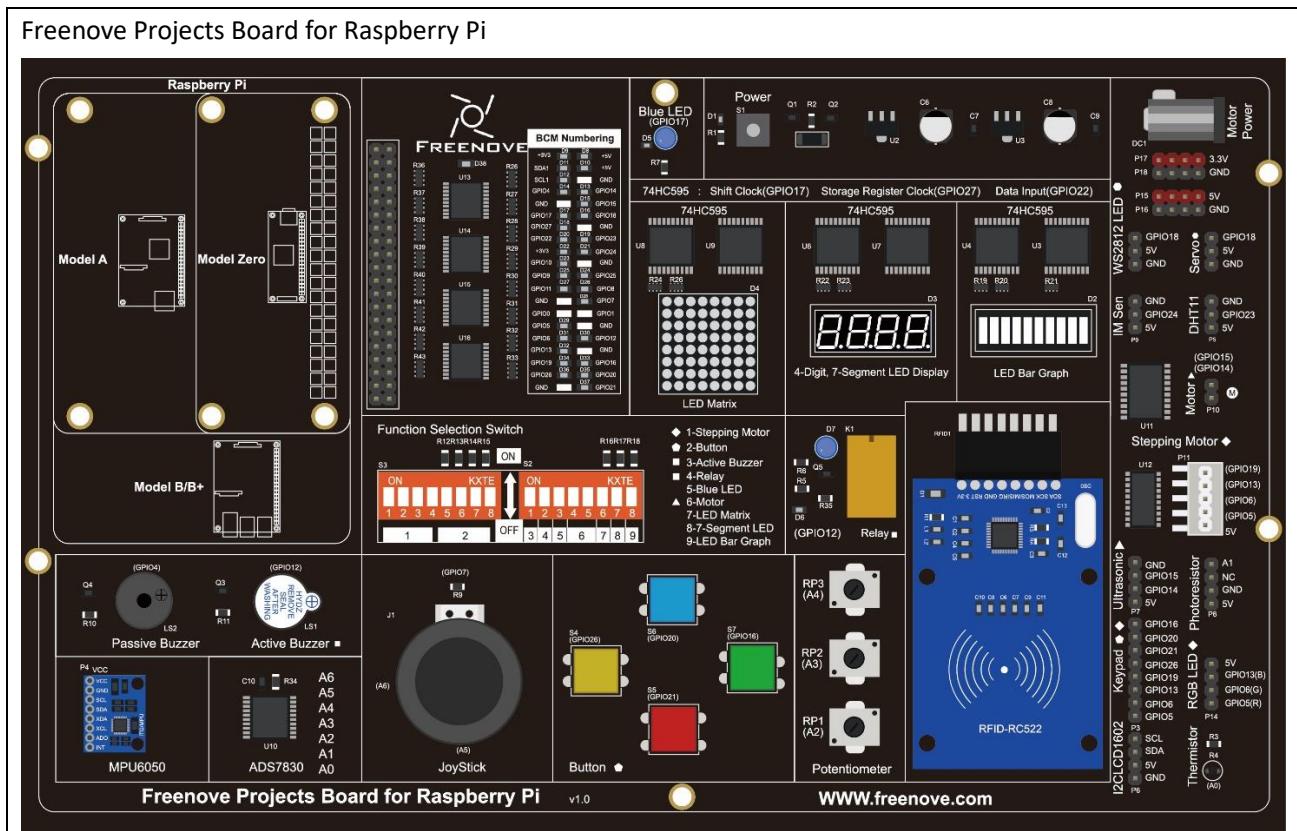


Circuit

Schematic diagram

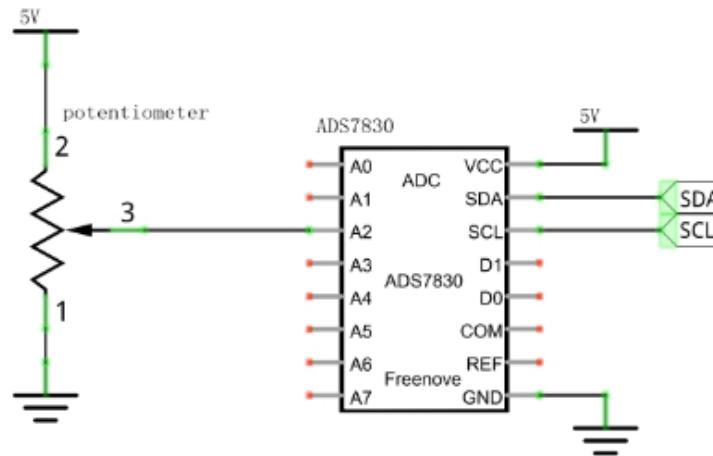

Hardware connection.

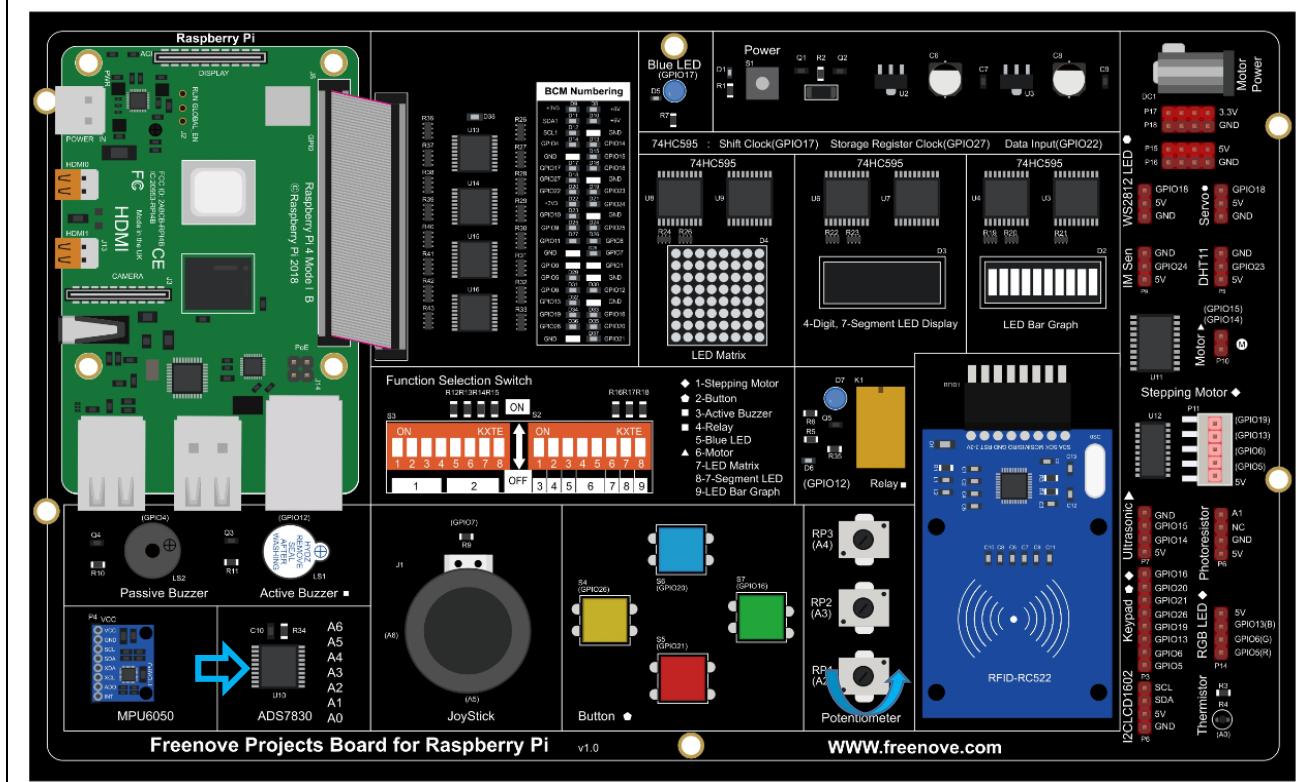

If you have any concerns, please send an email to: support@freenove.com



Sketch


Sketch 1.1.1 Oscilloscope

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Apps/App_01_1_1_Oscilloscope
```

And then right-click to select Processing IDE

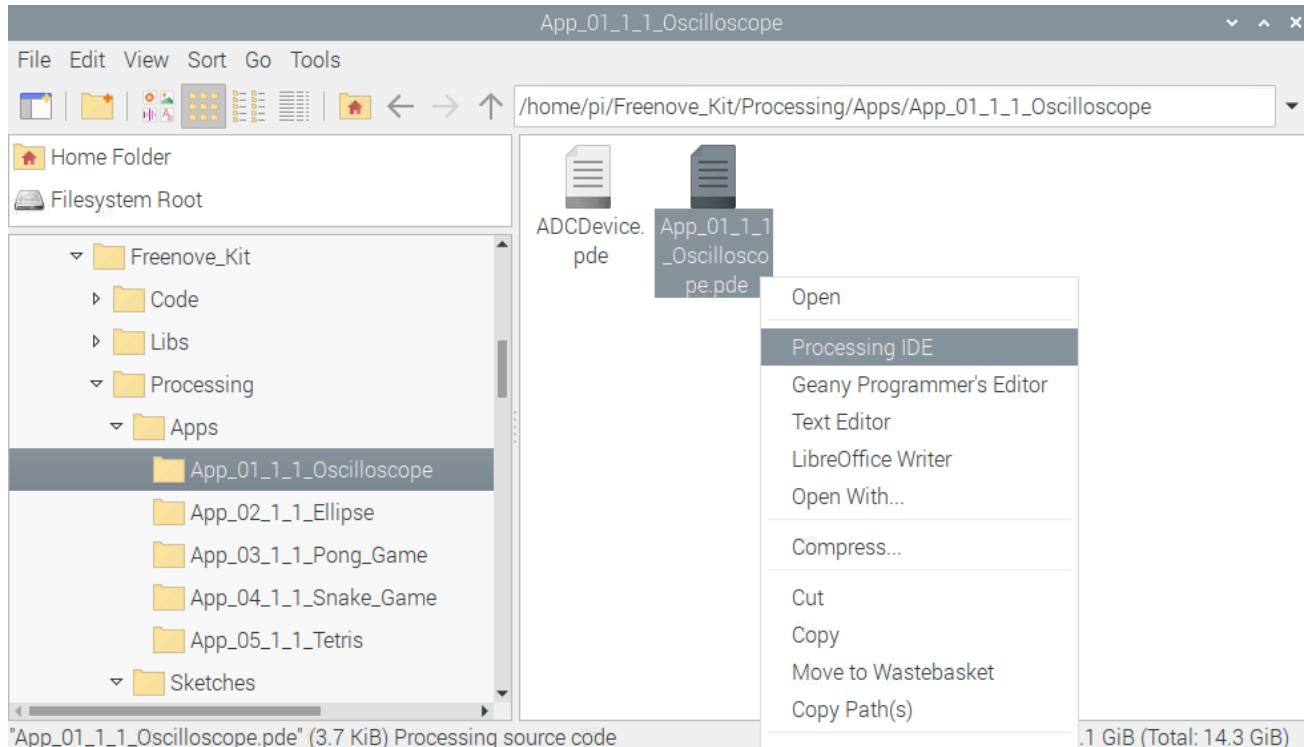

Or you can enter a command in the terminal to open the file App_01_1_1_Oscilloscope. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Apps/App_01_1_1_Oscilloscope/App_01_1_1_Oscilloscope.pde
```

Open Processing and click Run.


The screenshot shows the Processing IDE interface. The title bar reads "File Edit Sketch Debug Tools Help App_01_1_1_Oscilloscop...". Below the title bar are two circular buttons (play/pause) and a "Java" dropdown menu. The main area displays the following Java code:

```
18 ADCDevice adc = new ADCDevice();
19 int[] analogs; // Analog data send from serial device
20 int analogsCount; // Length of analogs[] array
21 int voltage = 0; // Voltage
22 int hMult = 1; // Horizontal zoom ratio, relative to 1 second
23 boolean pause = false; // Storage is suspended display
24
25 void setup()
26 {
27     size(530, 290);
28     if (adc.detectI2C(0x48)) {
29         adc = new ADS7830(0x48);
30     } else {
31         println("Not found ADC Module!");
32         System.exit(-1);
33     }
34     background(102);
35     textAlign(CENTER, CENTER);
36     textSize(64);
```

At the bottom of the IDE, there are tabs for "Console" and "Errors".



The result is as shown below. Rotating RP1 potentiometer will make changes.

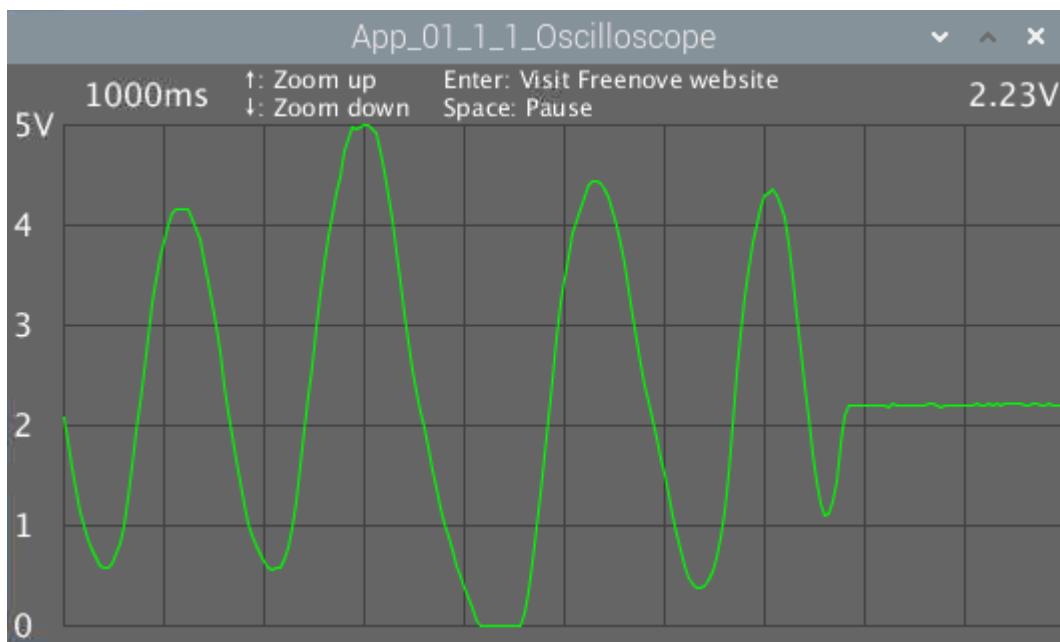

The left side of the software interface is a voltage scale, which is used to indicate the voltage of the waveform.

The "1000ms" on top left corner is the time of a square, and you can press "↑" and "↓" key on keyboard to adjust it.
The "0.00V" on top right corner is the voltage value of current signal.

You can press the space bar on keyboard to pause the display of waveform, which is easy to view and analysis.

We believe that with the help of this oscilloscope, you can have a more intuitive understanding of the actual work of some electronic circuits. It will help you complete the project and facilitate troubleshooting. You can export this sketch to an application used as a tool.

If you have any concerns, please send an email to: support@freenove.com



App 2 Control Graphics

In this chapter, we will use a potentiometer to make the graphics change in Processing.

App 2.1 Ellipse


This project uses two potentiometers to control the size and shape of an ellipse respectively.

Component List

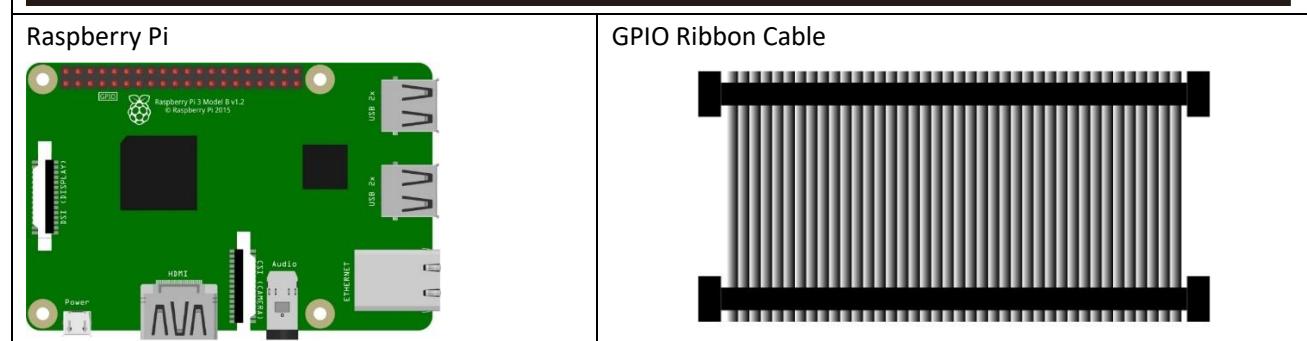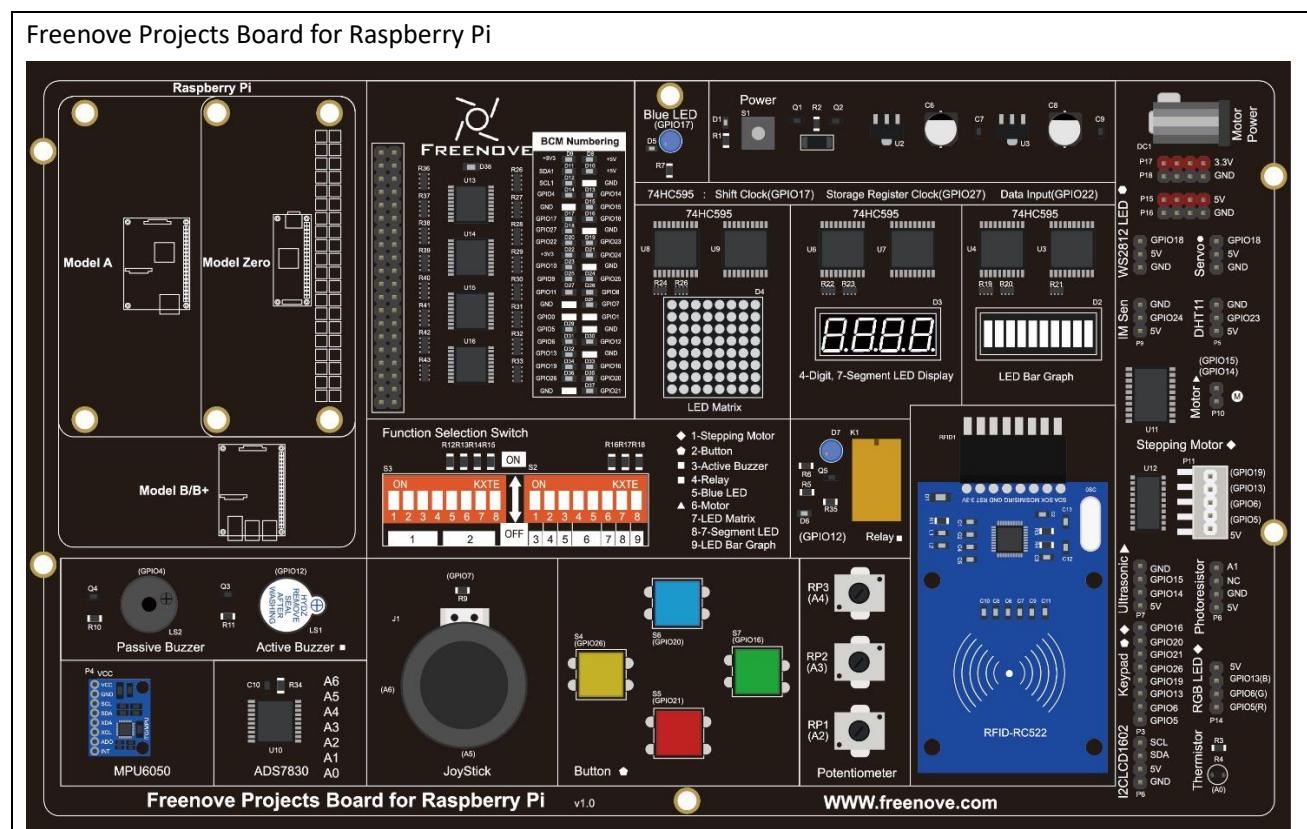


Circuit

Schematic diagram

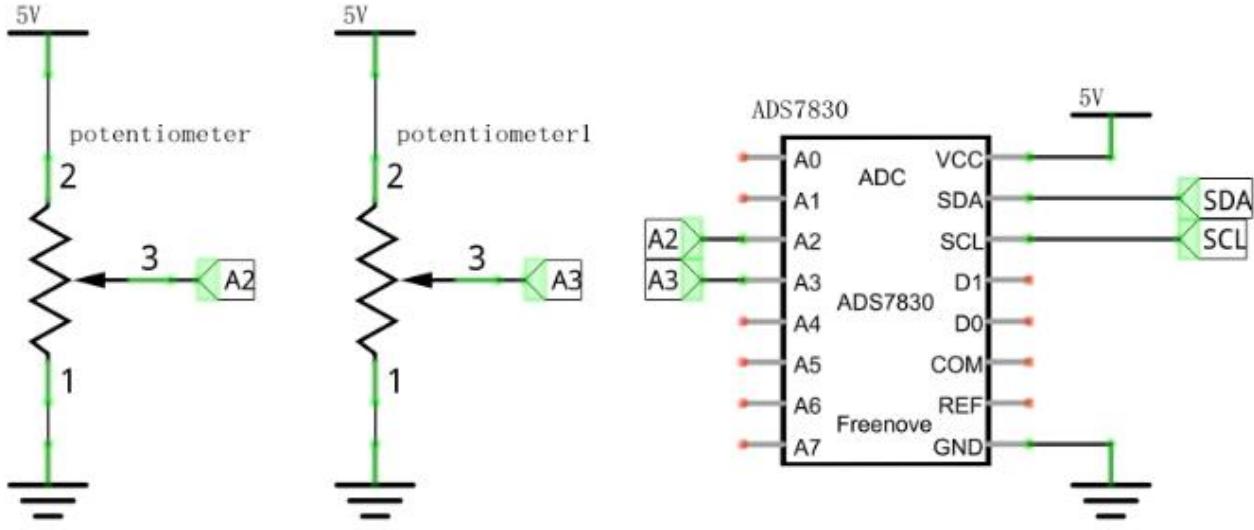

Hardware connection.

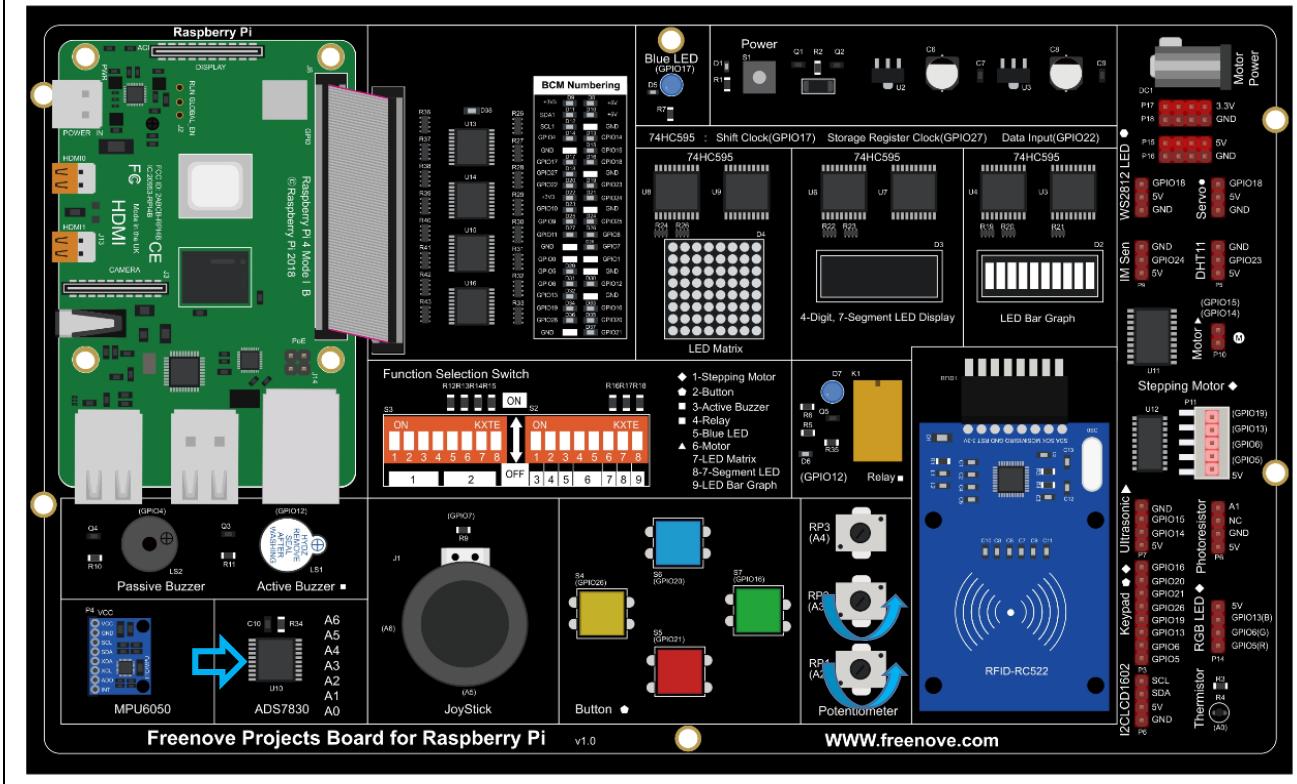

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 2.1.1 Ellipse

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Apps/App_02_1_1_Ellipse
```

And then right-click to select Processing IDE

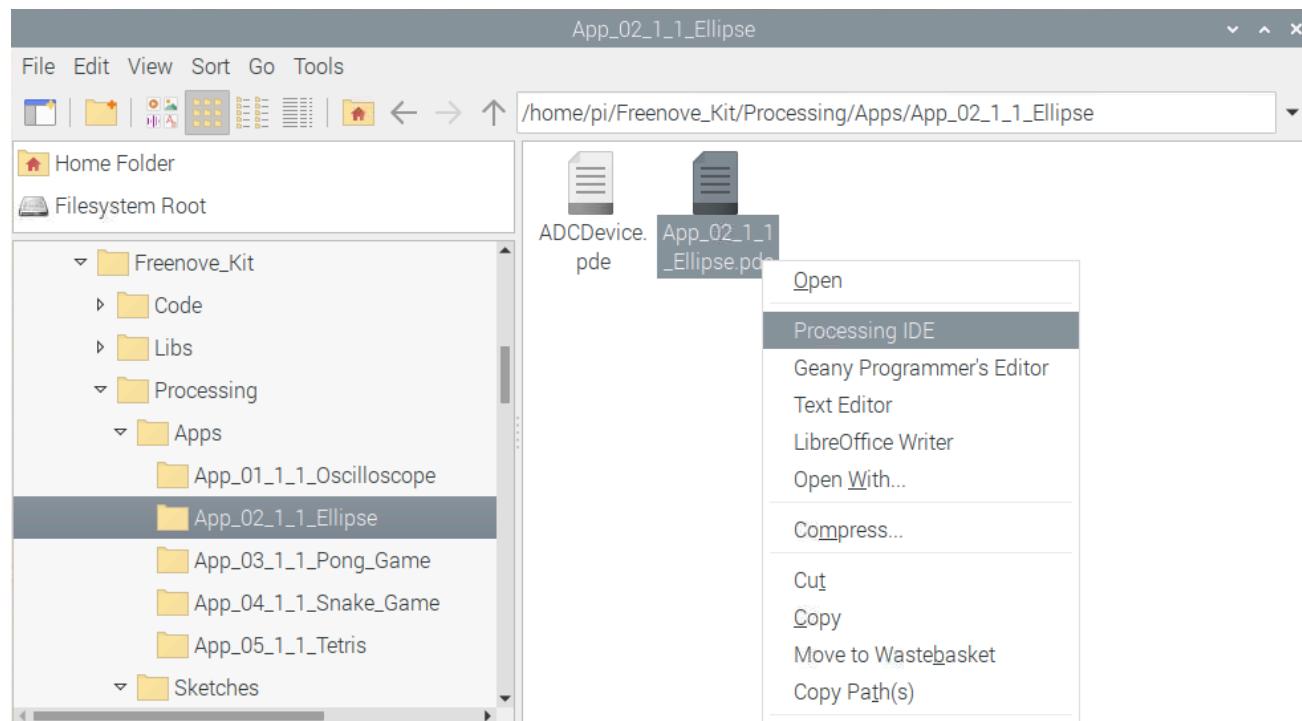

Or you can enter a command in the terminal to open the file App_02_1_1_Ellipse. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Apps/App_02_1_1_Ellipse/App_02_1_1_Ellipse.pde
```


Open Processing and click Run

The screenshot shows the Processing IDE interface. The title bar reads "App_02_1_1_Ellipse | Pro...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a stop button, and a refresh icon. The main workspace contains the following code:

```
17 ADCDevice adc = new ADCDevice();
18 void setup()
19 {
20     size(360, 360);
21     if (adc.detectI2C(0x48)) {
22         adc = new ADS7830(0x48);
23     } else {
24         println("Not found ADC Module!");
25         System.exit(-1);
26     }
27     background(102);
28     textAlign(CENTER, CENTER);
29     textSize(64);
30     text("Starting...", width / 2, (height - 40) / 2);
31     textSize(16);
32     text("www.freenove.com", width / 2, height - 20);
33 }
34
35 void draw()
```

At the bottom of the IDE, there are two tabs: "Console" and "Errors".

The result is as shown below. Rotating RP1 and RP2 potentiometers will change the length of the circle.

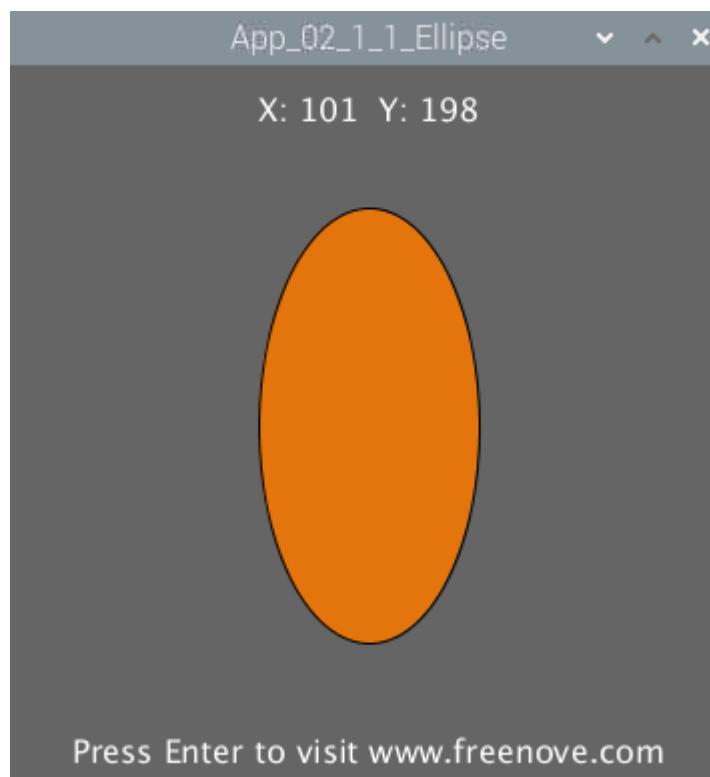

If you have any concerns, please send an email to: support@freenove.com

App 3 Pong Game


In this chapter, we will play a Pong Game.

App 3.1 Pong Game


Now, let's create and experience our own game.

Component List


Freenove Projects Board for Raspberry Pi

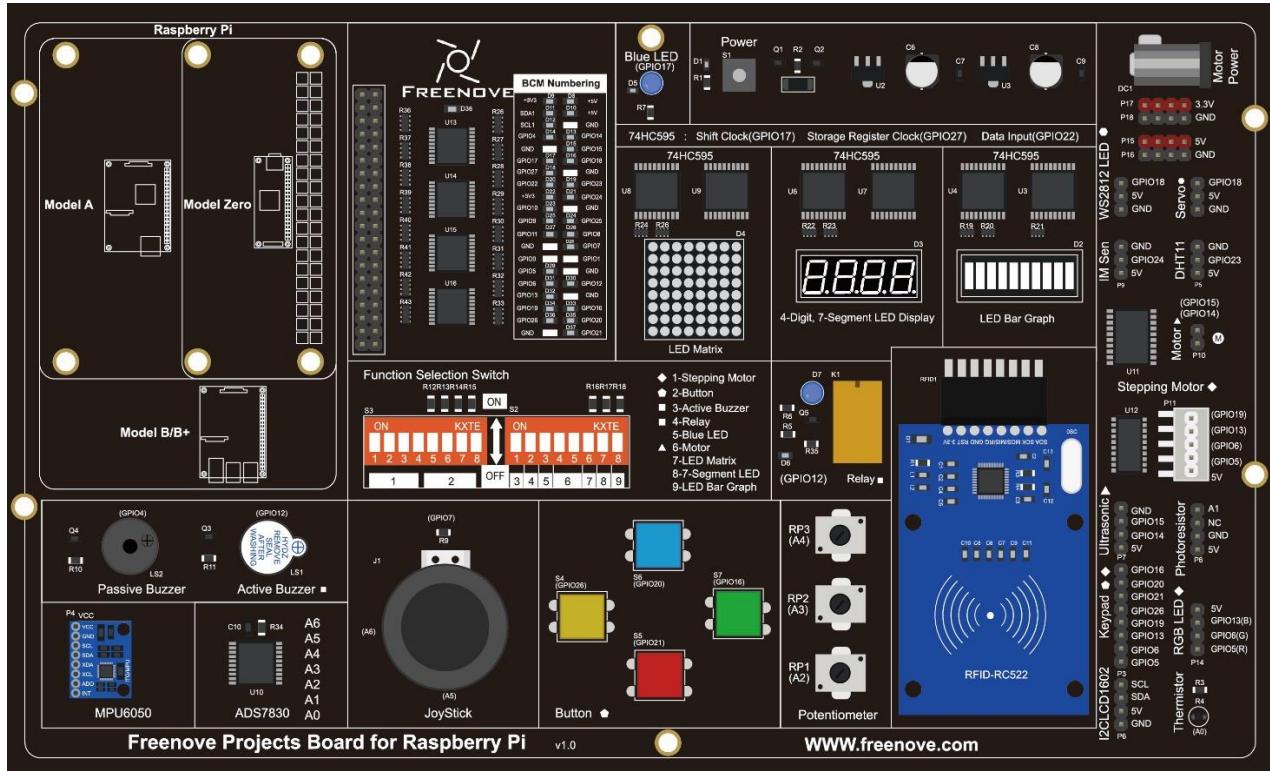


Raspberry Pi

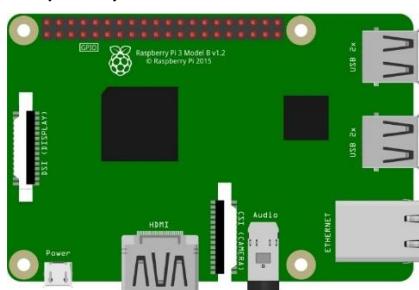


GPIO Ribbon Cable

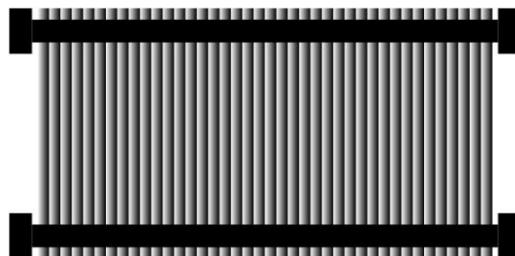

Circuit

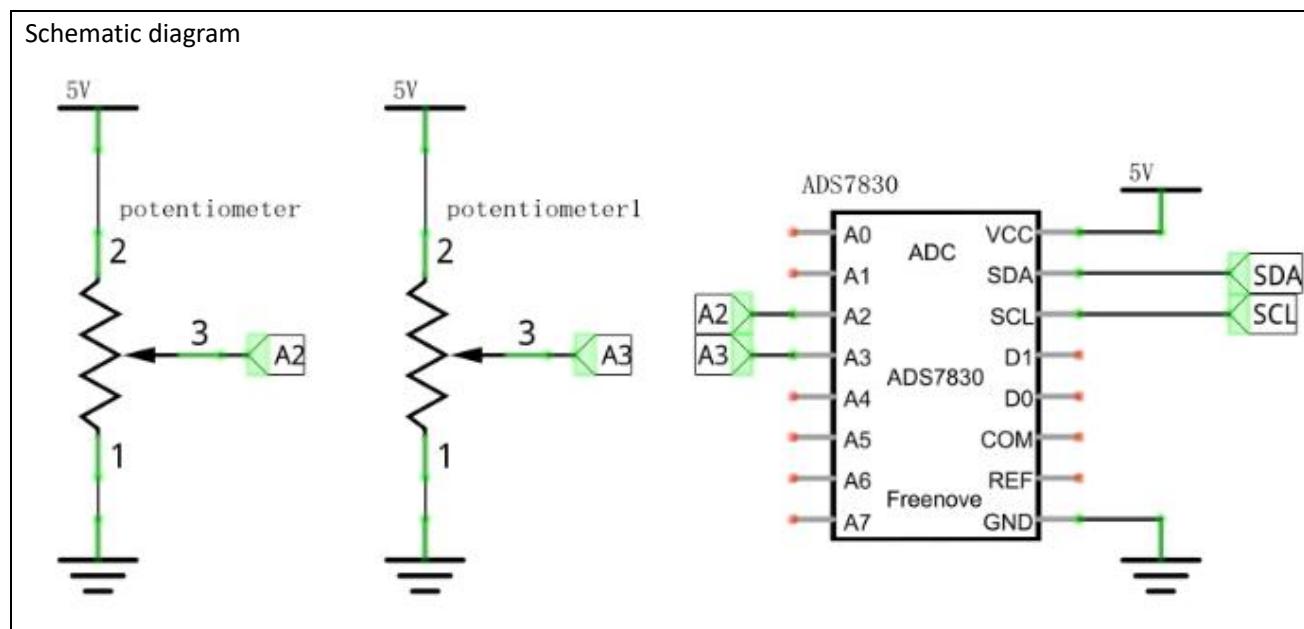

Hardware connection.

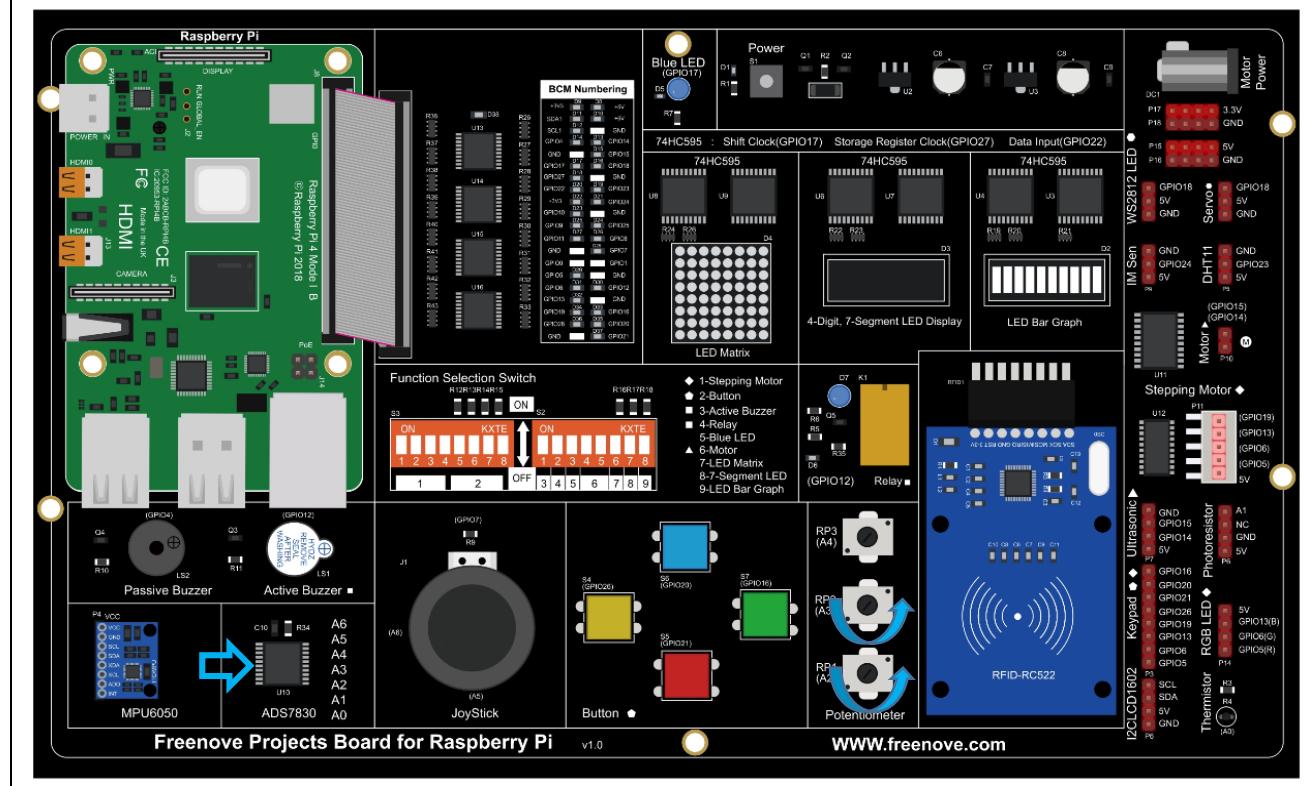

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 3.1.1 PongGame

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Apps/App_03_1_1_Pong_Game
```

And then right-click to select Processing IDE

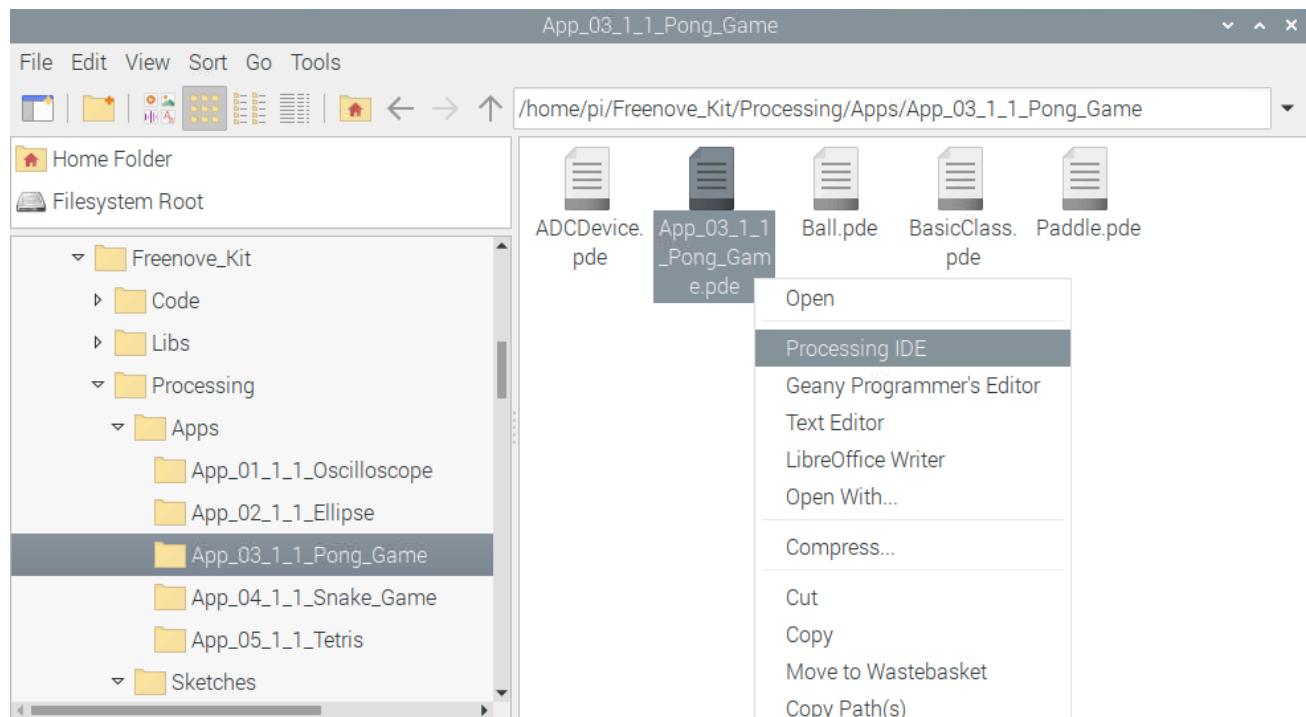

Or you can enter a command in the terminal to open the file App_03_1_1_Pong_Game. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Apps/App_03_1_1_Pong_Game/App_03_1_1_Pong_Game.pde
```

Open Processing and click Run

The screenshot shows the Processing IDE interface. The title bar reads "File Edit Sketch Debug Tools Help App_03_1_1_Pong_Gam...". Below the title bar are two circular buttons for play/pause and stop, and a "Java" dropdown menu. The main area displays the following Java code:

```
19 ADCDevice adc = new ADCDevice();
20
21 int winScore = 3;
22 float acceleration = 0.5;
23 float deviate = 1;
24 /* Private variables -----*/
25
26 Ball ball;
27 Paddle lPaddle, rPaddle;
28 int gameState = GameState.WELCOME;
29 int lScore, rScore;
30
31 void setup() {
32     size(640, 360);
33     if (adc.detectI2C(0x48)) {
34         adc = new ADS7830(0x48);
35     } else {
36         println("Not found ADC Module!");
37         System.exit(-1);
38 }
```

At the bottom of the IDE, there are tabs for "Console" and "Errors".



The result is as shown below. Player1 can control the pat by rotating RP1 and player2 can control by rotating RP2.



Pressing the space bar keyboard can start the game. Then you can try to rotate the potentiometer to control the movement of paddles:



Use potentiometer to control the movement of paddle to hit back the ball. The rules are the same as the classic Pong game:



The game will be over when one side gets three points. Pressing the space can restart the game:



You can restart the game by pressing the space bar at any time during the game.

If you have any concerns, please send an email to: support@freenove.com



App 4 Snake Game

In this chapter, we will play a classic game, snake.

App 4.1 Snake Game

Now, let's create and experience our own game.


Component List

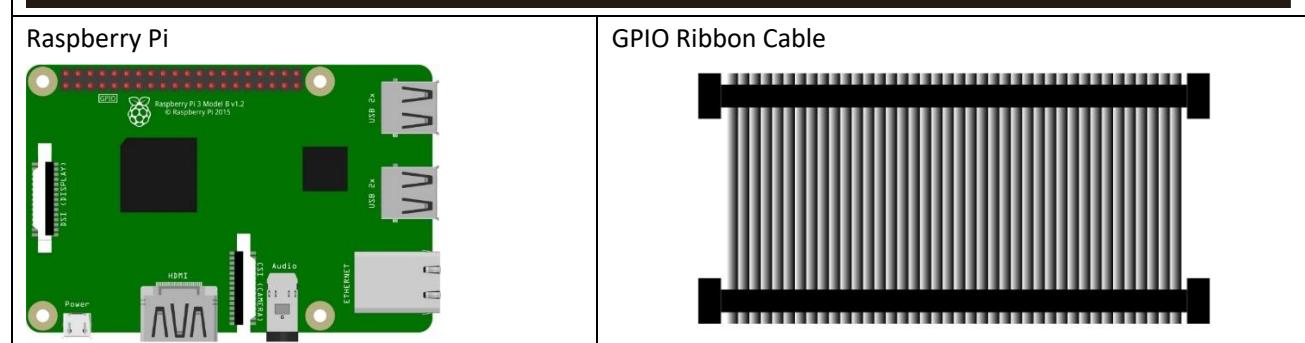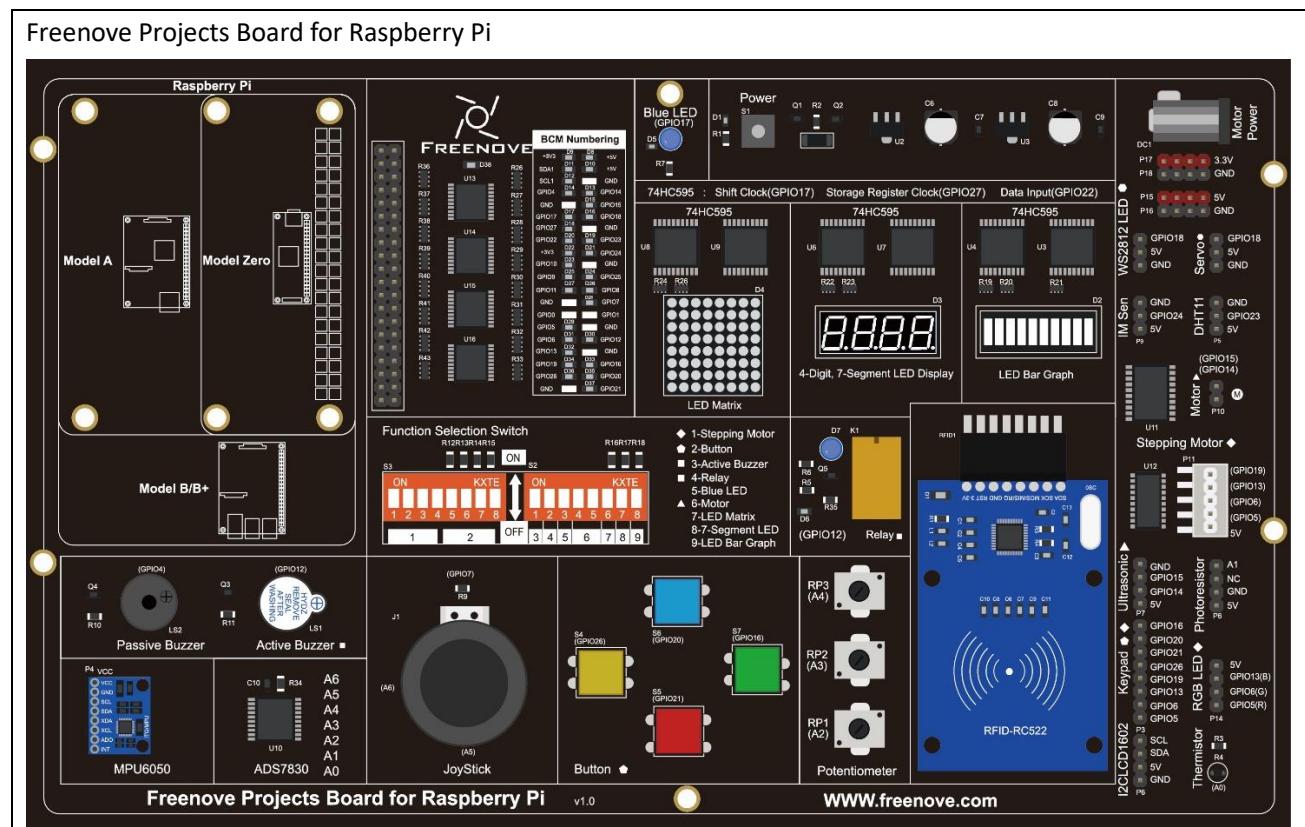




Circuit

Schematic diagram

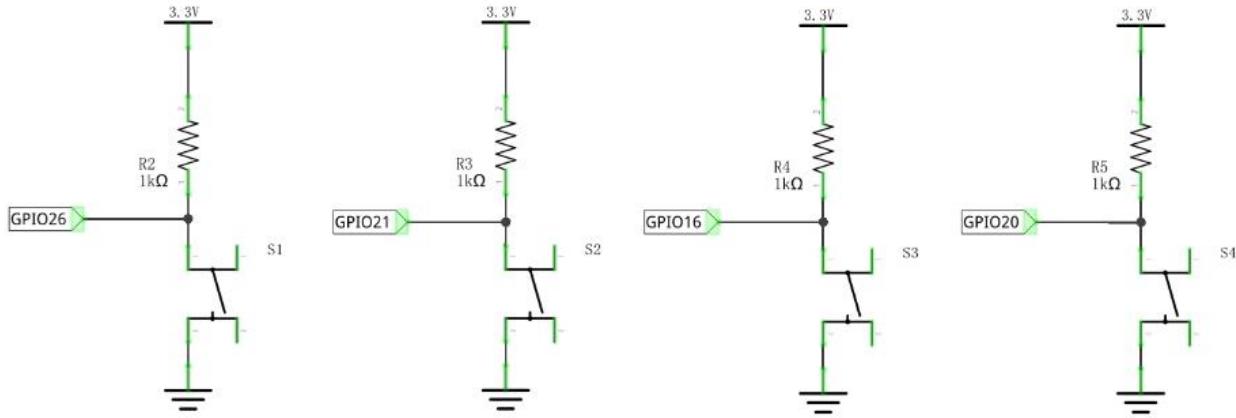

Hardware connection.

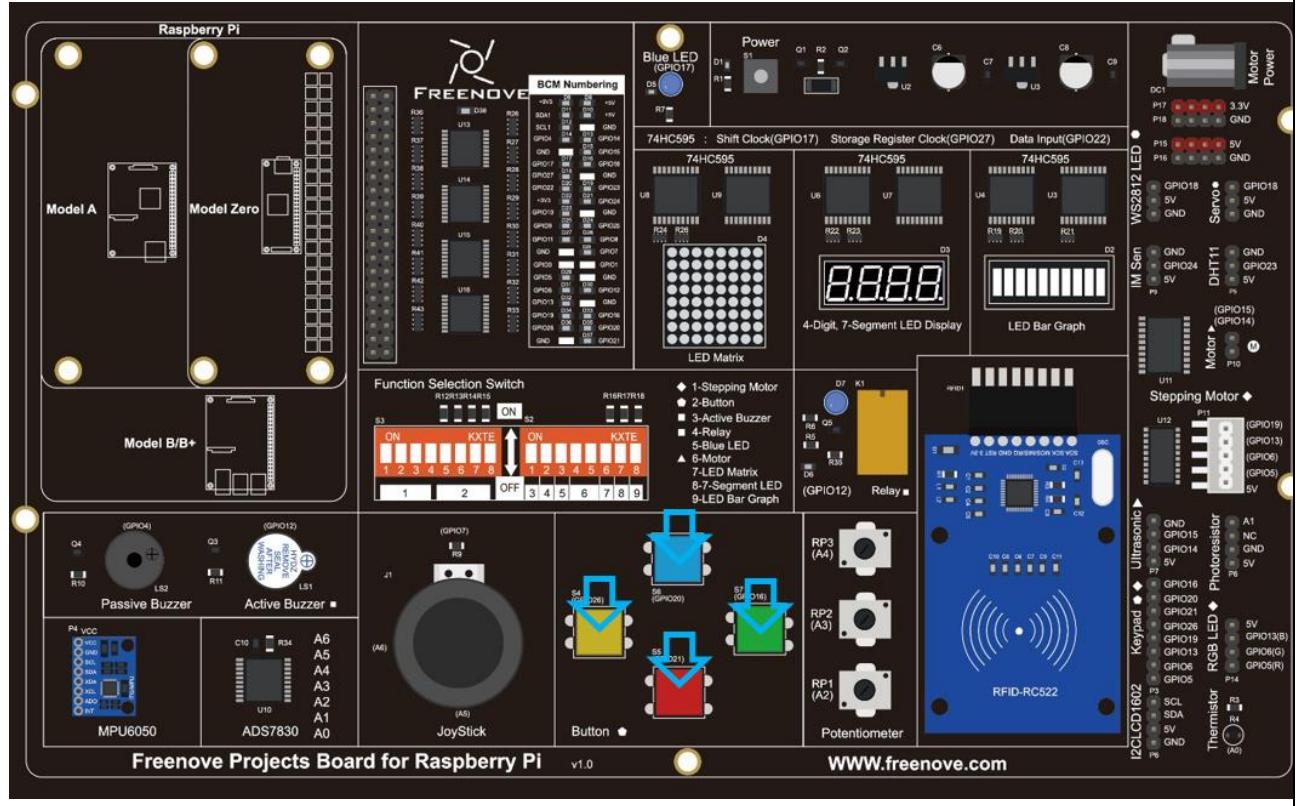

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 4.1.1 SnakeGame

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Apps/App_04_1_1_Snake_Game
```

And then right-click to select Processing IDE

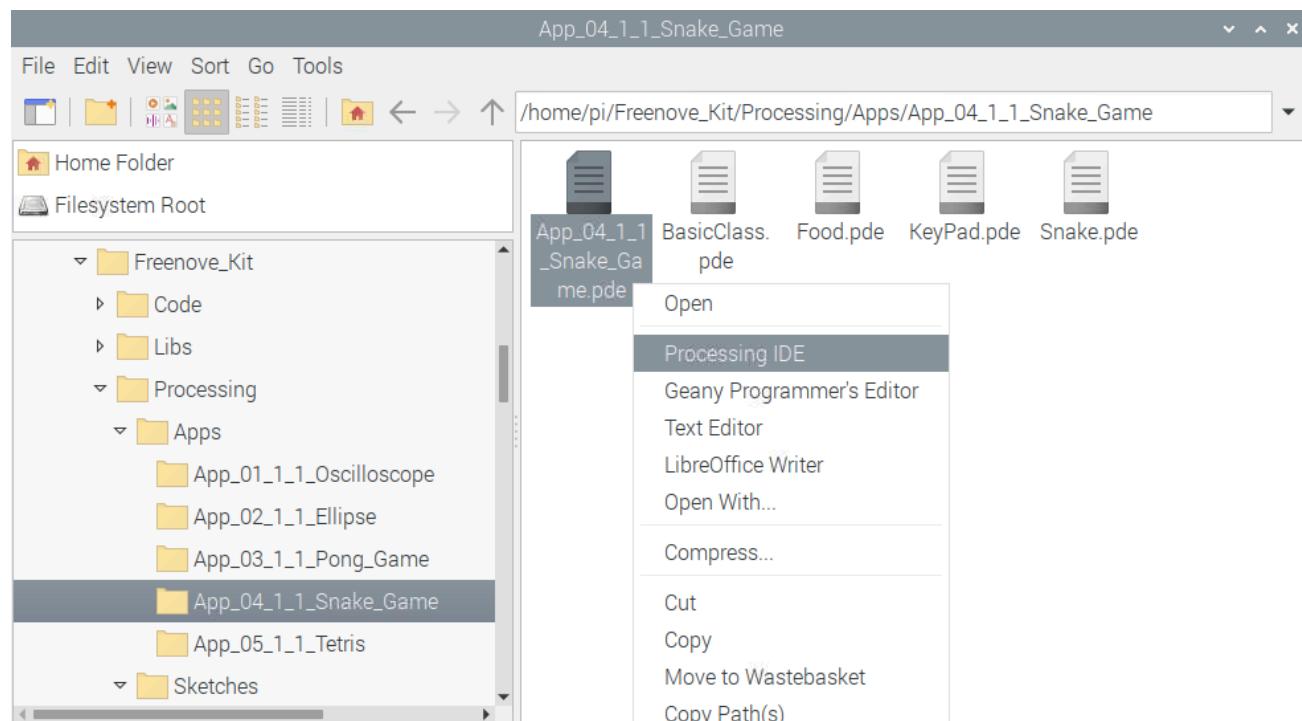

Or you can enter a command in the terminal to open the file App_04_1_1_Snake_Game. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Apps/App_04_1_1_Snake_Game/App_04_1_1_Snake_Game.pde
```

Open Processing and click Run.

The screenshot shows the Processing IDE interface. The title bar reads "File Edit Sketch Debug Tools Help App_04_1_1_Snake_Ga...". Below the title bar are two circular buttons (play and stop) and a status indicator (blue circle with a white play icon). A dropdown menu shows "Java". The main workspace contains the following Java code:


```
18 int threshold = 400;
19
20 KeyPad keyUp = new KeyPad(20);
21 KeyPad keyDown = new KeyPad(21);
22 KeyPad keyLeft = new KeyPad(26);
23 KeyPad keyRight = new KeyPad(16);
24
25 Snake snake;
26 Food food;
27
28 void setup() {
29     print("Starting ... \n");
30     size(640, 360);
31     background(102);
32     textAlign(CENTER, CENTER);
33     textSize(64);
34     text("Starting...", width / 2, (height - 40) / 2);
35     textSize(16);
36     text("freenove.com", width / 2, height - 20);
```

The code initializes variables for a snake and food, sets up the window size and background color, and prints a starting message along with the URL "freenove.com" at the bottom center.

Console


Errors

The result is as shown below. Pressing Space to start the game.

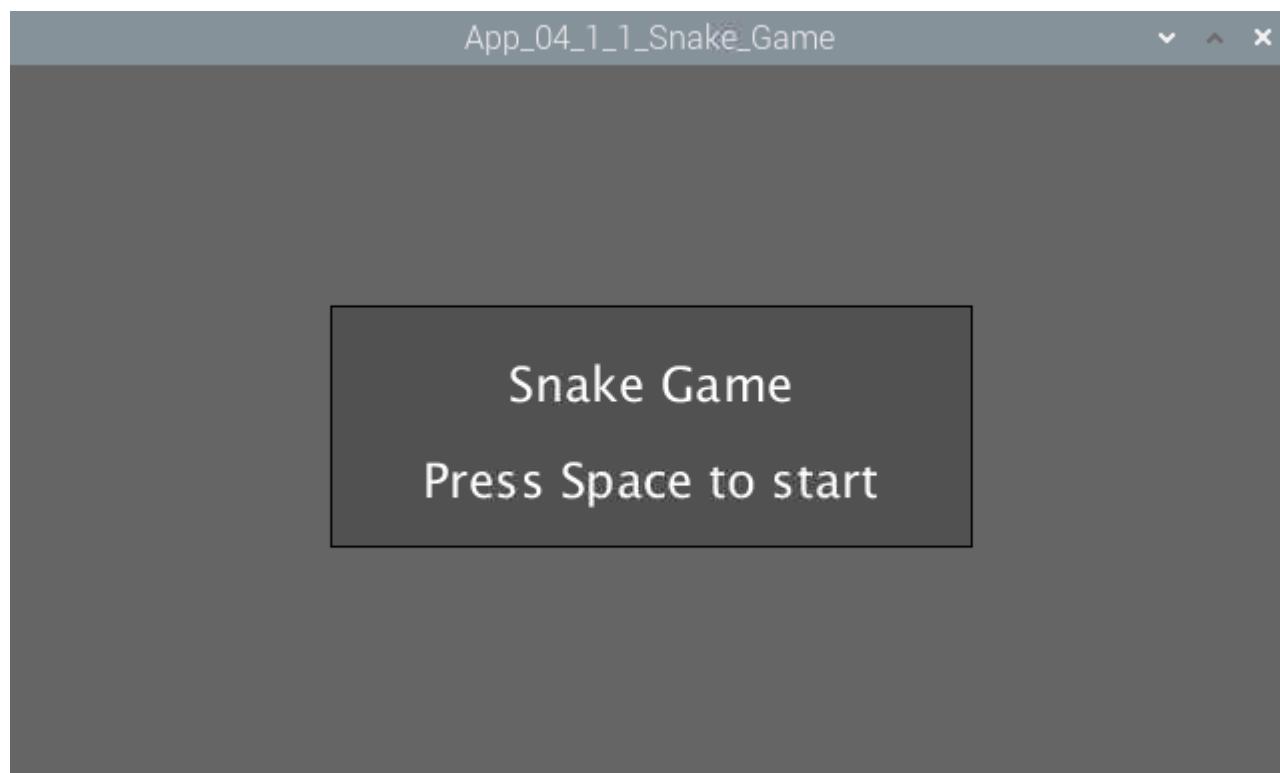





Pressing the space can start the game:

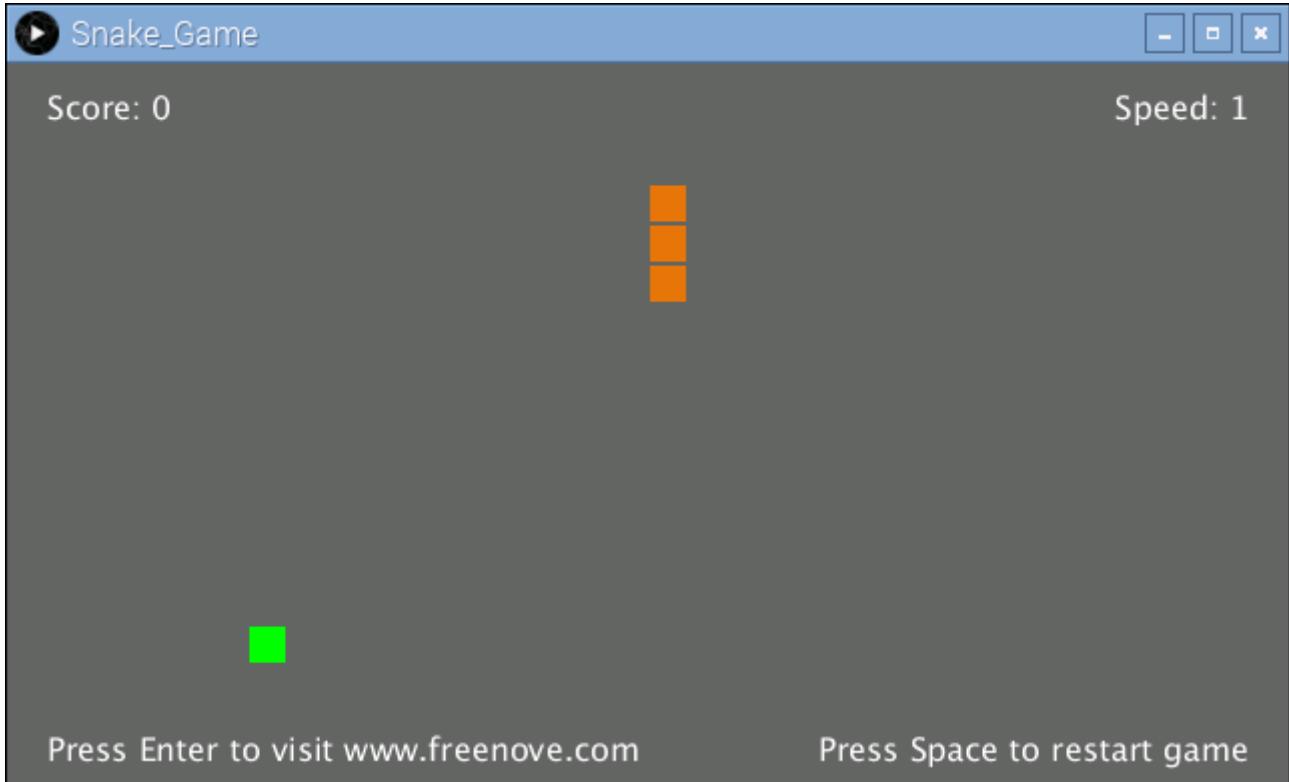

You can control the movement direction of the snake through the four buttons in circuit or four arrow keys on the keyboard. The rules are the same as the classic Snake game:

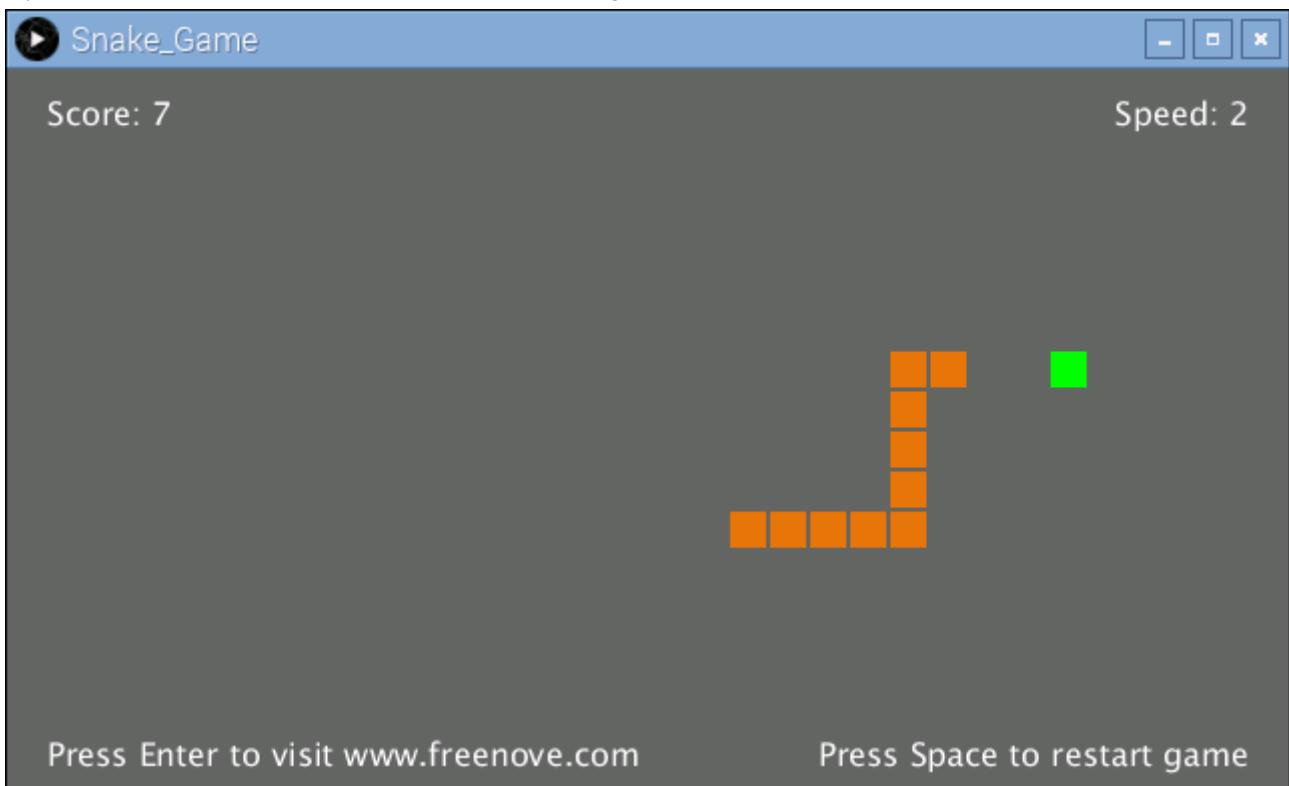

When the game is over, pressing the space can restart the game:

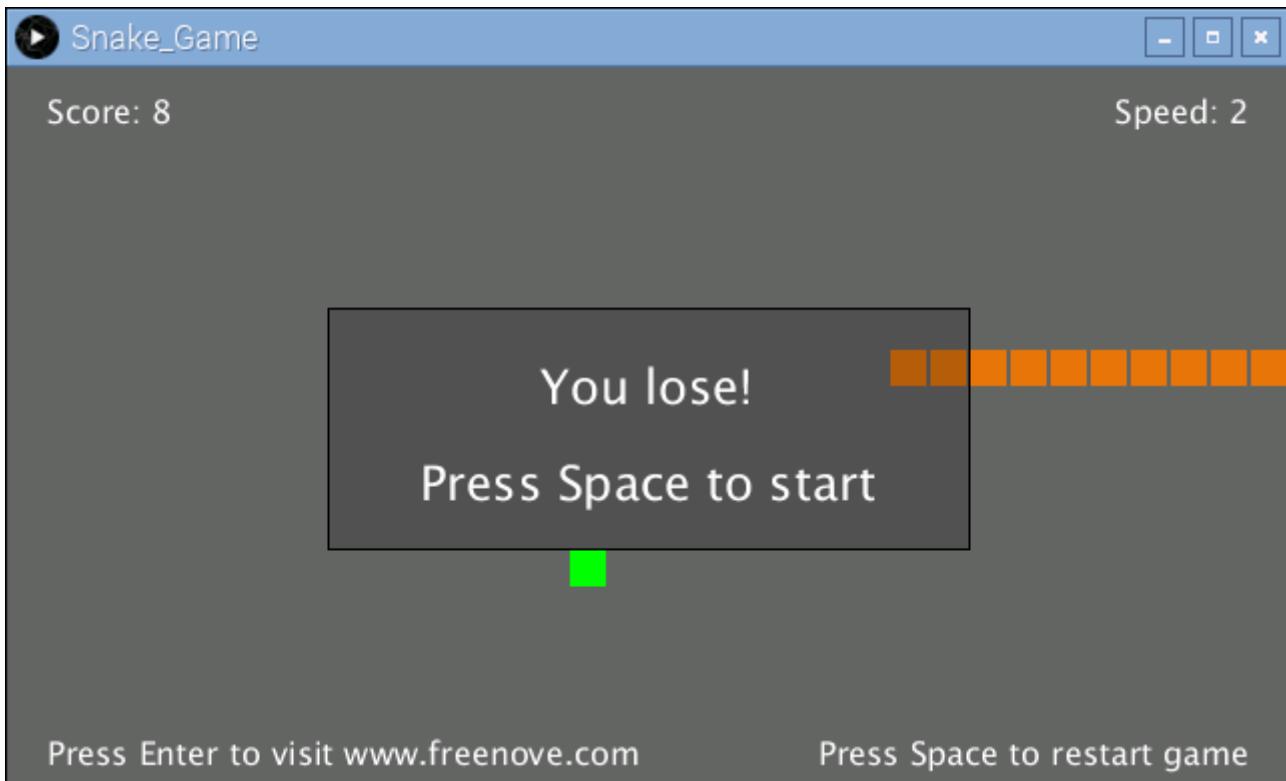

You can restart the game by pressing the space bar at any time during the game.

If you have any concerns, please send an email to: support@freenove.com

App 5 Tetris Game


In this chapter, we will play a game, Tetris game.

App 5.1 Tetris Game


Now, let's create and experience our own game.

Component List


Freenove Projects Board for Raspberry Pi

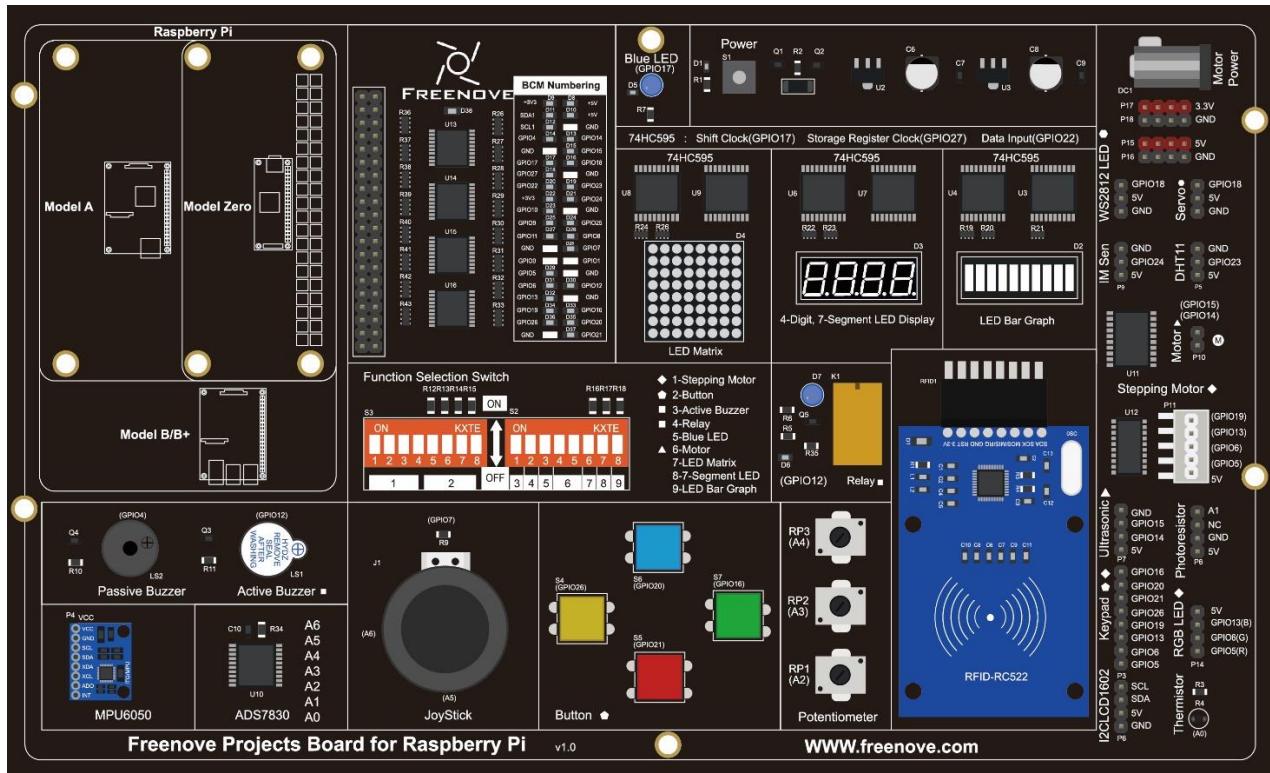

Raspberry Pi

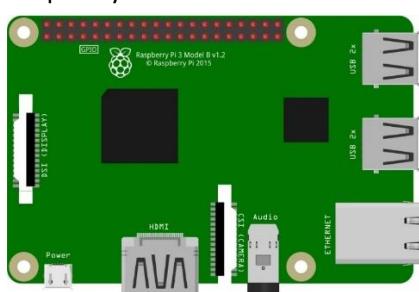


GPIO Ribbon Cable

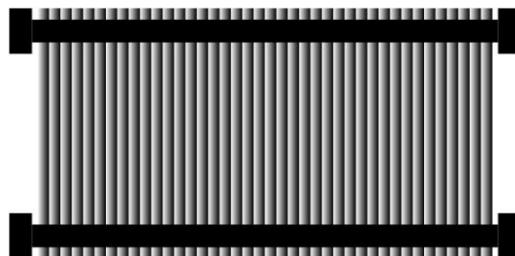


Circuit

Schematic diagram

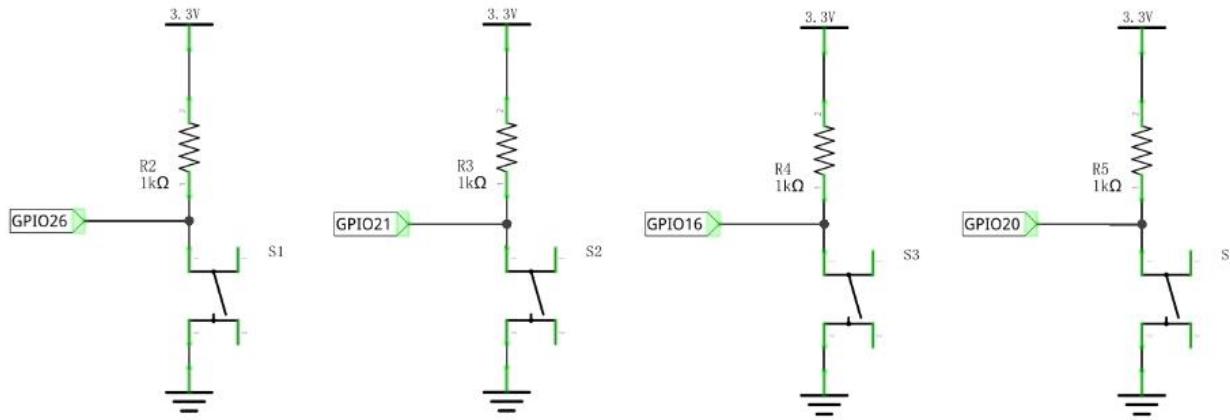

Hardware connection.

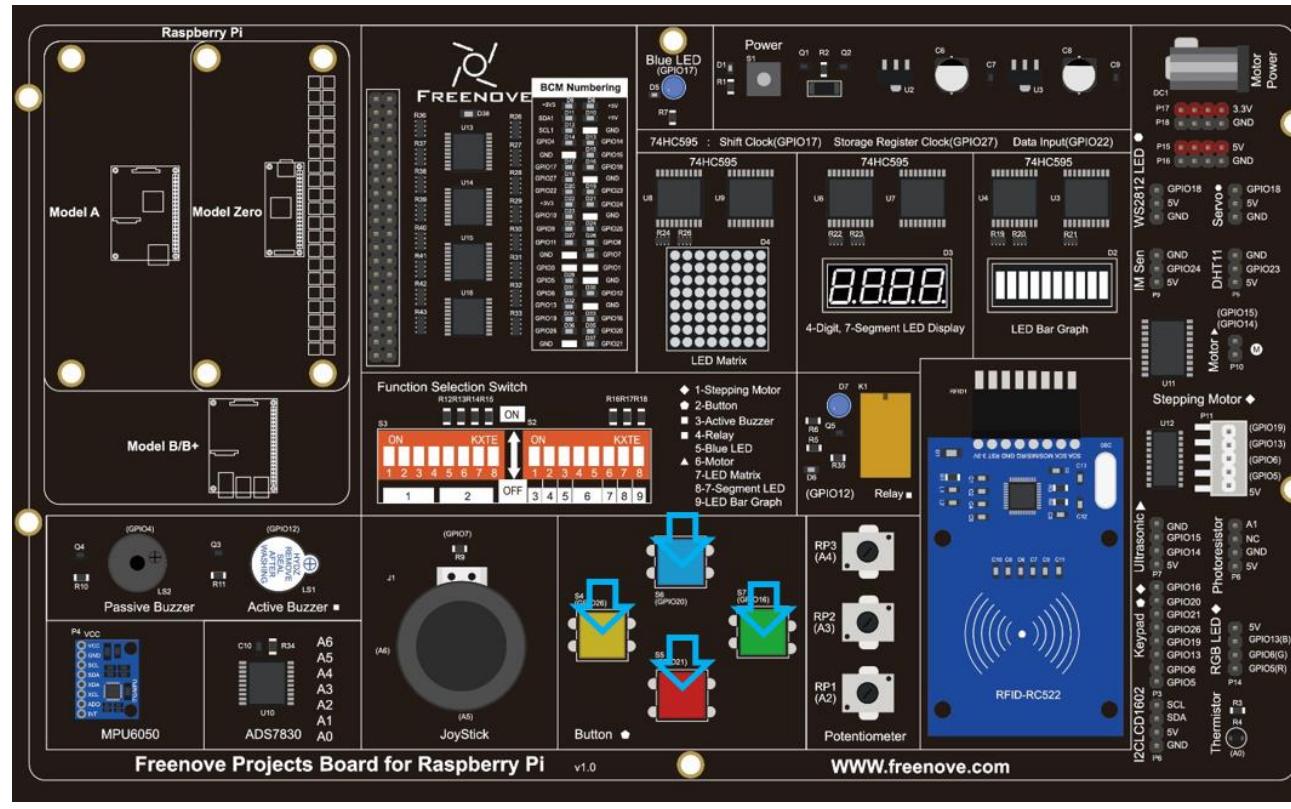

If you have any concerns, please send an email to: support@freenove.com

Sketch


Sketch 5.1.1 TetrisGame

If you have any concerns, please send an email to: support@freenove.com

First, enter where the project is located:

```
/home/pi/Freenove_Kit/Processing/Apps/App_05_1_1_Tetris
```


And then right-click to select Processing IDE

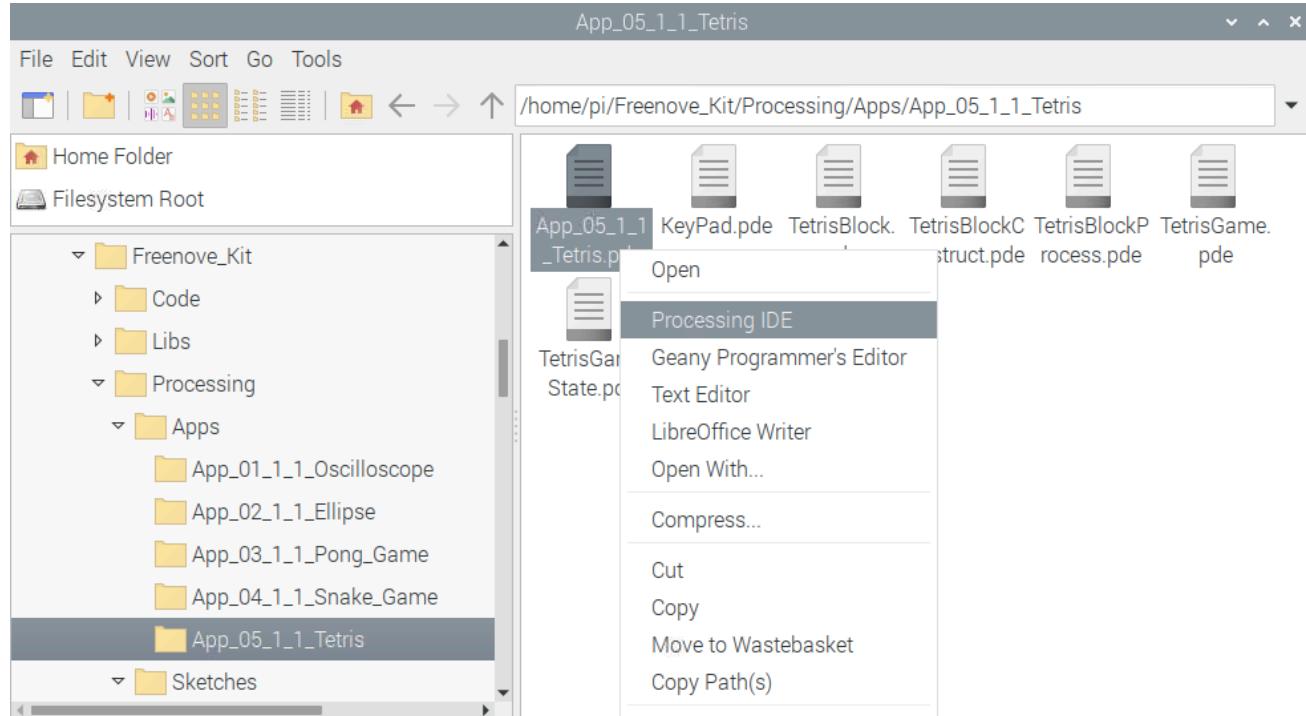

Or you can enter a command in the terminal to open the file App_05_1_1_Tetris. (The following is only one line of command. There is a Space after Processing.)

```
processing ~/Freenove_Kit/Processing/Apps/App_05_1_1_Tetris/App_05_1_1_Tetris.pde
```

Open Processing and click Run

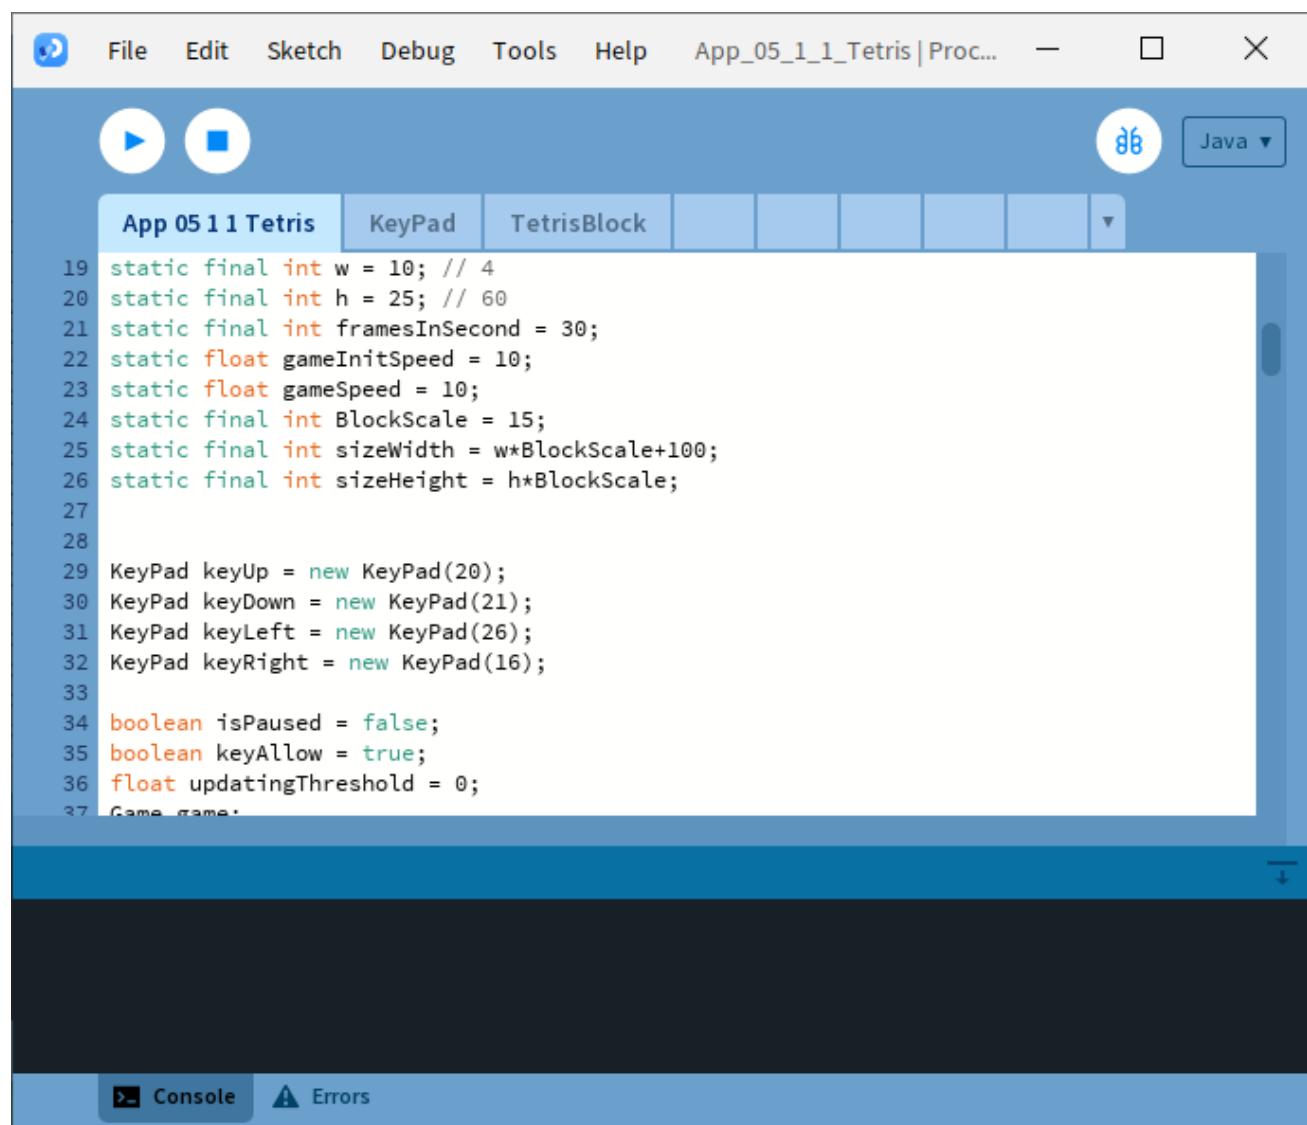



The screenshot shows the Processing IDE interface. The title bar reads "App_05_1_1_Tetris | Proc...". The menu bar includes File, Edit, Sketch, Debug, Tools, Help, and Java. Below the menu is a toolbar with a play button, a square button, and a help icon. The main workspace contains the following Java code for a Tetris game:

```
19 static final int w = 10; // 4
20 static final int h = 25; // 60
21 static final int framesInSecond = 30;
22 static float gameInitSpeed = 10;
23 static float gameSpeed = 10;
24 static final int BlockScale = 15;
25 static final int sizeWidth = w*BlockScale+100;
26 static final int sizeHeight = h*BlockScale;
27
28
29 KeyPad keyUp = new KeyPad(20);
30 KeyPad keyDown = new KeyPad(21);
31 KeyPad keyLeft = new KeyPad(26);
32 KeyPad keyRight = new KeyPad(16);
33
34 boolean isPaused = false;
35 boolean keyAllow = true;
36 float updatingThreshold = 0;
37 Game game;
```



At the bottom of the IDE, there are tabs for "Console" and "Errors".





The result is as shown below.

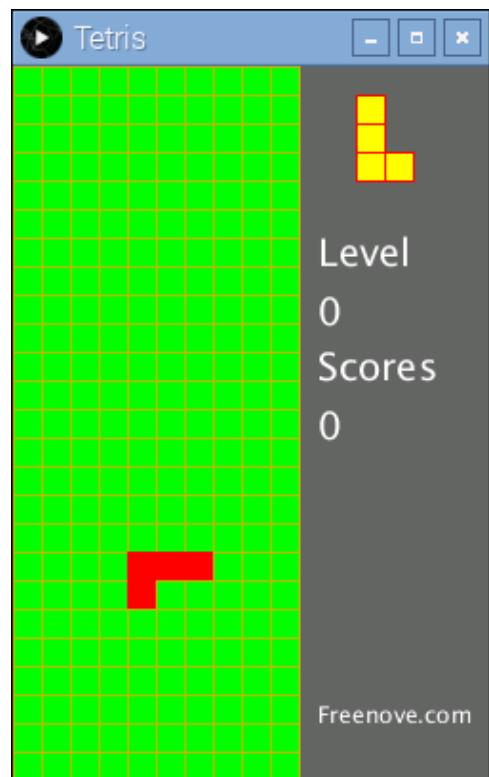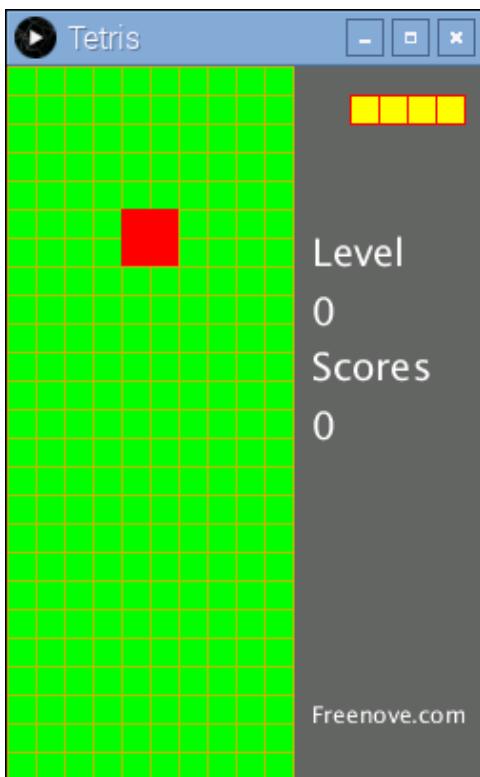


The left and right button in the circuit can control the movement of the falling block to left or right. And the button below can accelerate falling of the block. The button above is used for rotating of the block. Four direction keys on keyboard can also be used to play the game.

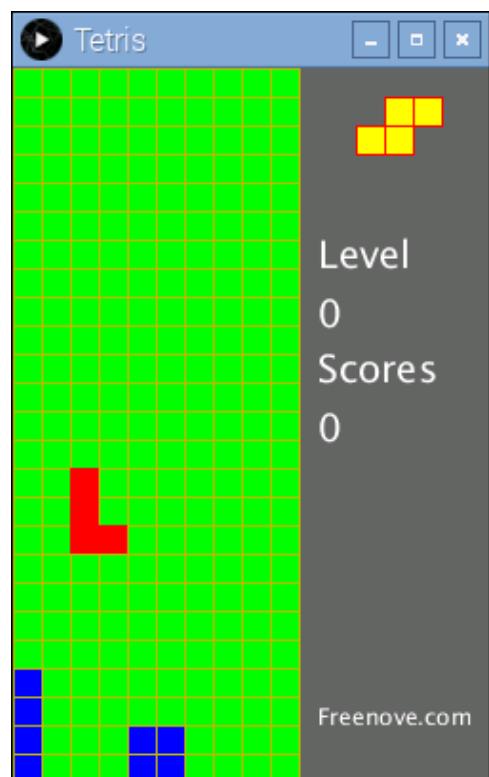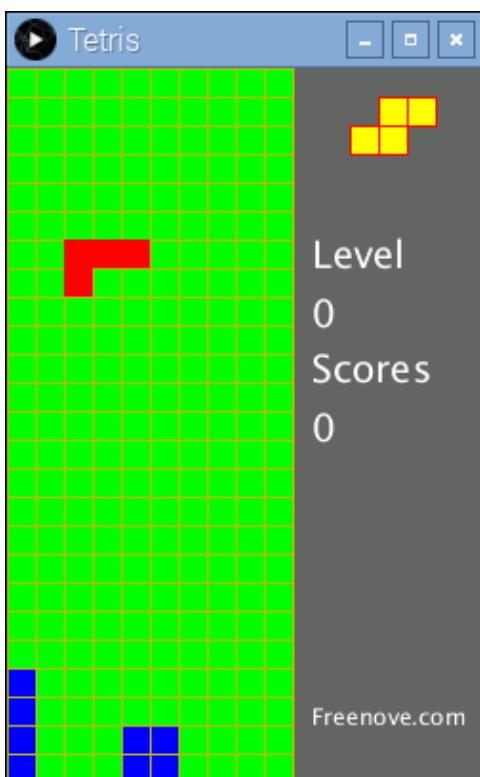

In the process of game, pressing the space bar on the keyboard can pause the game. The right side of the Display Window shows the upcoming block, the current game speed and the current score. The more lines you eliminate once, the higher the scores you will get. If you eliminate one line once, you will get 10 points. If you eliminate 4 lines once, you will get 70 points.

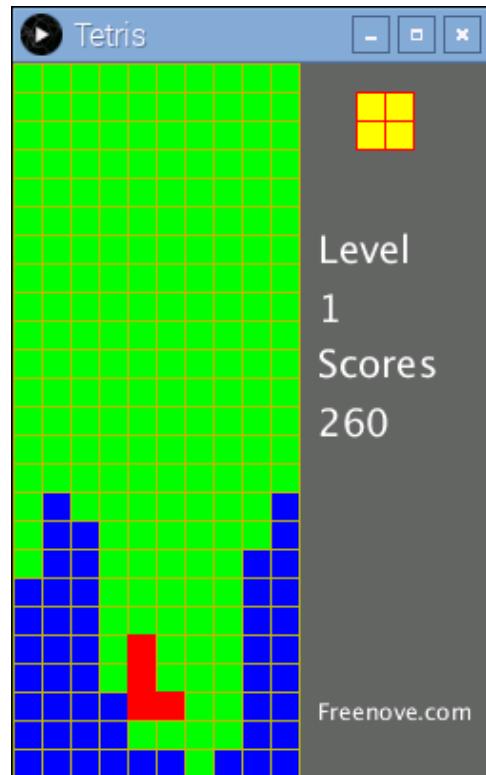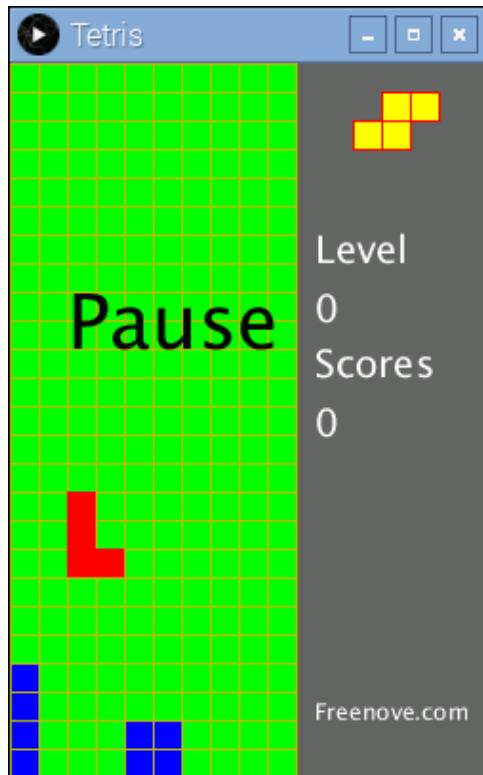

When the blocks are beyond the screen, the game is over. After the game is over, press the space bar to start a new game.

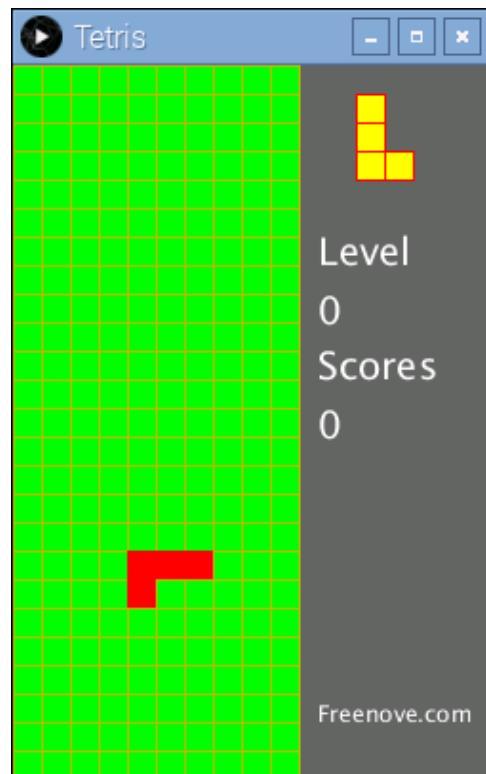

What's Next?

THANK YOU for participating in this learning experience!

We have reached the end of this Tutorial. If you find errors, omissions or you have suggestions and/or questions about the Tutorial or component contents of this Kit, please feel free to contact us: support@freenove.com. We will make every effort to make changes and correct errors as soon as feasibly possible and publish a revised version.

If you want to learn more about Arduino, Raspberry Pi, Smart Cars, Robotics and other interesting products in science and technology, please continue to visit our website. We will continue to launch fun, cost-effective, innovative and exciting products.

<http://www.freenove.com/>

Thank you again for choosing Freenove products.