

Welcome

Thank you for choosing Freenove products!

Getting Started

When reading this, you should have downloaded the ZIP file for this product.

Unzip it and you will get a folder containing tutorials and related files. Please start with this PDF tutorial.

- ! Unzip the ZIP file instead of opening the file in the ZIP file directly.
- ! Do not move, delete or rename files in the folder just unzipped.

Get Support

Encounter problems? Don't worry! Refer to "TroubleShooting.pdf" or contact us.

When there are packaging damage, quality problems, questions encountering in use, etc., just send us an email. We will reply to you within one working day and provide a solution.

support@freenove.com

Safety and Precautions

Please follow the following safety precautions when using or storing this product:

- Keep this product out of the reach of children under 6 years old.
- This product should be used only when there is adult supervision present as young children lack necessary judgment regarding safety and the consequences of product misuse.
- This product contains small parts and parts, which are sharp. This product contains electrically conductive parts. Use caution with electrically conductive parts near or around power supplies, batteries and powered (live) circuits.
- When the product is turned ON, activated or tested, some parts will move or rotate. To avoid injuries to hands and fingers, keep them away from any moving parts!
- It is possible that an improperly connected or shorted circuit may cause overheating. Should this happen, immediately disconnect the power supply or remove the batteries and do not touch anything until it cools down! When everything is safe and cool, review the product tutorial to identify the cause.
- Only operate the product in accordance with the instructions and guidelines of this tutorial, otherwise parts may be damaged or you could be injured.
- Store the product in a cool dry place and avoid exposing the product to direct sunlight.
- After use, always turn the power OFF and remove or unplug the batteries before storing.

Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)

About Freenove

Freenove provides open source electronic products and services worldwide.

Freenove is committed to assist customers in their education of robotics, programming and electronic circuits so that they may transform their creative ideas into prototypes and new and innovative products. To this end, our services include but are not limited to:

- Educational and Entertaining Project Kits for Robots, Smart Cars and Drones
- Educational Kits to Learn Robotic Software Systems for Arduino, Raspberry Pi and micro:bit
- Electronic Component Assortments, Electronic Modules and Specialized Tools
- **Product Development and Customization Services**

You can find more about Freenove and get our latest news and updates through our website:

<http://www.freenove.com>

Copyright

All the files, materials and instructional guides provided are released under [Creative Commons Attribution-NonCommercial-ShareAlike 3.0 Unported License](#). A copy of this license can be found in the folder containing the Tutorial and software files associated with this product.



This means you can use these resources in your own derived works, in part or completely, but **NOT for the intent or purpose of commercial use.**

Freenove brand and logo are copyright of Freenove Creative Technology Co., Ltd. and cannot be used without written permission.



Other registered trademarks and their owners appearing in this document:

Arduino® is a trademark of Arduino LLC (<https://www.arduino.cc/>).

Raspberry Pi® is a trademark of Raspberry Pi Foundation (<https://www.raspberrypi.org/>).

Raspberry Pi Pico® is a trademark of Raspberry Pi Foundation (<https://www.raspberrypi.org/>).

micro:bit® is a trademark of Micro:bit Educational Foundation (<https://www.microbit.org/>).

ESPRESSIF® and ESP32® are trademarks of ESPRESSIF Systems (Shanghai) Co, Ltd (<https://www.espressif.com/>).

Any concerns? ✉ support@freenove.com

Contents

Welcome.....	1
Contents	1
Preface.....	4
Raspberry Pi Pico.....	5
Raspberry Pi Pico W	8
Chapter 0 Getting Ready (Important).....	11
Programming Software.....	11
Installation of Development Board Support Package	14
Uploading Adruino-compatible Firmware for Pico.....	16
Paste the Sticker on the Breadboard.....	20
Chapter 1 LED (Important).....	21
Project 1.1 Blink	21
Project 1.2 Blink	26
Chapter 2 Button & LED	31
Project 2.1 Button & LED.....	32
Project 2.2 MINI table lamp.....	36
Chapter 3 LED Bar	40
Project 3.1 Flowing Light	40
Chapter 4 Analog & PWM	45
Project 4.1 Breathing LED.....	45
Project 4.2 Meteor Flowing Light	51
Chapter 5 RGBLED	56
Project 5.1 Random Color Light.....	56
Project 5.2 Gradient Color Light.....	61
Chapter 6 NeoPixel	63
Project 6.1 NeoPixel	63
Project 6.2 Rainbow Light.....	70
Chapter 7 Buzzer	73
Project 7.1 Doorbell.....	73

Any concerns?  support@freenove.com

Project 7.2 Alertor	79
Chapter 8 Serial Communication.....	84
Project 8.1 Serial Print.....	84
Project 8.2 Serial Read and Write	88
Chapter 9 AD Converter.....	91
Project 9.1 Read the Voltage of Potentiometer.....	91
Chapter 10 Potentiometer & LED.....	97
Project 10.1 Soft Light	97
Project 10.2 Soft Colorful Light	101
Project 10.3 Soft Rainbow Light.....	105
Chapter 11 Photoresistor & LED.....	109
Project 11.1 Control LED through Photoresistor.....	109
Chapter 12 Thermistor	114
Project 12.1 Thermometer	114
Chapter 13 Joystick	119
Project 13.1 Joystick	119
Chapter 14 74HC595 & LED Bar Graph.....	124
Project 14.1 Flowing Water Light.....	124
Chapter 15 74HC595 & 7-Segment Display.....	130
Project 15.1 7-Segment Display	130
Chapter 16 L293D & Motor.....	137
Project 16.1 Control Motor with Potentiometer.....	137
Chapter 17 Servo	144
Project 17.1 Servo Sweep.....	144
Project 17.2 Servo Knob	150
Chapter 18 LCD1602	153
Project 18.1 LCD1602	153
Chapter 19 Ultrasonic Ranging	161
Project 19.1 Ultrasonic Ranging	161
Project 19.2 Ultrasonic Ranging	167
Chapter 20 Infrared Remote	170

Project 20.1 Infrared Remote Control	170
Project 20.2 Control LED through Infrared Remote	178
Chapter 21 WiFi Working Modes (Only for Pico W).....	183
Project 21.1 Station mode.....	183
Project 21.2 AP mode.....	188
Project 21.3 AP+Station mode.....	193
Chapter 22 TCP/IP (Only for Pico W).....	197
Project 22.1 As Client.....	197
Project 22.2 As Server.....	211
Chapter 23 Control LED with Web (Only for Pico W).....	217
Project 23.1 Control the LED with Web.....	217
What's Next?	225

Preface

Raspberry Pi Pico is a tiny, fast, and versatile board built using RP2040, a brand new microcontroller chip designed by Raspberry Pi in the UK. Supporting Python and C/C++ development, it is perfect for DIY projects. In this tutorial, we use Arduino to learn Pico. If you want to learn the Python version, please refer to another tutorial: [python_tutorial.pdf](#).

Using Arduino IDE as the development environment for Raspberry Pi Pico allows users to learn Pico better and more quickly, which is just like developing Arduino programs. In addition, resources such as Arduino's libraries can be directly used to greatly improve the efficiency of development.

If you haven't downloaded the related material for Raspberry Pi Pico tutorial, you can download it from this link:

https://github.com/Freenove/Freenove_Super_Starter_Kit_for_Raspberry_Pi_Pico

In this tutorial, we devide each project into 4 sections:

- 1, Component list: helps users to learn and find what components are needed in each project.
- 2, Component Knowledge: allows you to learn the features and usage of the components.
- 3, Circuit: assists to build circuit for each project.
- 4, Sketches and comments: makes it easier for users to learn to use Raspberry Pi Pico and make secondary development.


After completing the projects in this tutorial, you can also combine the components in different projects to make your own smart homes, smart car, robot, etc., bringing your imagination and creativity to life with Raspberry Pi Pico.

If you have any problems or difficulties using this product, please contact us for quick and free technical support: support@freenove.com


Raspberry Pi Pico

Raspberry Pi Pico applies to all chapters except Wireless in this tutorial.

Before learning Pico, we need to know about it. Below is an imitated diagram of Pico, which looks very similar to the actual Pico.

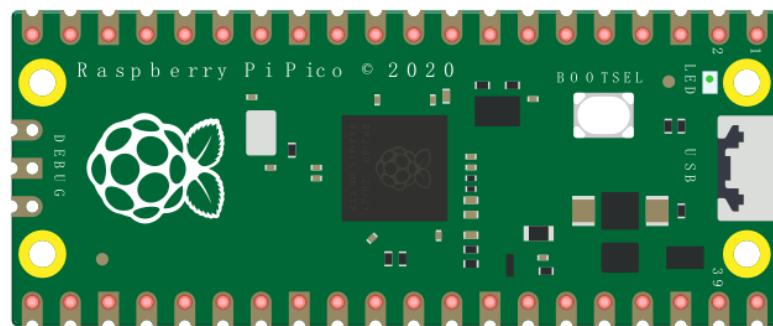

The hardware interfaces are distributed as follows:

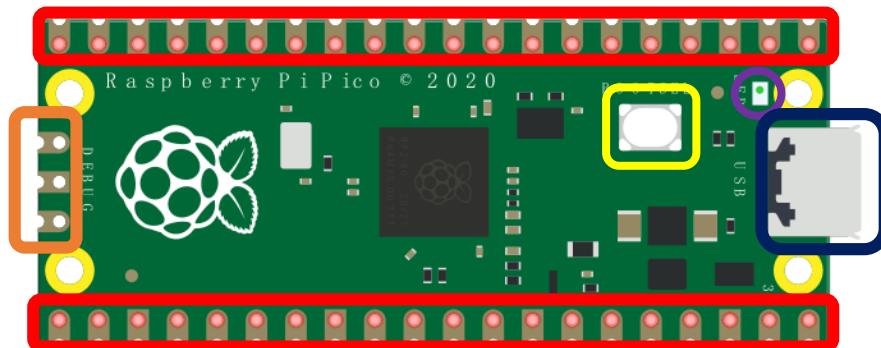

Frame color	Description
	Pins
	BOOTSEL button
	USB port
	LED
	Debugging

Function definition of pins:



Color	Pins	Color	Pins
Black	GND	Red	Power
Green	GPIO	Dark Green	ADC
Purple	UART(defualt)	Lavender	UART
Magenta	SPI	Blue	I2C
Light Red	System Control	Orange	Debugging

For details: <https://datasheets.raspberrypi.org/pico/pico-datasheet.pdf>

UART, I2C, SPI Defalt Pin

In Arduino IDE, the default pins of serial port are Pin0 and Pin1.

Note: Serial port is virtualized by RP2040. Therefore, when using the serial port, please enable the verification function of DTR. It can work under any baud rate.

UART

Function	Default
UART_BAUDRATE	X
UART_BITS	8
UART_STOP	1
UART_TX	Pin 0
UART_RX	Pin 1

I2C

Function	Default
I2C Frequency	400000
I2C_SDA	Pin 4
I2C_SCL	Pin 5


SPI

Function	Default
SPI_BAUDRATE	1000000
SPI_POLARITY	0
SPI_PHASE	0
SPI_BITS	8
SPI_FIRSTBIT	MSB
SPI_SCK	Pin 18
SPI_MOSI	Pin 19
SPI_MISO	Pin 16
SPI_SS	Pin 17


Raspberry Pi Pico W

Raspberry Pi Pico W applies to all chapters in this tutorial.

Raspberry Pi Pico W adds CYW43439 as the WiFi function on the basis of Raspberry Pi Pico. It is connected to RP2040 chip through SPI interface.

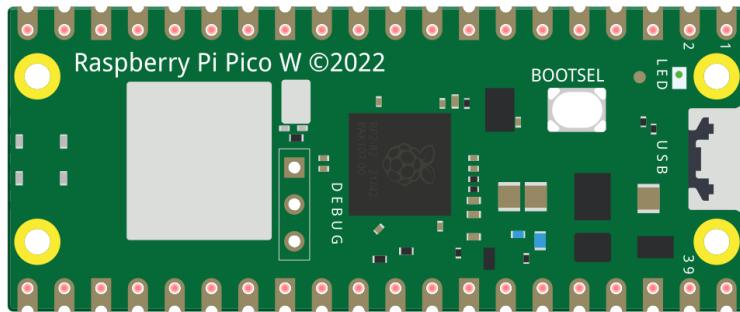


The hardware interfaces are distributed as follows:

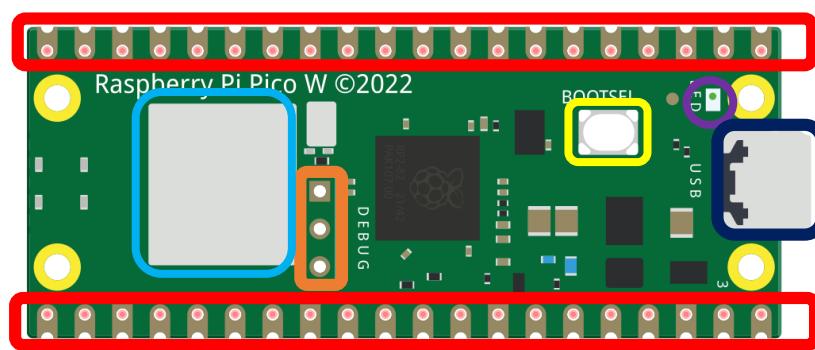

Frame color	Description
	Pins
	BOOTSEL button
	USB port
	LED
	Debugging
	Wireless

Function definition of pins:

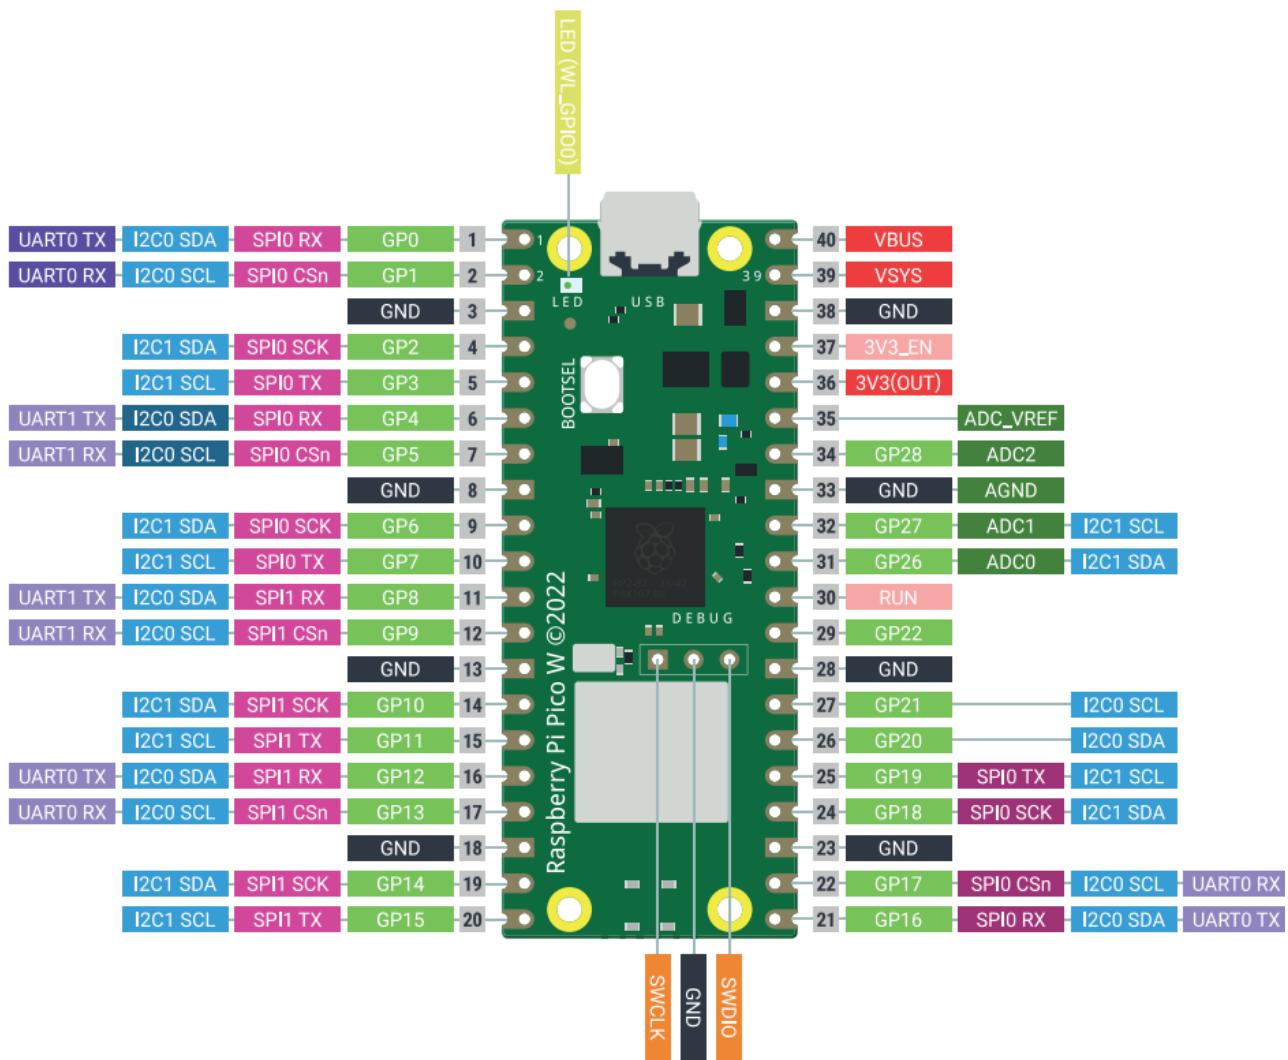

Color	Pins	Color	Pins
	GND		Power
	GPIO		ADC
	UART(defualt)		UART
	SPI		I2C
	System Control		Debugging

For details: <https://datasheets.raspberrypi.com/picow/pico-w-datasheet.pdf>



UART, I2C, SPI, Wireless Defalt Pin

In Arduino IDE, the default pins of serial port are Pin0 and Pin1.

Note: Serial port is virtualized by RP2040. Therefore, when using the serial port, please enable the verification function of DTR. It can work under any baud rate.

UART

Function	Default
UART_BAUDRATE	X
UART_BITS	8
UART_STOP	1
UART_TX	Pin 0
UART_RX	Pin 1

I2C

Function	Default
I2C Frequency	400000
I2C_SDA	Pin 4
I2C_SCL	Pin 5

SPI

Function	Default
SPI_BAUDRATE	1000000
SPI_POLARITY	0
SPI_PHASE	0
SPI_BITS	8
SPI_FIRSTBIT	MSB
SPI_SCK	Pin 18
SPI_MOSI	Pin 19
SPI_MISO	Pin 16
SPI_SS	Pin 17

Wireless

Function	Default
WL_ON	GPIO23
WL_D	GPIO24
WL_CLK	GPIO29_ADC
WL_CS	GPIO25


Chapter 0 Getting Ready (Important)

Before starting building the projects, you need to make some preparation first, which is so crucial that you must not skip.

Programming Software

Arduino Software (IDE) is used to write and upload the code for Arduino Board.

First, install Arduino Software (IDE): visit <https://www.arduino.cc>, click "Download" to enter the download page.

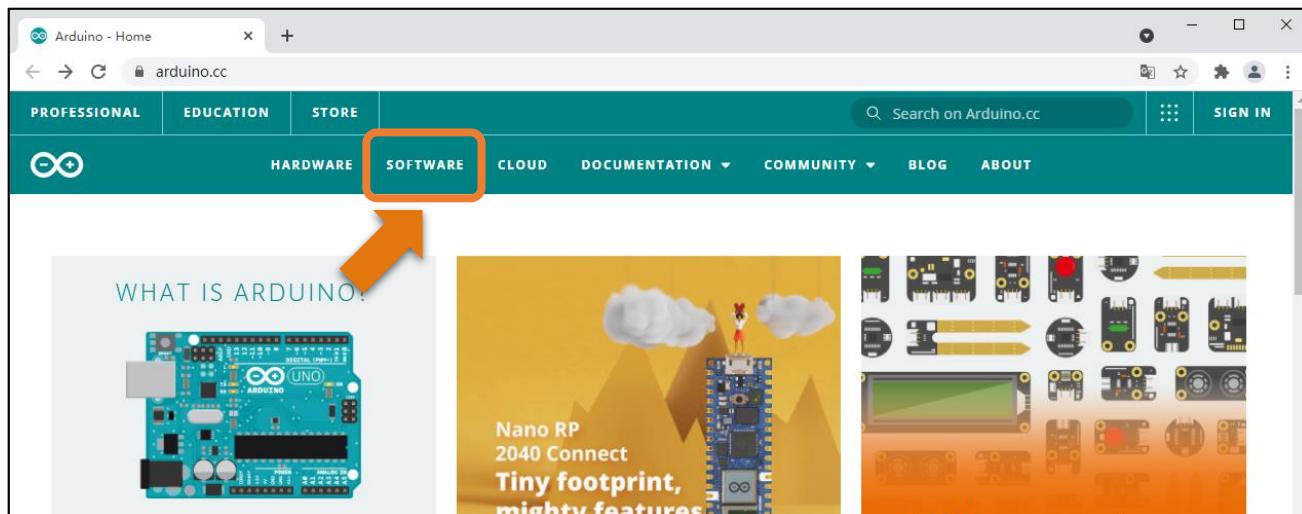

Select and download corresponding installer according to your operating system. If you are a windows user, please select the "Windows Installer" to download to install the driver correctly.

Downloads

The page shows the download for Arduino IDE 1.8.16. It includes a brief description of what the IDE is used for, a link to the 'Getting Started' page for installation instructions, and a 'SOURCE CODE' link. On the right side, there is a large teal sidebar titled 'DOWNLOAD OPTIONS' containing links for Windows (Win 7 and newer, ZIP file, app for Win 8.1 or 10), Linux (32 bits, 64 bits, ARM 32 bits, ARM 64 bits), and Mac OS X (10.10 or newer). There is also a link to 'Release Notes Checksums (sha512)'.




After the download completes, run the installer. For Windows users, there may pop up an installation dialog box of driver during the installation process. When it comes up, please allow the installation.

After installation is complete, an Arduino Software shortcut will be generated in the desktop. Run the Arduino Software.



The interface of Arduino Software is as follows:

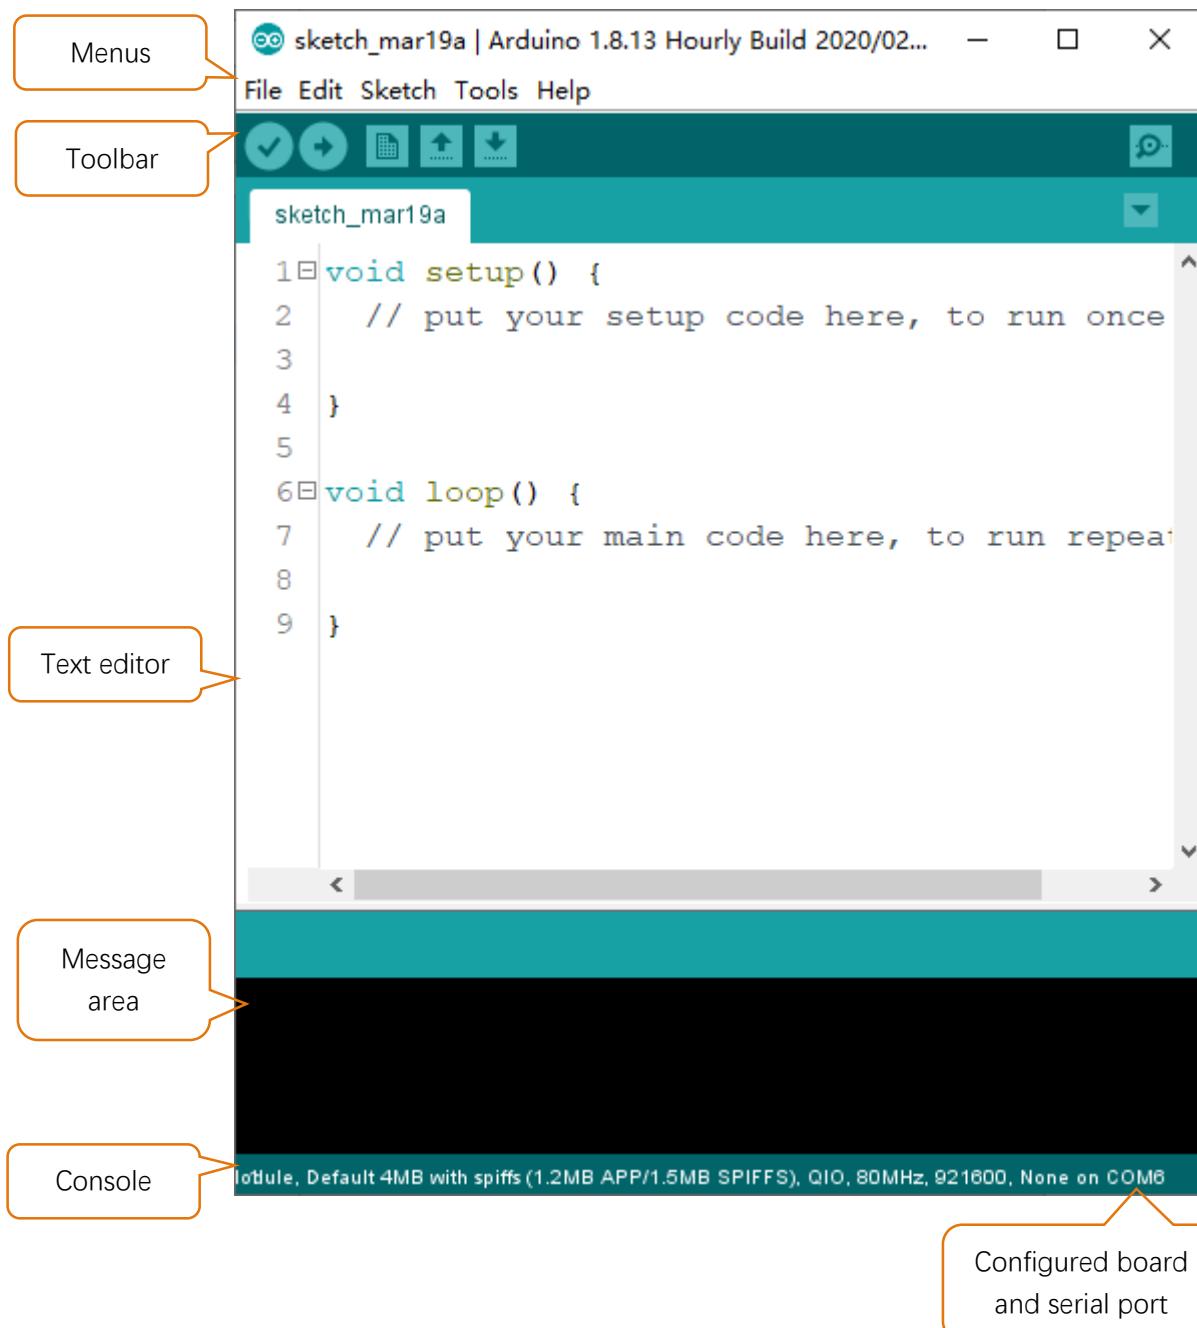

Programs written with Arduino Software (IDE) are called **sketches**. These sketches are written in the text editor and saved with the file extension.**.ino**. The editor has features for cutting/pasting and searching/replacing text. The message area gives feedback while saving and exporting and also displays errors. The console displays text output by the Arduino Software (IDE), including complete error messages and other information. The bottom right-hand corner of the window displays the configured board and serial port. The toolbar buttons allow you to verify and upload programs, create, open, and save sketches, and open the serial monitor.



Verify

Check your code for compile errors .



Upload

Compile your code and upload them to the configured board.



New

Create a new sketch.



Open

Present a menu of all the sketches in your sketchbook. Clicking one will open it within the current window and overwrite its content.



Save

Save your sketch.



Serial Monitor

Open the serial monitor.

Additional commands are found within the five menus: File, Edit, Sketch, Tools, Help. The menus are context sensitive, which means only those items relevant to the work currently being carried out are available.




Installation of Development Board Support Package


- 1, Make sure your network is of good connection.
- 2, Open Arduino IDE, and click File>Preference. In new pop-up window, find "Additional Boards Manager URLs", and replace with a new line:

https://github.com/earlephilhower/arduino-pico/releases/download/global/package_rp2040_index.json

As shown below:

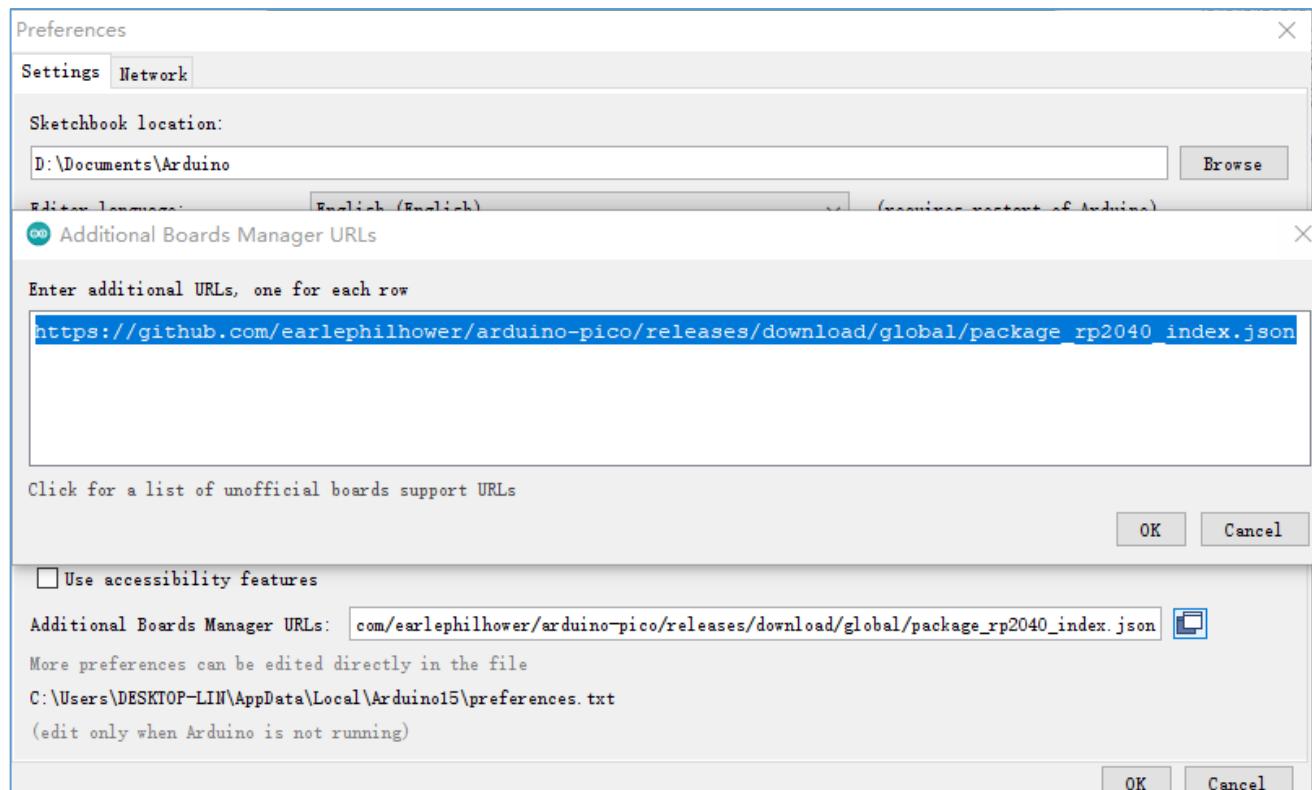


- 3, Open Arduino IDE. Click Tools>Board>Boards Manager...on the menu bar.

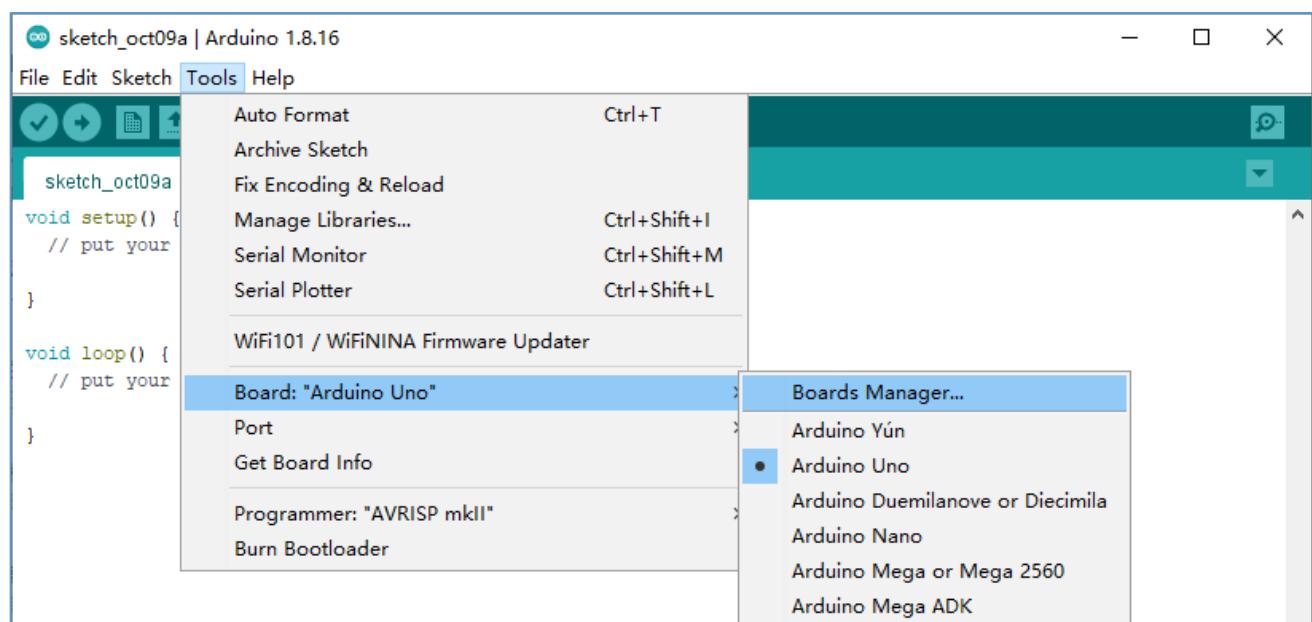

Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)

4, Enter Pico in the searching box, and select "Raspberry Pi Pico/RP2040" and click on Install.

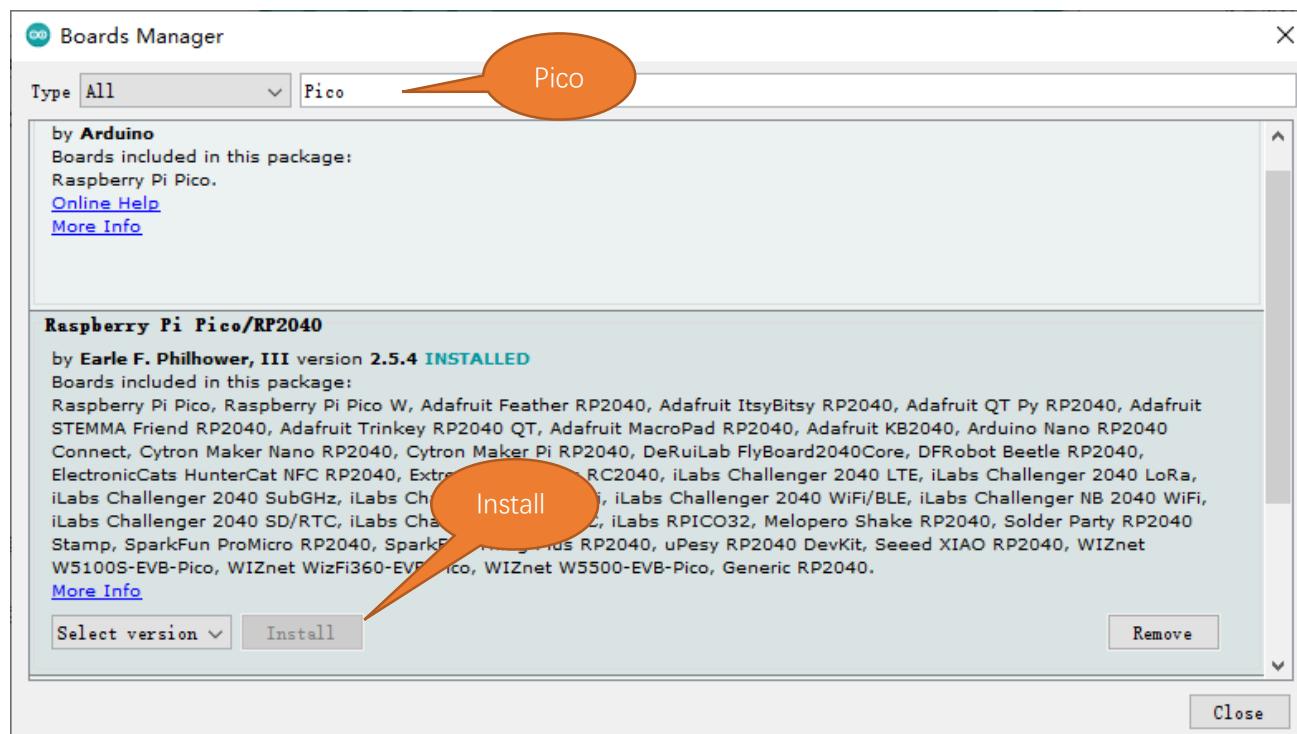


5, Click Yes in the pop-up “**dpinst-amd64.exe**”installation window. (Without it, you will fail to communicate with Arduino.) Thus far, we have finished installing the development support package.




Uploading Arduino-compatible Firmware for Pico

If your Pico is new and you want to use Arduino to learn and develop, you need to upload an Arduino-compatible Firmware for it. Please refer to the following steps to configure.


1, Disconnect Pico from computer. Keep pressing the white button (BOOTSEL) on Pico, and connect Pico to computer before releasing the button. (Note: Be sure to keep pressing the button before powering the Pico, otherwise the firmware will not download successfully)

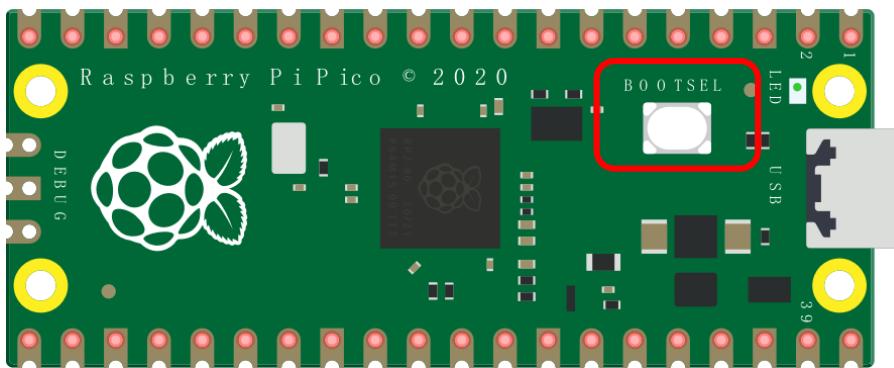


2, Open Arduino IDE. Click File>Examples>01.Basics>Blink.

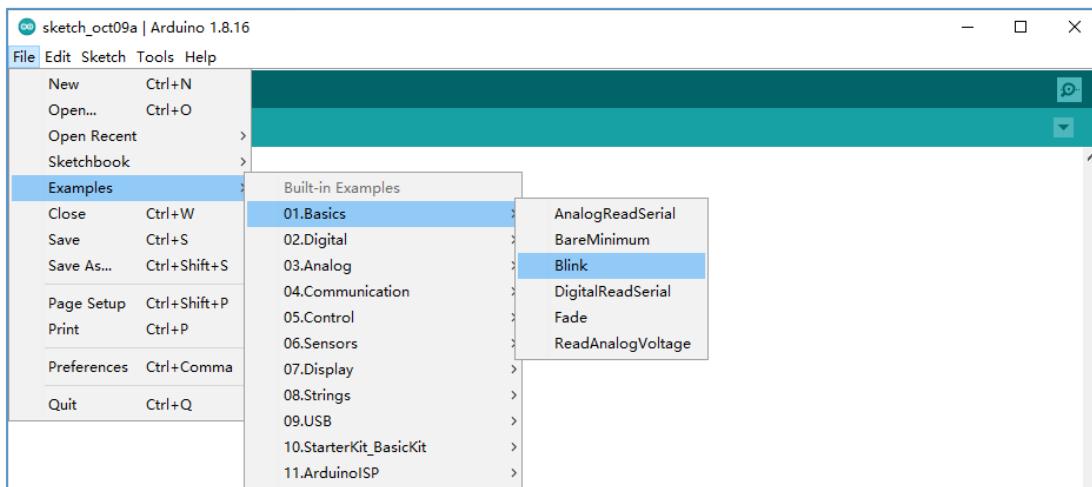


3, Click Tools>Board>Raspberry Pi RP2040 Boards>Raspberry Pi Pico.

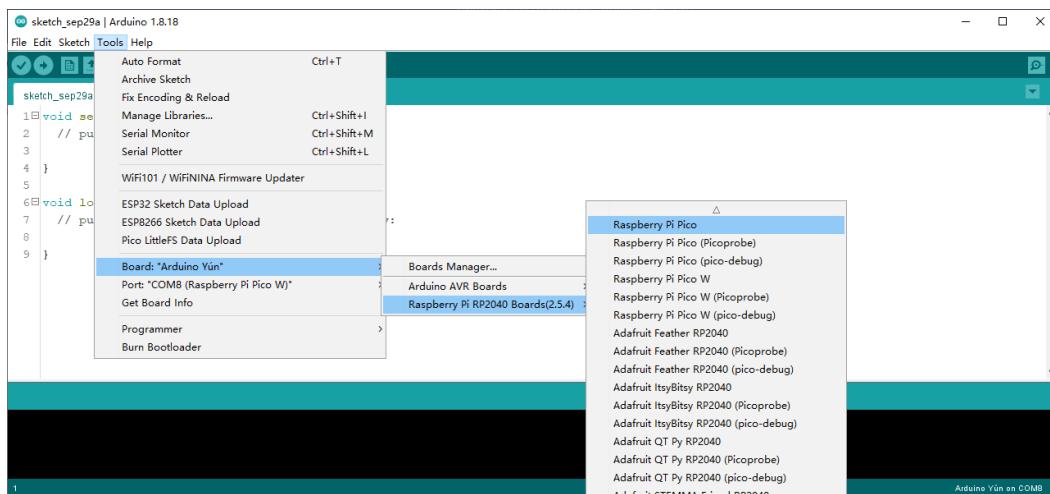


4, Click Tools>Port>UF2 Board.

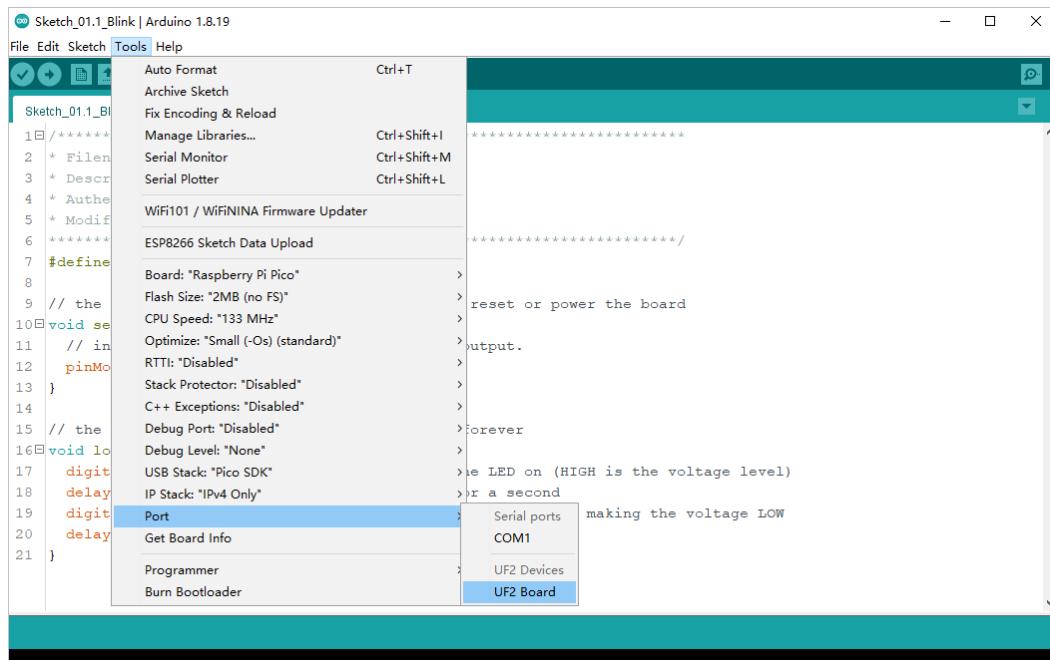

5, Upload sketch to Pico.

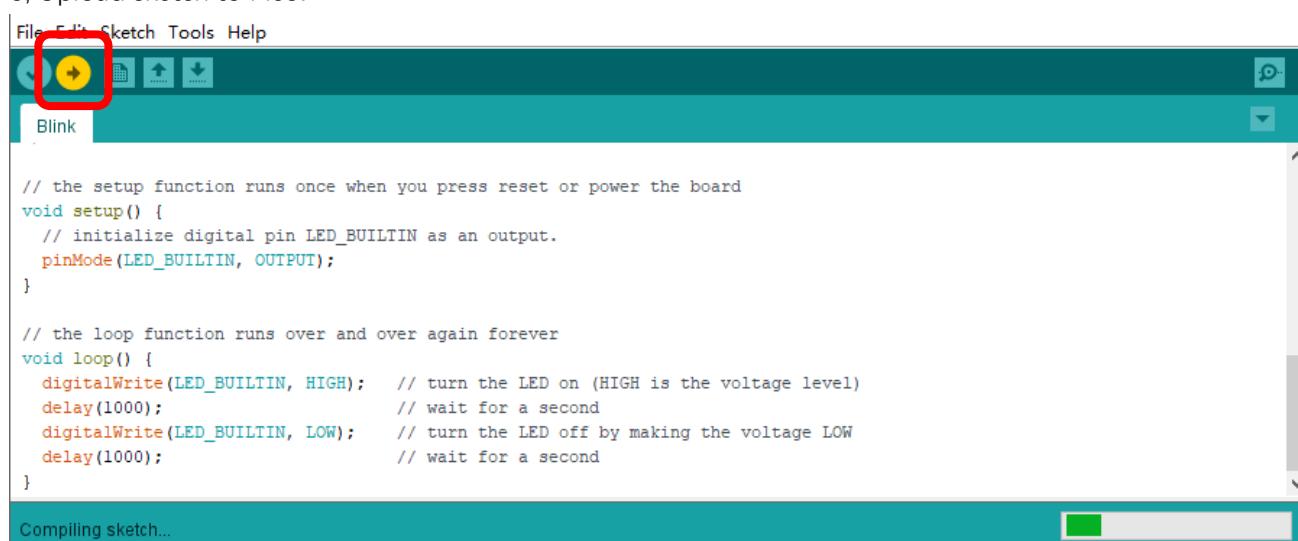

When the sketch finishes uploading, you can see the following prompt.

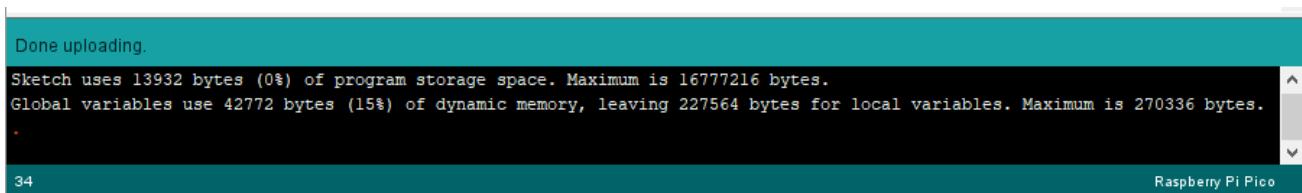


The screenshot shows a terminal window with the following text output:


```
Done uploading.  
Sketch uses 13932 bytes (0%) of program storage space. Maximum is 16777216 bytes.  
Global variables use 42772 bytes (15%) of dynamic memory, leaving 227564 bytes for local variables. Maximum is 270336 bytes.  
.  
34
```

The window title is "Raspberry Pi Pico".

And the indicator on Pico starts to flash.

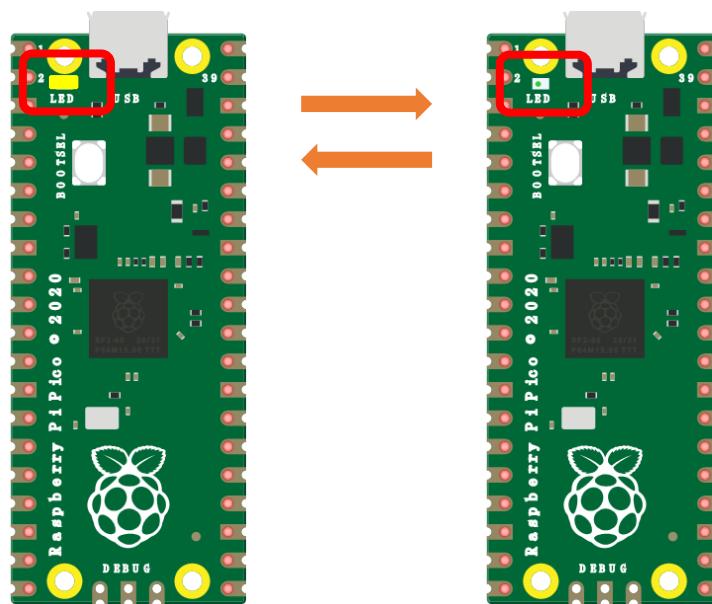

5, Click **Tools>Port>COMx(Raspberry Pi Pico)**. X of COMx varies from different computers. Please select the correct one on your computer. In our case, it is COM9.

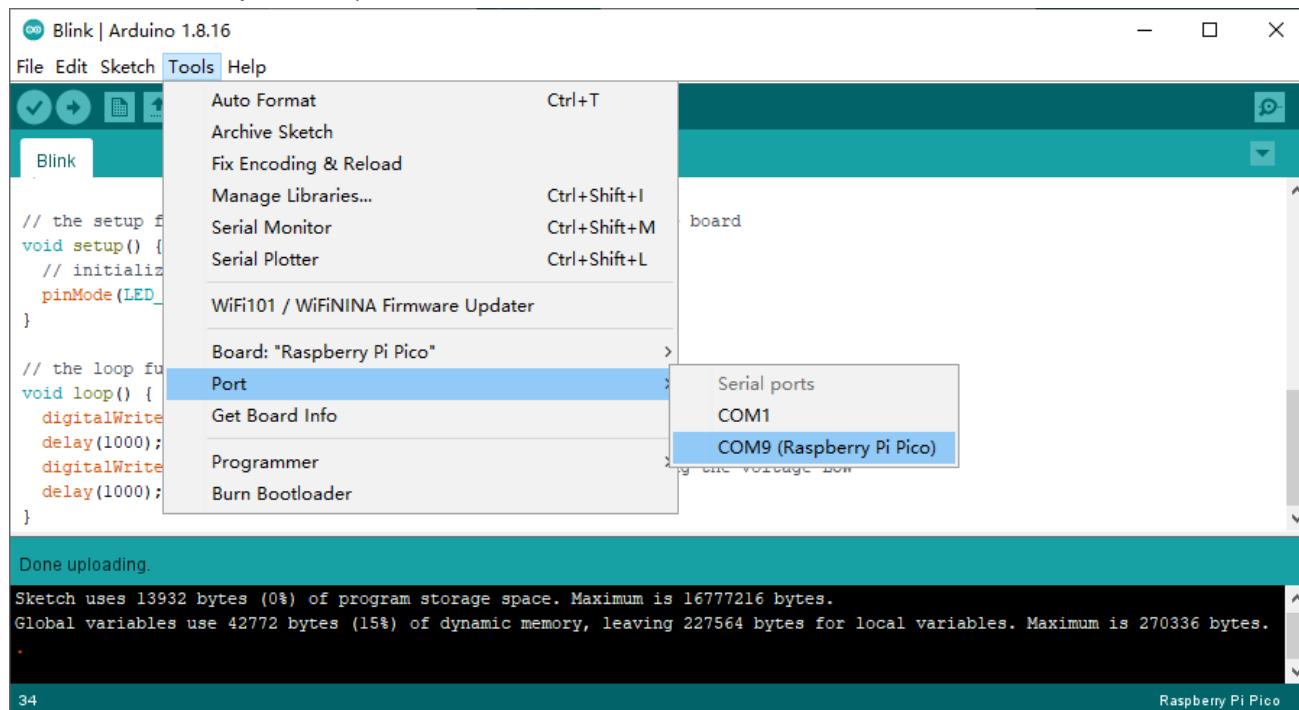


Note:

1. At the first time you use Arduino to upload sketch for Pico, you don't need to select port. After that, each time before uploading sketch, please check whether the port has been selected; otherwise, the downloading may fail.
2. Sometimes when using, Pico may lose firmware due to the code and fail to work. At this point, you can upload firmware for Pico as mentioned above.


Paste the Sticker on the Breadboard

It is not difficult to use the Pico. However, officially, the pin functions are printed on the back of the board, which makes it inconvenient to use. To help users finish each project in the tutorial faster and easier, we provide stickers of the pin functions as follows:

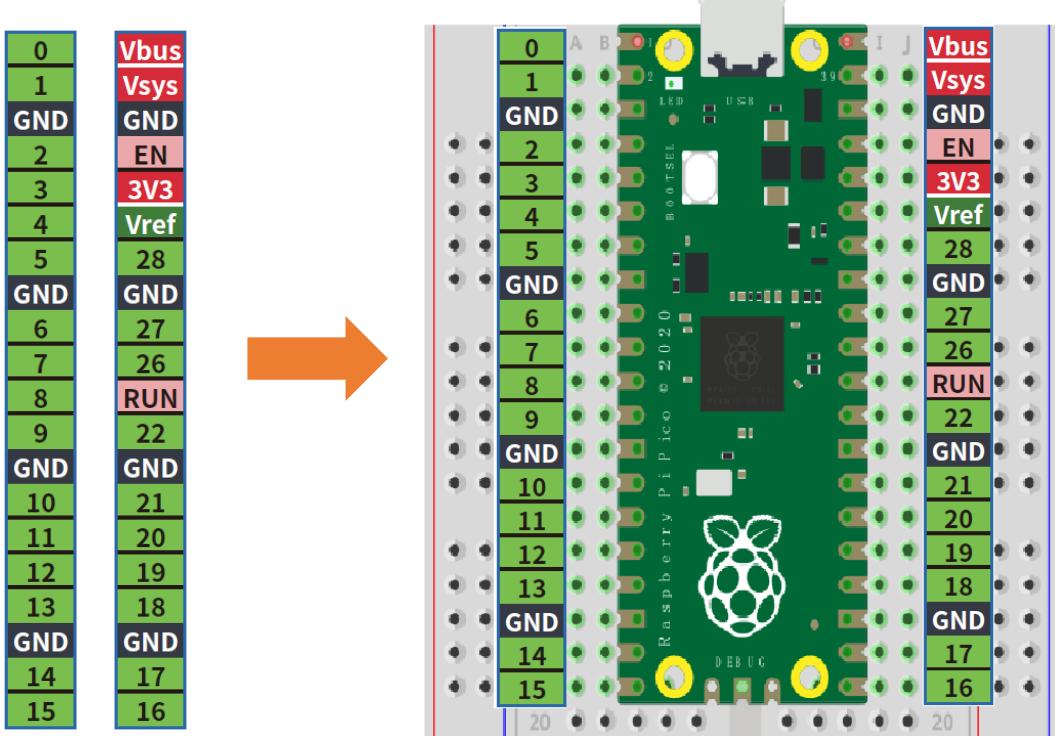

You can paste the sticker on the blank area of the breadboard as above.

To make the tutorial more intuitive, we've made some changes to the simulation diagram as below. The left one is the actual Pico and the right one is its simulation diagram. Please note that to avoid misunderstanding. In addition, the external pin interface functions of Pico and Pico W are identical.

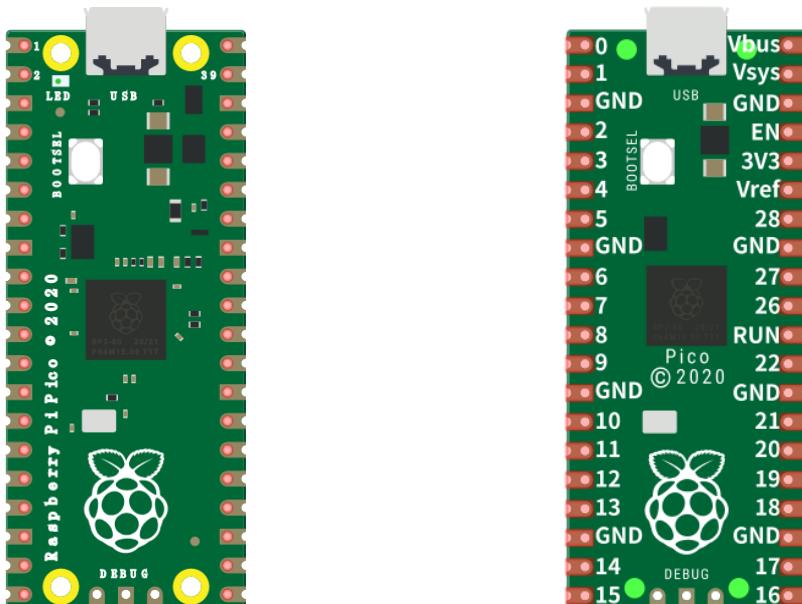

Chapter 1 LED (Important)

Note: Raspberry Pi Pico and Raspberry Pi Pico W only differ by wireless function, and are almost identical in other aspects. In this tutorial, except for the wireless function, other parts use Raspberry Pi Pico's map for tutorial demonstration.

This chapter is the Start Point in the journey to build and explore Pico electronic projects. We will start with simple "Blink" project.

Project 1.1 Blink


In this project, we will use Raspberry Pi Pico to control blinking a common LED.

If you haven't installed Arduino IDE, you can click [Here](#).

If you haven't uploaded firmware for Pico, you can click [Here](#) to upload.

Component List

Raspberry Pi Pico (or Pico W) x1

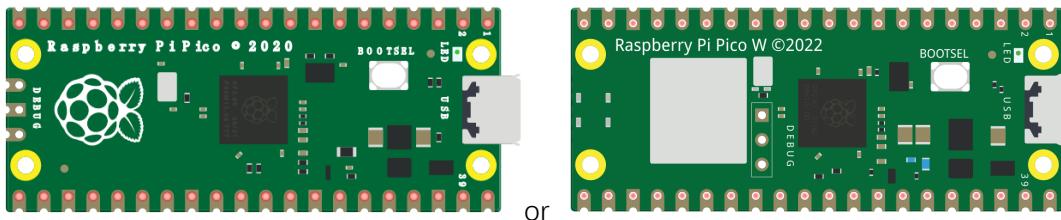


USB cable x1



Power

Raspberry Pi Pico requires 5V power supply. You can either connect external 5V power supply to Vsys pin of Pico or connect a USB cable to the onboard USB base to power Pico.

In this tutorial, we use USB cable to power Pico and upload sketches.

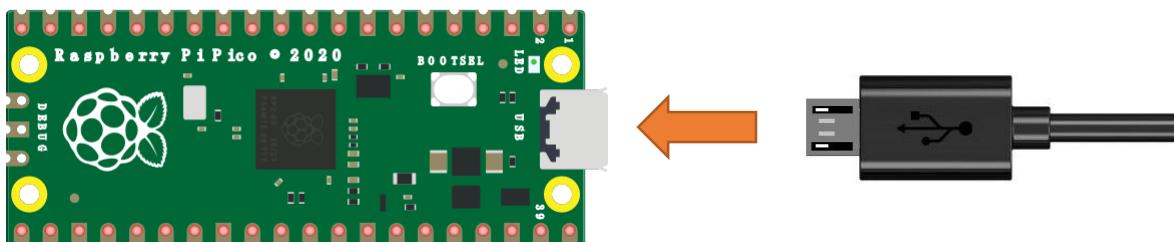


Sketch

The onboard LED of Raspberry Pi Pico is controlled by GP25. When GP25 outputs high level, LED lights up; When it outputs low, LED lights off. You can open the provided code:


Freenove_Super_Starter_Kit_for_Raspberry_Pi_Pico\C\Sketches\Sketch_01.1_Blink.

Before uploading code to Pico, please check the configuration of Arduino IDE.

Click Tools, make sure Board and Port are as follows:

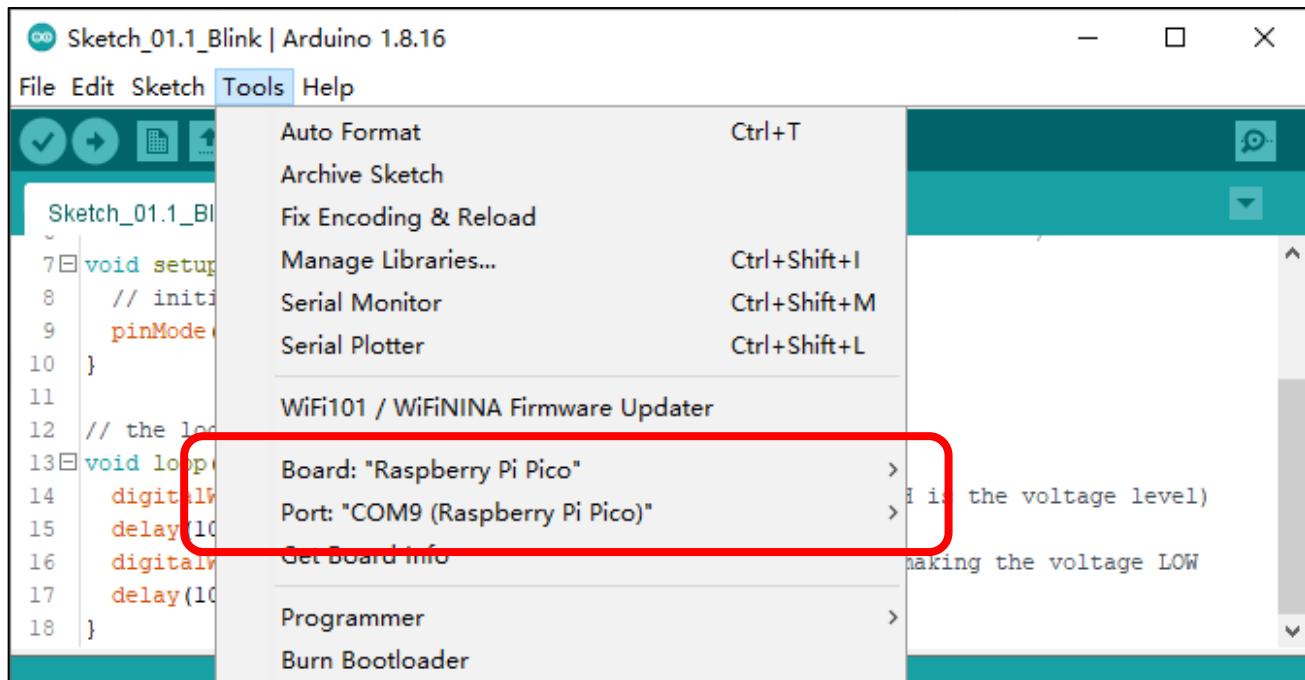


Click "Upload" to upload the sketch to Pico.

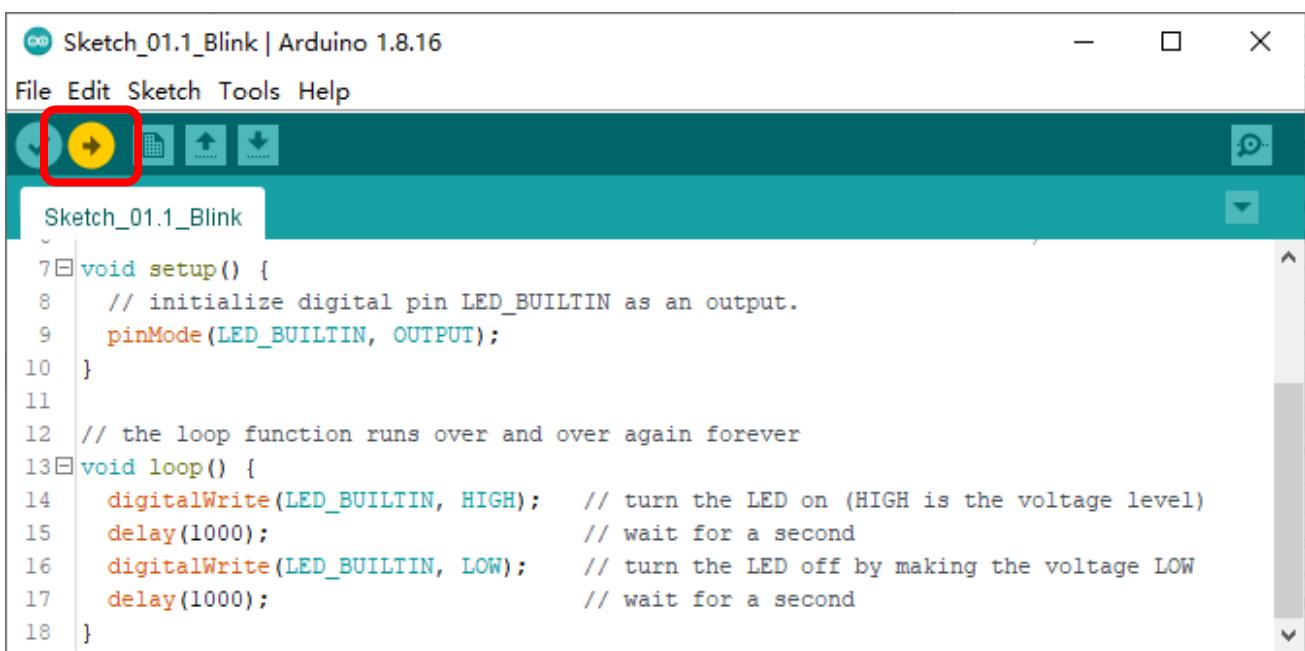

Any concerns? ✉ support@freenove.com


If you have any concerns, please contact us via: support@freenove.com

Pico's on-board LED lights on and off every 1s, flashing cyclically.

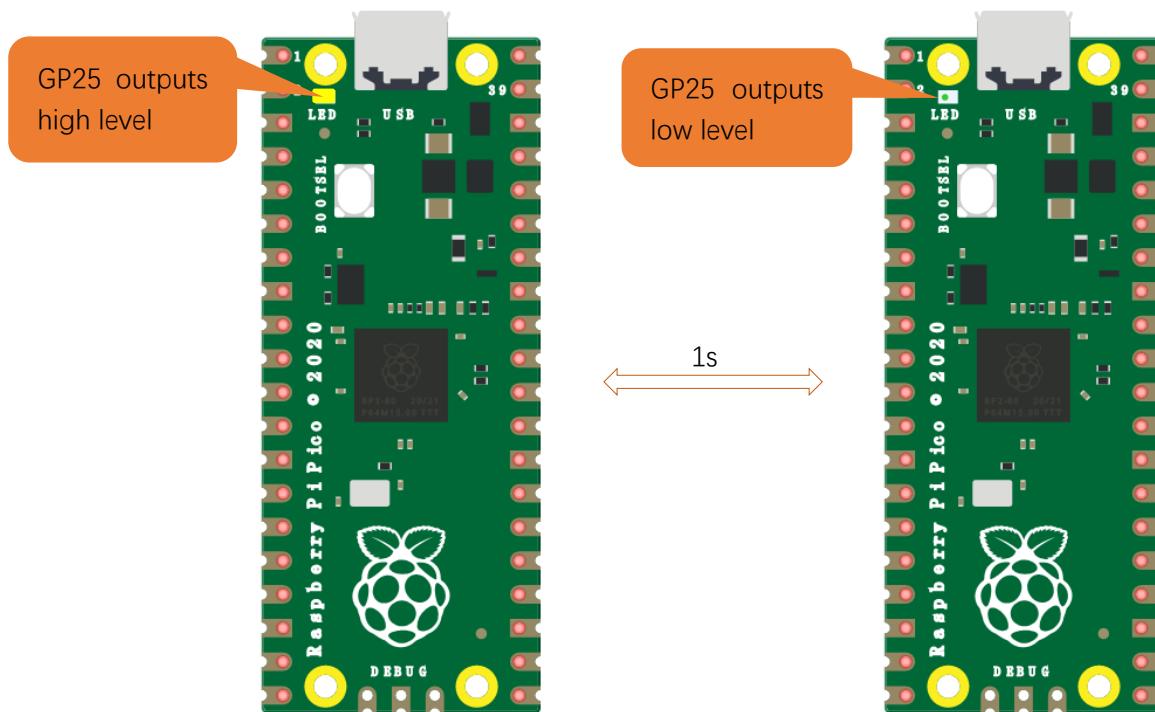

Note: Pico's on-board LED is driven by GPIO25. Pico W's on-board LED uses WL_GPIO0, which is defined as GPIO32 on Arduino.

If you use Pico W, please change "# define LED_BUILTIN 25" to "# define LED_BUILTIN 32" in the code.

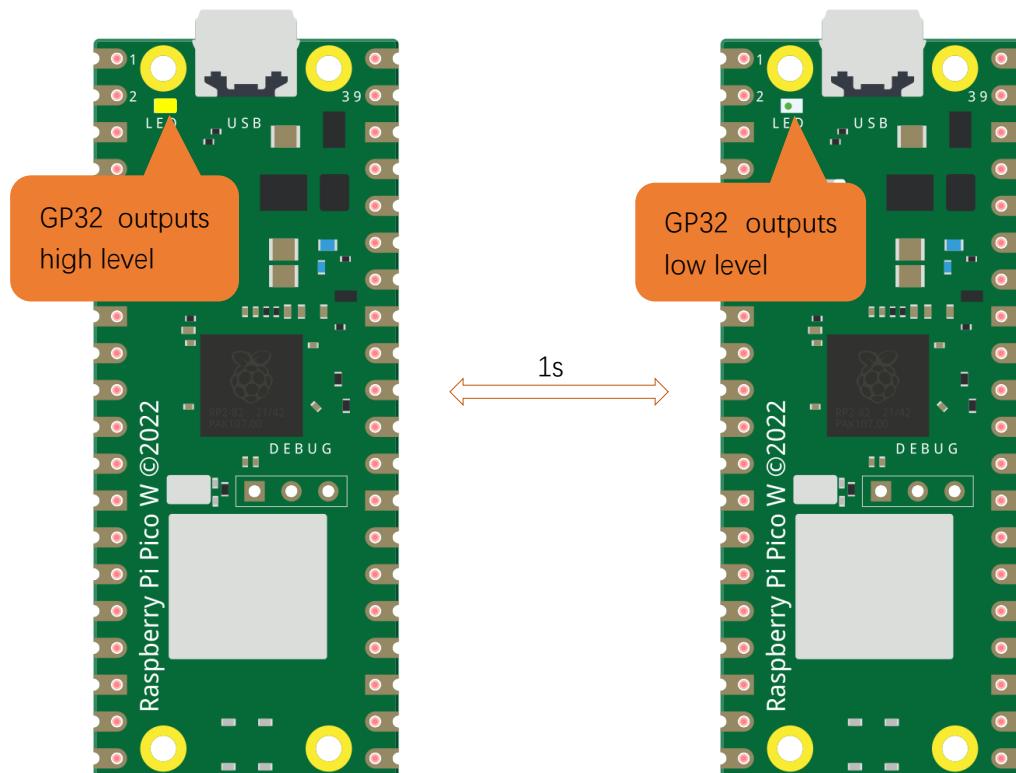

The following is the program code:


```

1 #define LED_BUILTIN 25
2
3 // the setup function runs once when you press reset or power the board
4 void setup() {
5     // initialize digital pin LED_BUILTIN as an output.
6     pinMode(LED_BUILTIN, OUTPUT);
7 }
8
9 // the loop function runs over and over again forever
10 void loop() {
11     digitalWrite(LED_BUILTIN, HIGH);      // turn the LED on (HIGH is the voltage level)
12     delay(1000);                      // wait for a second
13     digitalWrite(LED_BUILTIN, LOW);     // turn the LED off by making the voltage LOW
14     delay(1000);                      // wait for a second
15 }
```

The Arduino IDE code usually contains two basic functions: void setup() and void loop().

After the board is reset, the setup() function will be executed firstly, and then the loop() function.

setup() function is generally used to write code to initialize the hardware. And loop() function is used to write code to achieve certain functions. loop() function is executed repeatedly. When the execution reaches the end of loop(), it will back to the beginning of loop() to run again.

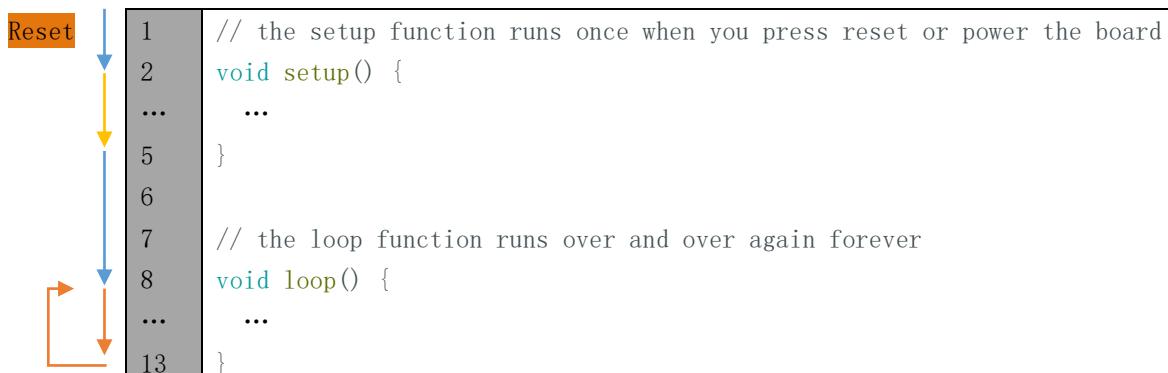

In the circuit, GP25 of Pico is connected to the LED, so the LED pin is defined as 25.

```
1 #define LED_BUILTIN 25
```

This means that after this line of code, all LED_BUILTIN will be regarded as 25.

In the setup() function, first, we set the LED_BUILTIN as output mode, which can make the port output high or low level.

```

4 // initialize digital pin LED_BUILTIN as an output.
5 pinMode(LED_BUILTIN, OUTPUT);
```

Then, in the loop() function, set the LED_BUILTIN to output high level to make LED light up.

```
10 digitalWrite(LED_BUILTIN, HIGH); // turn the LED on (HIGH is the voltage level)
```

Wait for 1000ms, that is 1s. Delay() function is used to make control board wait for a moment before executing the next statement. The parameter indicates the number of milliseconds to wait for.

```
11 delay(1000); // wait for a second
```

Any concerns? ✉ support@freenove.com

Then set the LED_BUILTIN to output low level, and LED lights off. One second later, the execution of loop() function will be completed.

```
12   digitalWrite(LED_BUILTIN, LOW); // turn the LED off by making the voltage LOW
13   delay(1000); // wait for a second
```

The loop() function is constantly being executed, so LED will keep blinking.

Reference

void pinMode(int pin, int mode);

Configures the specified pin to behave either as an input or an output.

Parameters

pin: the pin number to set the mode of LED.

mode: INPUT, OUTPUT, INPUT_PULLDOWN, or INPUT_PULLUP.

void digitalWrite (int pin, int value);

Writes the value HIGH or LOW (1 or 0) to the given pin which must have been previously set as an output.

For more related functions, please refer to <https://www.arduino.cc/reference/en/>



Project 1.2 Blink

In this project, we will use Raspberry Pi Pico to control blinking a common LED.

Component List


Raspberry Pi Pico x1	USB Cable x1
A green printed circuit board (PCB) with a central Broadcom SoC, labeled "Raspberry Pi Pico • 2020". It has a 2x34 pin header on the left, two yellow push buttons at the top, and a small grey header at the bottom right.	Two black USB cables, each with a standard A-type connector at one end and a smaller micro-B or Pico-specific connector at the other.
Breadboard x1	
A schematic diagram of a breadboard, showing its grid of 6 columns and 40 rows of connection points. Rows are numbered from 1 to 40 along the right edge, and columns are labeled A through L along the top and bottom edges.	
LED x1	Resistor 220Ω x1
A red light-emitting diode (LED) with a standard two-pin lead configuration.	A cylindrical resistor with a brown band, indicating a value of 220 ohms.
	Jumper
	A long, thin black wire with small black caps at both ends, used for connecting components.

Component Knowledge

LED

An LED is a type of diode. All diodes only work if current is flowing in the correct direction and have two Poles. An LED will only work (light up) if the longer pin (+) of LED is connected to the positive output from a power source and the shorter pin is connected to the negative (-). Negative output is also referred to as Ground (GND). This type of component is known as “Polar” (think One-Way Street).

All common 2 lead diodes are the same in this respect. Diodes work only if the voltage of its positive electrode is higher than its negative electrode and there is a narrow range of operating voltage for most all common diodes of 1.9 and 3.4V. If you use much more than 3.3V the LED will be damaged and burn out.

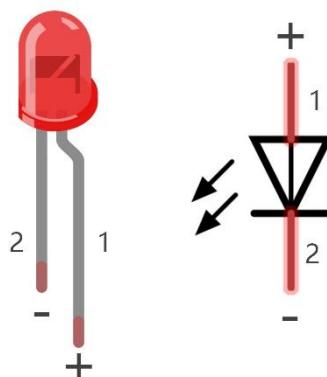


LED	Voltage	Maximum current	Recommended current
Red	1.9 - 2.2V	20mA	10mA
Green	2.9 - 3.4V	10mA	5mA
Blue	2.9 - 3.4V	10mA	5mA
Volt ampere characteristics conform to diode			

Note: LEDs cannot be directly connected to a power supply, which usually ends in a damaged component. A resistor with a specified resistance value must be connected in series to the LED you plan to use.

Resistor

Resistors use Ohms (Ω) as the unit of measurement of their resistance (R). $1M\Omega=1000k\Omega$, $1k\Omega=1000\Omega$.


A resistor is a passive electrical component that limits or regulates the flow of current in an electronic circuit. On the left, we see a physical representation of a resistor, and the right is the symbol used to represent the presence of a resistor in a circuit diagram or schematic.

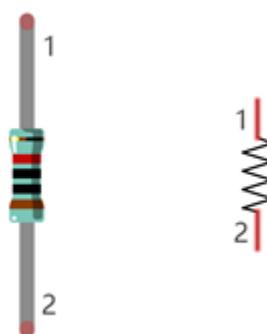

The bands of color on a resistor is a shorthand code used to identify its resistance value. For more details of resistor color codes, please refer to the appendix of this tutorial.

With a fixed voltage, there will be less current output with greater resistance added to the circuit. The relationship between Current, Voltage and Resistance can be expressed by this formula: $I=V/R$ known as Ohm's Law where I = Current, V = Voltage and R = Resistance. Knowing the values of any two of these allows you to solve the value of the third.

In the following diagram, the current through R1 is: $I=U/R=5V/10k\Omega=0.0005A=0.5mA$.

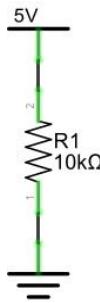


WARNING: Never connect the two poles of a power supply with anything of low resistance value (i.e. a metal object or bare wire) this is a Short and results in high current that may damage the power supply and electronic components.

Note: Unlike LEDs and Diodes, Resistors have no poles and are non-polar (it does not matter which direction you insert them into a circuit, it will work the same)

Breadboard


Here we have a small breadboard as an example of how the rows of holes (sockets) are electrically attached.

The left picture shows the way to connect pins. The right picture shows the practical internal structure.

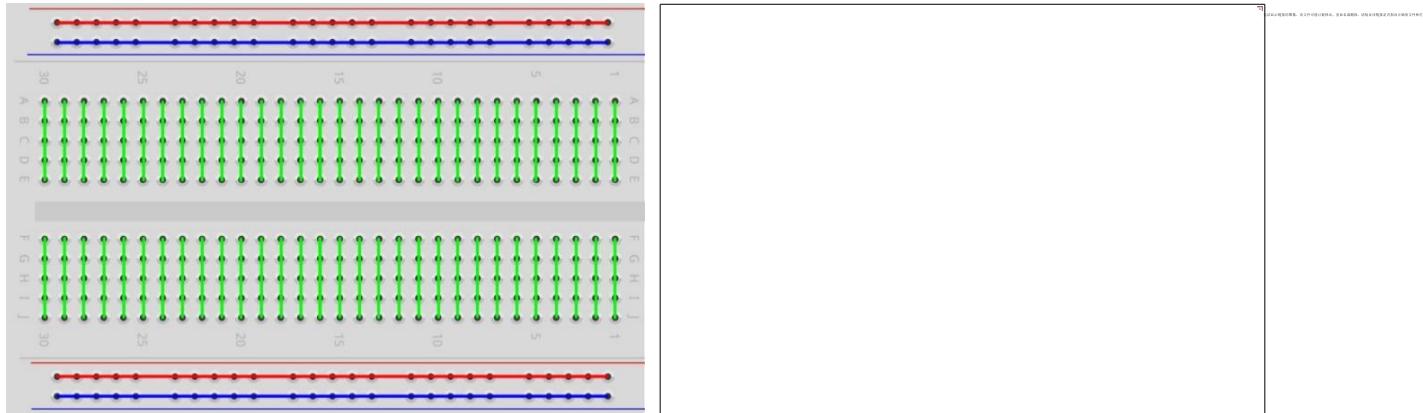

Power

In this tutorial, we connect Raspberry Pi Pico and computer with a USB cable.

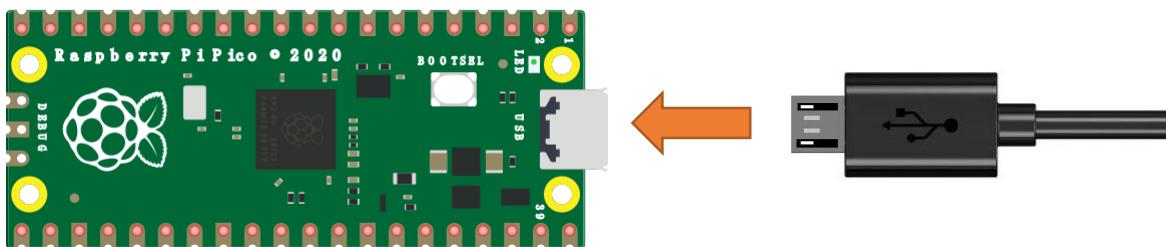


Circuit

First, disconnect all power from the Raspberry Pi Pico. Then build the circuit according to the circuit and hardware diagrams. After the circuit is built and verified correct, connect the PC to Raspberry Pi Pico.


CAUTION: Avoid any possible short circuits (especially connecting 3.3V and GND)!

WARNING: A short circuit can cause high current in your circuit, create excessive component heat and cause permanent damage to your hardware!

Schematic diagram

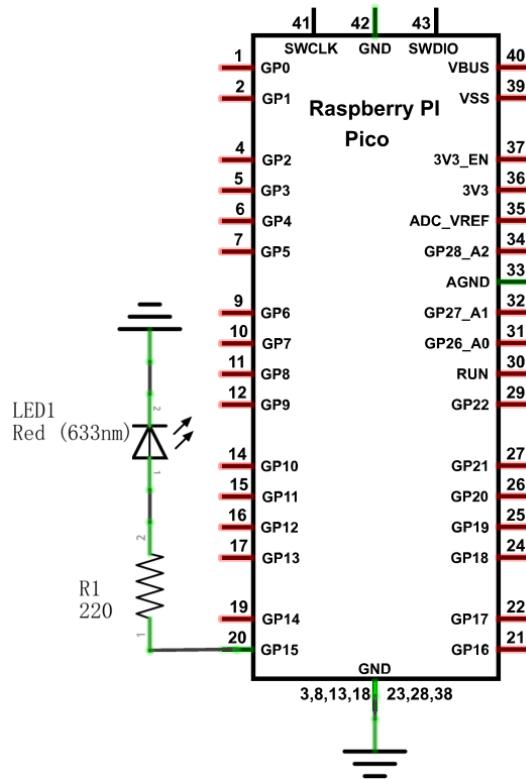

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

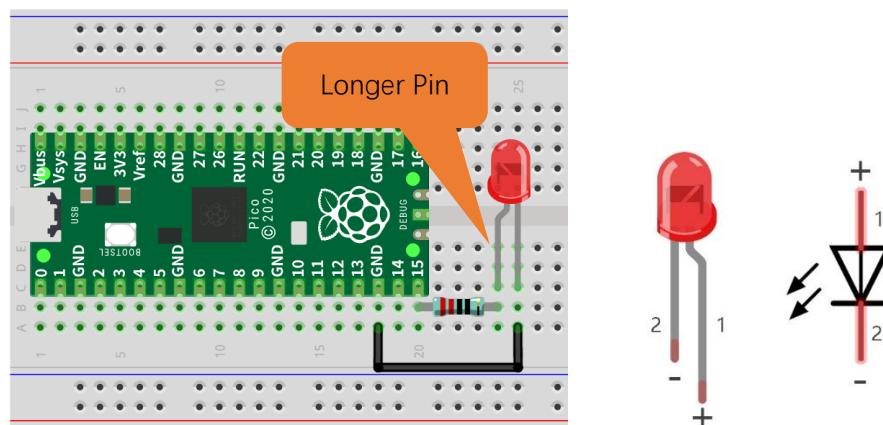

Note: To help users have a better experience when doing the projects, we have made some modifications to Pico's simulation diagram. Please note that there are certain differences between the simulation diagram and the actual board to avoid misunderstanding.

Sketch


According to the circuit diagram, when GP15 of Pico outputs high level, LED lights up; when it outputs low, LED lights off. Therefore, we can make LED flash repeatedly by controlling GP15 to output high and low repeatedly.

You can open the provided code:


Freenove_Super_Starter_Kit_for_Raspberry_Pi_Pico\C\Sketches\Sketch_01.2_Blink.

Before uploading code to Pico, please check the configuration of Arduino IDE.


Click Tools, make sure Board and Port are as follows:

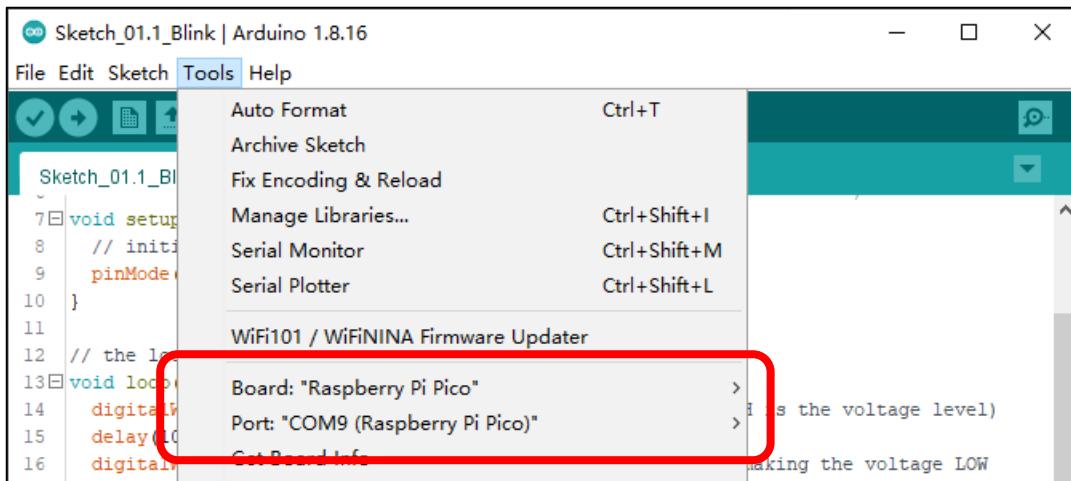

Click "Upload" to upload the sketch to Pico.

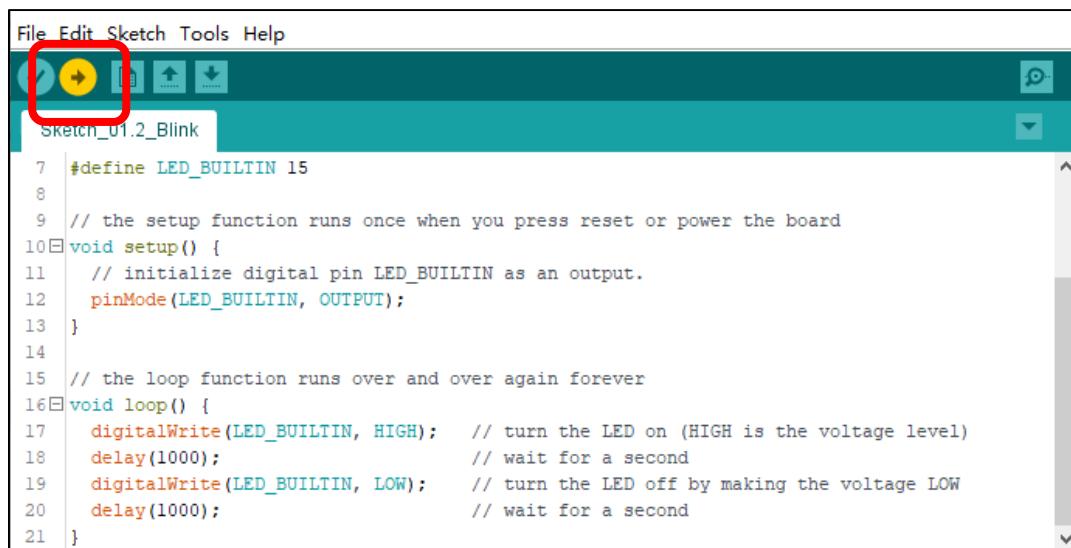

Click "Upload". Download the code to Pico and your LED in the circuit starts Blink.

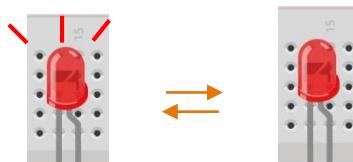


If you have any concerns, please contact us via: support@freenove.com

Any concerns? ✉ support@freenove.com

Chapter 2 Button & LED

Usually, there are three essential parts in a complete automatic control device: INPUT, OUTPUT, and CONTROL. In last section, the LED module was the output part and Raspberry Pi Pico was the control part. In practical applications, we not only make LEDs blink, but also make a device sense the surrounding environment, receive instructions and then take the appropriate action such as lighting up LEDs, turning ON a buzzer and so on.

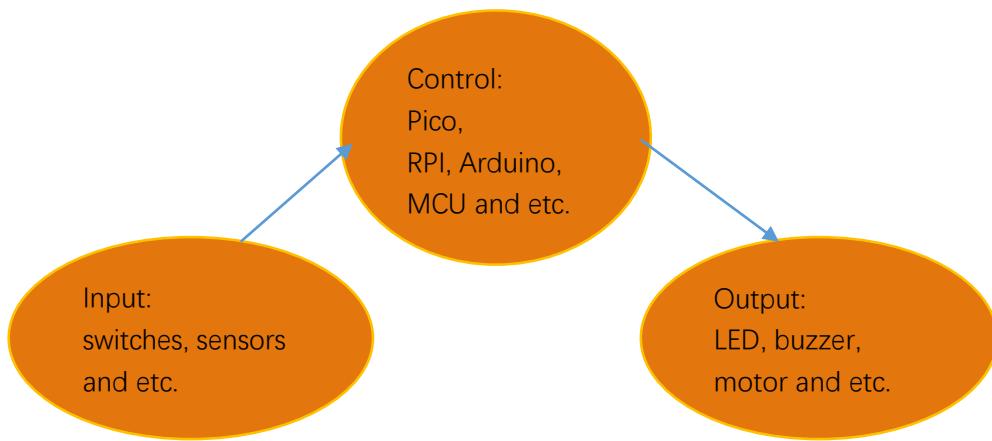

Next we make a simple project: build a control system with button, LED and Raspberry Pi Pico.

Input: Button

Control: Raspberry Pi Pico

Output: LED



Project 2.1 Button & LED

Note: Raspberry Pi Pico and Raspberry Pi Pico W only differ by wireless function, and are almost identical in other aspects. In this tutorial, except for the wireless function, other parts use Raspberry Pi Pico's map for tutorial demonstration.

In the project, we will control the LED state through a Push Button Switch. When the button is pressed, our LED will turn ON, and when it is released, the LED will turn OFF.


Component List

Raspberry Pi Pico x1	A green printed circuit board with a central Broadcom SoC, labeled "Raspberry Pi Pico • 2020". It has several pins along the top and bottom edges and some surface-mount components.	USB cable x1	A standard black USB cable with two A-type connectors.
Breadboard x1			
Jumper	A long, thin black wire with two small black caps at the ends.	LED x1	A red light-emitting diode with two leads.
		Resistor 220Ω x1	A cylindrical resistor with a brown band indicating 220 ohms.
		Resistor 10kΩ x2	A cylindrical resistor with a brown band indicating 10 kilohms.
		Push button x1	A rectangular push button switch with two pins.

Component Knowledge

Push button


This type of Push Button Switch has 4 pins (2 Pole Switch). Two pins on the left are connected, and both left and right sides are the same per the illustration:

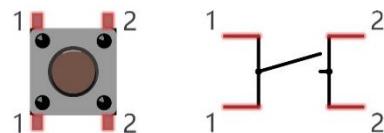


When the button on the switch is pressed, the circuit is completed (your project is Powered ON).

Circuit

Schematic diagram

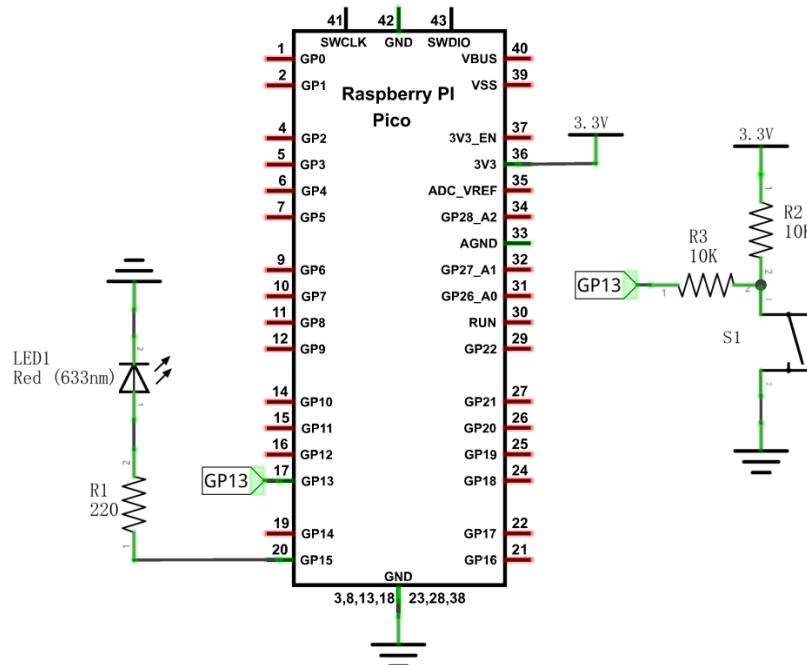

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

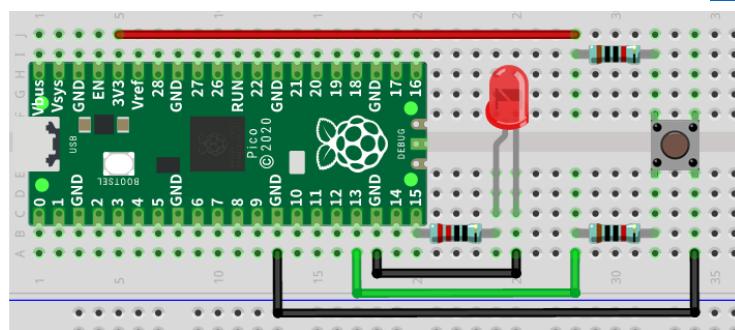

Note: To help users have a better experience when doing the projects, we have made some modifications to Pico's simulation diagram. Please note that there are certain differences between the simulation diagram and the actual board to avoid misunderstanding.


Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)

Sketch

This project is designed for learning how to use push button switch to control an LED. We first need to read the state of switch, and then determine whether to turn the LED ON in accordance to the state of the switch. Upload following sketch:

Freenove_Super_Starter_Kit_for_Raspberry_Pi_Pico\Sketches\Sketch_02.1_ButtonAndLed.

Sketch_02.1_ButtonAndLed


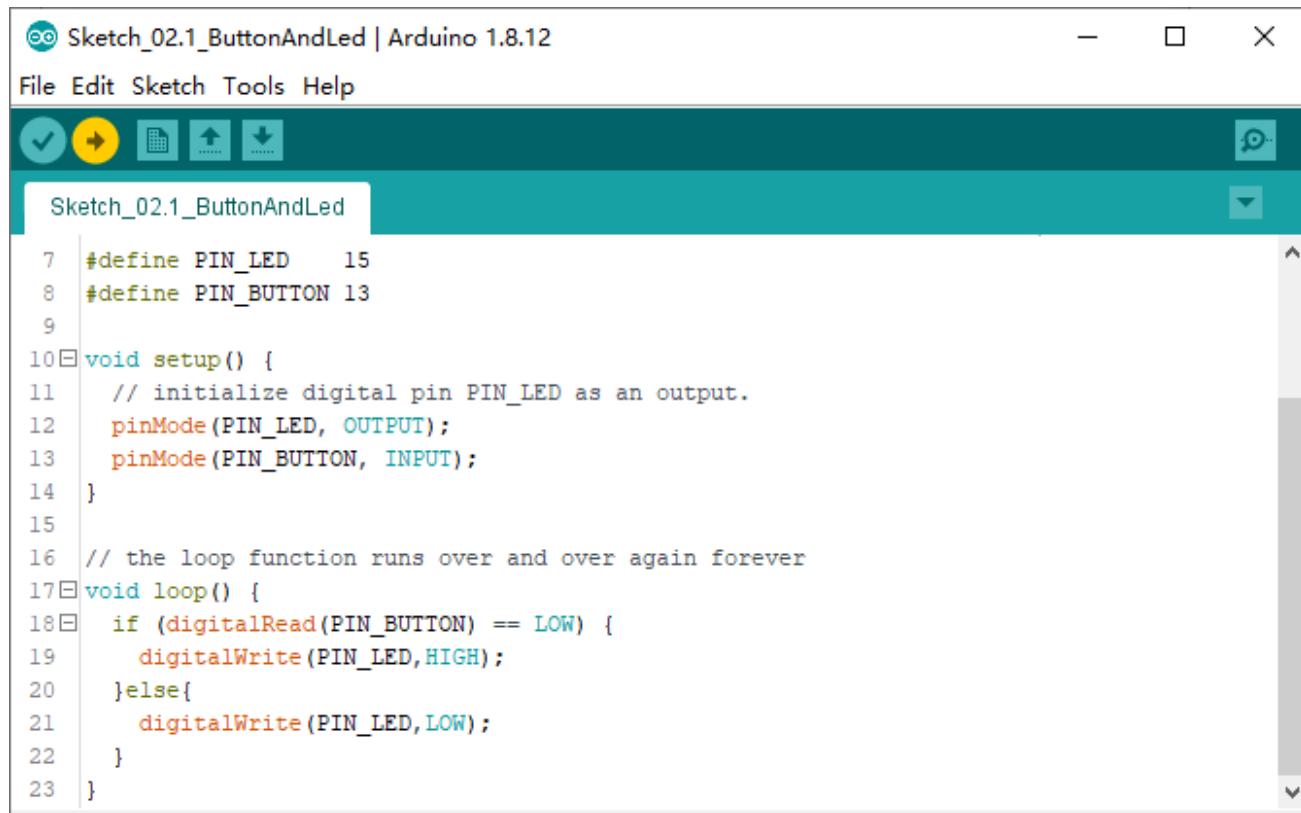


```

Sketch_02.1_ButtonAndLed | Arduino 1.8.12
File Edit Sketch Tools Help
Sketch_02.1_ButtonAndLed
7 #define PIN_LED      15
8 #define PIN_BUTTON 13
9
10 void setup() {
11     // initialize digital pin PIN_LED as an output.
12     pinMode(PIN_LED, OUTPUT);
13     pinMode(PIN_BUTTON, INPUT);
14 }
15
16 // the loop function runs over and over again forever
17 void loop() {
18     if (digitalRead(PIN_BUTTON) == LOW) {
19         digitalWrite(PIN_LED,HIGH);
20     }else{
21         digitalWrite(PIN_LED,LOW);
22     }
23 }

```

Upload the sketch to Pico. When pressing the button, LED lights up; when releasing the button, LED lights OFF.

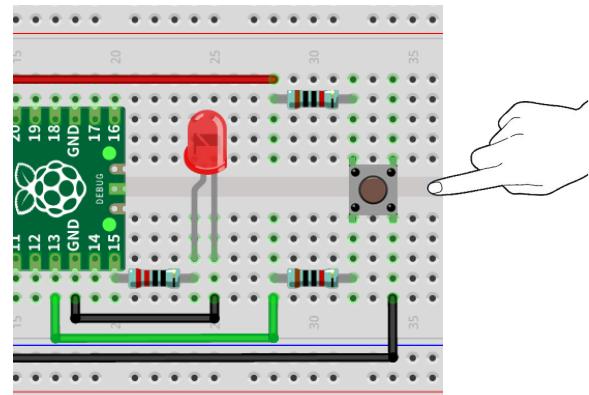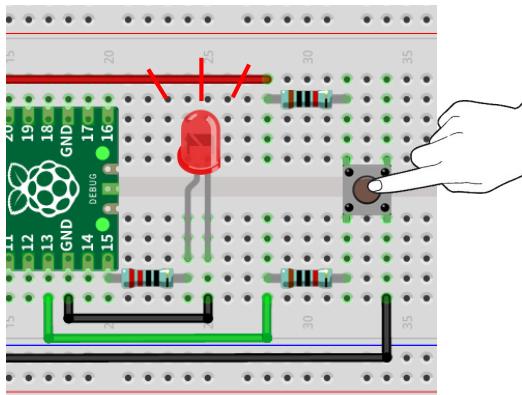

The following is the program code:

```

1 #define PIN_LED    15
2 #define PIN_BUTTON 13
3 // the setup function runs once when you press reset or power the board
4 void setup() {
5     // initialize digital pin PIN_LED as an output.
6     pinMode(PIN_LED, OUTPUT);
7     pinMode(PIN_BUTTON, INPUT);
8 }
9
10 // the loop function runs over and over again forever
11 void loop() {
12     if (digitalRead(PIN_BUTTON) == LOW) {
13         digitalWrite(PIN_LED, HIGH);
14     }else{
15         digitalWrite(PIN_LED, LOW);
16     }
17 }
```

In the circuit connection, LED and button are connected with GP15 and GP13 respectively, so define ledPin and buttonPin as 15 and 13 respectively.

```

1 #define PIN_LED    15
2 #define PIN_BUTTON 13
```

In the while cycle of main function, use digitalRead(buttonPin) to determine the state of button. When the button is pressed, the function returns low level and the result of "if" is true, so LED lights up. Otherwise, LED lights OFF.

```

11 void loop() {
12     if (digitalRead(PIN_BUTTON) == LOW) {
13         digitalWrite(PIN_LED, HIGH);
14     }else{
15         digitalWrite(PIN_LED, LOW);
16     }
17 }
```

Reference

```
int digitalRead (int pin);
```

This function returns the value read at the given pin. It will be "HIGH" or "LOW"(1 or 0) depending on the logic level at the pin.


Project 2.2 MINI table lamp

We will also use a Push Button Switch, LED and Raspberry Pi Pico to make a MINI Table Lamp but this will function differently: Press the button, the LED will turn ON, and pressing the button again, the LED turns OFF. The ON switch action is no longer momentary (like a door bell) but remains ON without needing to continually press on the Button Switch.

First, let us learn something about the push button switch.

Debounce for Push Button

When a Momentary Push Button Switch is pressed, it will not change from one state to another state immediately. Due to tiny mechanical vibrations, there will be a short period of continuous buffeting before it completely reaches another state too fast for Humans to detect but not for computer microcontrollers. The same is true when the push button switch is released. This unwanted phenomenon is known as “bounce”.

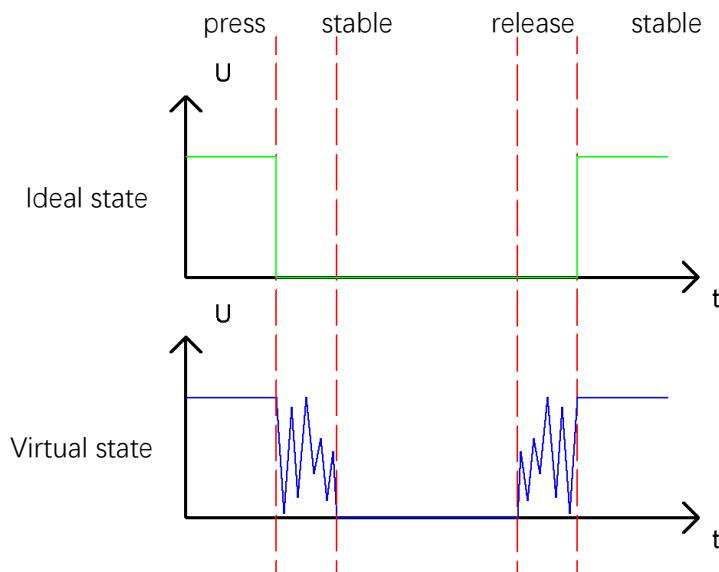

Therefore, if we can directly detect the state of the Push Button Switch, there are multiple pressing and releasing actions in one pressing cycle. This buffeting will mislead the high-speed operation of the microcontroller to cause many false decisions. Therefore, we need to eliminate the impact of buffeting. Our solution: to judge the state of the button multiple times. Only when the button state is stable (consistent) over a period of time, can it indicate that the button is actually in the ON state (being pressed).


This project needs the same components and circuits as we used in the previous section.

Sketch

Upload following sketch:

Freenove_Super_Starter_Kit_for_Raspberry_Pi_Pico\C\Sketches\Sketch_02.2_TableLamp.



Sketch_02.2_TableLamp

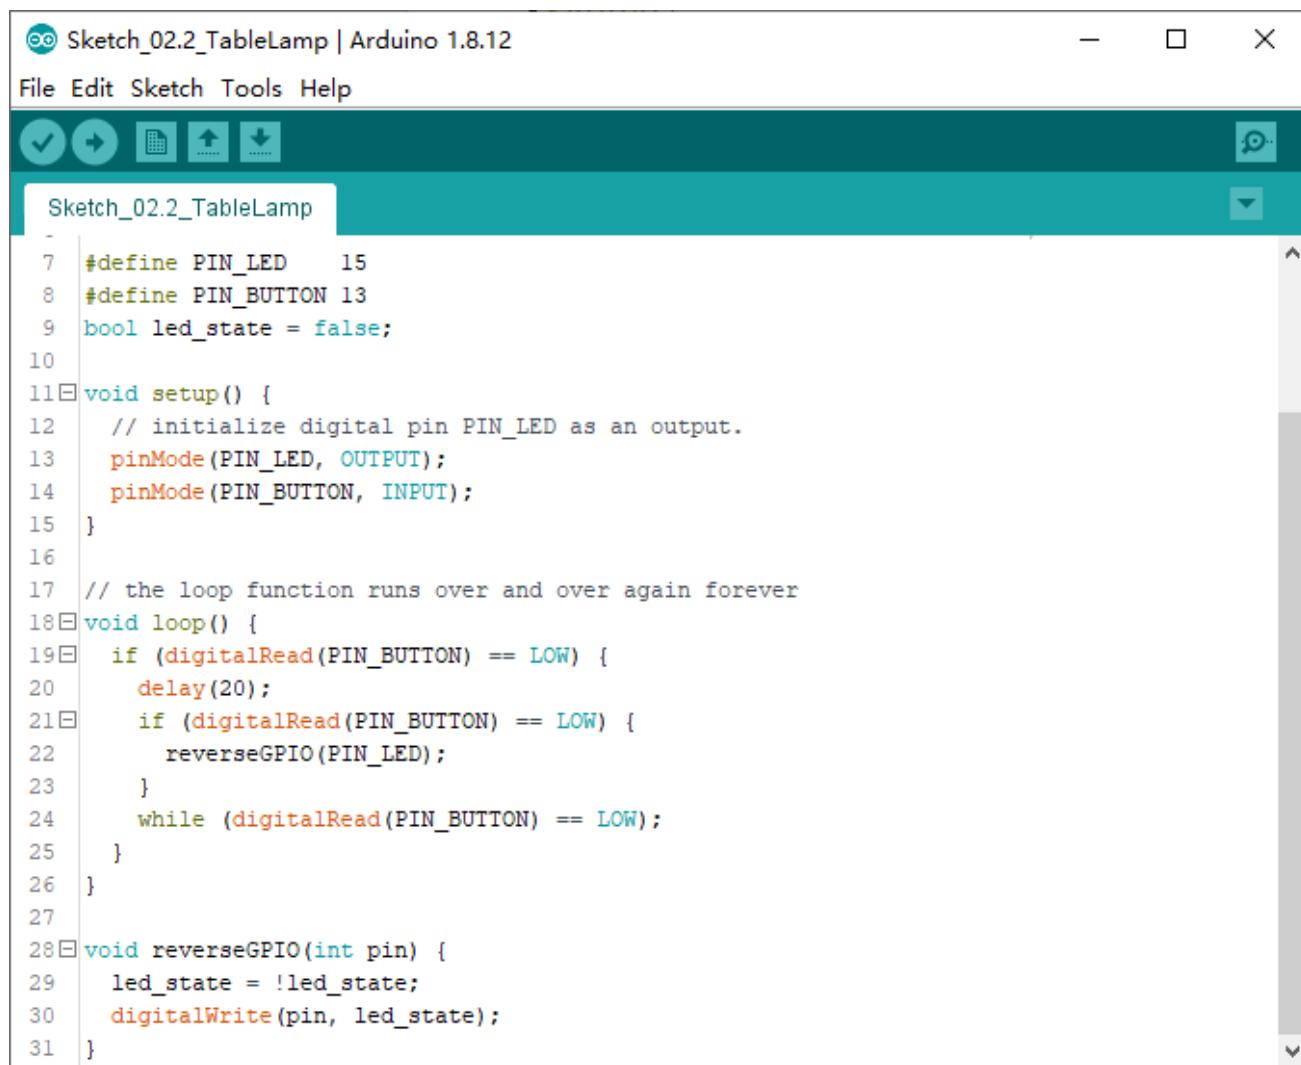

The screenshot shows the Arduino IDE interface with the title bar "Sketch_02.2_TableLamp | Arduino 1.8.12". The menu bar includes File, Edit, Sketch, Tools, and Help. Below the menu is a toolbar with icons for upload, download, and other functions. The main area displays the C++ code for the sketch:

```
Sketch_02.2_TableLamp
7 #define PIN_LED      15
8 #define PIN_BUTTON 13
9 bool led_state = false;
10
11 void setup() {
12     // initialize digital pin PIN_LED as an output.
13     pinMode(PIN_LED, OUTPUT);
14     pinMode(PIN_BUTTON, INPUT);
15 }
16
17 // the loop function runs over and over again forever
18 void loop() {
19     if (digitalRead(PIN_BUTTON) == LOW) {
20         delay(20);
21         if (digitalRead(PIN_BUTTON) == LOW) {
22             reverseGPIO(PIN_LED);
23         }
24         while (digitalRead(PIN_BUTTON) == LOW);
25     }
26 }
27
28 void reverseGPIO(int pin) {
29     led_state = !led_state;
30     digitalWrite(pin, led_state);
31 }
```


Upload the sketch to Pico. When the button is pressed, LED lights up; when the button is released, LED is still ON.

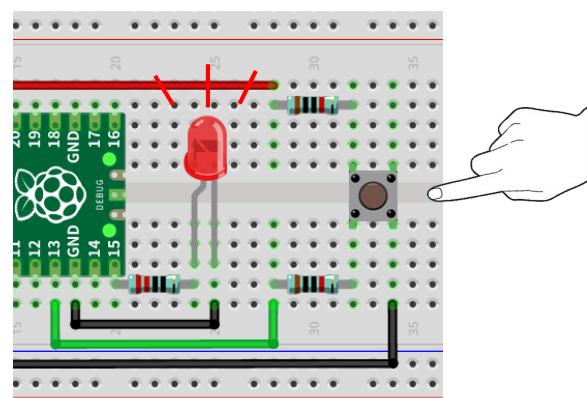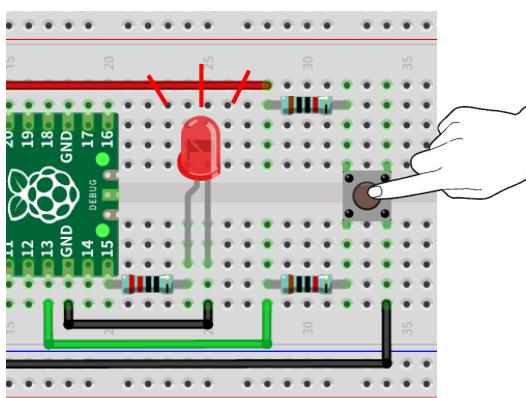

Any concerns? ✉ support@freenove.com



When the button is pressed again, LED turns OFF; when released, LED keeps OFF.

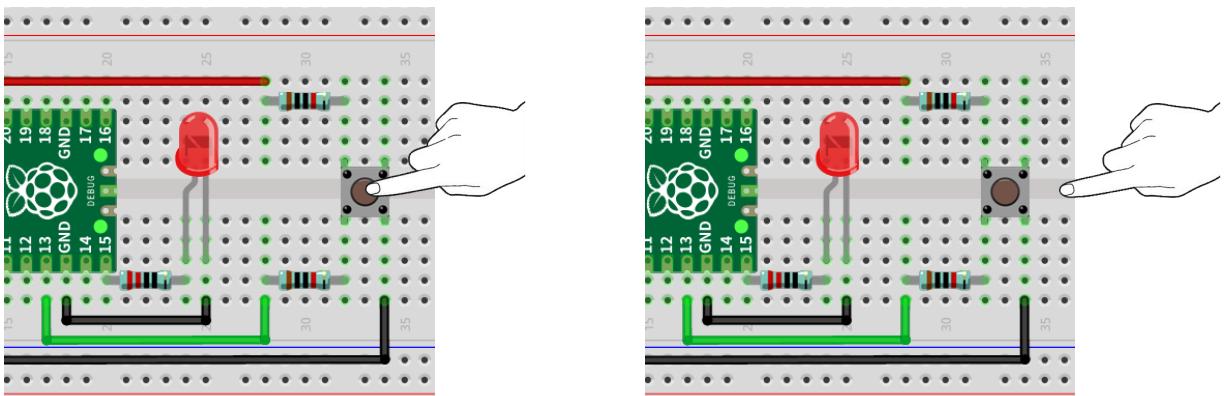

The following is the program code:

```

1 #define PIN_LED    15
2 #define PIN_BUTTON 13
3 bool ledState = false;
4
5 void setup() {
6     // initialize digital pin PIN_LED as an output.
7     pinMode(PIN_LED, OUTPUT);
8     pinMode(PIN_BUTTON, INPUT);
9 }
10
11 // the loop function runs over and over again forever
12 void loop() {
13     if (digitalRead(PIN_BUTTON) == LOW) {
14         delay(20);
15         if (digitalRead(PIN_BUTTON) == LOW) {
16             reverseGPIO(PIN_LED);
17         }
18         while (digitalRead(PIN_BUTTON) == LOW);
19     }
20 }
21
22 void reverseGPIO(int pin) {
23     ledState = !ledState;
24     digitalWrite(pin, ledState);
25 }
```

In the circuit connection, LED and button are connected with GP15 and GP13 respectively, so define ledPin and buttonPin as 15 and 13 respectively.

```

1 #define PIN_LED    15
2 #define PIN_BUTTON 13
```

Define a variable to store the status of LED.

```
3 bool ledState = false;
```

When judging the push button state, if it is detected as "pressed down", wait for a certain time to detect again to eliminate the effect of bounce. When confirmed, flip the LED on and off. Then it starts to wait for the pressed button to be released, and waits for a certain time to eliminate the effect of bounce after it is released.

```
13  if (digitalRead(PIN_BUTTON) == LOW) {  
14      delay(20);  
15      if (digitalRead(PIN_BUTTON) == LOW) {  
16          reverseGPIO(PIN_LED);  
17      }  
18      while (digitalRead(PIN_BUTTON) == LOW);  
19  }
```

When the button is pressed, reverseGPIO function is called to change the variable that controls LED's statue, and write it to Pico to reverse the pin's output state.

```
22  void reverseGPIO(int pin) {  
23      ledState = !ledState;  
24      digitalWrite(pin, ledState);  
25  }
```



Chapter 3 LED Bar

We have learned how to control an LED blinking, next we will learn how to control a number of LEDs.

Project 3.1 Flowing Light

Note: Raspberry Pi Pico and Raspberry Pi Pico W only differ by wireless function, and are almost identical in other aspects. In this tutorial, except for the wireless function, other parts use Raspberry Pi Pico's map for tutorial demonstration.

In this project, we use a number of LEDs to make a flowing light.

Component List

Raspberry Pi Pico x1	USB cable x1	
A green printed circuit board (PCB) with a central Broadcom SoC chip. It has several yellow circular pads around the perimeter, labeled 'GND' and 'VDD'. The board is labeled 'Raspberry Pi Pico • 2020'.	Two black USB cables, each with a standard A-type connector at one end and a micro-B connector at the other.	
Breadboard x1	A breadboard with two main horizontal strips of 40 pins each, separated by a vertical rail. The pins are numbered 1 through 60 along the top and bottom edges. The columns are labeled A, B, C, D, E, F, G, H, I, J from left to right.	
Jumper	LED bar graph x1	Resistor 220Ω x10


Any concerns? ✉ support@freenove.com

Component Knowledge

Let us learn about the basic features of these components to use and understand them better.


LED bar

A Bar Graph LED has 10 LEDs integrated into one compact component. The two rows of pins at its bottom are paired to identify each LED like the single LED used earlier.

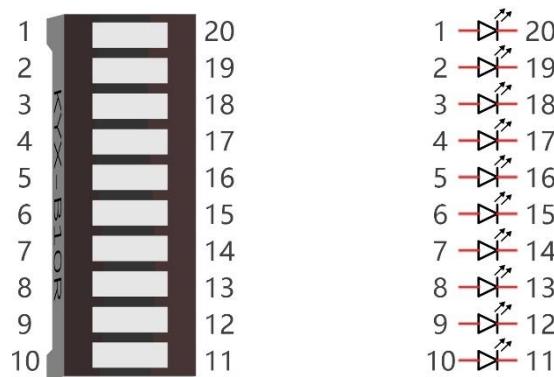


Circuit

Schematic diagram

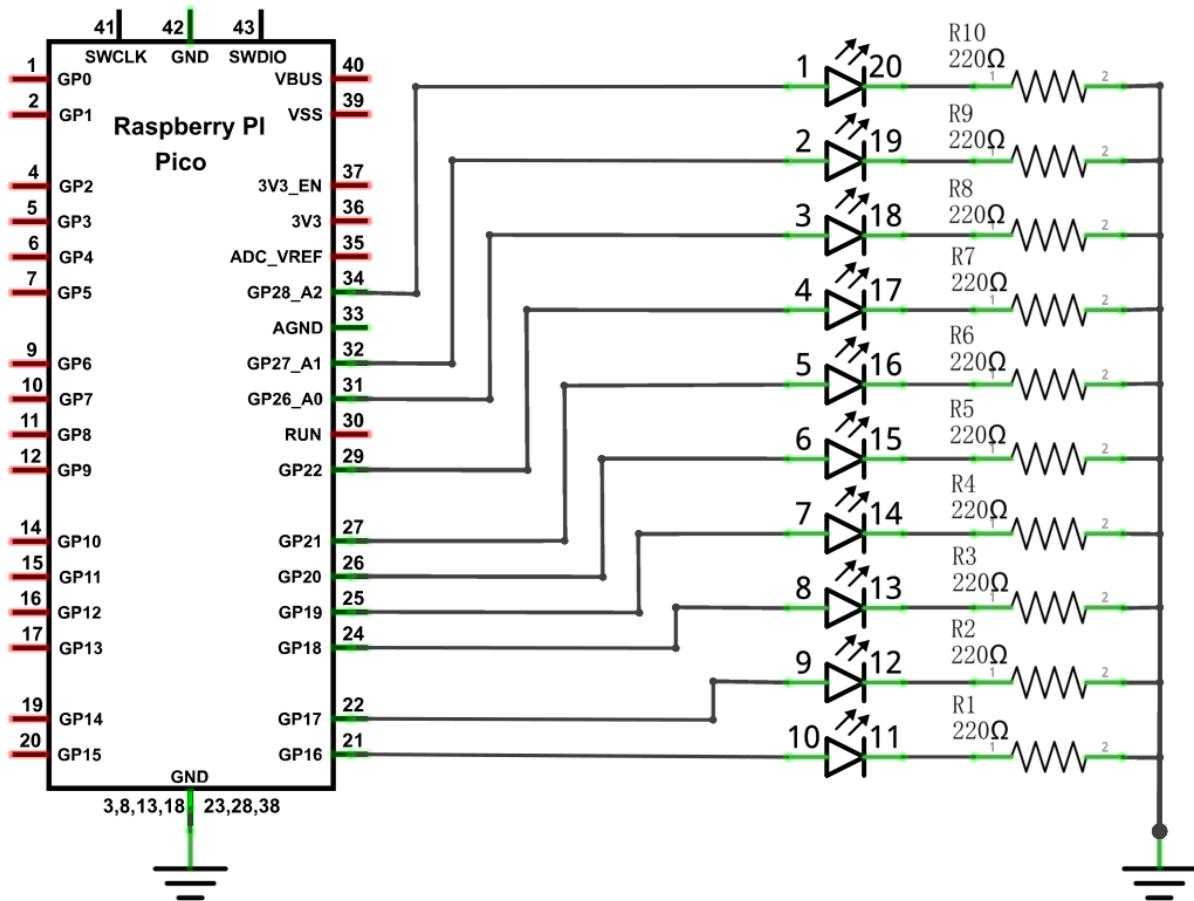

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

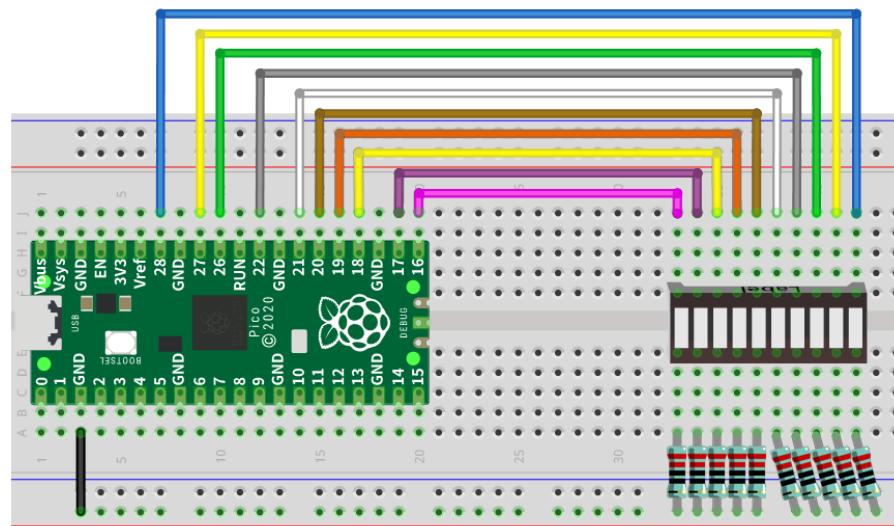

Note: To help users have a better experience when doing the projects, we have made some modifications to Pico's simulation diagram. Please note that there are certain differences between the simulation diagram and the actual board to avoid misunderstanding.

If LEDbar doesn't work, try to rotate LEDbar for 180°. The label is random.

Any concerns? ✉ support@freenove.com

Sketch

This project is designed to make a flowing water lamp, which are these actions: First turn LED #1 ON, then turn it OFF. Then turn LED #2 ON, and then turn it OFF... and repeat the same to all 10 LEDs until the last LED is turns OFF. This process is repeated to achieve the “movements” of flowing water.

Upload following sketch:

Freenove_Super_Starter_Kit_for_Raspberry_Pi_Pico\С\Sketches\Sketch_03.1_FlowingLight.

Sketch_03.1_FlowingLight


The screenshot shows the Arduino IDE interface. The title bar says "Sketch_03.1_FlowingLight | Arduino 1.8.12". The menu bar includes File, Edit, Sketch, Tools, and Help. Below the menu is a toolbar with icons for Save, Undo, Redo, Open, Upload, and a magnifying glass. The main area displays the C++ code for the sketch. The code initializes an array of pins (ledPins) and sets up each pin as an output. The loop function contains two nested for loops. The inner loop turns each LED on for 100ms and off for 100ms. The outer loop iterates from the first LED to the last, and then back from the last to the first, repeating the sequence. At the bottom of the code window, it says "Done uploading." and shows the progress of loading the sketch into flash memory (91%, 96%, 100%). The status bar at the bottom right indicates "Raspberry Pi Pico on COM10".

```
byte ledPins[] = {16, 17, 18, 19, 20, 21, 22, 26, 27, 28};
int ledCounts;

void setup() {
    ledCounts = sizeof(ledPins);
    for (int i = 0; i < ledCounts; i++) {
        pinMode(ledPins[i], OUTPUT);
    }
}

void loop() {
    for (int i = 0; i < ledCounts; i++) {
        digitalWrite(ledPins[i], HIGH);
        delay(100);
        digitalWrite(ledPins[i], LOW);
    }
    for (int i = ledCounts - 1; i > -1; i--) {
        digitalWrite(ledPins[i], HIGH);
        delay(100);
        digitalWrite(ledPins[i], LOW);
    }
}
```

Click Upload to upload the sketch to Pico. LEDs of LED bar graph lights up one by one from left to right and then back from right to left.



If you have any concerns, please contact us via: support@freenove.com

Any concerns? ✉ support@freenove.com



The following is the program code:

```

1 byte ledPins[] = {16, 17, 18, 19, 20, 21, 22, 26, 27, 28};
2 int ledCounts;
3
4 void setup() {
5     ledCounts = sizeof(ledPins);
6     for (int i = 0; i < ledCounts; i++) {
7         pinMode(ledPins[i], OUTPUT);
8     }
9 }
10
11 void loop() {
12     for (int i = 0; i < ledCounts; i++) {
13         digitalWrite(ledPins[i], HIGH);
14         delay(100);
15         digitalWrite(ledPins[i], LOW);
16     }
17     for (int i = ledCounts - 1; i > -1; i--) {
18         digitalWrite(ledPins[i], HIGH);
19         delay(100);
20         digitalWrite(ledPins[i], LOW);
21     }
22 }
```

Use an array to define 10 GPIO ports connected to LED bar graph for easier operation.

```
1 byte ledPins[] = {16, 17, 18, 19, 20, 21, 22, 26, 27, 28};
```

In setup(), use sizeof() to get the number of array, which is the number of LEDs, then configure the GPIO port to output mode.

```

5 ledCounts = sizeof(ledPins);
6 for (int i = 0; i < ledCounts; i++) {
7     pinMode(ledPins[i], OUTPUT);
8 }
```

Then, in loop(), use two “for” loop to realize flowing water light from left to right and from right to left.

```

12 for (int i = 0; i < ledCounts; i++) {
13     digitalWrite(ledPins[i], HIGH);
14     delay(100);
15     digitalWrite(ledPins[i], LOW);
16 }
17 for (int i = ledCounts - 1; i > -1; i--) {
18     digitalWrite(ledPins[i], HIGH);
19     delay(100);
20     digitalWrite(ledPins[i], LOW);
21 }
```

Chapter 4 Analog & PWM

In previous study, we have known that one button has two states: pressed and released, and LED has light-on/off state, then how to enter a middle state? How to output an intermediate state to let LED "semi bright"? That's what we're going to learn.

First, let's learn how to control the brightness of an LED.

Project 4.1 Breathing LED

Breathing light, that is, LED is turned from off to on gradually, and gradually from on to off, just like "breathing". So, how to control the brightness of an LED? We will use PWM to achieve this target.


Component List

Raspberry Pi Pico x1		USB cable x1
Breadboard x1		
	Resistor 220Ω x1	Jumper
		

Related Knowledge

Analog & Digital

An Analog Signal is a continuous signal in both time and value. On the contrary, a Digital Signal or discrete-time signal is a time series consisting of a sequence of quantities. Most signals in life are analog signals. A familiar example of an Analog Signal would be how the temperature throughout the day is continuously changing and could not suddenly change instantaneously from 0°C to 10°C. However, Digital Signals can instantaneously change in value. This change is expressed in numbers as 1 and 0 (the basis of binary code). Their differences can more easily be seen when compared when graphed as below.

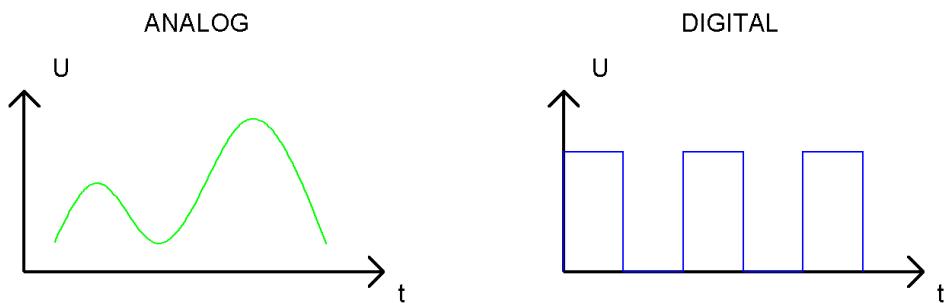


In practical application, we often use binary as the digital signal, that is a series of 0's and 1's. Since a binary signal only has two values (0 or 1), it has great stability and reliability. Lastly, both analog and digital signals can be converted into the other.

PWM

PWM, Pulse-Width Modulation, is a very effective method for using digital signals to control analog circuits. Common processors cannot directly output analog signals. PWM technology makes it very convenient to achieve this conversion (translation of digital to analog signals).

PWM technology uses digital pins to send certain frequencies of square waves, that is, the output of high levels and low levels, which alternately last for a while. The total time for each set of high levels and low levels is generally fixed, which is called the period (Note: the reciprocal of the period is frequency). The time of high level outputs are generally called "pulse width", and the duty cycle is the percentage of the ratio of pulse duration, or pulse width (PW) to the total period (T) of the waveform.

The longer the output of high levels last, the longer the duty cycle and the higher the corresponding voltage in the analog signal will be. The following figures show how the analog signal voltages vary between 0V-5V (high level is 5V) corresponding to the pulse width 0%-100%:

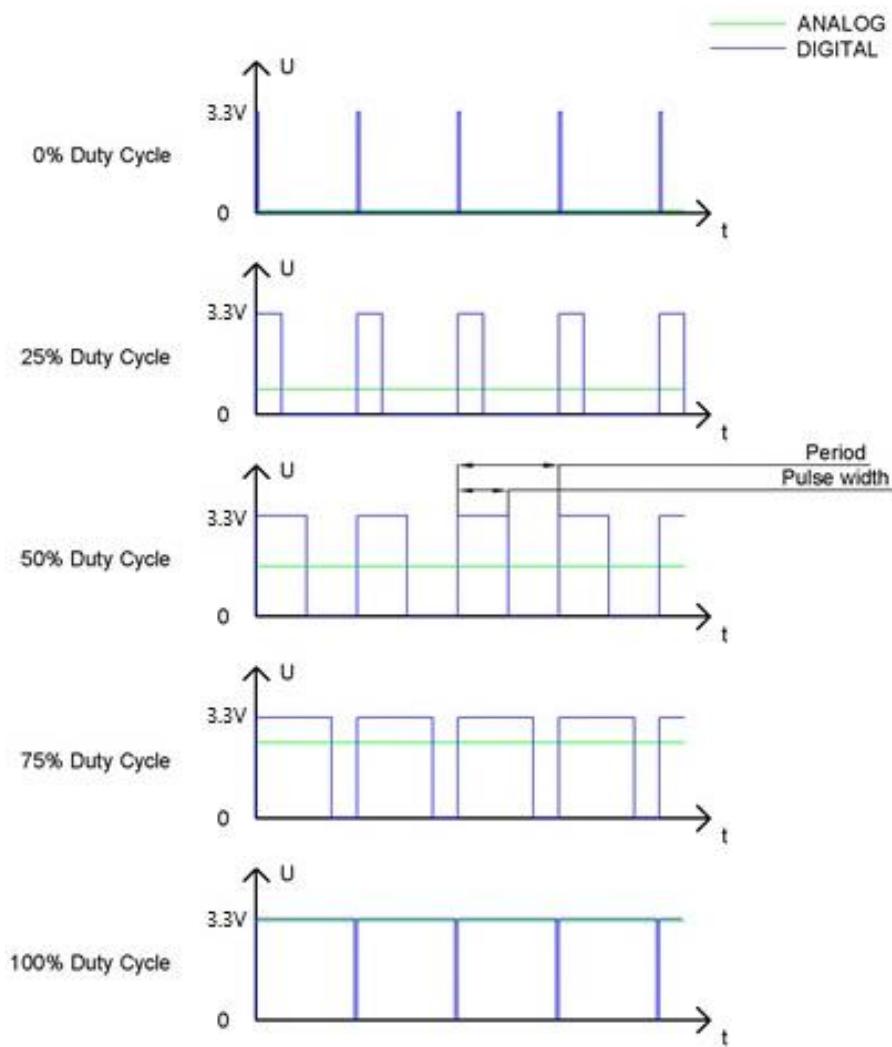

The longer the PWM duty cycle is, the higher the output power will be. Now that we understand this relationship, we can use PWM to control the brightness of an LED or the speed of DC motor and so on. It is evident from the above that PWM is not real analog, and the effective value of the voltage is equivalent to the corresponding analog. So, we can control the output power of the LED and other output modules to achieve different effects.


Raspberry Pi Pico and PWM

Raspberry Pi Pico has 16 PWM channels, each of which can control frequency and duty cycle independently. Every pin on Raspberry Pi Pico can be configured as PWM output. In Arduino, PWM frequency is set to 500Hz. You can change the PWM output by changing duty cycle.


Circuit

This circuit is the same as the one in project Blink.

Schematic diagram

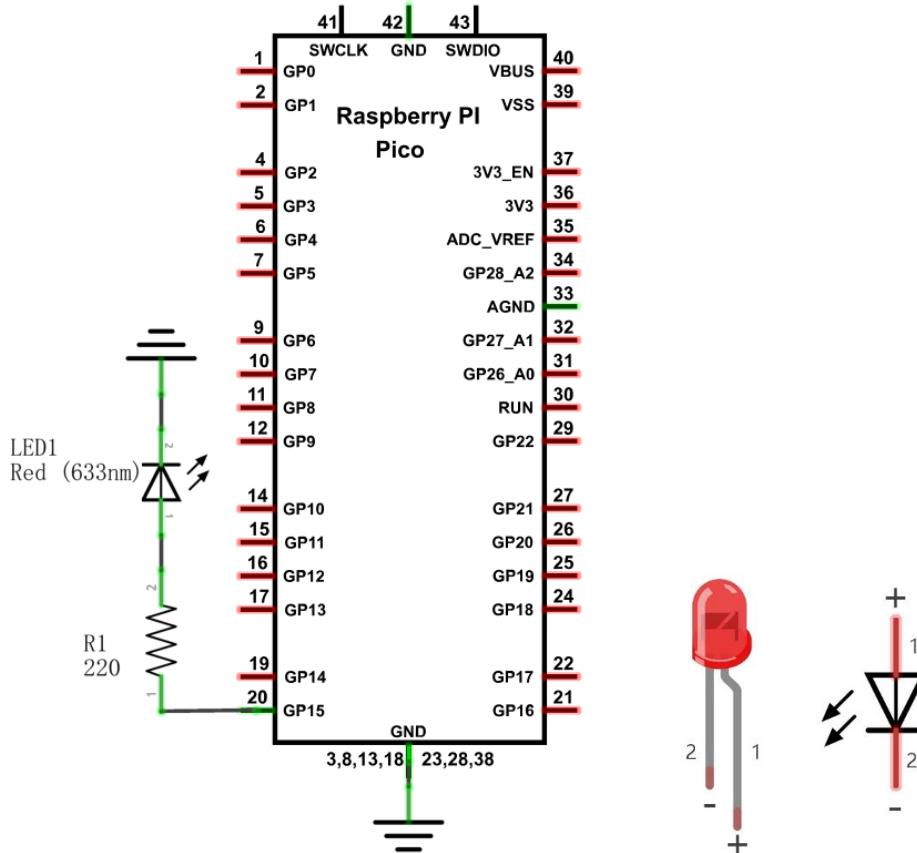

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

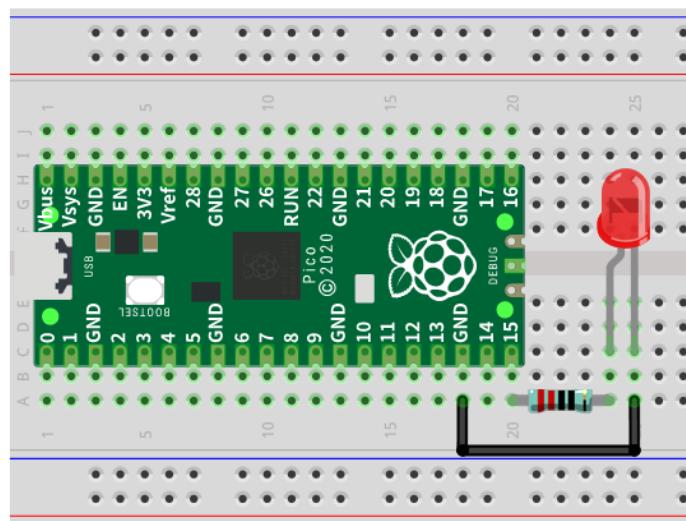


Note: To help users have a better experience when doing the projects, we have made some modifications to Pico's simulation diagram. Please note that there are certain differences between the simulation diagram and the actual board to avoid misunderstanding.

Any concerns? ✉ support@freenove.com

Sketch

This project is designed to make PWM output GP15 with pulse width increasing from 0% to 100%, and then reducing from 100% to 0% gradually.

Sketch_04.1_BreathingLight

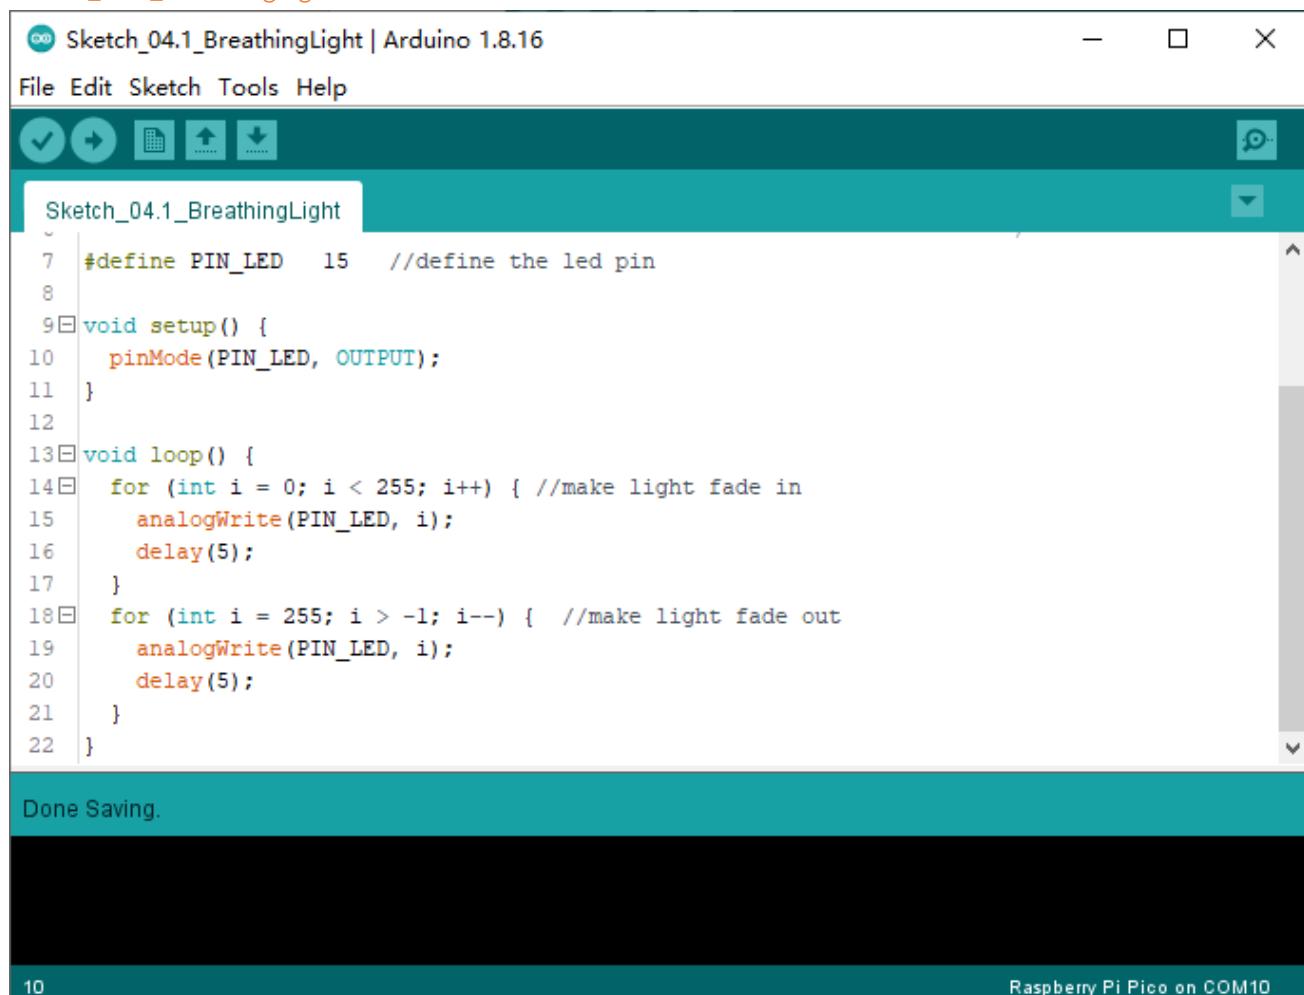

The screenshot shows the Arduino IDE interface with the following details:

- Title Bar:** Sketch_04.1_BreathingLight | Arduino 1.8.16
- Menu Bar:** File Edit Sketch Tools Help
- Toolbar:** Includes icons for Save, Run, Stop, Upload, and Download.
- Code Editor:** Displays the C++ code for the breathing light sketch. The code defines a pin for the LED, sets it up as an output, and then enters a loop where it alternates between fading the LED on and off.

```
#define PIN_LED 15 //define the led pin
void setup() {
    pinMode(PIN_LED, OUTPUT);
}
void loop() {
    for (int i = 0; i < 255; i++) { //make light fade in
        analogWrite(PIN_LED, i);
        delay(5);
    }
    for (int i = 255; i > -1; i--) { //make light fade out
        analogWrite(PIN_LED, i);
        delay(5);
    }
}
```

- Status Bar:** Shows "Done Saving." and "Raspberry Pi Pico on COM10".

Download the code to Pico, and you'll see that LED is turned from on to off and then from off to on gradually like breathing.





The following is the program code:

```

1 #define PIN_LED 15 //define the led pin
2
3 void setup() {
4     pinMode(PIN_LED, OUTPUT);
5 }
6
7 void loop() {
8     for (int i = 0; i < 255; i++) { //make light fade in
9         analogWrite(PIN_LED, i);
10        delay(5);
11    }
12    for (int i = 255; i > -1; i--) { //make light fade out
13        analogWrite(PIN_LED, i);
14        delay(5);
15    }
16 }
```

Set the pin controlling LED to output mode.

7	pinMode(PIN_LED, OUTPUT);
---	---------------------------

In the loop(), there are two “for” loops. The first makes the LED Pin output PWM from 0% to 100% and the second makes the LED Pin output PWM from 100% to 0%. This allows the LED to gradually light and extinguish.

```

11 for (int i = 0; i < 255; i++) { //make light fade in
12     analogWrite(PIN_LED, i);
13     delay(5);
14 }
15 for (int i = 255; i > -1; i--) { //make light fade out
16     analogWrite(PIN_LED, i);
17     delay(5);
18 }
```

You can also adjust the rate of the state change of LED by changing the parameters of the delay() function in the “for” loop.

analogWrite(pin, value)




Arduino IDE provides the function, analogWrite(pin, value), which can make ports directly output PWM waves. Every pin on Pico board can be configured to output PWM. In the function called analogWrite(pin, value), the parameter "pin" specifies the port used to output PWM wave. The range of value is 0-255, which represents the duty cycle of 0%-100%.

In order to use this function, we need to set the port to output mode.

Project 4.2 Meteor Flowing Light


After learning about PWM, we can use it to control LED bar graph and realize a cooler flowing light. The component list, circuit, and hardware are exactly consistent with the project [Flowing Light](#).

Component List

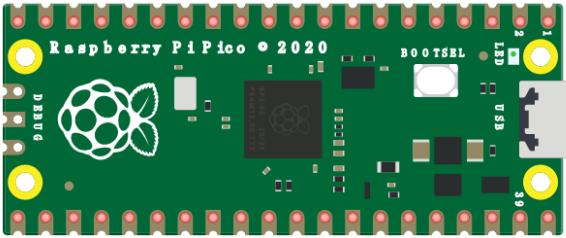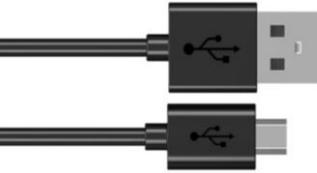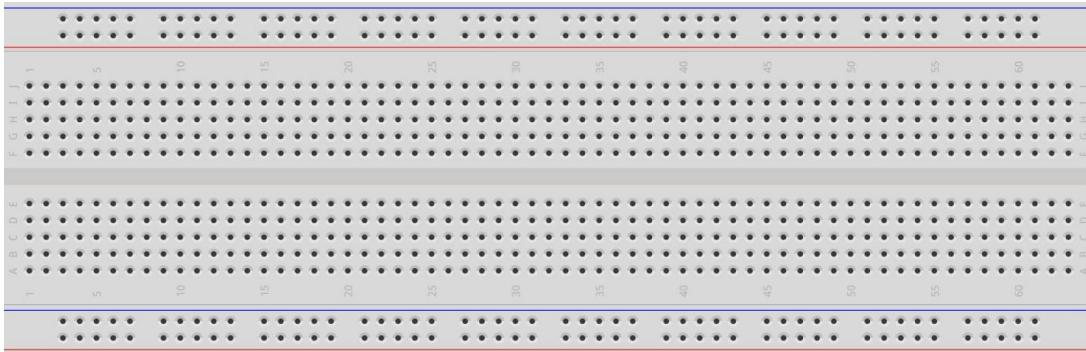
Raspberry Pi Pico x1	USB cable x1		
			
Breadboard x1			
	Jumper	LED bar graph x1	Resistor 220Ω x10

Circuit

Schematic diagram

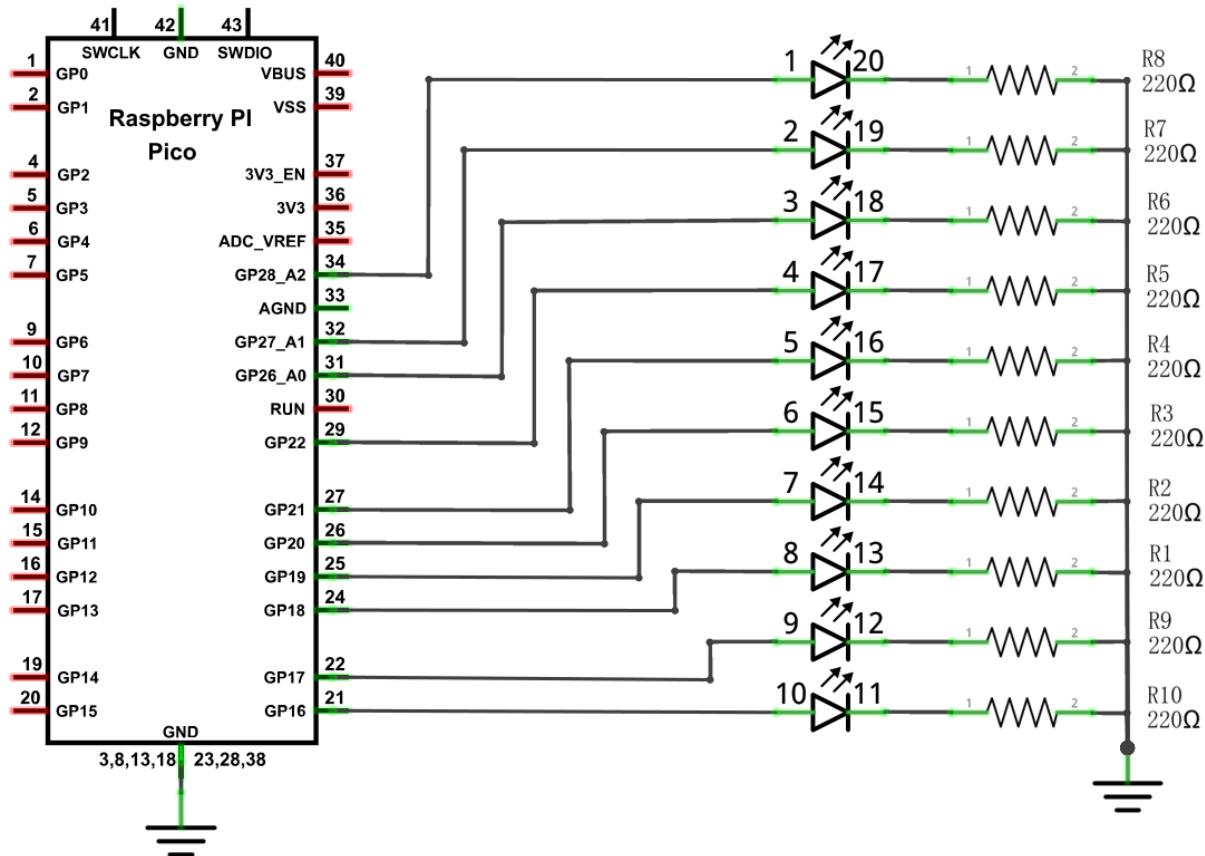

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

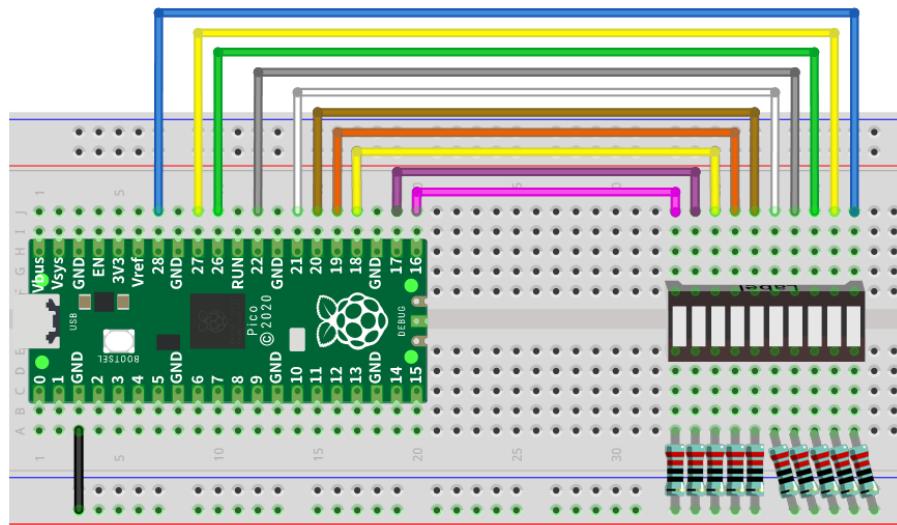

Note: To help users have a better experience when doing the projects, we have made some modifications to Pico's simulation diagram. Please note that there are certain differences between the simulation diagram and the actual board to avoid misunderstanding.


If LEDbar doesn't work, try to rotate LEDbar for 180°. The label is random.

Any concerns? ✉ support@freenove.com

Sketch

Meteor flowing light will be implemented with PWM.

Sketch_04.2_FlowingLight2

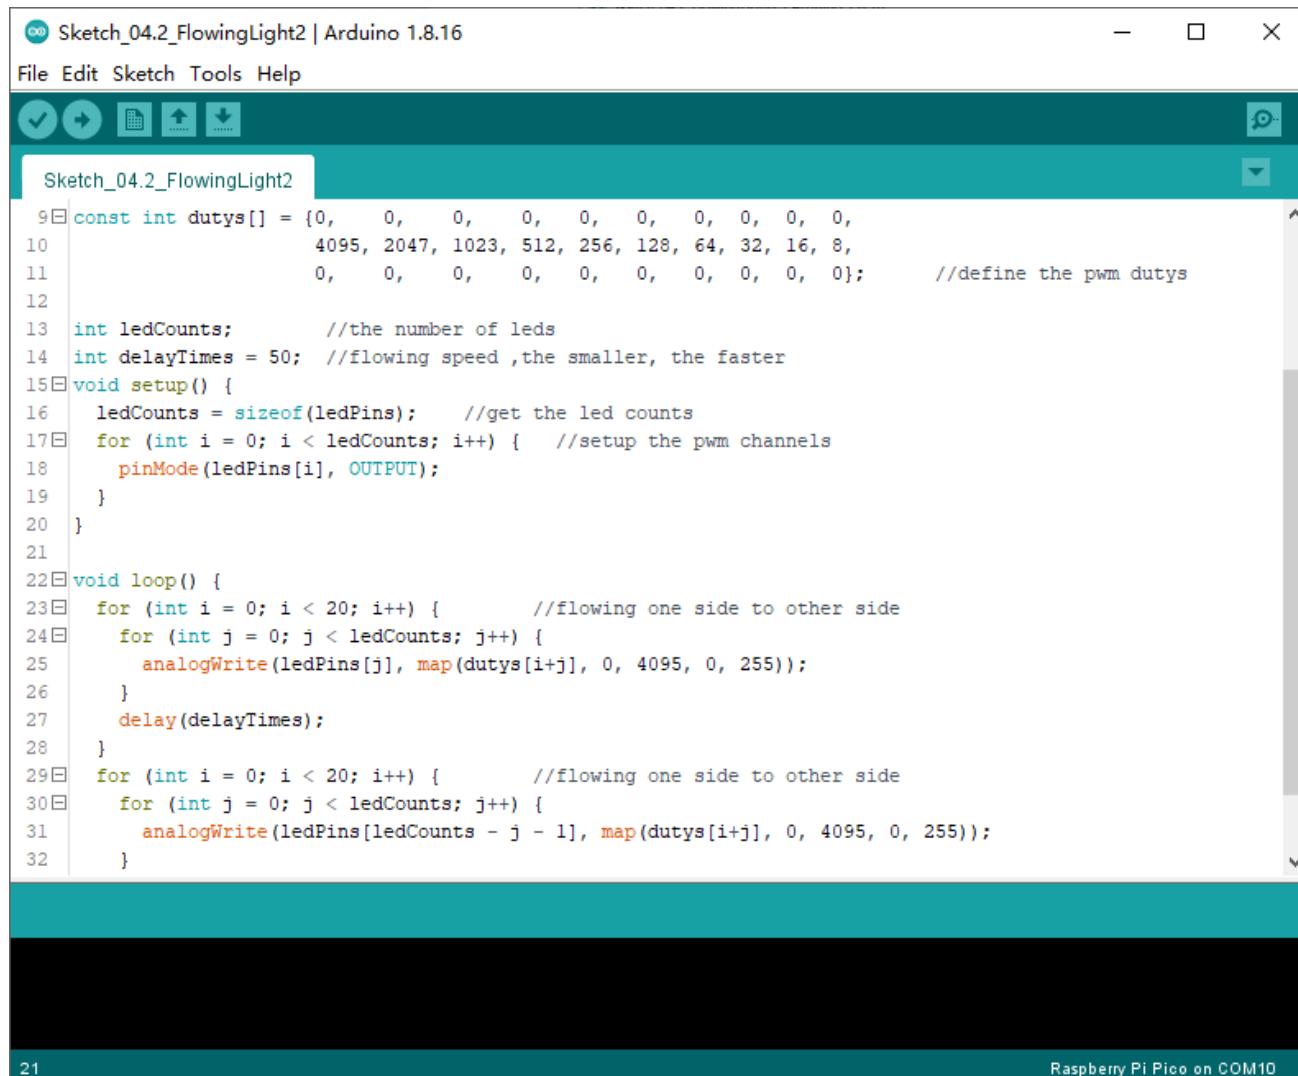

```

Sketch_04.2_FlowingLight2 | Arduino 1.8.16

File Edit Sketch Tools Help

Sketch_04.2_FlowingLight2

9 const int dutys[] = {0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
10 4095, 2047, 1023, 512, 256, 128, 64, 32, 16, 8,
11 0, 0, 0, 0, 0, 0, 0, 0, 0, 0}; //define the pwm dutys
12
13 int ledCounts; //the number of leds
14 int delayTimes = 50; //flowing speed ,the smaller, the faster
15 void setup() {
16   ledCounts = sizeof(ledPins); //get the led counts
17   for (int i = 0; i < ledCounts; i++) { //setup the pwm channels
18     pinMode(ledPins[i], OUTPUT);
19   }
20 }
21
22 void loop() {
23   for (int i = 0; i < 20; i++) { //flowing one side to other side
24     for (int j = 0; j < ledCounts; j++) {
25       analogWrite(ledPins[j], map(dutys[i+j], 0, 4095, 0, 255));
26     }
27     delay(delayTimes);
28   }
29   for (int i = 0; i < 20; i++) { //flowing one side to other side
30     for (int j = 0; j < ledCounts; j++) {
31       analogWrite(ledPins[ledCounts - j - 1], map(dutys[i+j], 0, 4095, 0, 255));
32     }
}

```

21 Raspberry Pi Pico on COM10

Download the code to Pico, and LED bar graph will gradually light up and out from left to right, then back from right to left.

The following is the program code:

```

1 const byte ledPins[] = {16, 17, 18, 19, 20, 21, 22, 26, 27, 28}; //define led pins
2
3 const int dutys[] = {0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
4 4095, 2047, 1023, 512, 256, 128, 64, 32, 16, 8,
5 0, 0, 0, 0, 0, 0, 0, 0, 0, 0};//define the pwm dutys
6
7 int ledCounts; //the number of leds
8 int delayTimes = 50; //flowing speed ,the smaller, the faster
9 void setup() {

```

```

10 ledCounts = sizeof(ledPins);           //get the led counts
11 for (int i = 0; i < ledCounts; i++) {  //setup the pwm channels
12     pinMode(ledPins[i], OUTPUT);
13 }
14 }
15
16 void loop() {
17     for (int i = 0; i < 20; i++) {        //flowing one side to other side
18         for (int j = 0; j < ledCounts; j++) {
19             analogWrite(ledPins[j], map(dutys[i+j], 0, 4095, 0, 255));
20         }
21         delay(delayTimes);
22     }
23     for (int i = 0; i < 20; i++) {        //flowing one side to other side
24         for (int j = 0; j < ledCounts; j++) {
25             analogWrite(ledPins[ledCounts - j - 1], map(dutys[i+j], 0, 4095, 0, 255));
26         }
27         delay(delayTimes);
28     }
29 }
```

First we defined 10 GPIO, 10 PWM channels, and 30 pulse width values.

```

1 const byte ledPins[] = {16, 17, 18, 19, 20, 21, 22, 26, 27, 28};      //define led pins
2
3 const int dutys[] = {0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
4                     4095, 2047, 1023, 512, 256, 128, 64, 32, 16, 8,
5                     0, 0, 0, 0, 0, 0, 0, 0, 0};//define the pwm dutys
```

Define a variable to store the number of LEDs and another to control the flashing speed of the LED bar.

```

7 int ledCounts;          //the number of leds
8 int delayTimes = 50;   //flowing speed , the smaller, the faster
```

Sizeof() function is used to obtain the number of members of the array ledPins and assign it to ledCount.
Use the for loop to set all pins to output mode.

```

10 ledCounts = sizeof(ledPins);           //get the led counts
11 for (int i = 0; i < ledCounts; i++) {  //setup the pwm channels
12     pinMode(ledPins[i], OUTPUT);
13 }
```

In loop(), a nested for loop is used to control the pulse width of the PWM, and LED bar graph moves one grid after each 1 is added in the first for loop, gradually changing according to the values in the array duties. As shown in the table below, the value of the second row is the value in the array duties, and the 10 green squares in each row below represent the 10 LEDs on the LED bar graph. Every 1 is added to I , the value of the LED bar graph will move to the right by one grid, and when it reaches the end, it will move from the end to the starting point, achieving the desired effect.

0	1	2	3	4	5	7	8	9	1	11	1	1	1	1	1	1	1	2	2	2	2	2	3
d	0	0	0	0	0	0	0	0	0	10	5	2	1	6	3	1	8	4	2	0	0	0	0
i										23	1	5	2	4	2	6							
0											2	6	8										
1																							
2																							
3																							
...																							
1																							
8																							
1																							
9																							
2																							
0																							

In the code, two nested for loops are used to achieve this effect.

```

17   for (int i = 0; i < 20; i++) {          //flowing one side to other side
18     for (int j = 0; j < ledCounts; j++) {
19       analogWrite(ledPins[j], map(dutys[i+j], 0, 4095, 0, 255));
20     }
21     delay(delayTimes);
22   }
23   for (int i = 0; i < 20; i++) {          //flowing one side to other side
24     for (int j = 0; j < ledCounts; j++) {
25       analogWrite(ledPins[ledCounts - j - 1], map(dutys[i+j], 0, 4095, 0, 255));
26     }
27     delay(delayTimes);
28   }

```

map(value, fromLow, fromHigh, toLow, toHigh)

This function is used to remap a value, which will return a new value whose percentage in the range of toLow-toHigh is equal to the percentage of "value" in the range of fromLow-fromHigh. For example, 1 is the maximum in the range of 0-1 and the maximum value in the scope of 0-2 is 2, that is, the result value of map (1, 0, 1, 0, 2) is 2.



Chapter 5 RGBLED

In this chapter, we will learn how to control an RGBLED. It can emit different colors of light. Next, we will use RGBLED to make a multicolored light.

Project 5.1 Random Color Light


In this project, we will make a multicolored LED. And we can control RGBLED to switch different colors automatically.

Component List

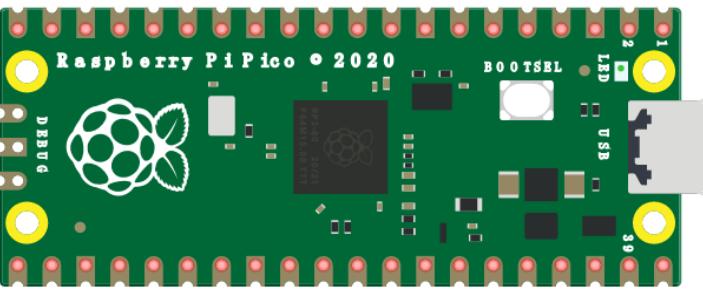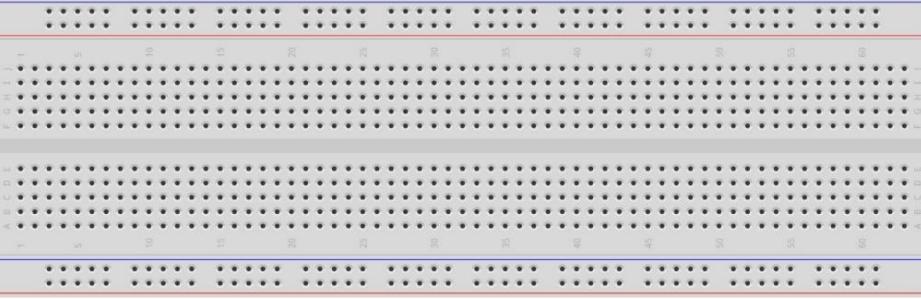
Raspberry Pi Pico x1	USB cable x1	
Breadboard x1		
RGBLED x1	Resistor 220Ω x3	Jumper
		

Related Knowledge

RGB LED has integrated 3 LEDs that can respectively emit red, green and blue light. And it has 4 pins. The long pin (1) is the common port, that is, 3 LED's positive or negative port. The RGB LED with common positive port and its symbol is shown below. We can make RGB LED emit various colors of light by controlling these 3 LEDs to emit light with different brightness.

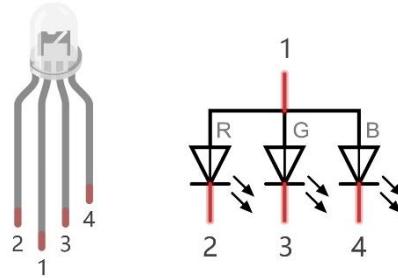


Red, green, and blue light are known as three primary colors. When you combine these three primary-color lights with different brightness, it can produce almost all kinds of visible lights. Computer screens, single pixel of cell phone screen, neon, and etc. are working under this principle.

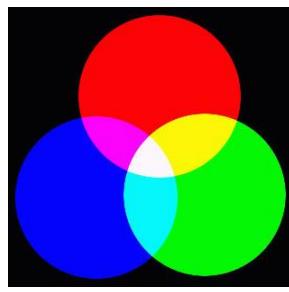


If we use three 8-bit PWMs to control the RGB LED, in theory, we can create $2^8 * 2^8 * 2^8 = 16777216$ (16 million) colors through different combinations.

Circuit

Schematic diagram

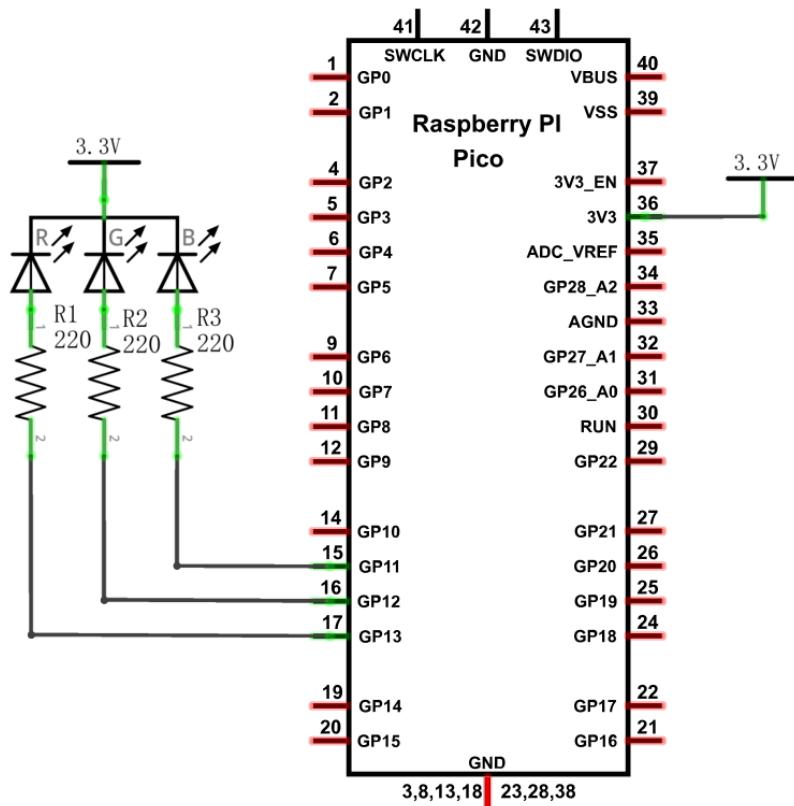

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

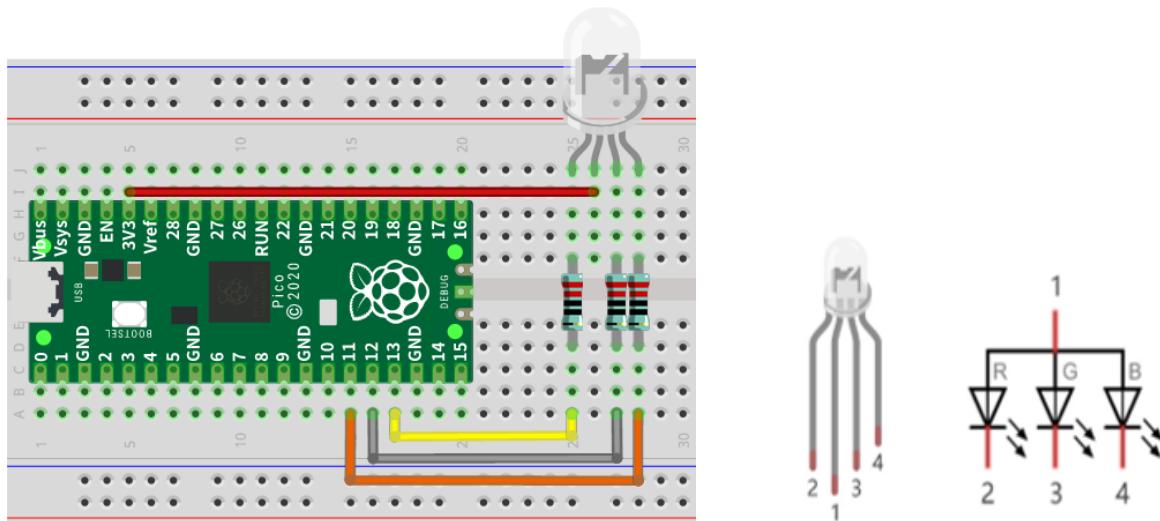


Note: To help users have a better experience when doing the projects, we have made some modifications to Pico's simulation diagram. Please note that there are certain differences between the simulation diagram and the actual board to avoid misunderstanding.

Any concerns?  support@freenove.com

Sketch

We need to create three PWM channels and use random duty cycle to make random RGB LED color.

Sketch_05.1_ColorfulLight

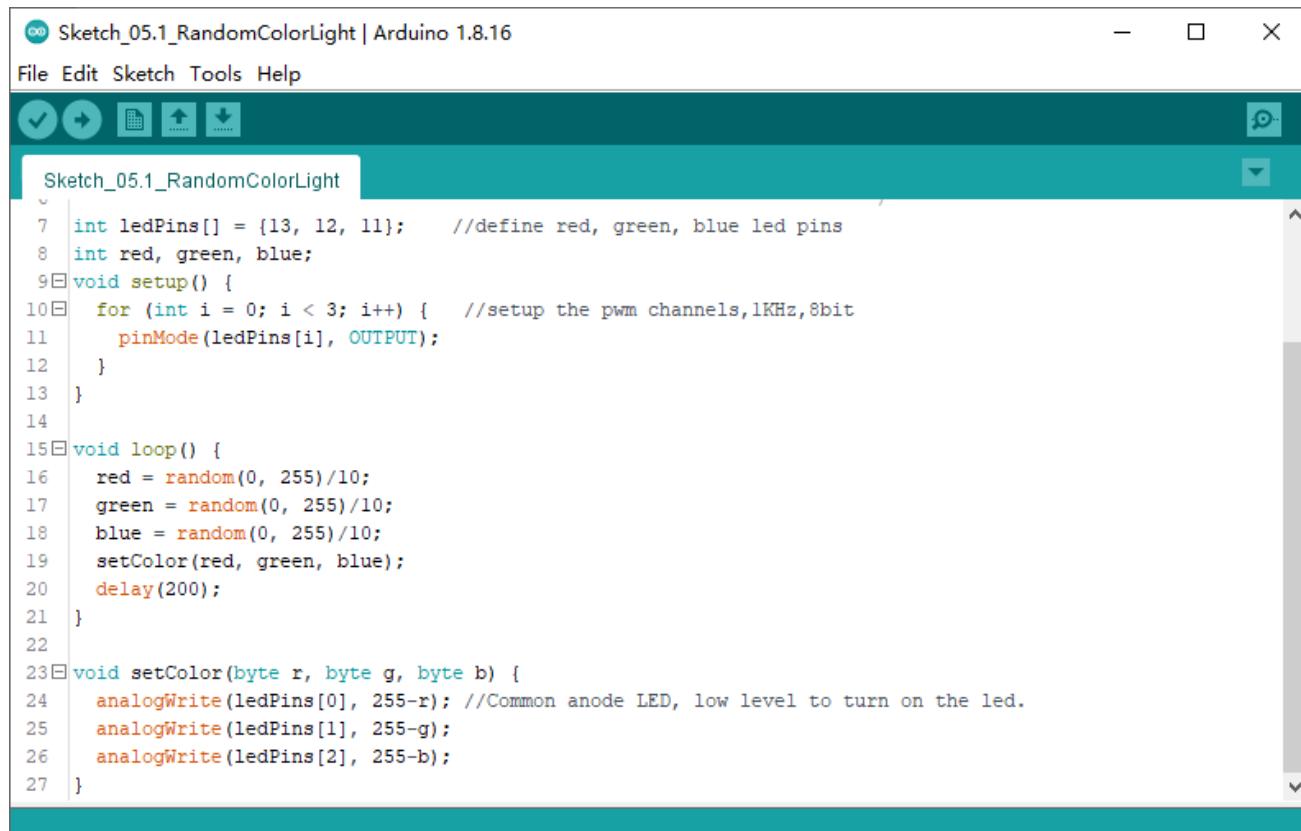


```

Sketch_05.1_RandomColorLight | Arduino 1.8.16
File Edit Sketch Tools Help
Sketch_05.1_RandomColorLight
7 int ledPins[] = {13, 12, 11}; //define red, green, blue led pins
8 int red, green, blue;
9 void setup() {
10 for (int i = 0; i < 3; i++) { //setup the pwm channels,1KHz,8bit
11   pinMode(ledPins[i], OUTPUT);
12 }
13 }
14
15 void loop() {
16   red = random(0, 255)/10;
17   green = random(0, 255)/10;
18   blue = random(0, 255)/10;
19   setColor(red, green, blue);
20   delay(200);
21 }
22
23 void setColor(byte r, byte g, byte b) {
24   analogWrite(ledPins[0], 255-r); //Common anode LED, low level to turn on the led.
25   analogWrite(ledPins[1], 255-g);
26   analogWrite(ledPins[2], 255-b);
27 }

```

With the code downloaded to Pico, RGB LED begins to display random colors.

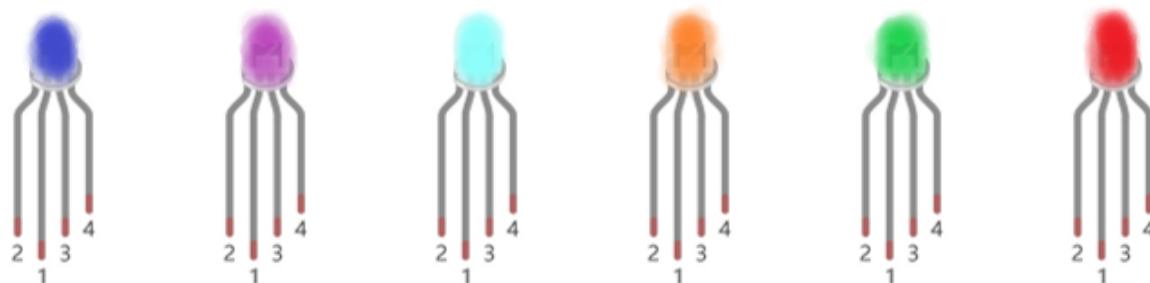

The following is the program code:

1	int ledPins[] = {13, 12, 11}; //define red, green, blue led pins
2	int red, green, blue;
3	void setup() {
4	for (int i = 0; i < 3; i++) { //setup the pwm channels,1KHz,8bit
5	pinMode(ledPins[i], OUTPUT);
6	}
7	}
8	

```

9 void loop() {
10    red = random(0, 255);
11    green = random(0, 255);
12    blue = random(0, 255);
13    setColor(red, green, blue);
14    delay(200);
15 }
16
17 void setColor(byte r, byte g, byte b) {
18    analogWrite(ledPins[0], 255-r); //Common anode LED, low level to turn on the led.
19    analogWrite(ledPins[1], 255-g);
20    analogWrite(ledPins[2], 255-b);
21 }
```

Define pins to control RGB LED, and configure them as output mode.

```

1 int ledPins[] = {13, 12, 11};      //define red, green, blue led pins
2 int red, green, blue;
3 void setup() {
4     for (int i = 0; i < 3; i++) {    //setup the pwm channels, 1KHz, 8bit
5         pinMode(ledPins[i], OUTPUT);
6     }
7 }
```

In setColor(), this function controls the output color of RGB LED by the given color value. Because the circuit uses a common anode, the LED lights up when the GPIO outputs low power. Therefore, in PWM, low level is the active level, so 255 minus the given value is necessary.

```

19 void setColor(byte r, byte g, byte b) {
20     ledcWrite(chns[0], 255 - r); //Common anode LED, low level to turn on the led.
21     ledcWrite(chns[1], 255 - g);
22     ledcWrite(chns[2], 255 - b);
23 }
```

In loop(), get three random Numbers and set them as color values.

```

12 red = random(0, 255);
13 green = random(0, 255);
14 blue = random(0, 255);
15 setColor(red, green, blue);
16 delay(200);
```

The related function of software PWM can be described as follows:

long random(min, max);


This function will return a random number(min --- max-1).

Project 5.2 Gradient Color Light

In the previous project, we have mastered the usage of RGBLED, but the random color display is rather stiff. This project will realize a fashionable Light with soft color changes.

Component list, the circuit is exactly the same as the project random color light.

Using a color model, the color changes from 0 to 255 as shown below.

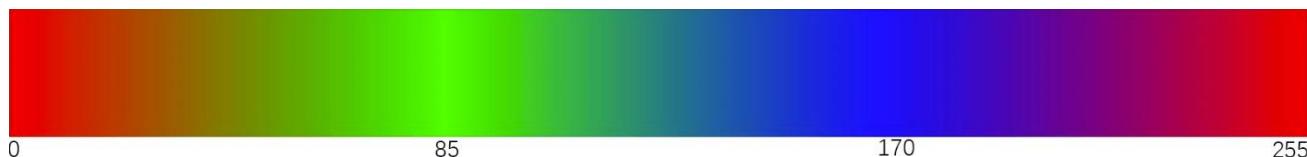

Sketch

In this code, the color model will be implemented and RGBLED will change colors along the model.

Sketch_05.2_SoftColorfulLight

The following is the program code:

```
1 const byte ledPins[] = {13, 12, 11};      //define led pins
2 void setup() {
3     for (int i = 0; i < 3; i++) {    //setup the pwm channels
4         pinMode(ledPins[i], OUTPUT);
5     }
6 }
7
8 void loop() {
9     for (int i = 0; i < 256; i++) {
10        setColor(wheel(i));
11        delay(100);
12    }
13 }
14
15 void setColor(long rgb) {
16     analogWrite(ledPins[0], 255 - (rgb >> 16) & 0xFF);
17     analogWrite(ledPins[1], 255 - (rgb >> 8) & 0xFF);
18     analogWrite(ledPins[2], 255 - (rgb >> 0) & 0xFF);
19 }
20
21 long wheel(int pos) {
22     long WheelPos = pos % 0xff;
23     if (WheelPos < 85) {
24         return ((255 - WheelPos * 3) << 16) | ((WheelPos * 3) << 8);
25     } else if (WheelPos < 170) {
```

```

26     WheelPos -= 85;
27     return (((255 - WheelPos * 3) << 8) | (WheelPos * 3));
28 } else {
29     WheelPos -= 170;
30     return ((WheelPos * 3) << 16 | (255 - WheelPos * 3));
31 }
32 }
```

In `setColor()`, a variable represents the value of RGB, and a hexadecimal representation of color is a common representation, such as `0xAABBCC`, where AA represents the red value, BB represents the green value, and CC represents the blue value. The use of a variable can make the transmission of parameters more convenient, in the split, only a simple operation can take out the value of each color channel

```

15 void setColor(long rgb) {
16     ledcWrite(chns[0], 255 - (rgb >> 16) & 0xFF);
17     ledcWrite(chns[1], 255 - (rgb >> 8) & 0xFF);
18     ledcWrite(chns[2], 255 - (rgb >> 0) & 0xFF);
19 }
```

The `wheel()` function is the color selection method for the color model introduced earlier. The **pos** parameter ranges from 0 to 255 and outputs a color value in hexadecimal.

```

21 long wheel(int pos) {
22     long WheelPos = pos % 0xff;
23     if (WheelPos < 85) {
24         return (((255 - WheelPos * 3) << 16) | ((WheelPos * 3) << 8));
25     } else if (WheelPos < 170) {
26         WheelPos -= 85;
27         return (((255 - WheelPos * 3) << 8) | (WheelPos * 3));
28     } else {
29         WheelPos -= 170;
30         return ((WheelPos * 3) << 16 | (255 - WheelPos * 3));
31     }
32 }
```

Chapter 6 NeoPixel


This chapter will help you learn to use a more convenient RGBLED lamp, which requires only one GPIO control and can be connected in infinite series in theory. Each LED can be controlled independently.

Project 6.1 NeoPixel

Learn the basic usage of NeoPixel and use it to blink red, green, blue and white.

Component List


Raspberry Pi Pico x1

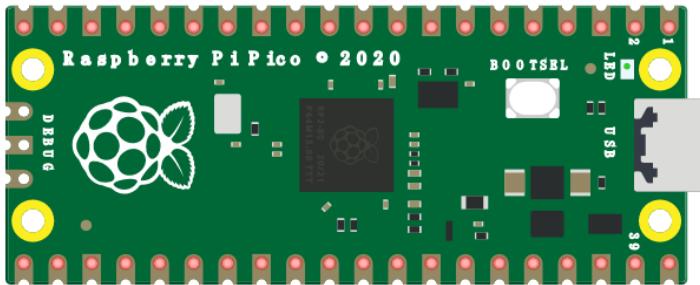


USB cable x1



Breadboard x1

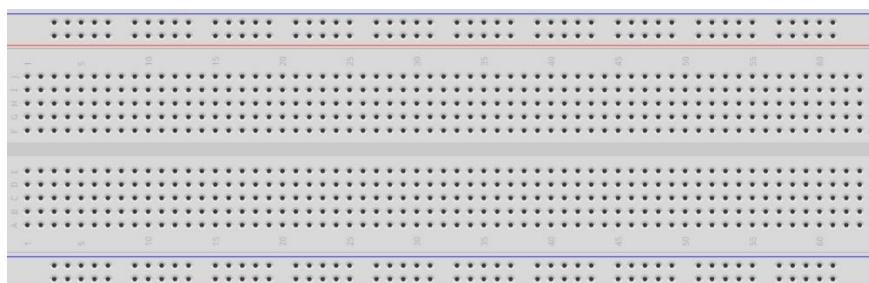

Freenove 8 RGB LED Module x1

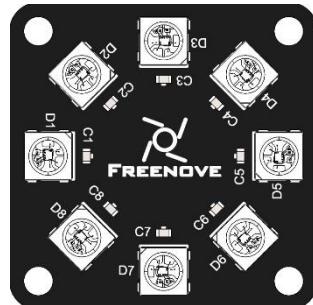



Jumper





Related Knowledge

Freenove 8 RGB LED Module

The Freenove 8 RGB LED Module is as below. You can use only one data pin to control eight LEDs on the module. As shown below:

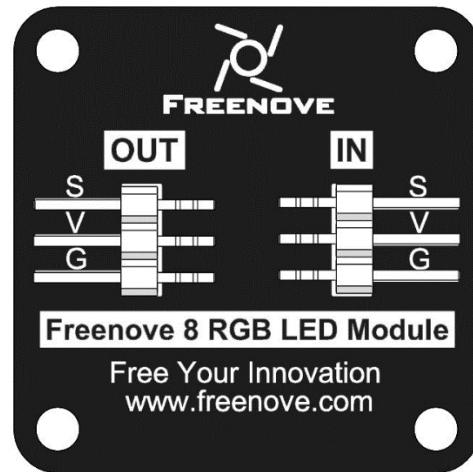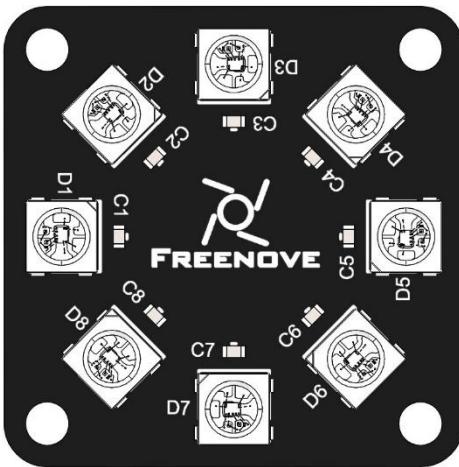

And you can also control many modules at the same time. Just connect OUT pin of one module to IN pin of another module. In this way, you can use one data pin to control 8, 16, 32 ... LEDs.

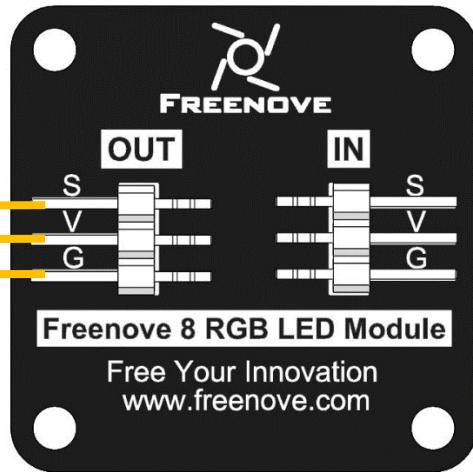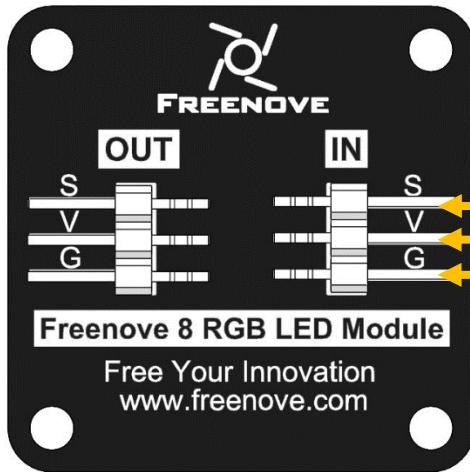


Pin description:


(IN)		(OUT)	
symbol	Function	symbol	Function
S	Input control signal	S	Output control signal
V	Power supply pin, +3.3V~5.5V	V	Power supply pin, +3.3V~5.5V
G	GND	G	GND

Circuit

Schematic diagram

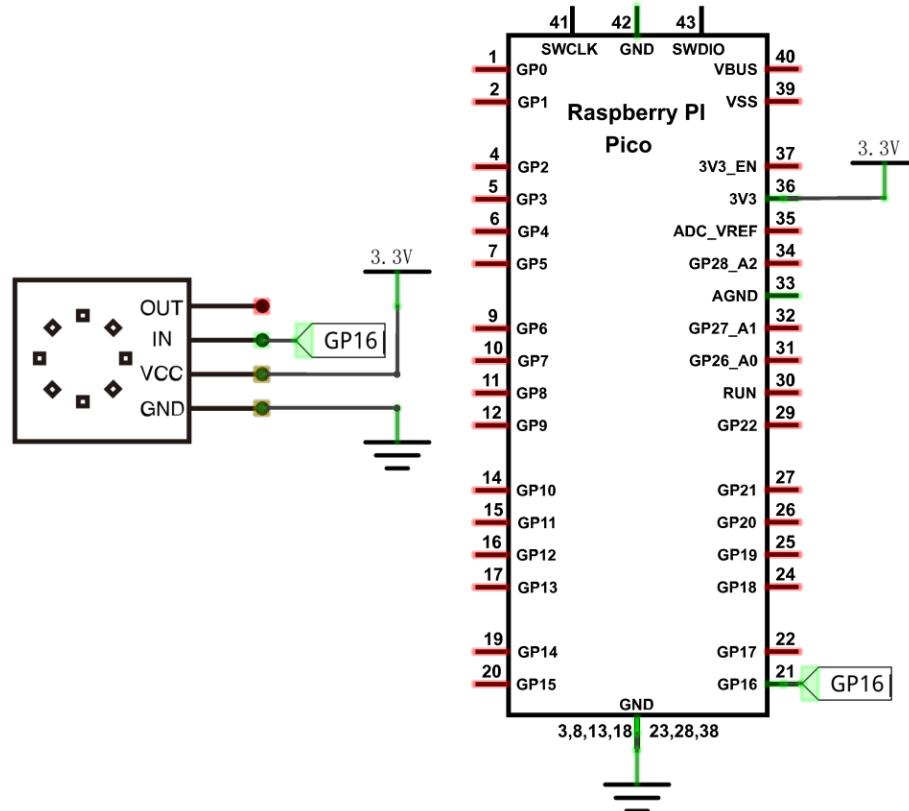

Hardware connection. If you need any support, please free to contact us via: support@freenove.com

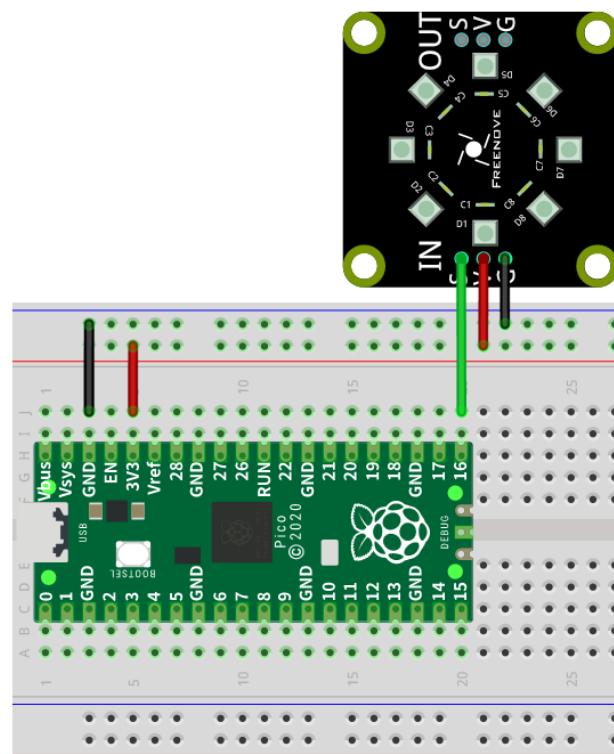

Any concerns? support@freenove.com



Sketch


This code uses a library named "**Adafruit_NeoPixel**". If you have not installed it, please do so first.

Library is an important feature of the open source world, and we know that Arduino is an open source platform that everyone can contribute to. Libraries are generally licensed under the LGPL, which means you can use them for free to apply to your creations.


How to install the library

There are two ways to add libraries.


The first way, open the Arduino IDE, click Tools → Manager Libraries.

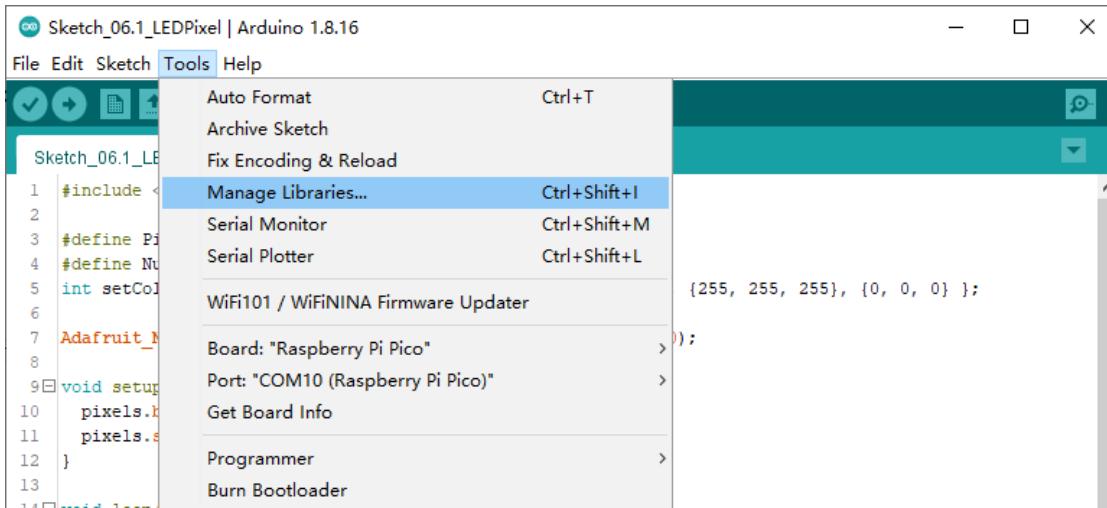

In the pop-up window, Library Manager, search for the name of the Library, "**Adafruit_NeoPixel**". Then click Install.

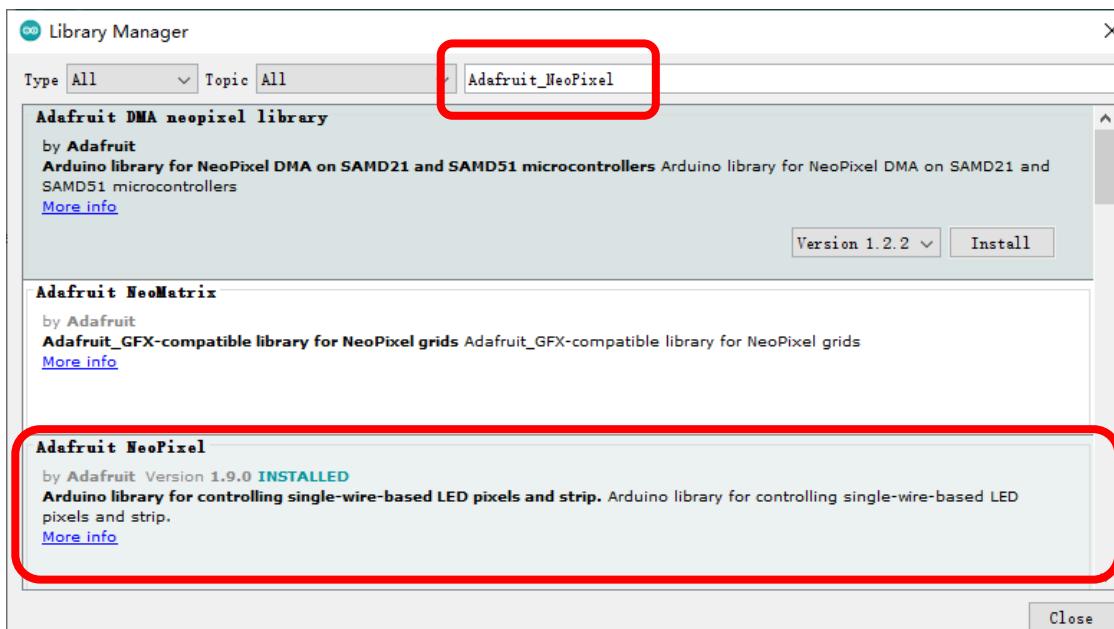

The second way, open Arduino IDE, click Sketch → Include Library → Add .ZIP Library. In the pop-up window, find the file named ".Libraries/ **Adafruit_NeoPixel.Zip**" which locates in this directory, and click OPEN.

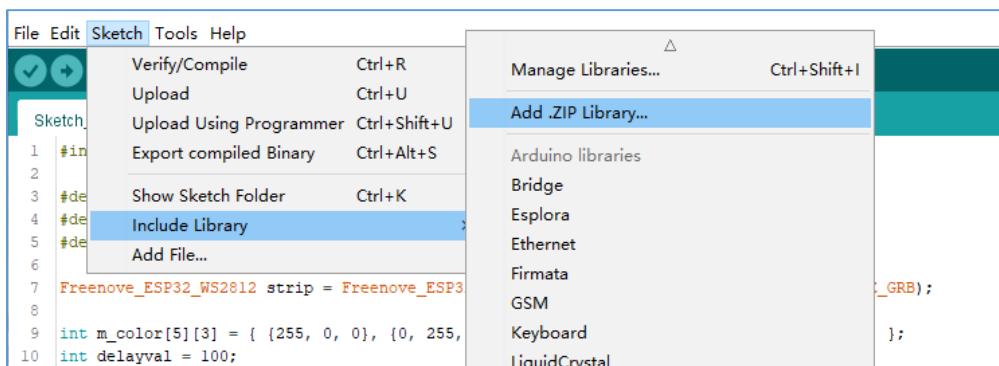

Sketch_06.1_LEDPixel

```

Sketch_06.1_LEDPixel | Arduino 1.8.16
File Edit Sketch Tools Help
Sketch_06.1_LEDPixel
1 #include <Adafruit_NeoPixel.h>
2
3 #define Pin      16
4 #define NumPixels 8
5 int setColor[5][3] = { {255, 0, 0}, {0, 255, 0}, {0, 0, 255}, {255, 255, 255}, {0, 0, 0} };
6
7 Adafruit_NeoPixel pixels(NumPixels, Pin, NEO_GRB + NEO_KHZ800);
8
9 void setup() {
10   pixels.begin();
11   pixels.setBrightness(20);
12 }
13
14 void loop() {
15   for (int i = 0; i < 5; i++) {
16     int color = pixels.Color(setColor[i][0], setColor[i][1], setColor[i][2]);
17     pixels.fill(color, 0, NumPixels);
18     pixels.show();
19     delay(500);
20   }
21 }

```

Done uploading.
rp2040load 1.0.1 - compiled with gol.15.8
Loading into Flash: [=====] 100%

Raspberry Pi Pico on COM10

Download the code to Pico and RGB LED begins to light up in red, green, blue, white and black.





The following is the program code:

```

1 #include <Adafruit_NeoPixel.h>
2
3 #define Pin      16
4 #define NumPixels 8
5 int setColor[5][3] = { {255, 0, 0}, {0, 255, 0}, {0, 0, 255}, {255, 255, 255}, {0, 0, 0} };
6
7 Adafruit_NeoPixel pixels(NumPixels, Pin, NEO_GRB + NEO_KHZ800);
8
9 void setup() {
10   pixels.begin();
11   pixels.setBrightness(20);
12 }
13
14 void loop() {
15   for (int j = 0; j < 5; j++) {
16     for (int i = 0; i < NumPixels; i++) {
17       pixels.setPixelColor(i, setColor[j][0], setColor[j][1], setColor[j][2]);
18       pixels.show();
19       delay(100);
20     }
21     delay(500);
22   }
23 }
```

To use some libraries, first you need to include the library's header file.

```
1 #include <Adafruit_NeoPixel.h>
```

Define the pins connected to the ring, the number of LEDs on the ring.

```

3 #define Pin      16
4 #define NumPixels 8
```

Apply for an object that controls the RGB LED ring, and assign the number of LEDs, the number of pins that control the LEDs, and the control mode of the LEDs to the object.

```
7 Adafruit_NeoPixel pixels(NumPixels, Pin, NEO_GRB + NEO_KHZ800);
```

Define the color values to be used, as red, green, blue, white, and black.

```
9 u8 m_color[5][3] = { {255, 0, 0}, {0, 255, 0}, {0, 0, 255}, {255, 255, 255}, {0, 0, 0} };
```

Initialize pixels() in setup() and set the brightness.

```

10   pixels.begin();
11   pixels.setBrightness(20);
```

In the loop(), there are two “for” loops, the internal for loop is to light the LED one by one, and the external for loop to switch colors. setPixelColor() is used to set the color, but it does not change immediately. Only when show() is called will the color data be sent to the LED to change the color.

```

15   for (int j = 0; j < 5; j++) {
16     for (int i = 0; i < NumPixels; i++) {
17       pixels.setPixelColor(i, setColor[j][0], setColor[j][1], setColor[j][2]);
18       pixels.show();
```

Any concerns? ✉ support@freenove.com

```
19     delay(100);  
20 }  
21 delay(500);  
22 }
```

Reference

Adafruit_NeoPixel(uint16_t n, int16_t pin = 6, neoPixelType type = NEO_GRB + NEO_KHZ800)

Constructor to create a NeoPixel object.

Before each use of the constructor, please add “[Adafruit_NeoPixel.h](#)”

Parameters

n: The number of led.

pin_gpio: A pin connected to an LED.

type: Types of LED.

NEO_RGB: The sequence of NeoPixel module loading color is red, green and blue.

NEO_RBG: The sequence of NeoPixel module loading color is red, blue and green.

NEO_GRB: The sequence of NeoPixel module loading color is green, red and blue.

TYPE_GBR: The sequence of NeoPixel module loading color is green, blue and red.

NEO_BRG: The sequence of NeoPixel module loading color is blue, red and green.

NEO_BGR: The sequence of NeoPixel module loading color is blue, green and red.

void begin(void);

Initialize the NeoPixel object

void setPixelColor (u8 index, u8 r, u8 g, u8 b);

void setPixelColor (u8 index, u32 rgb);

void setPixelColor (u8 index, u8 r, u8 g, u8 b, u8 w);

Set the color of LED with order number n.

void show(void);

Send the color data to the led and display the set color immediately.

void setBrightness(uint8_t);

Set the brightness of the LED.

If you want to learn more about this library, you can visit the following website:

https://github.com/adafruit/Adafruit_NeoPixel




Project 6.2 Rainbow Light

In the previous project, we have mastered the usage of NeoPixel. This project will realize a slightly complicated Rainbow Light. The component list and the circuit are exactly the same as the project NeoPixel.

Sketch

Continue to use the following color model to equalize the color distribution of the 8 LEDs and gradually change.

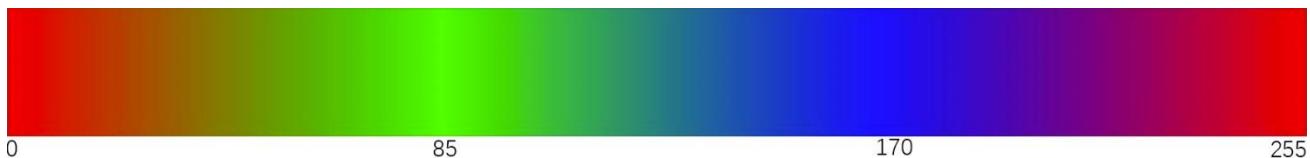

Sketch_06.2_RainbowLight

The screenshot shows the Arduino IDE interface with the following details:

- Title Bar:** Sketch_06.2_RainbowLight | Arduino 1.8.16
- Menu Bar:** File Edit Sketch Tools Help
- Toolbar:** Includes icons for upload, refresh, and search.
- Code Editor:** Displays the C++ code for the NeoPixel rainbow light project. The code initializes an Adafruit_NeoPixel strip with 8 pixels on pin 16, sets brightness to 20, and then enters a loop where it cycles through colors using a wheel algorithm for each pixel over 5 iterations.

```
#include <Adafruit_NeoPixel.h>
#define Pin 16
#define NumPixels 8
int red = 0;
int green = 0;
int blue = 0;
Adafruit_NeoPixel strip(NumPixels, Pin, NEO_GRB + NEO_KHZ800);
void setup() {
    strip.begin();
    strip.setBrightness(20);
}
void loop() {
    for (int j = 0; j < 256 * 5; j++) {
        for (int i = 0; i < 8; i++) {
            Wheel((i * 256 / 8) + j) * 255);
            strip.setPixelColor(i, strip.Color(red, green, blue));
        }
        strip.show();
        delay(10);
    }
}
```

- Status Bar:** Shows "Done uploading.", "Loading into Flash: [=====] 100%", and "Raspberry Pi Pico on COM10".

Download the code to Pico, and the Freenove 8 RGB LED Strip displays different colors and the color changes gradually.



The following is the program code:

```
1 #include <Adafruit_NeoPixel.h>
2
3 #define Pin      16
4 #define NumPixels 8
5 int red = 0;
6 int green = 0;
7 int blue = 0;
8 Adafruit_NeoPixel strip(NumPixels, Pin, NEO_GRB + NEO_KHZ800);
9
10 void setup() {
11     strip.begin();
12     strip.setBrightness(20);
13 }
14
15 void loop() {
16     for (int j = 0; j < 256 * 5; j++) {
17         for (int i = 0; i < 8; i++) {
18             Wheel(((i * 256 / 8) + j)%255);
19             strip.setPixelColor(i, strip.Color(red, green, blue));
20         }
21         strip.show();
22         delay(10);
23     }
24 }
25
26 void Wheel(byte WheelPos) {
27     WheelPos = 255 - WheelPos;
28     if (WheelPos < 85) {
29         red = 255 - WheelPos * 3;
30         green = 0;
31         blue = WheelPos * 3;
32     }
33     else if (WheelPos < 170) {
34         WheelPos -= 85;
35         red = 0;
```

```
36     green = WheelPos * 3;  
37     blue = 255 - WheelPos * 3;  
38 }  
39 else {  
40     WheelPos -= 170;  
41     red = WheelPos * 3;  
42     green = 255 - WheelPos * 3;  
43     blue = 0;  
44 }  
45 }
```

In the loop(), two “for” loops are used, the internal “for” loop(for-i) is used to set the color of each LED, and the external “for” loop(for-i) is used to change the color, in which the self-increment value in i+=1 can be changed to change the color step distance. Changing the delay parameter changes the speed of the color change. Wheel(((i * 256 / 8) + j)%255) will take color from the color model at equal intervals starting from i.

```
16 for (int j = 0; j < 256 * 5; j++) {  
17     for (int i = 0; i < 8; i++) {  
18         Wheel(((i * 256 / 8) + j)%255);  
19         strip.setPixelColor(i, strip.Color(red, green, blue));  
20     }  
21     strip.show();  
22     delay(10);  
23 }
```




Chapter 7 Buzzer

In this chapter, we will learn about buzzers and the sounds they make.

Project 7.1 Doorbell

We will make this kind of doorbell: when the button is pressed, the buzzer sounds; and when the button is released, the buzzer stops sounding.

Component List

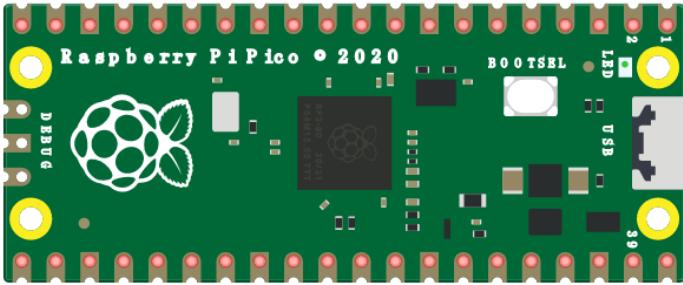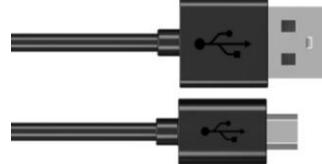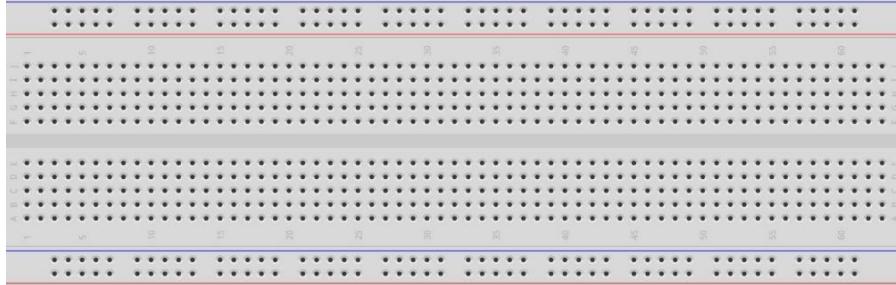
Raspberry Pi Pico x1		USB cable x1	
Breadboard x1			
Jumper			
NPN transistor x1 (S8050)		Active buzzer x1	
Push button x1		Resistor 1kΩ x1	
		Resistor 10kΩ x2	

Component Knowledge


Buzzer

Buzzer is a sounding component, which is widely used in electronic devices such as calculator, electronic warning clock and alarm. Buzzer has two types: active and passive. Active buzzer has oscillator inside, which will sound as long as it is supplied with power. Passive buzzer requires external oscillator signal (generally use PWM with different frequency) to make a sound.

Active buzzer

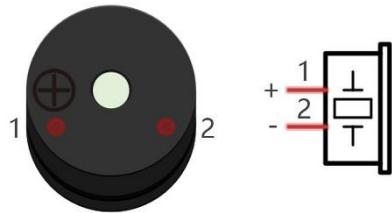

Passive buzzer

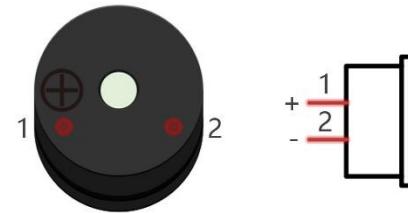

Active buzzer is easy to use. Generally, it can only make a specific frequency of sound. Passive buzzer requires an external circuit to make a sound, but it can be controlled to make a sound with different frequency. The resonant frequency of the passive buzzer is 2kHz, which means the passive buzzer is loudest when its resonant frequency is 2kHz.

Next, we will use an active buzzer to make a doorbell and a passive buzzer to make an alarm.

How to identify active and passive buzzer?

1. Usually, there is a label on the surface of active buzzer covering the vocal hole, but this is not an absolute judgment method.
2. Active buzzers are more complex than passive buzzers in their manufacture. There are many circuits and crystal oscillator elements inside active buzzers; all of this is usually protected with a waterproof coating (and a housing) exposing only its pins from the underside. On the other hand, passive buzzers do not have protective coatings on their underside. From the pin holes viewing of a passive buzzer, you can see the circuit board, coils, and a permanent magnet (all or any combination of these components depending on the model).

Active buzzer



Passive buzzer



Transistor


Because the buzzer requires such large current that GP of Raspberry Pi Pico output capability cannot meet the requirement, a transistor of NPN type is needed here to amplify the current.

Transistor, the full name: semiconductor transistor, is a semiconductor device that controls current. Transistor


Any concerns? ✉ support@freenove.com

can be used to amplify weak signal, or works as a switch. It has three electrodes(PINs): base (b), collector (c) and emitter (e). When there is current passing between "be", "ce" will allow several-fold current (transistor magnification) pass, at this point, transistor works in the amplifying area. When current between "be" exceeds a certain value, "ce" will not allow current to increase any longer, at this point, transistor works in the saturation area. Transistor has two types as shown below: PNP and NPN.

PNP transistor

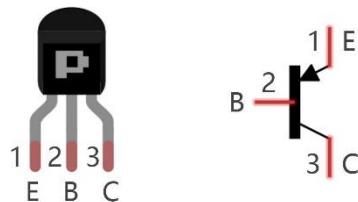

NPN transistor

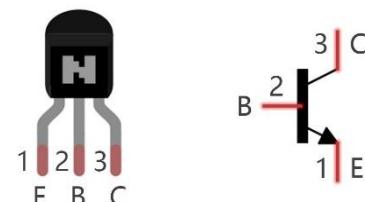


In our kit, the PNP transistor is marked with 8550, and the NPN transistor is marked with 8050.

Based on the transistor's characteristics, it is often used as a switch in digital circuits. As micro-controller's capacity to output current is very weak, we will use transistor to amplify current and drive large-current components.


When using NPN transistor to drive buzzer, we often adopt the following method. If GP outputs high level, current will flow through R1, the transistor will get conducted, and the buzzer will sound. If GP outputs low level, no current flows through R1, the transistor will not be conducted, and buzzer will not sound.

When using PNP transistor to drive buzzer, we often adopt the following method. If GP outputs low level, current will flow through R1, the transistor will get conducted, and the buzzer will sound. If GP outputs high level, no current flows through R1, the transistor will not be conducted, and buzzer will not sound.

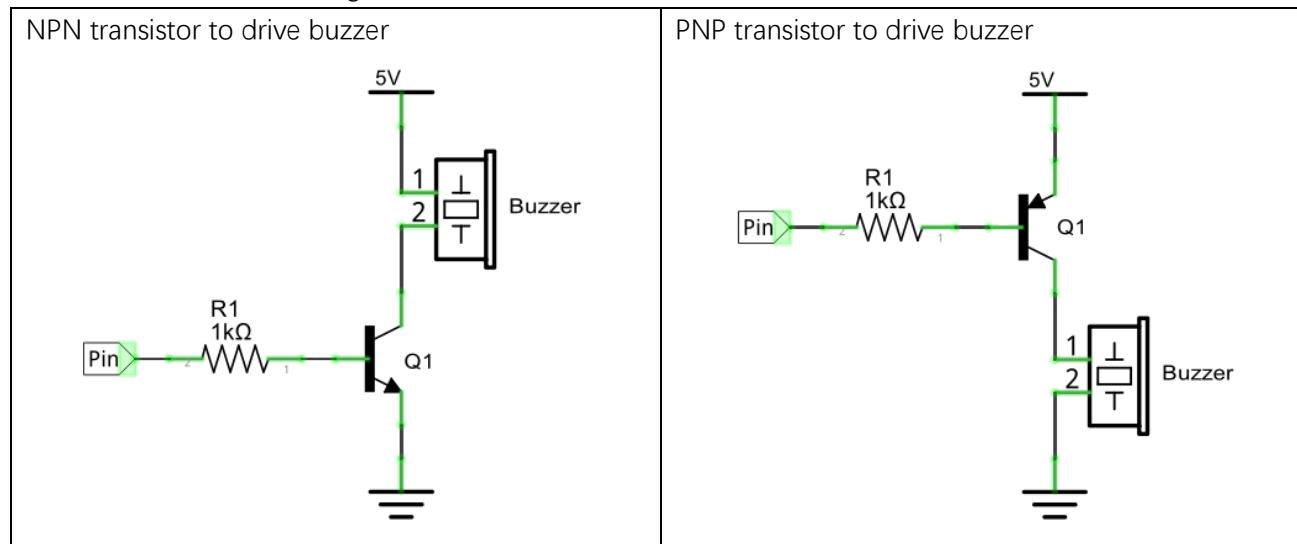


Circuit

Schematic diagram

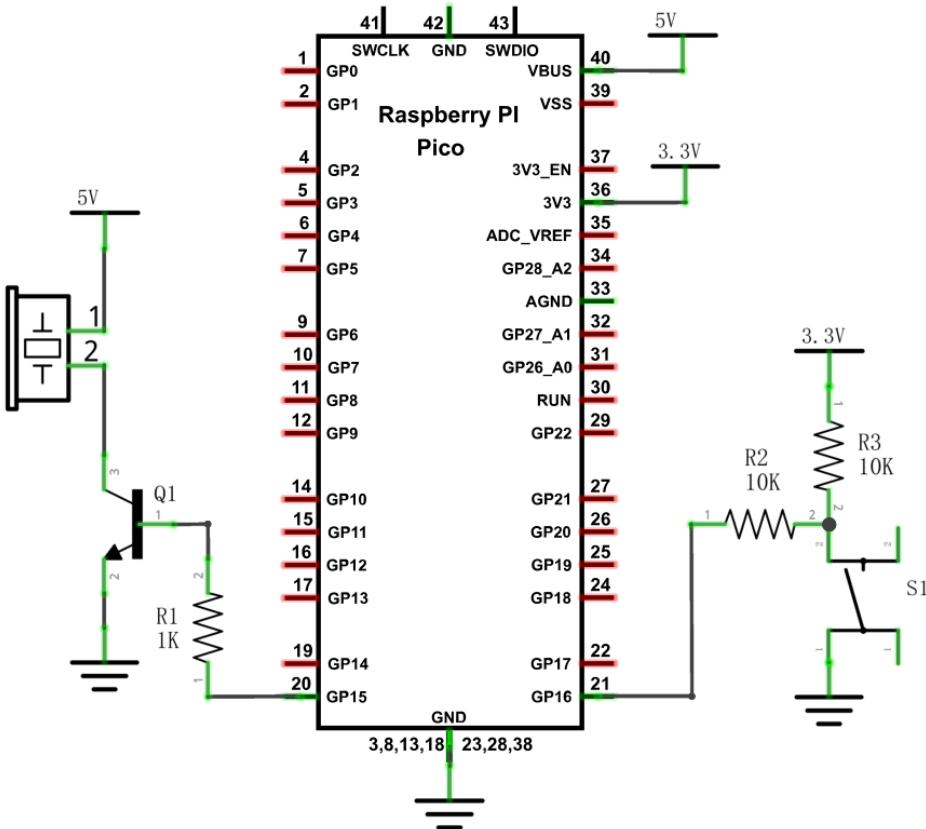

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

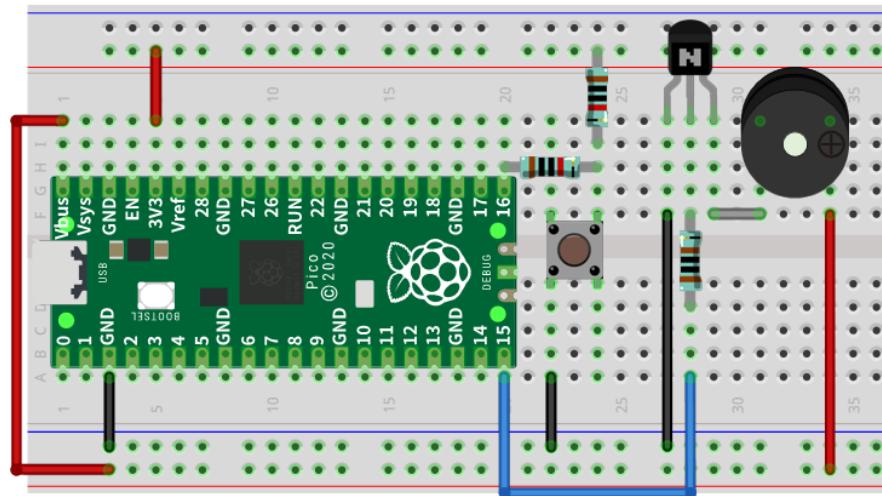

Note:


1. in this circuit, the power supply for buzzer is 5V, and pull-up resistor of the button connected to the power 3.3V. The buzzer can work when connected to power 3.3V, but it will reduce the loudness.
 2. VBUS should be connect to the positive end of USB cable. If it connects to GND, it may burn the computer or Raspberry Pi Pico. Similarly, please be careful when wiring pins 36-40 of Pico to avoid short circuit.

Any concerns? support@freenove.com

Sketch

In this project, a buzzer will be controlled by a push button switch. When the button switch is pressed, the buzzer sounds and when the button is released, the buzzer stops. It is analogous to our earlier project that controlled an LED ON and OFF.

Sketch_07.1_Doorbell

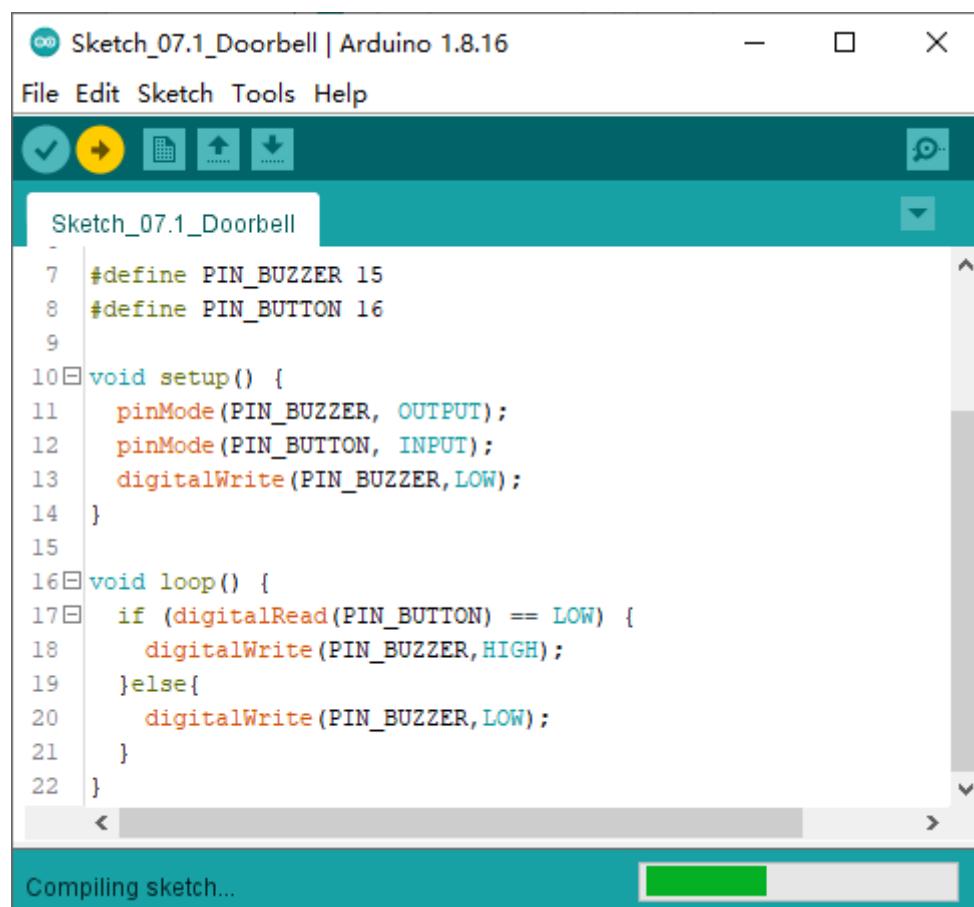

```

Sketch_07.1_Doorbell | Arduino 1.8.16
File Edit Sketch Tools Help


Sketch_07.1_Doorbell

7 #define PIN_BUZZER 15
8 #define PIN_BUTTON 16
9
10 void setup() {
11     pinMode(PIN_BUZZER, OUTPUT);
12     pinMode(PIN_BUTTON, INPUT);
13     digitalWrite(PIN_BUZZER,LOW);
14 }
15
16 void loop() {
17     if (digitalRead(PIN_BUTTON) == LOW) {
18         digitalWrite(PIN_BUZZER,HIGH);
19     }else{
20         digitalWrite(PIN_BUZZER,LOW);
21     }
22 }

```

Compiling sketch...

Download the code to Pico, press the push button switch and the buzzer will sound. Release the push button switch and the buzzer will stop.

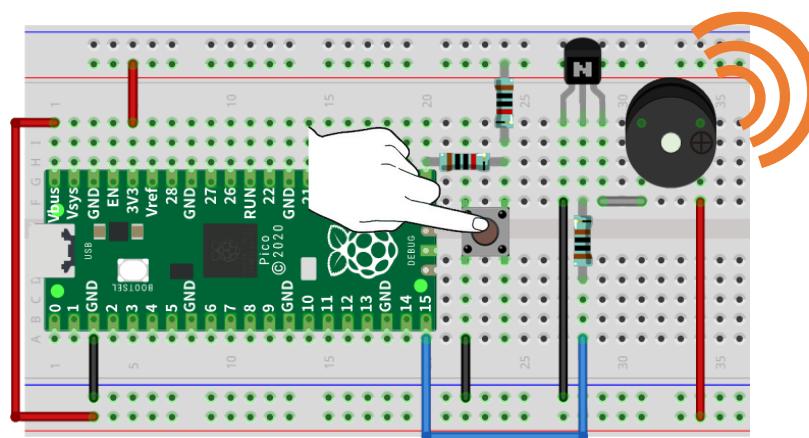



The following is the program code:

```
1 #define PIN_BUZZER 15
2 #define PIN_BUTTON 16
3
4 void setup() {
5     pinMode(PIN_BUZZER, OUTPUT);
6     pinMode(PIN_BUTTON, INPUT);
7     digitalWrite(PIN_BUZZER, LOW);
8 }
9
10 void loop() {
11     if (digitalRead(PIN_BUTTON) == LOW) {
12         digitalWrite(PIN_BUZZER, HIGH);
13     }else{
14         digitalWrite(PIN_BUZZER, LOW);
15     }
16 }
```



The code is logically the same as using button to control LED.

Project 7.2 Alertor

Next, we will use a passive buzzer to make an alarm.


Component list and the circuit part is similar to last section, only the **active buzzer** needs to be **replaced** with a **passive buzzer** for this project.

Component List

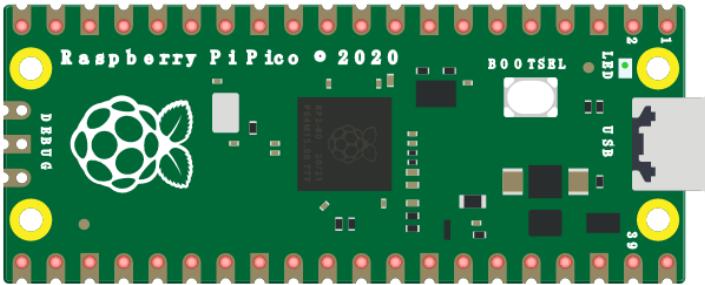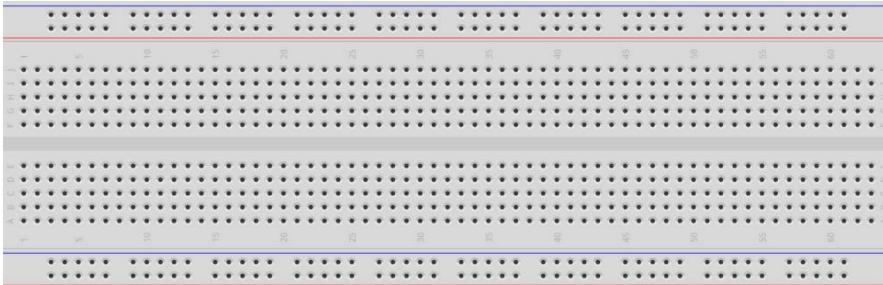
Raspberry Pi Pico x1	USB cable x1			
				
Breadboard x1				
Jumper				
NPN transistorx1 (S8050)	Passive buzzer x1	Push button x1	Resistor 1kΩ x1	Resistor 10kΩ x2
				

Circuit

Schematic diagram

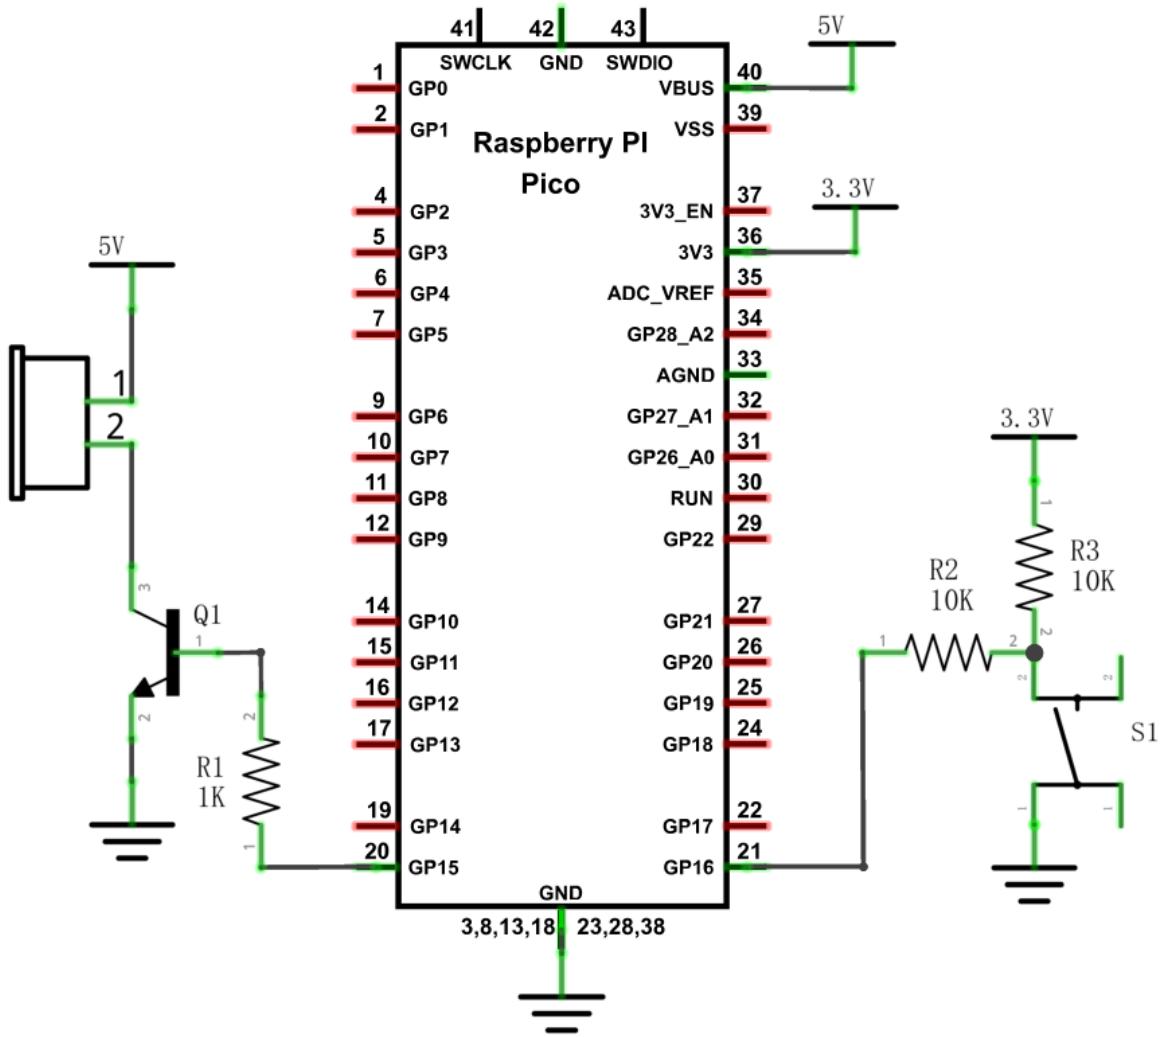

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

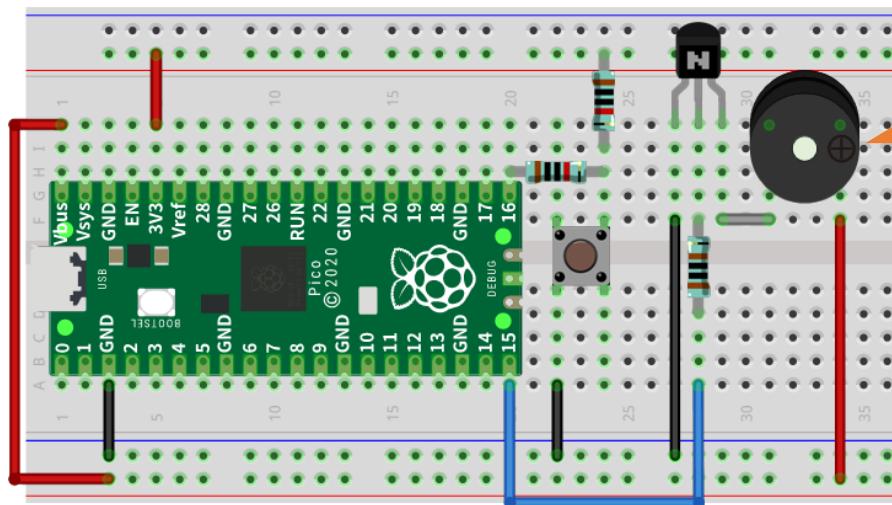


Any concerns? ✉ support@freenove.com

Sketch

In this project, the buzzer alarm is controlled by the button. Press the button, then buzzer sounds. If you release the button, the buzzer will stop sounding. It is logically the same as using button to control LED, but in the control method, passive buzzer requires PWM of certain frequency to sound.

Sketch_07.2_Alertor

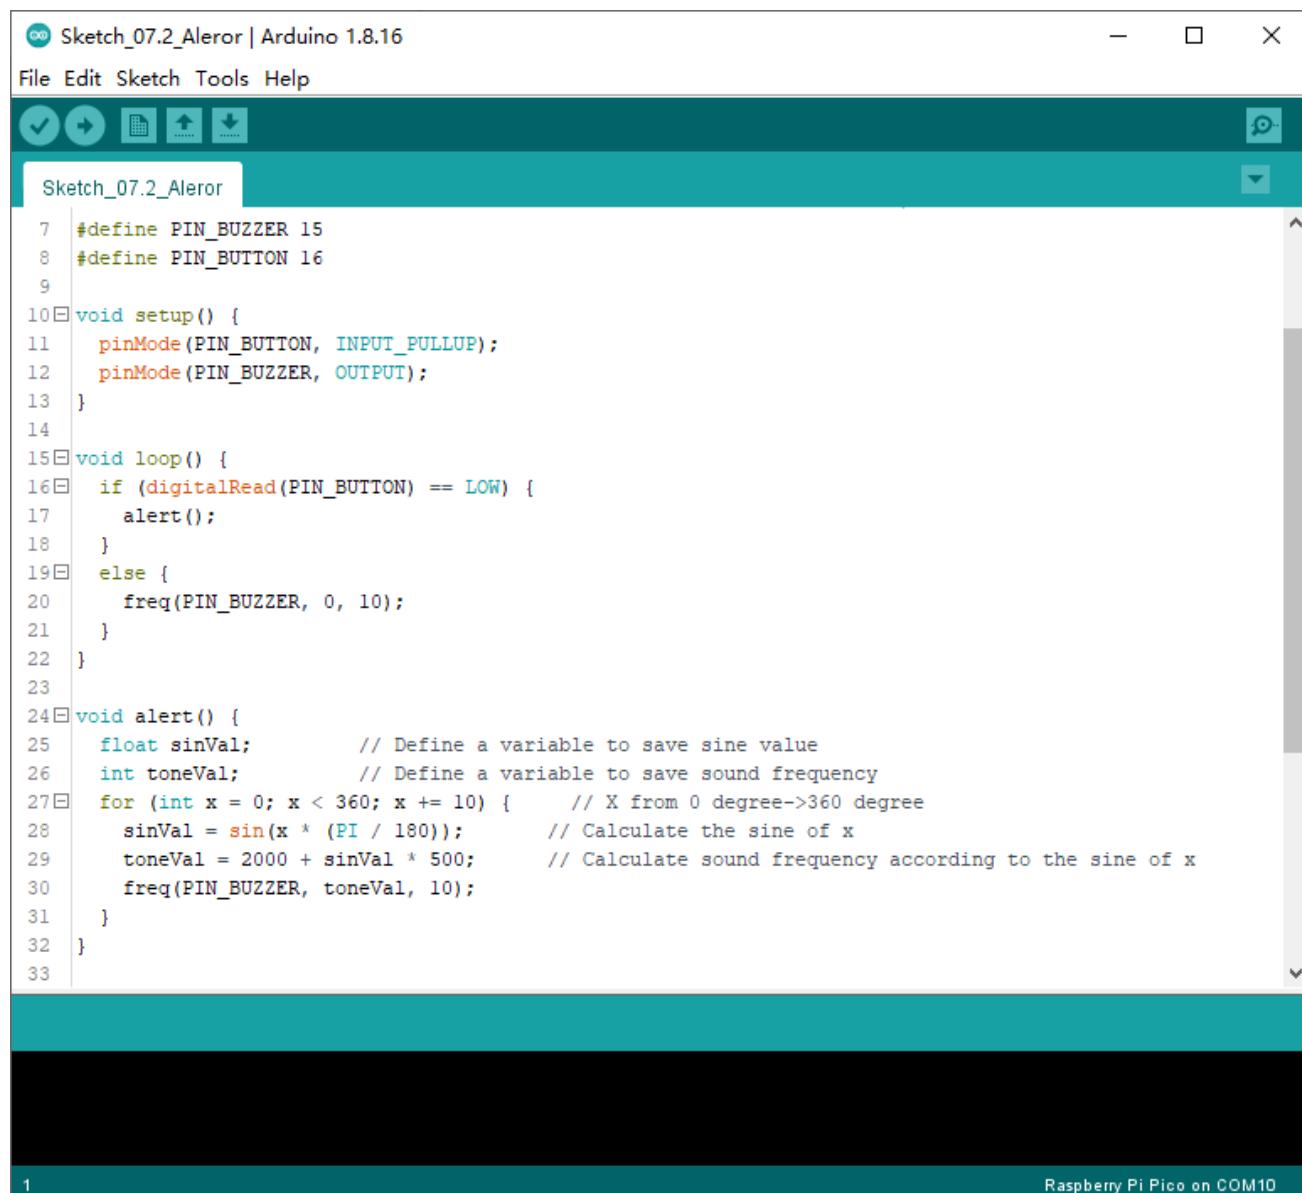

The screenshot shows the Arduino IDE interface with the sketch titled "Sketch_07.2_Alertor" open. The code implements a simple alert system using a button and a passive buzzer connected to pins 16 and 15 respectively. The sketch defines two pins: PIN_BUZZER (15) and PIN_BUTTON (16). In the setup() function, both pins are set as inputs with pull-up resistors. In the loop() function, it checks if the button is pressed (LOW). If pressed, it calls the alert() function. The alert() function calculates a sine wave value for each degree from 0 to 360 and uses it to determine the sound frequency (toneVal) for the buzzer. The freq() function is used to set the frequency of the buzzer to toneVal for a duration of 10ms. The code includes comments explaining the variables and the calculation of frequency based on the sine of the angle.


```
#define PIN_BUZZER 15
#define PIN_BUTTON 16

void setup() {
    pinMode(PIN_BUTTON, INPUT_PULLUP);
    pinMode(PIN_BUZZER, OUTPUT);
}

void loop() {
    if (digitalRead(PIN_BUTTON) == LOW) {
        alert();
    }
    else {
        freq(PIN_BUZZER, 0, 10);
    }
}

void alert() {
    float sinVal; // Define a variable to save sine value
    int toneVal; // Define a variable to save sound frequency
    for (int x = 0; x < 360; x += 10) { // X from 0 degree->360 degree
        sinVal = sin(x * (PI / 180)); // Calculate the sine of x
        toneVal = 2000 + sinVal * 500; // Calculate sound frequency according to the sine of x
        freq(PIN_BUZZER, toneVal, 10);
    }
}
```

Download the code to Pico, press the button, then alarm sounds. And when the button is released, the alarm will stop sounding.

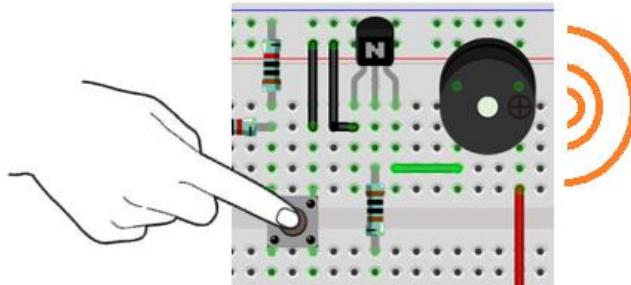

The following is the program code:

```

1 #define PIN_BUZZER 15
2 #define PIN_BUTTON 16
3
4 void setup() {
5     pinMode(PIN_BUTTON, INPUT_PULLUP);
6     pinMode(PIN_BUZZER, OUTPUT);
7 }
8
9 void loop() {
10    if (digitalRead(PIN_BUTTON) == LOW) {
11        alert();
12    }else {
13        freq(PIN_BUZZER, 0, 10);
14    }
15 }
16
17 void alert() {
18     float sinVal;          // Define a variable to save sine value
19     int toneVal;           // Define a variable to save sound frequency
20     for (int x = 0; x < 360; x += 10) { // X from 0 degree->360 degree
21         sinVal = sin(x * (PI / 180));      // Calculate the sine of x
22         toneVal = 2000 + sinVal * 500;      // Calculate sound frequency according to the sine of x
23         freq(PIN_BUZZER, toneVal, 10);
24     }
25 }
26
27 void freq(int PIN, int freqs, int times) {
28     if (freqs == 0) {
29         digitalWrite(PIN, LOW);
30     }
31     else {
32         for (int i = 0; i < times * freqs / 1000; i++) {
33             digitalWrite(PIN, HIGH);

```

```

34     delayMicroseconds(1000000 / freqs / 2);
35     digitalWrite(PIN, LOW);
36     delayMicroseconds(1000000 / freqs / 2);
37   }
38 }
39 }
```

Define the button and pin to control the passive buzzer.

```

1 #define PIN_BUZZER 15
2 #define PIN_BUTTON 16
```

Write a function to drive the passive buzzer with a duty cycle of 50%. The `delayMicroseconds()` function is in

1us. $1\text{ s} = 1000000\text{ us}$. By the formula $T = \frac{1}{f}$, when the frequency is fixed, the PWM period T is also fixed.

```

27 void freq(int PIN, int freqs, int times) {
28   if (freqs == 0) {
29     digitalWrite(PIN, LOW);
30   }
31   else {
32     for (int i = 0; i < times * freqs / 1000; i++) {
33       digitalWrite(PIN, HIGH);
34       delayMicroseconds(1000000 / freqs / 2);
35       digitalWrite(PIN, LOW);
36       delayMicroseconds(1000000 / freqs / 2);
37     }
38   }
39 }
```

The frequency curve of the alarm is based on the sine curve. We need to calculate the sine value from 0 to 360 degree and multiply a certain value (here it is 500) and plus the resonant frequency of buzzer.

```

17 void alert() {
18   float sinVal;           // Define a variable to save sine value
19   int toneVal;            // Define a variable to save sound frequency
20   for (int x = 0; x < 360; x += 10) { // X from 0 degree->360 degree
21     sinVal = sin(x * (PI / 180));      // Calculate the sine of x
22     toneVal = 2000 + sinVal * 500;      // Calculate sound frequency according to the sine of x
23     freq(PIN_BUZZER, toneVal, 10);
24   }
25 }
```

In the `loop()` function, when the button is pressed, subfunction `alert()` will be called and the alertor will issue a warning sound; otherwise, it stops the buzzer.

```

10 if (digitalRead(PIN_BUTTON) == LOW) {
11   alert();
12 }else {
13   freq(PIN_BUZZER, 0, 10);
14 }
```


Chapter 8 Serial Communication

Serial Communication is a means of Communication between different devices. This section describes Raspberry Pi Pico Serial Communication.

Project 8.1 Serial Print

This project uses Raspberry Pi Pico serial communicator to send data to the computer and print it on the serial monitor.

Component List

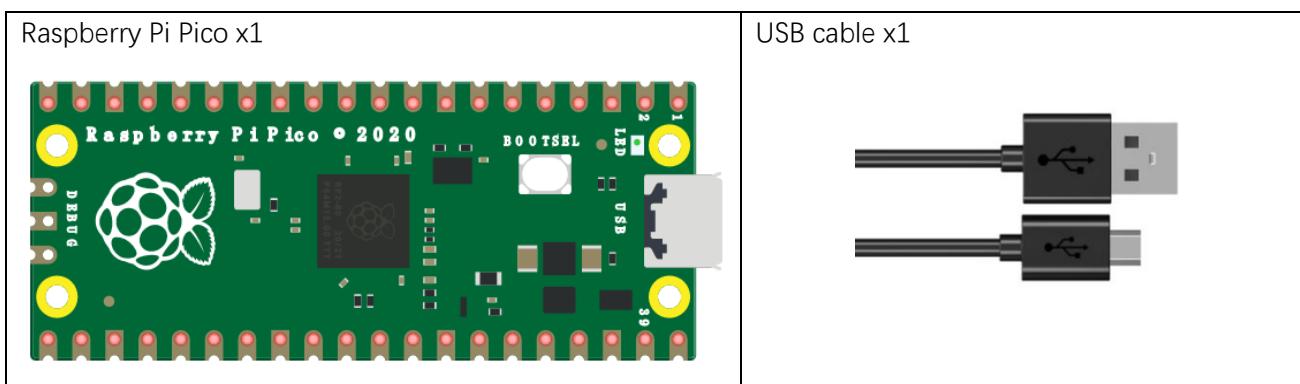

Related Knowledge

Serial communication

Serial communication generally refers to the Universal Asynchronous Receiver/Transmitter (UART), which is commonly used in electronic circuit communication. It has two communication lines, one is responsible for sending data (TX line) and the other for receiving data (RX line). The serial communication connections two devices use is as follows:



Before serial communication starts, the baud rate of both sides must be the same. Communication between devices can work only if the same baud rate is used. The baud rates commonly used is 9600 and 115200.

Serial port on Raspberry Pi Pico

Raspberry Pi Pico has integrated USB to serial transfer, so it could communicate with computer connecting to USB cable.




Arduino Software also uploads code to Pico through the serial connection.

Your computer identifies serial devices connecting to it as COMx. We can use the Serial Monitor window of Arduino Software to communicate with Pico, connect Pico to computer through the USB cable, choose the correct device, and then click the Serial Monitor icon to open the Serial Monitor window.




Interface of serial monitor window is as follows. If you can't open it, make sure Pico has been connected to the computer, and choose the right serial port in the menu bar "Tools".

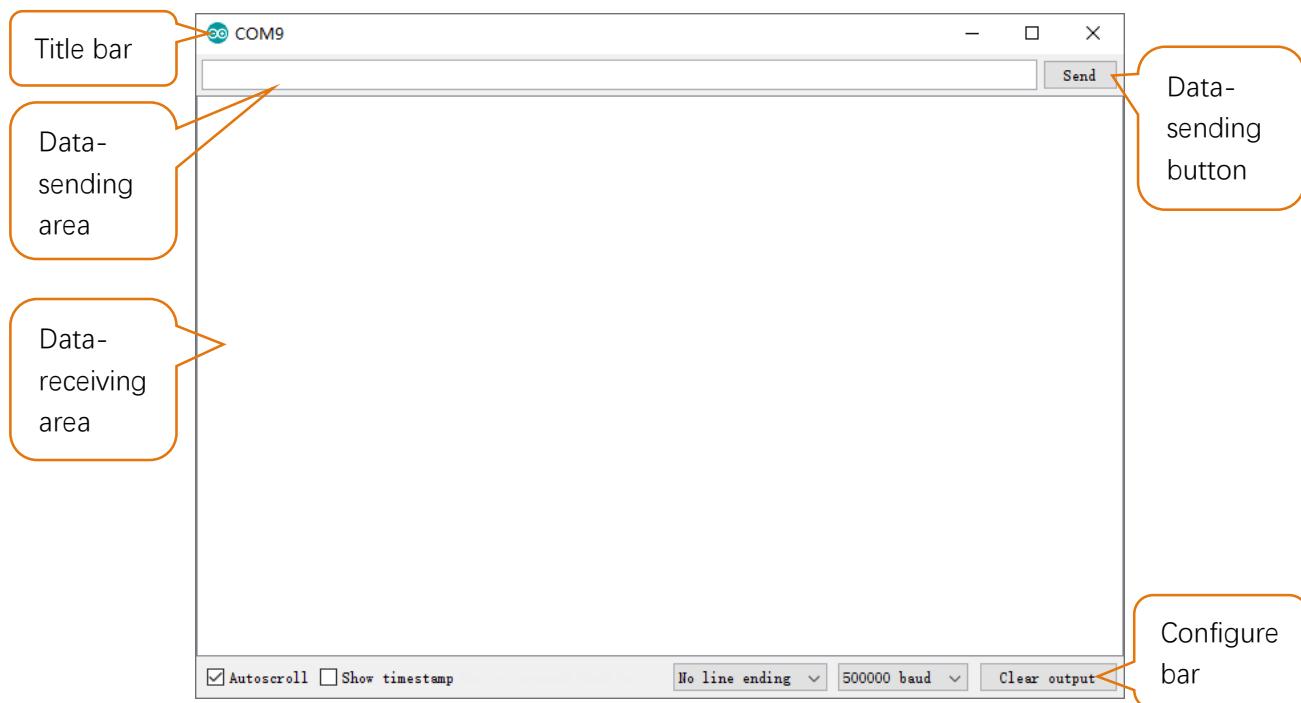

Circuit

Connect Raspberry Pi Pico to the computer with USB cable.

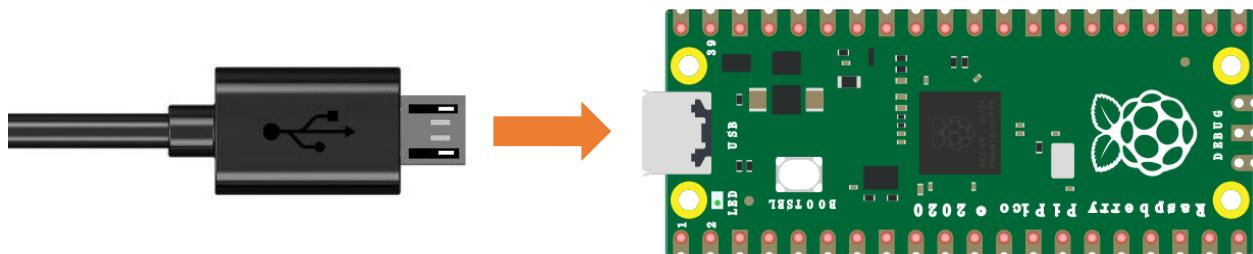

Sketch


Sketch_08.1_SerialPrinter

A screenshot of the Arduino IDE interface. The title bar reads "Sketch_08.1_SerialPrinter | Arduino 1.8.16". The menu bar includes File, Edit, Sketch, Tools, and Help. Below the menu is a toolbar with icons for save, upload, and other functions. The main area shows the code for "Sketch_08.1_SerialPrinter". The code is as follows:

```
1 // ****
2 Filename      : SerialPrinter
3 Description   : Use UART send some data to PC, and show them on serial monitor.
4 Author       : www.freenove.com
5 Modification: 2020/07/11
6 ****
7
8 void setup() {
9   Serial.begin(115200);
10  delay(2000);
11  Serial.println("Raspberry Pi Pico initialization completed!");
12 }
13
14 void loop() {
15   Serial.println( millis() / 1000 % 60 );
16   delay(1000);
17 }
```

The status bar at the bottom of the IDE window displays the message "Done compiling."

Download the code to Pico, open the serial port monitor, set the baud rate to 115200. As shown in the following picture:

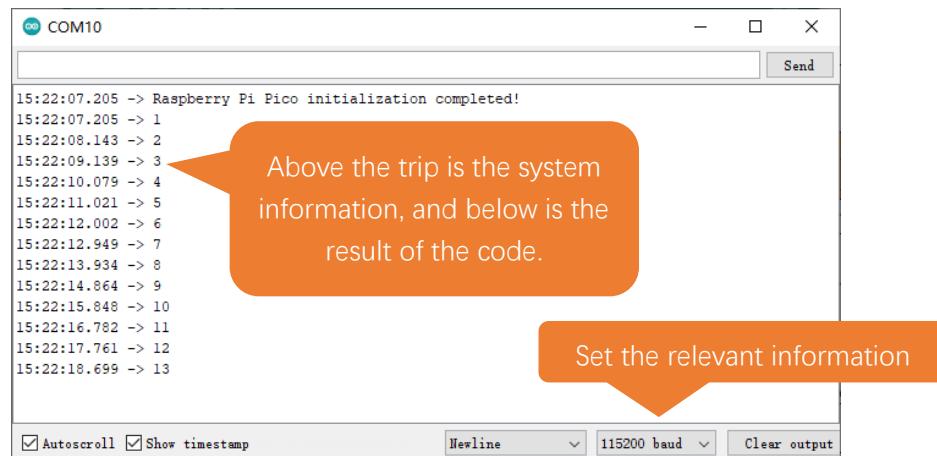

As shown above, when the code runs, the data is printed every one second.

Reference

```
void begin(unsigned long baud, uint32_t config=SERIAL_8N1, int8_t rxPin=-1,
          int8_t txPin=-1, bool invert=false, unsigned long timeout_ms = 20000UL);
```

Initializes the serial port. Parameter baud is baud rate, other parameters generally use the default value.

```
size_t println( arg );
```

Print to the serial port and wrap. The parameter **arg** can be a number, a character, a string, an array of characters, etc.

```
size_t printf(const char * format, ...) __attribute__ ((format (printf, 2, 3)));
```


Print formatted content to the serial port in the same way as print in standard C.

```
unsigned long millis();
```

Returns the number of milliseconds since the current system was booted.

For details, please refer to [UART, I2C, SPI default pin](#).

And you can also change settings according to the distribution of pins.

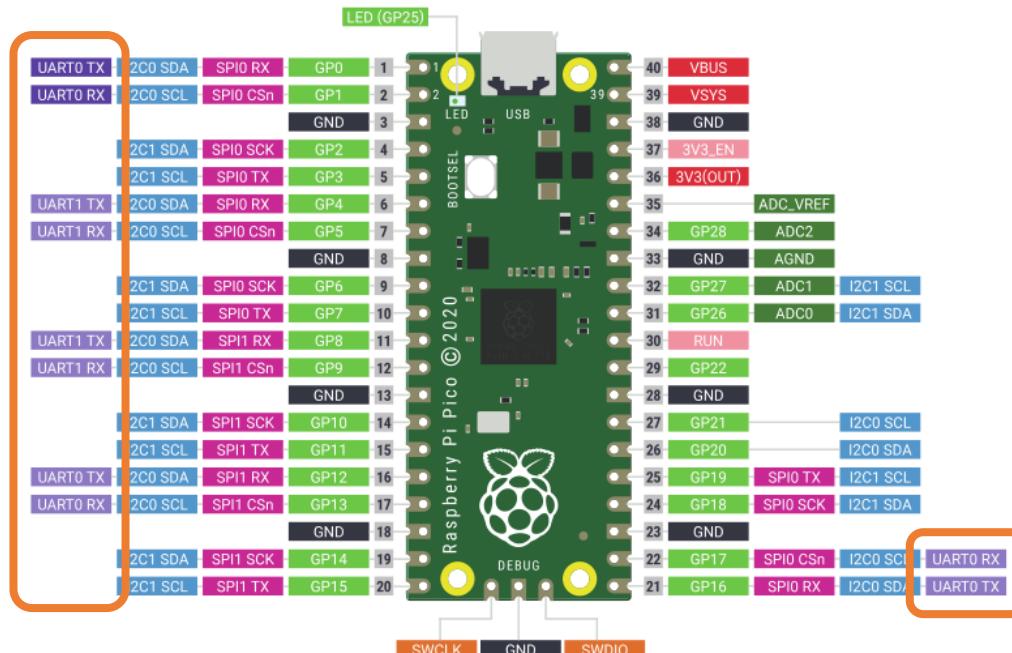


Project 8.2 Serial Read and Write

From last section, we use serial port on Pico to send data to a computer, now we will use that to receive data from computer.

Component and circuit are the same as in the previous project.

Sketch

Sketch_08.2_SerialRW

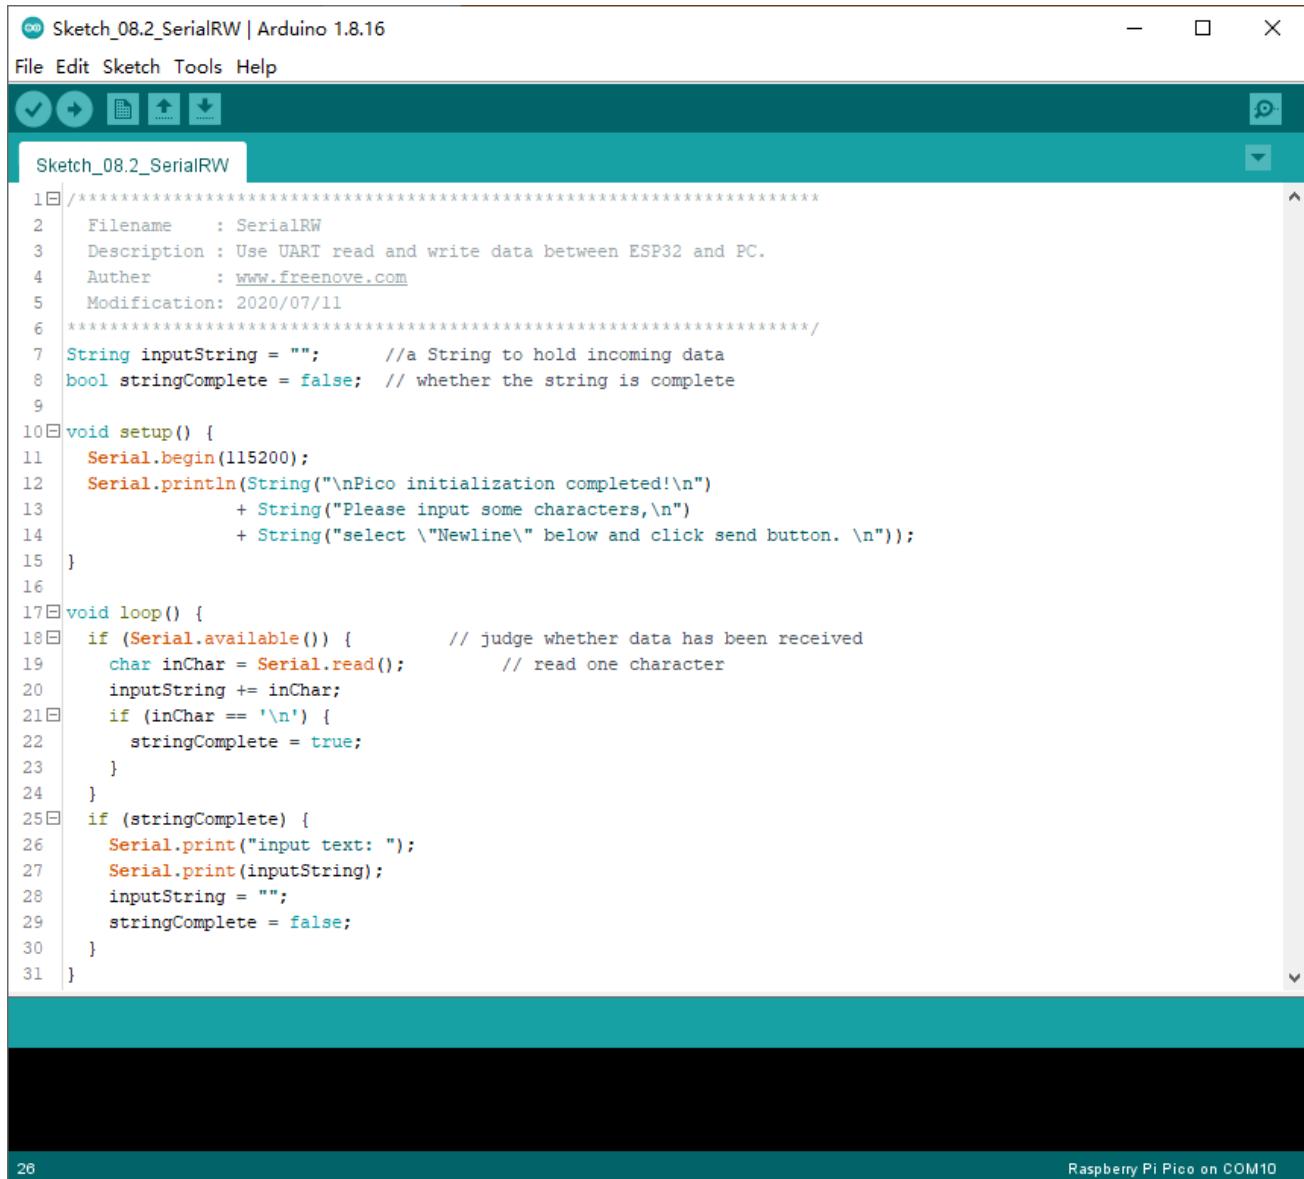


The screenshot shows the Arduino IDE interface with the following details:


- Title Bar:** Sketch_08.2_SerialRW | Arduino 1.8.16
- Menu Bar:** File Edit Sketch Tools Help
- Toolbar:** Includes icons for Save, Run, Upload, and others.
- Sketch Area:** Displays the C++ code for the sketch. The code is well-organized with comments and includes setup() and loop() functions for serial communication.
- Status Bar:** Shows "Raspberry Pi Pico on COM10" at the bottom right.

```
Sketch_08.2_SerialRW
1 //*****
2 Filename : SerialRW
3 Description : Use UART read and write data between ESP32 and PC.
4 Author : www.freenove.com
5 Modification: 2020/07/11
6 ****
7 String inputString = ""; //a String to hold incoming data
8 bool stringComplete = false; // whether the string is complete
9
10 void setup() {
11     Serial.begin(115200);
12     Serial.println(String("\nPico initialization completed!\n")
13                 + String("Please input some characters,\n")
14                 + String("select \"Newline\" below and click send button. \n"));
15 }
16
17 void loop() {
18     if (Serial.available()) { // judge whether data has been received
19         char inChar = Serial.read(); // read one character
20         inputString += inChar;
21         if (inChar == '\n') {
22             stringComplete = true;
23         }
24     }
25     if (stringComplete) {
26         Serial.print("input text: ");
27         Serial.print(inputString);
28         inputString = "";
29         stringComplete = false;
30     }
31 }
```

Download the code to Pico, open the serial monitor, and set the bottom to Newline, 115200, as shown in the following picture:

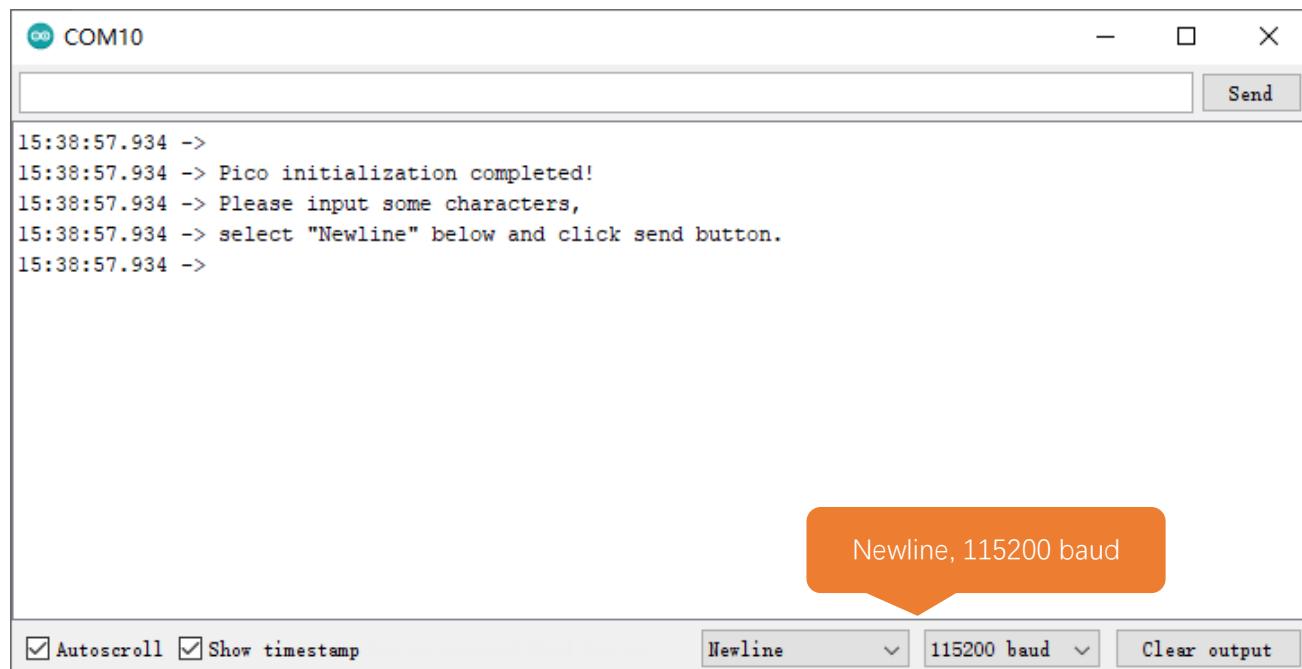

Then type characters like 'ABCDEFG' into the data sent at the top and click the Send button to print out the data Pico receives.

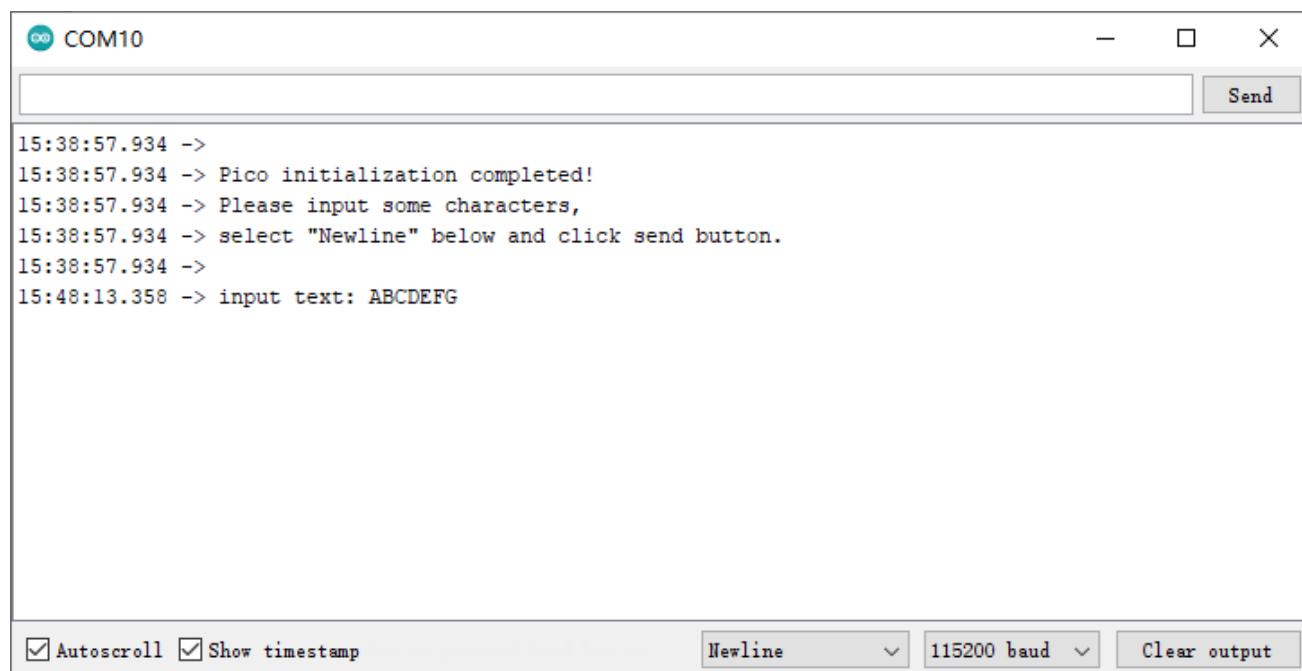

The following is the program code:

```

1  String inputString = "";      //a String to hold incoming data
2  bool stringComplete = false; // whether the string is complete
3
4  void setup() {
5      Serial.begin(115200);delay(1000);
6      Serial.println(String("\nPico initialization completed!\n")
7                      + String("Please input some characters, \n")
8                      + String("select \"Newline\" below and click send button. \n"));
9  }
10
11 void loop() {
12     if (Serial.available()) {      // judge whether data has been received
13         char inChar = Serial.read();      // read one character
14         inputString += inChar;
15         if (inChar == '\n') {
16             stringComplete = true;
17         }
18     }
19     if (stringComplete) {
20         Serial.print("input text: ");
21         Serial.print(inputString);
22         inputString = "";
23         stringComplete = false;
24     }
25 }
```

In loop(), determine whether the serial port has data, if so, read and save the data, and if the newline character is read, print out all the data that has been read.

Reference

String();

Constructs an instance of the String class.

For more information, please visit

<https://www.arduino.cc/reference/en/language/variables/data-types/stringobject/>

int available(void);

Get the number of bytes (characters) available for reading from the serial port. This is data that's already arrived and stored in the serial receive buffer.

Serial.read();

Reads incoming serial data.





Chapter 9 AD Converter

In this chapter we learn to use the ADC function of Raspberry Pi Pico.

Project 9.1 Read the Voltage of Potentiometer

In this chapter, we use ADC function of Pico to read the voltage output by potentiometer.


Component List

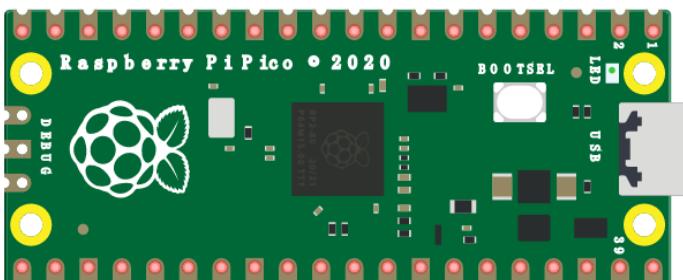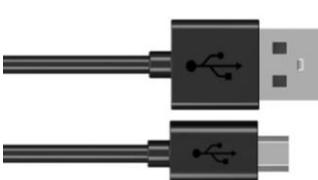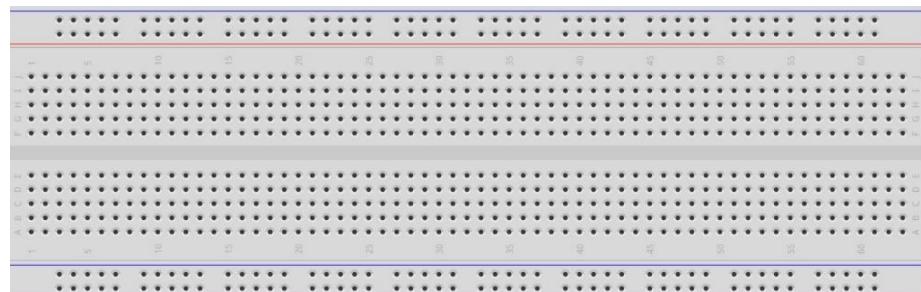Raspberry Pi Pico x1	 A photograph of a green Raspberry Pi Pico development board. It features a central Broadcom SoC, several pins along the edges, and various component markings like 'Raspberry Pi Pico • 2020' and 'BOOTSEL'.	USB cable x1	 A diagram showing two standard USB-A to USB-B cables connected to a single Pico board.
Breadboard x1			 A photograph of a standard breadboard with multiple horizontal and vertical connection points for component pins.
Rotary potentiometer x1	 A photograph of a standard three-terminal rotary potentiometer with a metal shaft and a brown base.	Jumper	 A photograph of a long, thin black jumper wire with two small black caps at the ends.

Related Knowledge

ADC

An ADC is an electronic integrated circuit used to convert analog signals such as voltages to digital or binary form consisting of 1s and 0s. The range of our ADC on Pico is 10 bits, that means the resolution is $2^{10}=1024$, and it represents a range (at 3.3V) will be divided equally to 1024 parts. The range of analog values corresponds to ADC values. So the more bits the ADC has, the denser the partition of analog will be and the greater the precision of the resulting conversion.

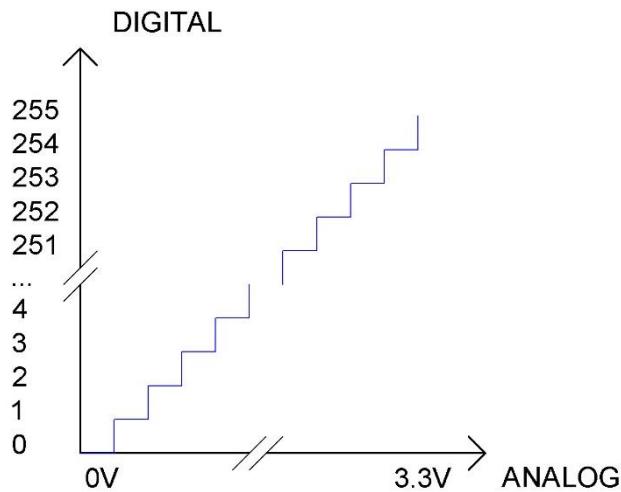

Subsection 1: the analog in rang of 0V---3.3/1023 V corresponds to digital 0;

Subsection 2: the analog in rang of 3.3/1023V---2*3.3/1023V corresponds to digital 1;

...

The following analog will be divided accordingly.

The conversion formula is as follows:

$$ADC\ Value = \frac{\text{Analog\ Voltage}}{3.3} * 1023$$


ADC Channels Raspberry Pi Pico

Raspberry Pi Pico has 4 ADC channels, which are ADC0(GP26), ADC1(GP27), ADC2(GP28), ADC3(GP29). ADC3 used to measure VSYS on Pico board. Therefore, there are only three generic ADC channels that can be directly used, namely, ADC0, ADC1 and ADC2.

Component Knowledge


Potentiometer

Potentiometer is a resistive element with three Terminal parts. Unlike the resistors that we have used thus far in our project which have a fixed resistance value, the resistance value of a potentiometer can be adjusted. A potentiometer is often made up by a resistive substance (a wire or carbon element) and movable contact brush. When the brush moves along the resistor element, there will be a change in the resistance of the potentiometer's output side (3) (or change in the voltage of the circuit that is a part). The illustration below represents a linear sliding potentiometer and its electronic symbol on the right.

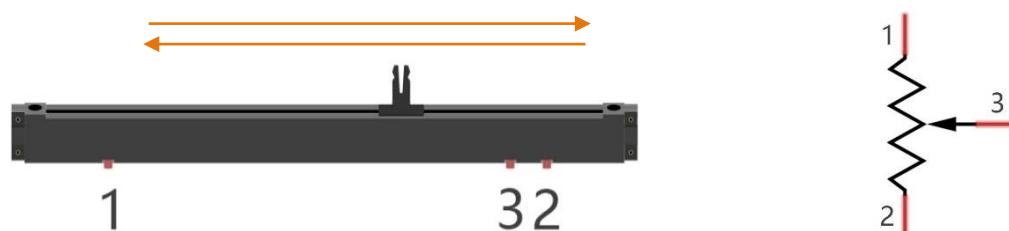


Between potentiometer pin 1 and pin 2 is the resistive element (a resistance wire or carbon) and pin 3 is connected to the brush that makes contact with the resistive element. In our illustration, when the brush moves from pin 1 to pin 2, the resistance value between pin 1 and pin 3 will increase linearly (until it reaches the highest value of the resistive element) and at the same time the resistance between pin 2 and pin 3 will decrease linearly and conversely down to zero. At the midpoint of the slider the measured resistance values between pin 1 and 3 and between pin 2 and 3 will be the same.

In a circuit, both sides of resistive element are often connected to the positive and negative electrodes of power. When you slide the brush "pin 3", you can get variable voltage within the range of the power supply.

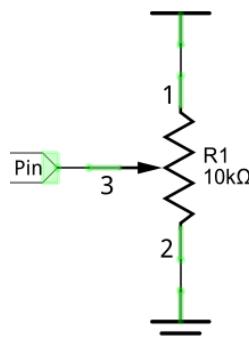


Rotary potentiometer

Rotary potentiometers and linear potentiometers have the same function; the only difference being the physical action being a rotational rather than a sliding movement.

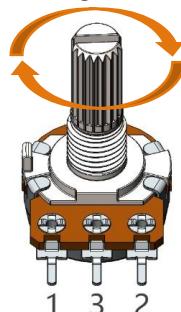


Circuit

Schematic diagram

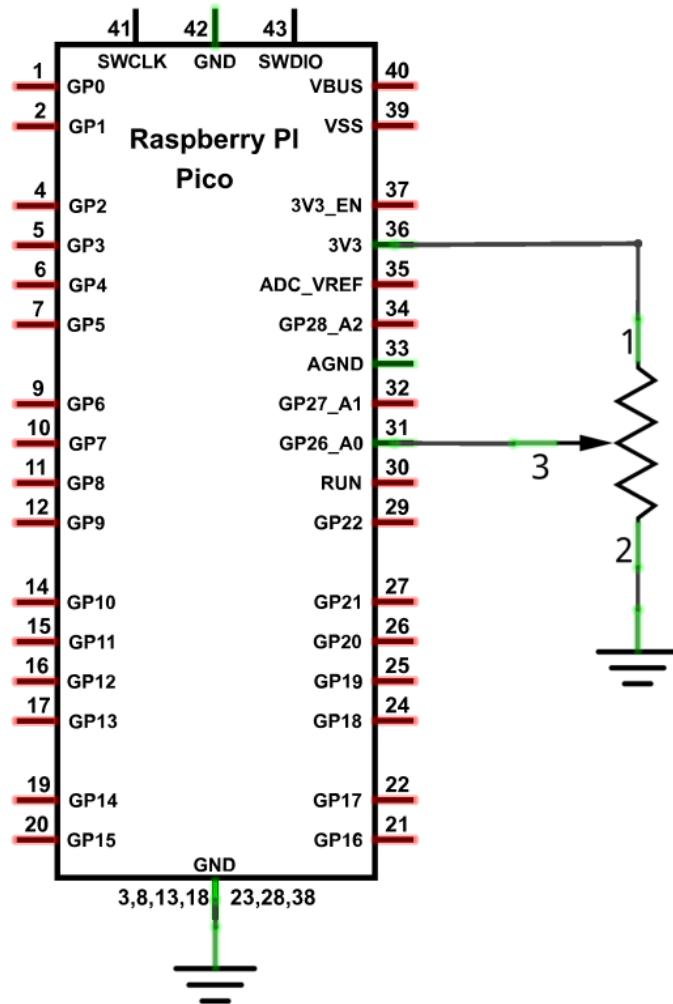

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

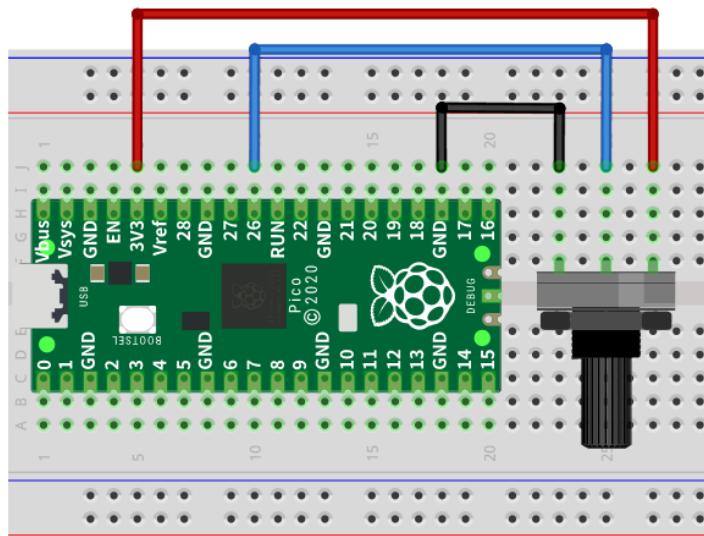

Any concerns? ✉ support@freenove.com

Sketch

Sketch_09.1_ADC

The screenshot shows the Arduino IDE interface. The title bar says "Sketch_09.1_ADC | Arduino 1.8.16". The menu bar includes File, Edit, Sketch, Tools, and Help. Below the menu is a toolbar with icons for upload, refresh, and save. The main code editor window contains the following C++ code:

```

1 #define PIN_ANALOG_IN 26
2
3 void setup() {
4     Serial.begin(115200);
5 }
6
7 void loop() {
8     int adcVal = analogRead(PIN_ANALOG_IN);
9     double voltage = adcVal / 1023.0 * 3.3;
10    Serial.println("ADC Value: " + String(adcVal) + " --- Voltage Value: " + String(voltage) + "V");
11    delay(500);
12 }

```

Below the code editor, a message says "Done uploading." followed by the output from the serial monitor:

```

rp2040load 1.0.1 - compiled with gol.15.8
Loading into Flash: [=====] 100%

```

The status bar at the bottom right shows "Raspberry Pi Pico on COM10".

Download the code to Pico, open the serial monitor, and set the baud rate to 115200, as shown in the following picture,

The screenshot shows the Serial Monitor window titled "COM10". The window displays a series of lines of text representing the data being printed from the Arduino sketch. The text shows timestamped ADC values and their corresponding voltage calculations. At the bottom of the window, there are several control buttons: "Autoscroll" (checked), "Show timestamp" (checked), "Newline" (dropdown menu), "115200 baud" (dropdown menu), and "Clear output".

```

16:08:01.822 -> ADC Value: 165 --- Voltage Value: 0.53V
16:08:02.276 -> ADC Value: 168 --- Voltage Value: 0.54V
16:08:02.777 -> ADC Value: 170 --- Voltage Value: 0.55V
16:08:03.279 -> ADC Value: 178 --- Voltage Value: 0.57V
16:08:03.735 -> ADC Value: 184 --- Voltage Value: 0.59V
16:08:04.237 -> ADC Value: 189 --- Voltage Value: 0.61V
16:08:04.693 -> ADC Value: 192 --- Voltage Value: 0.62V
16:08:05.189 -> ADC Value: 193 --- Voltage Value: 0.62V
16:08:05.644 -> ADC Value: 195 --- Voltage Value: 0.63V
16:08:06.146 -> ADC Value: 196 --- Voltage Value: 0.63V
16:08:06.601 -> ADC Value: 196 --- Voltage Value: 0.63V
16:08:07.099 -> ADC Value: 192 --- Voltage Value: 0.62V
16:08:07.600 -> ADC Value: 195 --- Voltage Value: 0.63V
16:08:08.055 -> ADC Value: 191 --- Voltage Value: 0.62V
16:08:08.556 -> ADC Value: 193 --- Voltage Value: 0.62V

```

The following is the code:

```

1 #define PIN_ANALOG_IN 26
2
3 void setup() {
4     Serial.begin(115200);
5 }
6
7 void loop() {
8     int adcVal = analogRead(PIN_ANALOG_IN);
9     double voltage = adcVal / 1023.0 * 3.3;
10    Serial.println("ADC Value: " + String(adcVal) + " --- Voltage Value: " + String(voltage) +
11        "V");
12    delay(500);
13 }
```

In loop() function, analogRead is called to get the ADC value of ADC0 and assign it to adcVal. Calculate the measured voltage value through the formula, and print these data through the serial port monitor.

```

8 int adcVal = analogRead(PIN_ANALOG_IN);
9     double voltage = adcVal / 1023.0 * 3.3;
10    Serial.println("ADC Value: " + String(adcVal) + " --- Voltage Value: " + String(voltage) +
11        "V");
```

Reference

`uint16_t analogRead(uint8_t pin);`

Reads the value from the specified analog pin. Return the analog reading on the pin. (0-1023 for 10 bits).



Chapter 10 Potentiometer & LED

We have learnt to use ADC in the previous chapter. In this chapter, we will combine PWM and ADC to use potentiometer to control LED, RGBLED and Neopixel.

Project 10.1 Soft Light


In this project, we will make a soft light. We will use an ADC Module to read ADC values of a potentiometer and map it to duty cycle of the PWM used to control the brightness of an LED. Then you can change the brightness of an LED by adjusting the potentiometer.

Component List

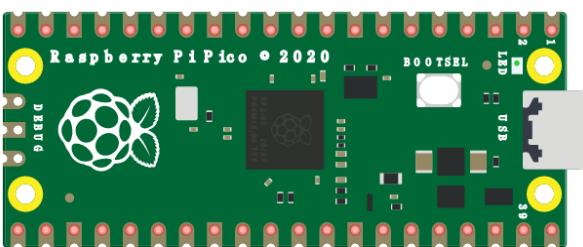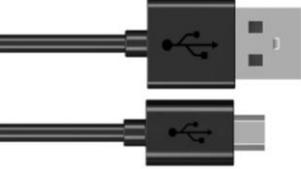
Raspberry Pi Pico x1		USB cable x1	
Breadboard x1			
Rotary potentiometer x1	Resistor 220Ω x1	LED x1	Jumper

Circuit

Schematic diagram

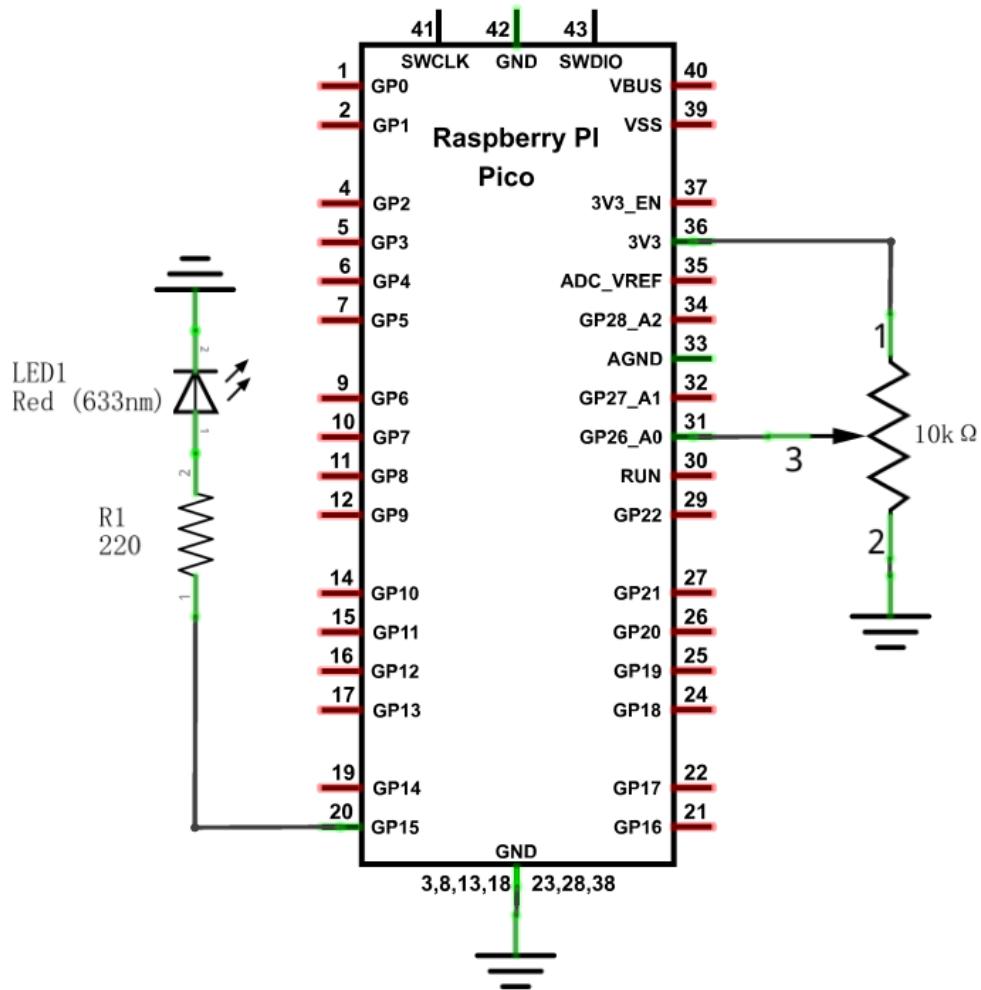

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

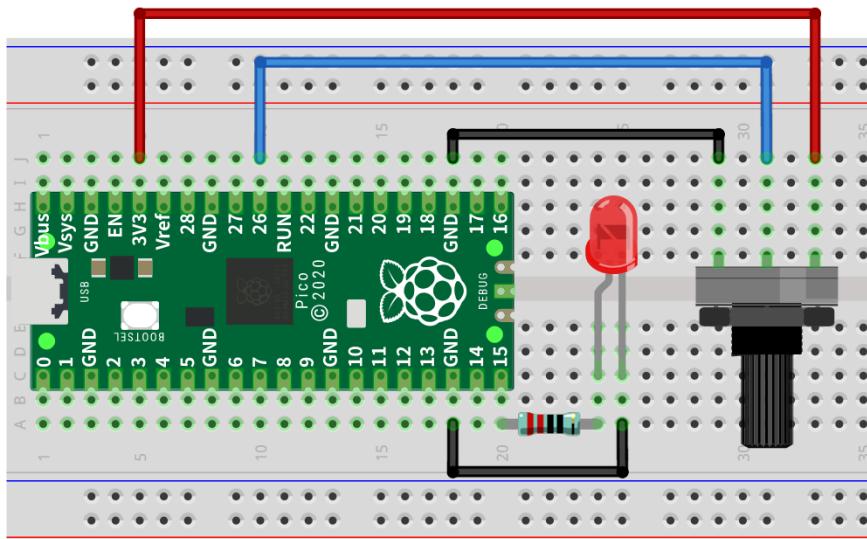

Any concerns? ✉ support@freenove.com

Sketch

Sketch_10.1_Softlight


The screenshot shows the Arduino IDE interface with the following details:

- Title Bar:** Sketch_10.1_SoftLight | Arduino 1.8.16
- Menu Bar:** File Edit Sketch Tools Help
- Toolbar:** Includes icons for Save, Run, Upload, and Download.
- Sketch List:** Sketch_10.1_SoftLight is selected.
- Code Editor:** Displays the following C++ code:

```
7 #define PIN_ADC0      26
8 #define PIN_LED       15
9
10 void setup() {
11   pinMode(PIN_LED, OUTPUT);
12 }
13
14 void loop() {
15   int adcVal = analogRead(PIN_ADC0); //read adc
16   analogWrite(PIN_LED, map(adcVal, 0, 1023, 0, 255));
17   delay(10);
18 }
```
- Status Bar:** Compiling sketch... (with a progress bar)
- Command Line:** Shows the path to the tools used for compilation:

```
"C:\\\\Users\\\\DESKTOP-LIN\\\\AppData\\\\Local\\\\Arduinol5\\\\packages\\\\arduino\\\\tools\\\\arm-none-eabi-gcc\\\\7-2017q4\\\\bin"
"C:\\\\Users\\\\DESKTOP-LIN\\\\AppData\\\\Local\\\\Arduinol5\\\\packages\\\\arduino\\\\tools\\\\arm-none-eabi-gcc\\\\7-2017q4\\\\bin"
```

Download the code to Pico, by turning the adjustable resistor to change the input voltage of GP26, Pico changes the output voltage of GP15 according to this voltage value, thus changing the brightness of the LED.

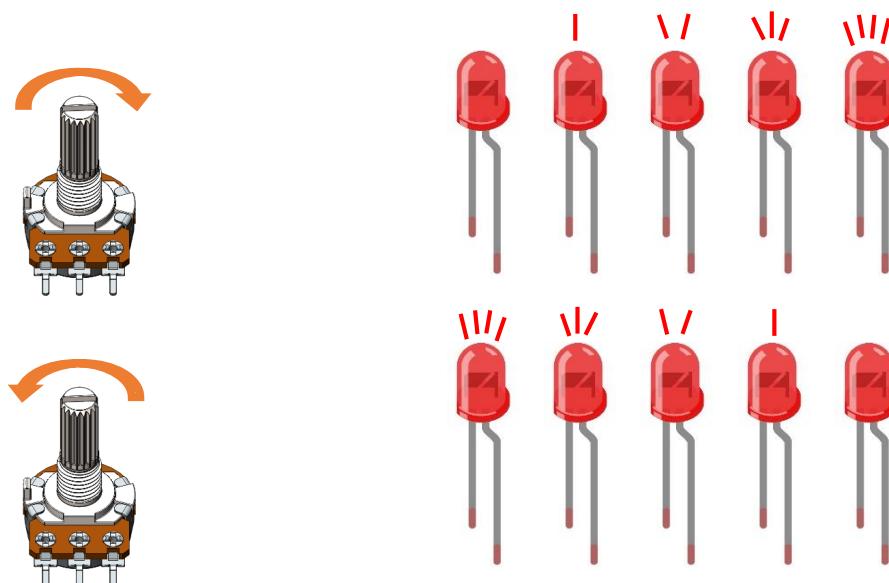



The following is the code:

```
1 #define PIN_ADC0      26
2 #define PIN_LED       15
3
4 void setup() {
5     pinMode(PIN_LED, OUTPUT);
6 }
7
8 void loop() {
9     int adcVal = analogRead(PIN_ADC0); //read adc
10    analogWrite(PIN_LED, map(adcVal, 0, 1023, 0, 255));
11    delay(10);
12 }
```

In the code, read the ADC value of potentiometer and map it to the duty cycle of PWM to control LED brightness.





If you have any concerns, please contact us via: support@freenove.com

Any concerns? ✉ support@freenove.com

Project 10.2 Soft Colorful Light


In this project, 3 potentiometers are used to control the RGB LED and in principle it is the same as the Soft Light project. Namely, read the voltage value of the potentiometer and then convert it to PWM used to control LED brightness. Difference is that the original project only controlled one LED, but this project required (3) RGB LEDs.

Component List

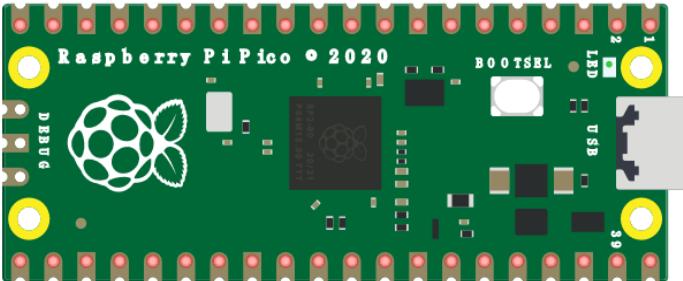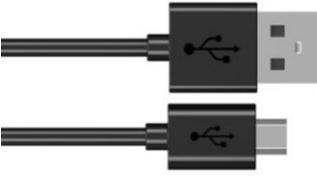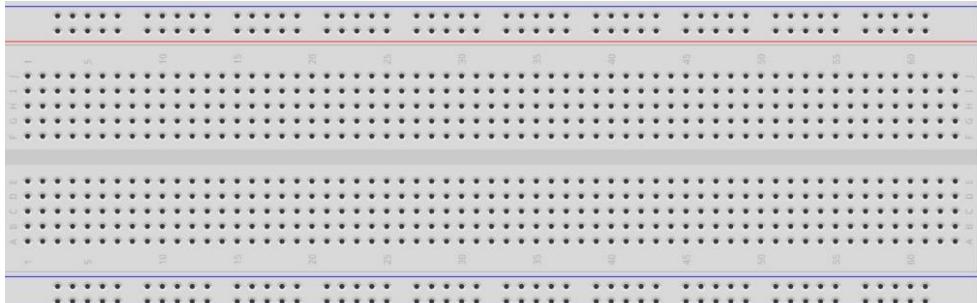
Raspberry Pi Pico x1	USB cable x1		
			
Breadboard x1			
Rotary potentiometer x3	Resistor 220Ω x3	RGBLED x1	Jumper
			

Circuit

Schematic diagram

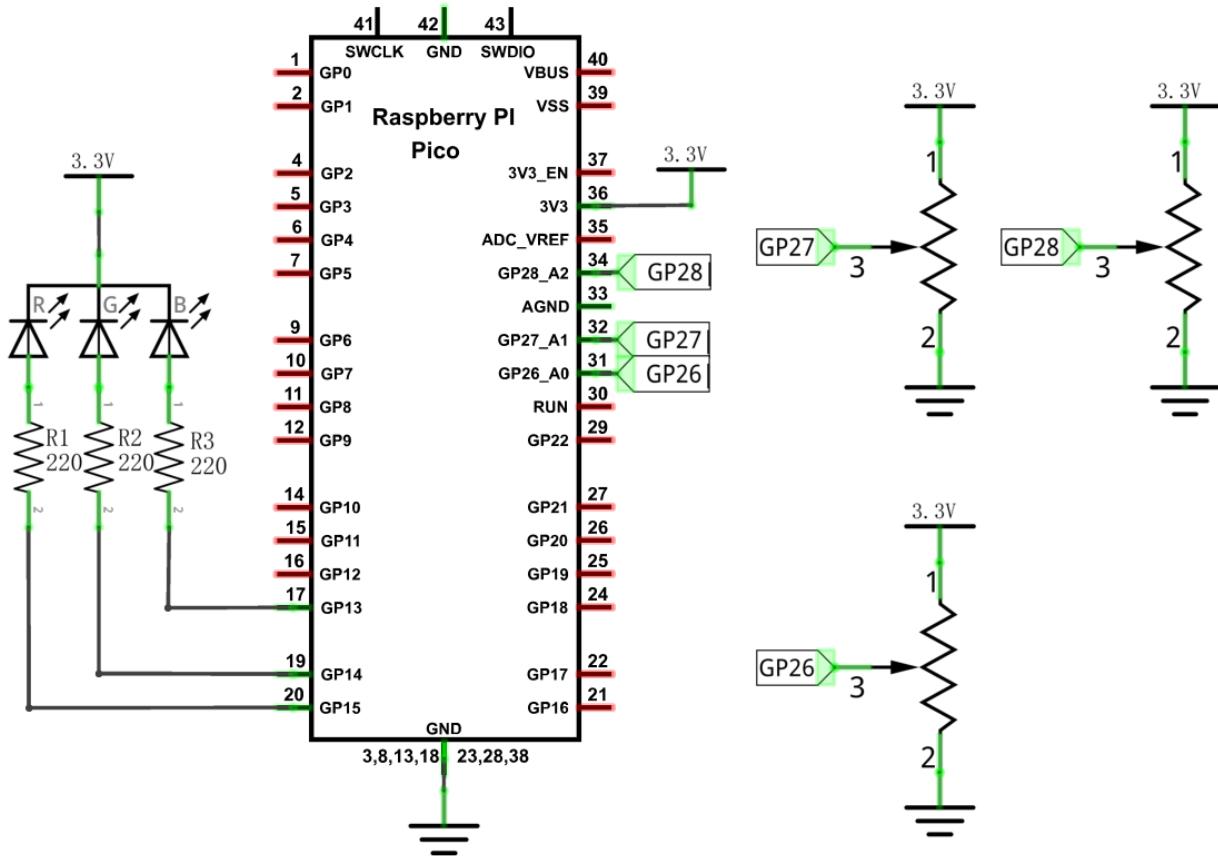


Hardware connection. If you need any support, please free to contact us via: support@freenove.com

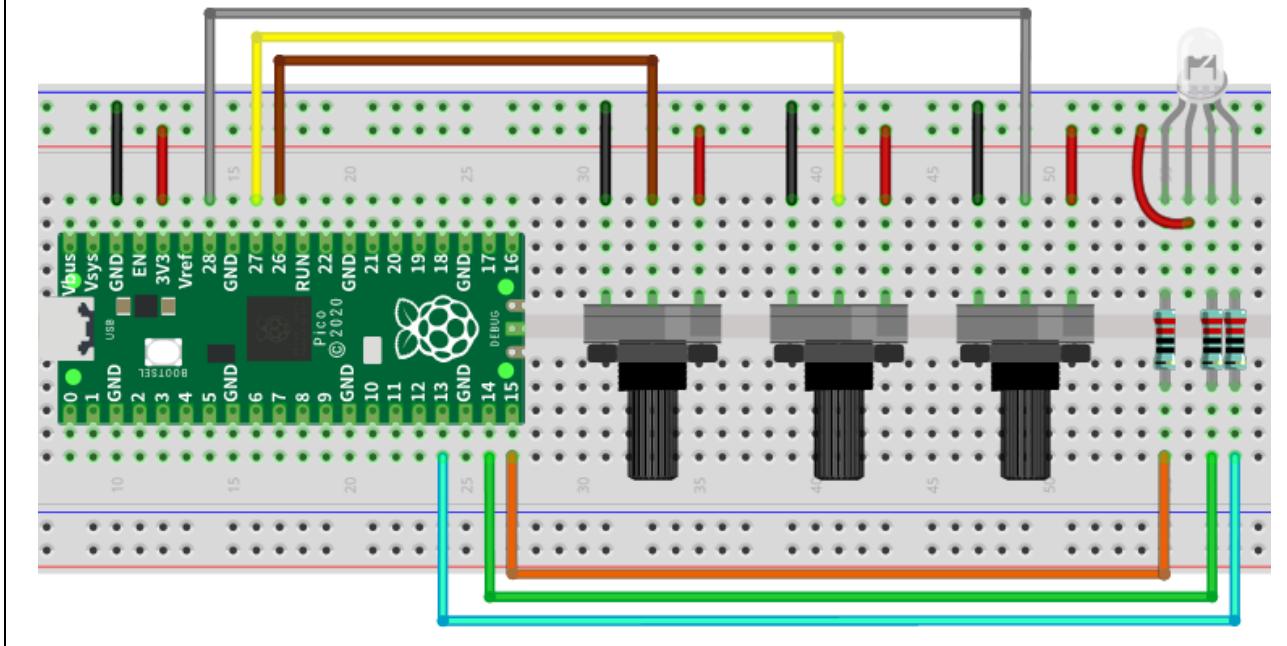

Any concerns? ✉ support@freenove.com

Sketch

Sketch_10.2_SoftColorfullLight

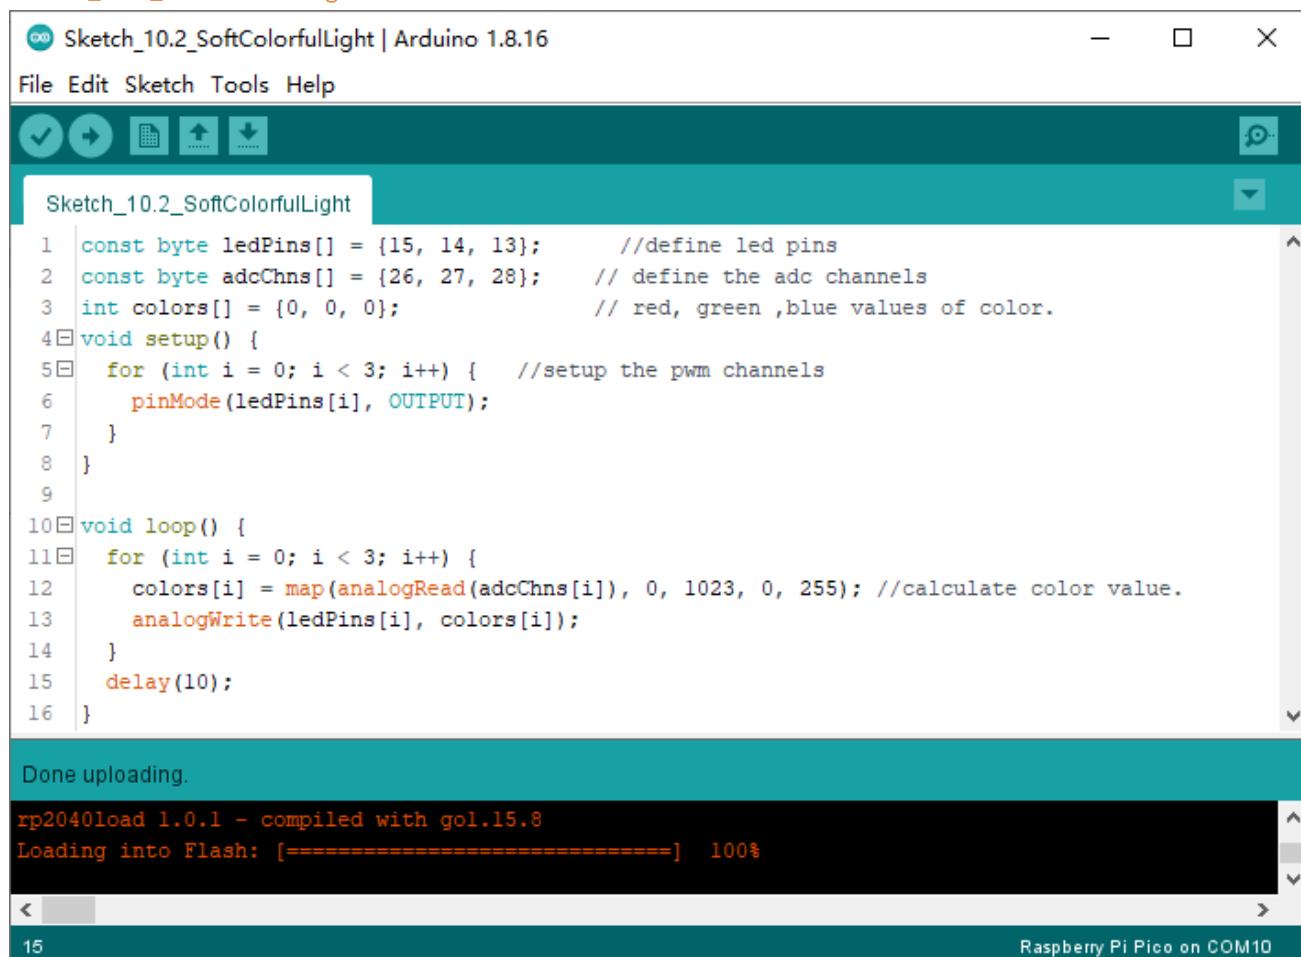

```
Sketch_10.2_SoftColorfullLight | Arduino 1.8.16
File Edit Sketch Tools Help
Sketch_10.2_SoftColorfullLight
1 const byte ledPins[] = {15, 14, 13};      //define led pins
2 const byte adcChns[] = {26, 27, 28};      // define the adc channels
3 int colors[] = {0, 0, 0};                  // red, green ,blue values of color.
4 void setup() {
5     for (int i = 0; i < 3; i++) {    //setup the pwm channels
6         pinMode(ledPins[i], OUTPUT);
7     }
8 }
9
10 void loop() {
11     for (int i = 0; i < 3; i++) {
12         colors[i] = map(analogRead(adcChns[i]), 0, 1023, 0, 255); //calculate color value.
13         analogWrite(ledPins[i], colors[i]);
14     }
15     delay(10);
16 }
```

Done uploading.

```
rp2040load 1.0.1 - compiled with gol.15.8
Loading into Flash: [=====] 100%
```

15 Raspberry Pi Pico on COM10

Download the code to Pico, rotate one of the potentiometers, then the color of RGB LED will change.

If you have any concerns, please contact us via: support@freenove.com



The following is the program code:



```
1 const byte ledPins[] = {15, 14, 13};      //define led pins
2 const byte adcChns[] = {26, 27, 28};      // define the adc channels
3 int colors[] = {0, 0, 0};                  // red, green ,blue values of color.
4 void setup() {
5     for (int i = 0; i < 3; i++) { //setup the pwm channels
6         pinMode(ledPins[i], OUTPUT);
7     }
8 }
9
10 void loop() {
11     for (int i = 0; i < 3; i++) {
12         colors[i] = map(analogRead(adcChns[i]), 0, 1023, 0, 255); //calculate color value.
13         analogWrite(ledPins[i], colors[i]);
14     }
15     delay(10);
16 }
```

In the code you can read the ADC values of the 3 potentiometers and map it into a PWM duty cycle to control the 3 LED elements to vary the color of their respective RGB LED.

Project 10.3 Soft Rainbow Light


In this project, we use a potentiometer to control Freenove 8 RGBLED Module.

Component List

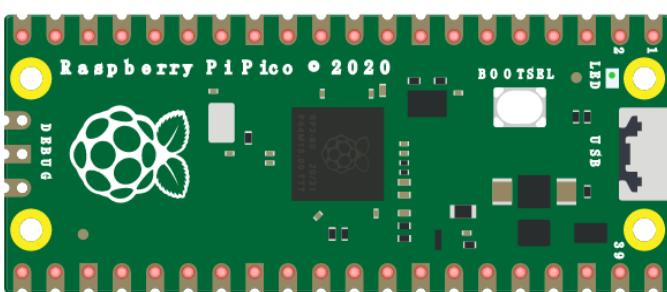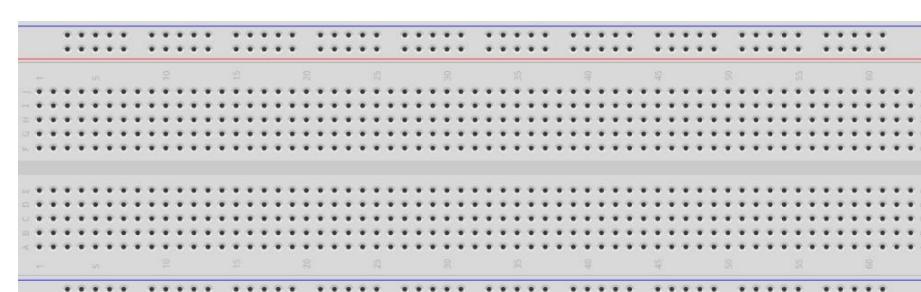
Raspberry Pi Pico x1	 A green printed circuit board with a central Broadcom SoC, labeled "Raspberry Pi Pico • 2020". It has a 40-pin header at the bottom, several surface-mount components, and two yellow circular pads on the left side.	USB cable x1	 A standard black USB cable with A and B type connectors.		
Breadboard x1	 A white breadboard with four vertical columns of 40 pins each, labeled A through H along the top and 1 through 30 along the bottom.				
Rotary potentiometer x1	 A standard three-terminal rotary potentiometer with a metal shaft and a black plastic housing.	Freenove 8 RGB LED Module x1	 A black square module with eight RGB LED chips arranged in a 2x4 grid. Each LED is labeled with a letter from D1 to D8. The word "FREENOVE" is printed in the center.	Jumper Jumper	 Two green jumpers, each consisting of a short black wire connected to a longer green wire.

Circuit

Schematic diagram

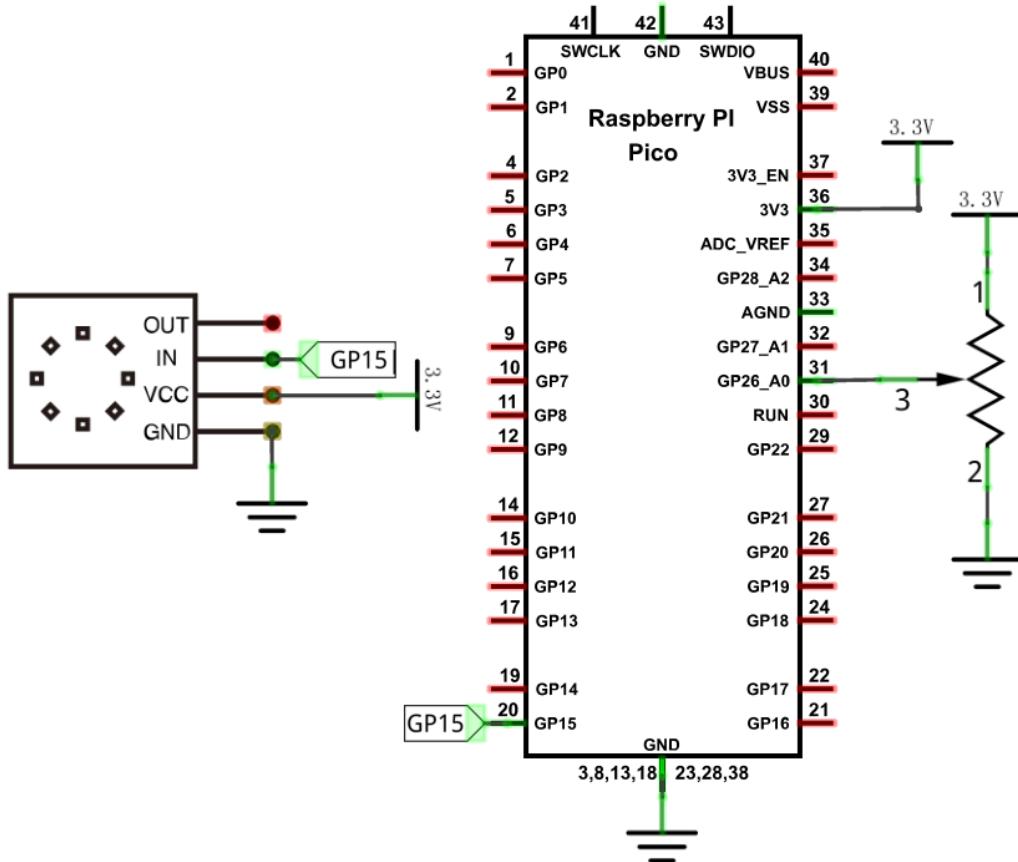


Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

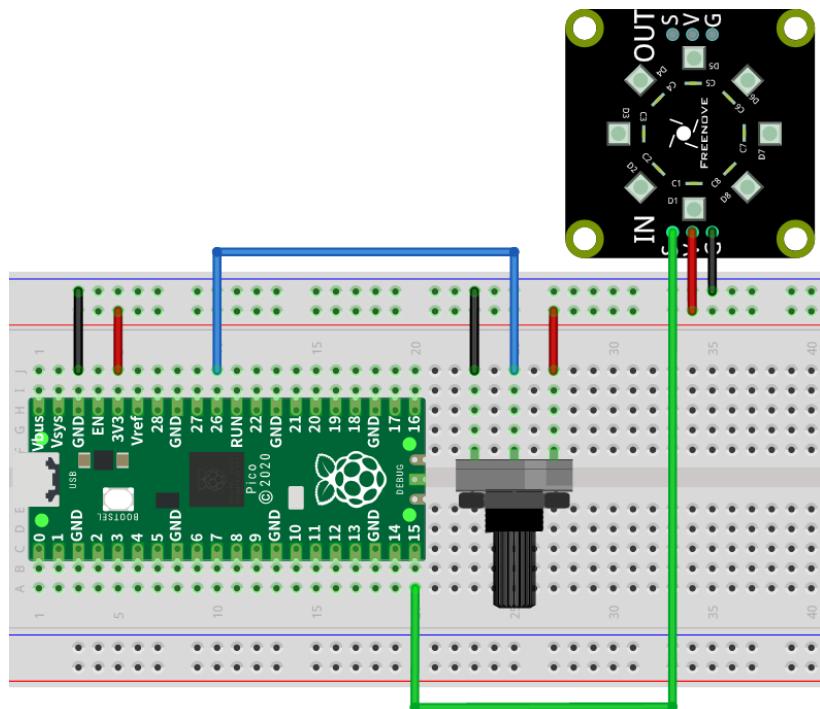

Any concerns? ✉ support@freenove.com

Sketch

Sketch_10.3_Soft_Rainbow_Light

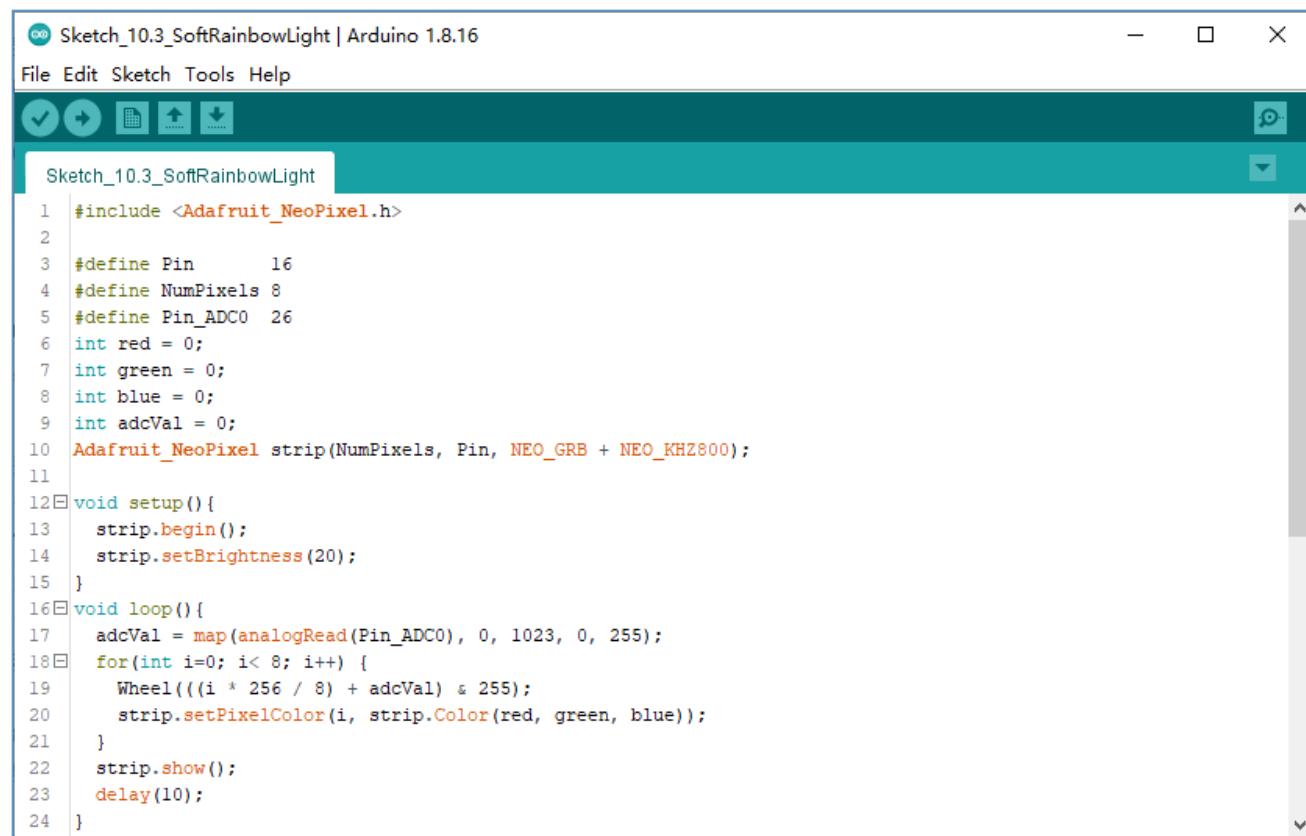


```

Sketch_10.3_SoftRainbowLight | Arduino 1.8.16
File Edit Sketch Tools Help
Sketch_10.3_SoftRainbowLight
1 #include <Adafruit_NeoPixel.h>
2
3 #define Pin      16
4 #define NumPixels 8
5 #define Pin_ADC0 26
6 int red = 0;
7 int green = 0;
8 int blue = 0;
9 int adcVal = 0;
10 Adafruit_NeoPixel strip(NumPixels, Pin, NEO_GRB + NEO_KHZ800);
11
12 void setup() {
13   strip.begin();
14   strip.setBrightness(20);
15 }
16 void loop() {
17   adcVal = map(analogRead(Pin_ADC0), 0, 1023, 0, 255);
18   for(int i=0; i< 8; i++) {
19     Wheel(((i * 256 / 8) + adcVal) & 255);
20     strip.setPixelColor(i, strip.Color(red, green, blue));
21   }
22   strip.show();
23   delay(10);
24 }

```

Download the code to Pico, rotate the handle of the potentiometer, and the color of the lamp ring will change.

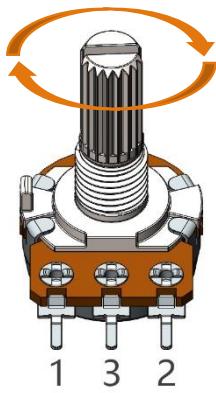

The following is the program code:

```

1 #include <Adafruit_NeoPixel.h>
2
3 #define Pin      16
4 #define NumPixels 8
5 #define Pin_ADC0 26
6 int red = 0;

```

```
7 int green = 0;
8 int blue = 0;
9 int adcVal = 0;
10 Adafruit_NeoPixel strip(NumPixels, Pin, NEO_GRB + NEO_KHZ800);
11
12 void setup() {
13     strip.begin();
14     strip.setBrightness(20);
15 }
16 void loop() {
17     adcVal = map(analogRead(Pin_ADC0), 0, 1023, 0, 255);
18     for(int i=0; i< 8; i++) {
19         Wheel(((i * 256 / 8) + adcVal) & 255);
20         strip.setPixelColor(i, strip.Color(red, green, blue));
21     }
22     strip.show();
23     delay(10);
24 }
25
26 void Wheel(byte WheelPos) {
27     WheelPos = 255 - WheelPos;
28     if(WheelPos < 85) {
29         red = 255 - WheelPos * 3;
30         green = 0;
31         blue = WheelPos * 3;
32     } else if(WheelPos < 170) {
33         WheelPos -= 85;
34         red = 0;
35         green = WheelPos * 3;
36         blue = 255 - WheelPos * 3;
37     } else{
38         WheelPos -= 170;
39         red = WheelPos * 3;
40         green = 255 - WheelPos * 3;
41         blue = 0;
42     }
43 }
```

The overall logical structure of the code is the same as the previous project rainbow light, except that the starting point of the color in this code is controlled by potentiometer.



Chapter 11 Photoresistor & LED

In this chapter, we will learn how to use photoresistor.

Project 11.1 Control LED through Photoresistor

A Photoresistor is very sensitive to the amount of light present. We can take advantage of the characteristic to make a night lamp with the following function: when the ambient light is less (darker environment) the LED will automatically become brighter to compensate and when the ambient light is greater (brighter environment) the LED will automatically dim to compensate.


Component List

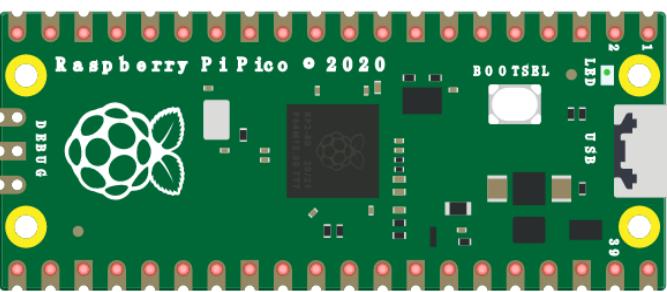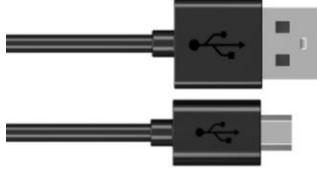Raspberry Pi Pico x1		USB cable x1	
Breadboard x1			
		Photoresistor x1	
Resistor 220Ω x1	10KΩ x1	LED x1	Jumper


Component Knowledge

Photoresistor

Photoresistor is simply a light sensitive resistor. It is an active component that decreases resistance with respect to receiving luminosity (light) on the component's light sensitive surface. Photoresistor's resistance value will change in proportion to the ambient light detected. With this characteristic, we can use a Photoresistor to detect light intensity. The Photoresistor and its electronic symbol are as follows.

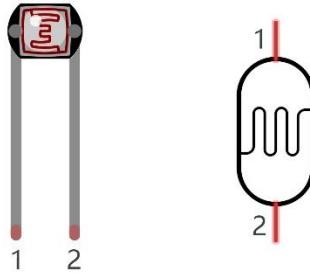

The circuit below is used to detect the change of a Photoresistor's resistance value:

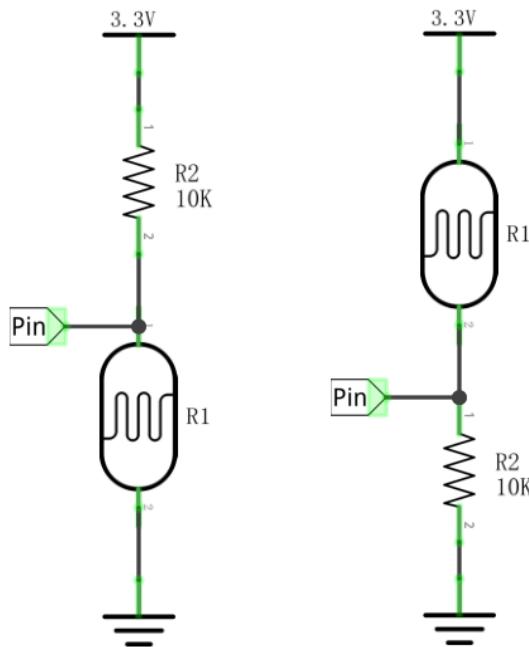


In the above circuit, when a Photoresistor's resistance value changes due to a change in light intensity, the voltage between the Photoresistor and Resistor R1 will also change. Therefore, the intensity of the light can be obtained by measuring this voltage.


Circuit

The circuit of this project is similar to SoftLight. The only difference is that the input signal is changed from a potentiometer to a combination of a photoresistor and a resistor.

Schematic diagram

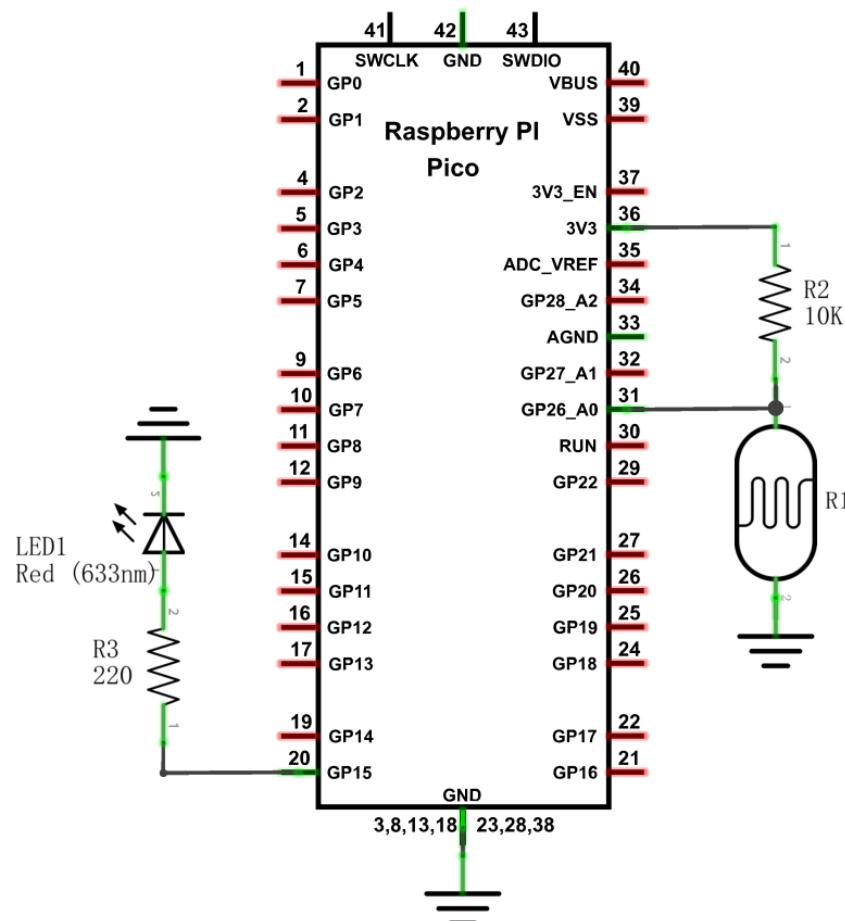

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

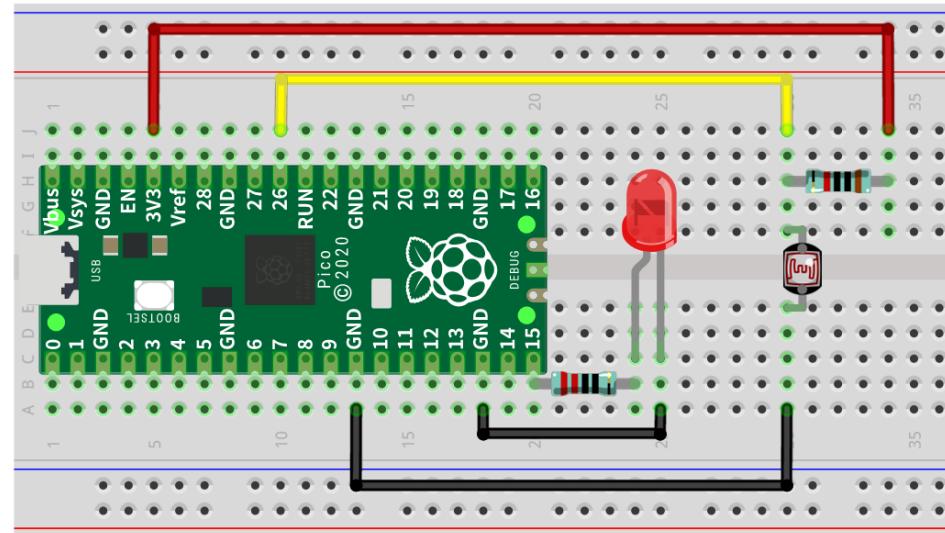

Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)



Sketch

The circuit used is similar to the project Soft Light. The only difference is that the input signal of the ADC0 pin of ADC changes from a potentiometer to a combination of a photoresistor and a resistor.

Sketch_11.1_Nightlamp

```

Sketch_11.1_Photosensitive | Arduino 1.8.16
File Edit Sketch Tools Help
Sketch_11.1_Photosensitive
1 #define PIN_ADC0      26
2 #define PIN_LED       15
3
4 void setup() {
5   pinMode(PIN_LED, OUTPUT);
6 }
7
8 void loop() {
9   int adcVal = analogRead(PIN_ADC0); //Read the voltage of the photoresistor
10  analogWrite(PIN_LED, map(adcVal, 0, 1023, 0, 255));
11  delay(10);
12 }

```

Compiling sketch...

Using board 'pico' from platform in folder: C:\Users\DESKTOP-LIN\AppData\Local\Arduino


Using core 'arduino' from platform in folder: C:\Users\DESKTOP-LIN\AppData\Local\Arduino

Raspberry Pi Pico on COM10

Download the code to Pico, if you cover the photoresistor or increase the light shining on it, the brightness of the LED changes accordingly.


If you have any concerns, please contact us via: support@freenove.com

Fully cover the photoresistor:

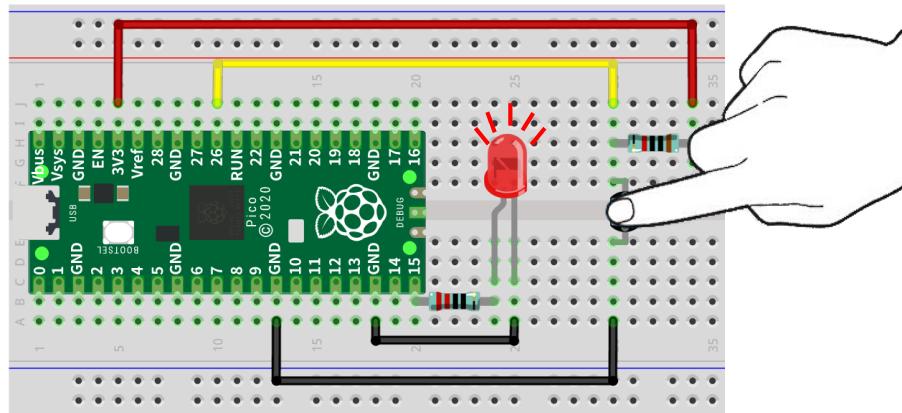


Any concerns? ✉ support@freenove.com

Half cover the photoresistor:

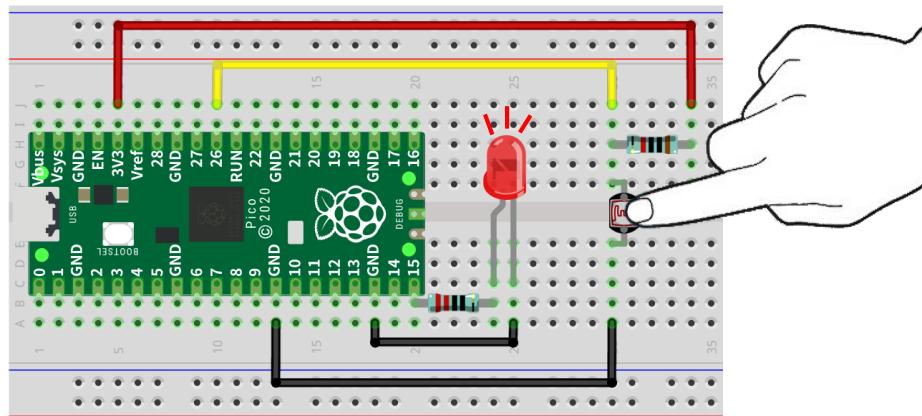

Not cover the photoresistor:

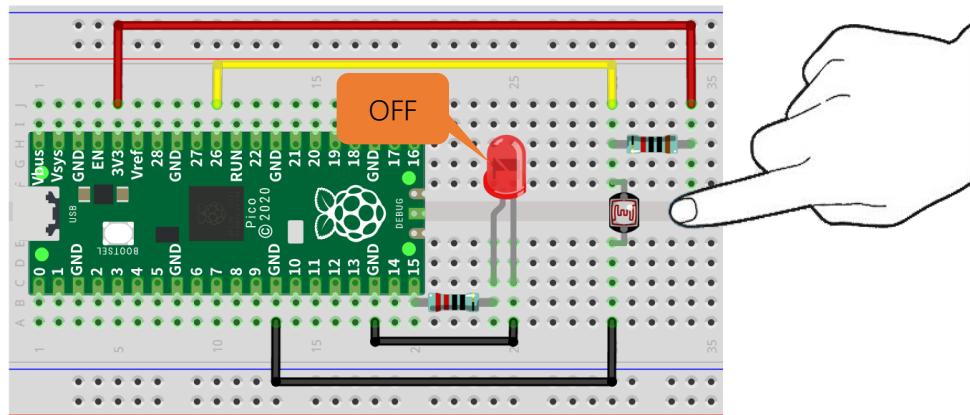

The following is the program code:

```

1 #define PIN_ADC0      26
2 #define PIN_LED       15
3
4 void setup() {
5     pinMode(PIN_LED, OUTPUT);
6 }
7
8 void loop() {
9     int adcVal = analogRead(PIN_ADC0); //Read the voltage of the photoresistor
10    analogWrite(PIN_LED, map(adcVal, 0, 1023, 0, 255));
11    delay(10);
12 }
```




Chapter 12 Thermistor

In this chapter, we will learn about Thermistors which are another kind of Resistor.

Project 12.1 Thermometer

A Thermistor is a type of Resistor whose resistance value is dependent on temperature and changes in temperature. Therefore, we can take advantage of this characteristic to make a thermometer.


Component List

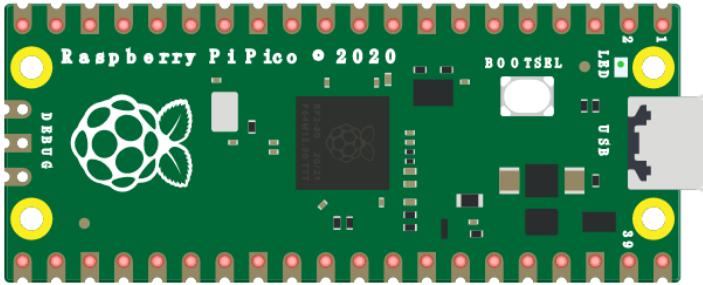Raspberry Pi Pico x1		USB cable x1
Breadboard x1		
Thermistor x1	Resistor 10kΩ x1	Jumper
		

Component Knowledge

Thermistor

A Thermistor is a temperature sensitive resistor. When it senses a change in temperature, the resistance of the Thermistor will change. We can take advantage of this characteristic by using a Thermistor to detect temperature intensity. A Thermistor and its electronic symbol are shown below.

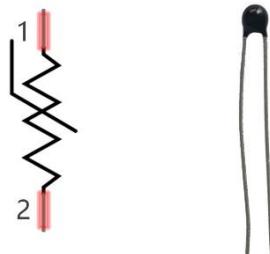

The relationship between resistance value and temperature of a thermistor is:

$$R_t = R * \text{EXP} \left[B * \left(\frac{1}{T_2} - \frac{1}{T_1} \right) \right]$$

Where:

Rt is the thermistor resistance under T2 temperature;

R is the nominal resistance of thermistor under T1 temperature;


EXP[n] is nth power of e;

B is for thermal index;

T1, T2 is Kelvin temperature (absolute temperature). Kelvin temperature=273.15 + Celsius temperature.

For the parameters of the Thermistor, we use: B=3950, R=10kΩ, T1=25°C.

The circuit connection method of the Thermistor is similar to photoresistor, as the following:

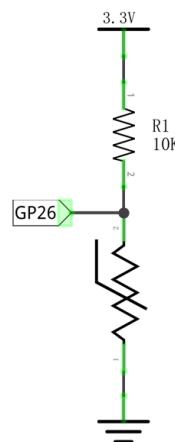

We can use the value measured by the ADC converter to obtain the resistance value of Thermistor, and then we can use the formula to obtain the temperature value.


Therefore, the temperature formula can be derived as:

$$T_2 = 1 / \left(\frac{1}{T_1} + \ln \left(\frac{R_t}{R} \right) / B \right)$$


Circuit

The circuit of this project is similar to the one in the previous chapter. The only difference is that the Photoresistor is replaced by a Thermistor.

Schematic diagram

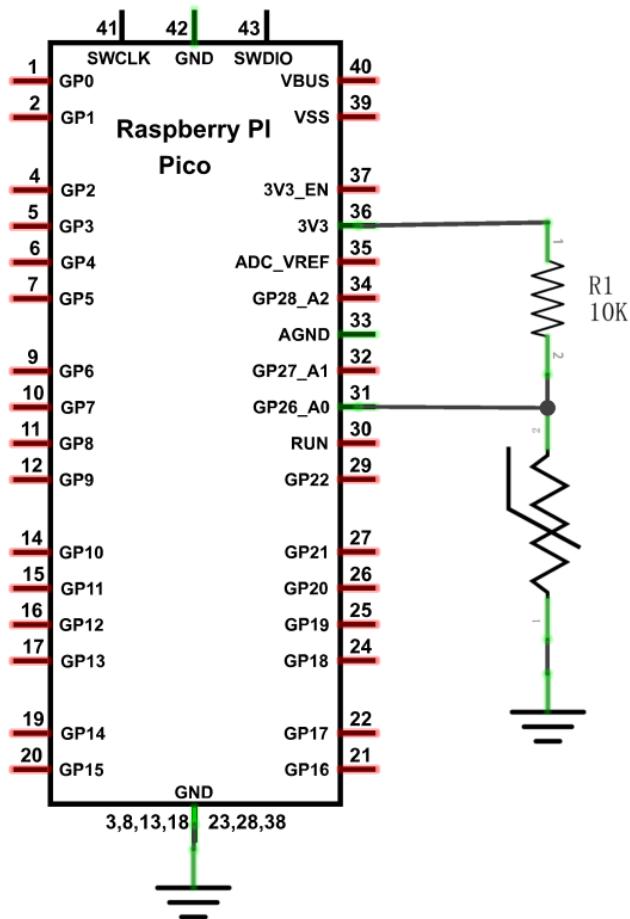

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

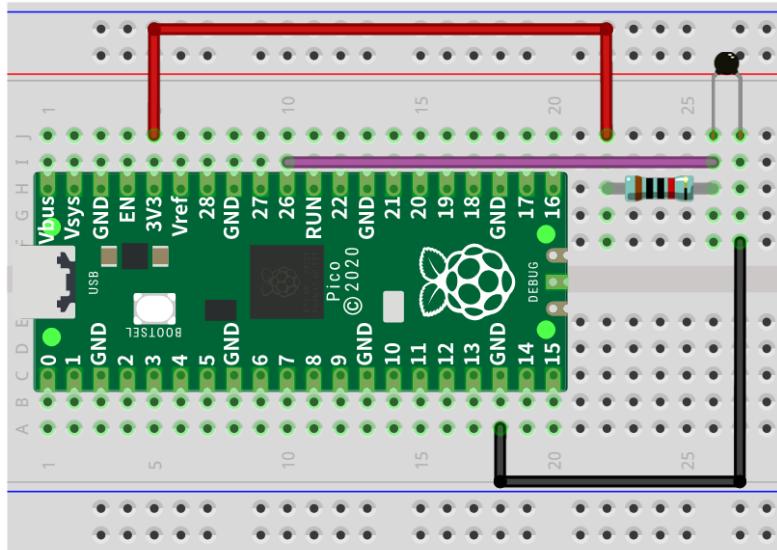

Any concerns? ✉ support@freenove.com

Sketch

Sketch_12.1_Thermometer

The screenshot shows the Arduino IDE interface. The title bar says "Sketch_12.1_Thermometer | Arduino 1.8.16". The menu bar includes File, Edit, Sketch, Tools, Help. Below the menu is a toolbar with icons for file operations. The main area contains the sketch code:

```

1 #define PIN_ADC0 26
2 void setup() {
3     Serial.begin(115200);
4 }
5
6 void loop() {
7     int adcValue = analogRead(PIN_ADC0); //read ADC pin
8     double voltage = (float)adcValue / 1023.0 * 3.3; // calculate voltage
9     double Rt = 10 * voltage / (3.3 - voltage); //calculate resistance value of thermistor
10    double tempK = 1 / (1 / (273.15 + 25) + log(Rt / 10) / 3950.0); //calculate temperature (Kelvin)
11    double tempC = tempK - 273.15; //calculate temperature (Celsius)
12    Serial.println("Voltage: " + String(voltage) + "V\t" + "Kelvins: " + String(tempK) + "K\t" + "Temperature: " + String(tempC) + "C");
13    delay(1000);
14 }

```

Below the code, it says "Uploading..." with a progress bar. The status bar at the bottom shows "C:\Users\DESKTOP-LIN\AppData\Local\Arduino15\packages\arduino\tools\rp2040tools\1.0.2\rp2040load -v -D C:\Users\DESKTOP-LIN\AppData\Local\Temp\arduino\rp2040load 1.0.1 - compiled with gol.15.8 Loading into Flash: [=====] 89%" and "Raspberry Pi Pico on COM10".

Upload the code to Pico and serial monitor will display the current ADC, voltage and temperature values. Try to “pinch” the thermistor (without touching the leads) with your index finger and thumb for a brief time, you should see that the temperature value increases.

The screenshot shows the Serial Monitor window titled "COM10". The text area displays the following data:

Voltage	Kelvins	Temperature
1.61V	299.25K	26.10C
1.60V	299.43K	26.28C
1.59V	299.70K	26.55C
1.60V	299.61K	26.46C
1.61V	299.34K	26.19C
1.60V	299.52K	26.37C
1.62V	298.99K	25.84C
1.61V	299.17K	26.02C
1.61V	299.17K	26.02C
1.61V	299.25K	26.10C
1.62V	298.99K	25.84C
1.61V	299.17K	26.02C
1.61V	299.25K	26.10C

At the bottom, there are checkboxes for "Autoscroll" and "Show timestamp", and dropdown menus for "Newline", "115200 baud", and "Clear output".

If you have any concerns, please contact us via: support@freenove.com

The following is the code:

```
1 #define PIN_ADC0 26
2 void setup() {
3     Serial.begin(115200);
4 }
5
6 void loop() {
7     int adcValue = analogRead(PIN_ADC0); //read ADC pin
8     double voltage = (float)adcValue / 1023.0 * 3.3;// calculate voltage
9     double Rt = 10 * voltage / (3.3 - voltage);//calculate resistance value of thermistor
10    double tempK = 1 / (1 / (273.15 + 25) + log(Rt / 10) / 3950.0);//calculate temperature
11    (Kelvin)
12    double tempC = tempK - 273.15;//calculate temperature (Celsius)
13    Serial.println("Voltage: " + String(voltage) + "V,\t\t" + "Kelvins: " + String(tempK) +
14    "K,\t" + "Temperature: " + String(tempC) + "C");
15    delay(1000);
16 }
```

In the code, the ADC value of ADC module A0 port is read, and then calculates the voltage and the resistance of thermistor according to Ohms Law. Finally, it calculates the temperature sensed by the thermistor, according to the formula.




Chapter 13 Joystick

In the previous chapter, we have learned how to use rotary potentiometer. Now, let's learn a new electronic module Joystick which works on the same principle as rotary potentiometer.

Project 13.1 Joystick

In this project, we will read the output data of a Joystick and display it to the Terminal screen.


Component List

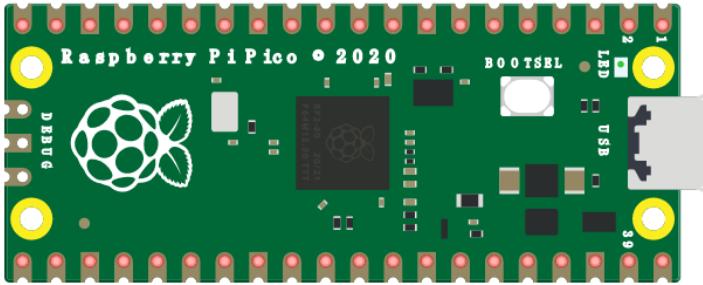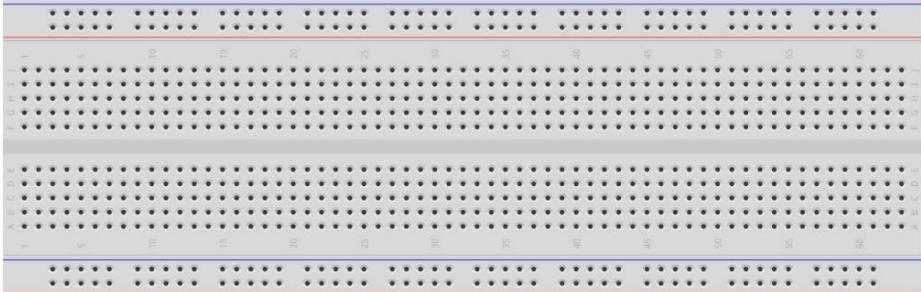Raspberry Pi Pico x1	 A green printed circuit board (PCB) for the Raspberry Pi Pico. It features a central Broadcom SoC, a USB Type-C port, and several yellow circular pads labeled 'DEBUG' and 'JTAG'. Pin numbers are visible along the bottom edge.	USB cable x1	 Two standard black USB cables, each with a black USB-A male connector at one end and a grey USB-B male connector at the other.
Breadboard x1	 A schematic diagram of a breadboard. It shows a grid of 40 columns and 24 rows of connection points. The columns are labeled with letters A through H at both the top and bottom. The rows are numbered 1 through 24 along the left side. The central area is a grid of connection points where components can be soldered or connected via jumper wires.		
Joystick x1	 A black cylindrical joystick module. It has four pins labeled GND, 5V, VRX, and VRY. There are also two white circular pads on the bottom right.		
	Jumper		


Component Knowledge

Joystick

A Joystick is a kind of input sensor used with your fingers. You should be familiar with this concept already as they are widely used in gamepads and remote controls. It can receive input on two axes (Y and or X) at the same time (usually used to control direction on a two dimensional plane). And it also has a third direction capability by pressing down (Z axis/direction).

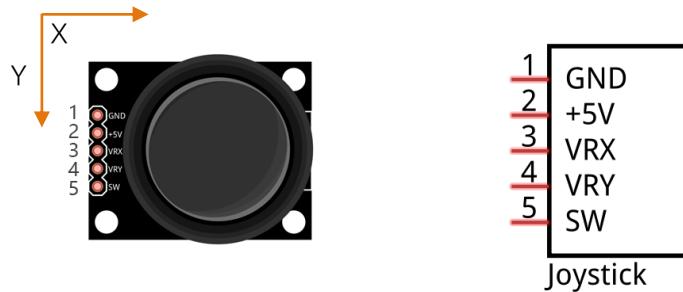


This is accomplished by incorporating two rotary potentiometers inside the Joystick Module at 90 degrees of each other, placed in such a manner as to detect shifts in direction in two directions simultaneously and with a Push Button Switch in the “vertical” axis, which can detect when a User presses on the Joystick.

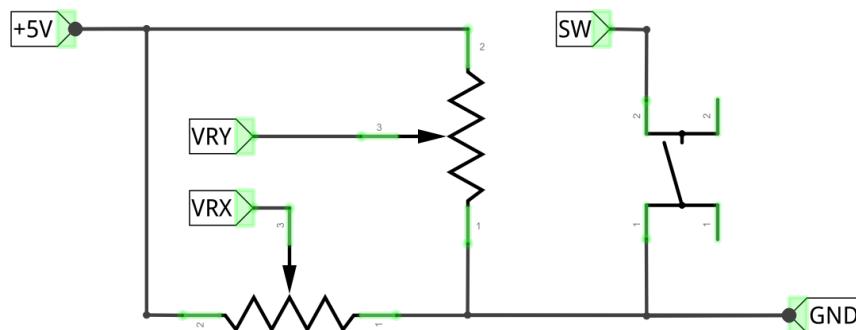


When the Joystick data is read, there are some differences between the axes: data of X and Y axes is analog, which needs to use the ADC. The data of the Z axis is digital, so you can directly use the GPIO to read this data or you have the option to use the ADC to read this.

Circuit

Schematic diagram

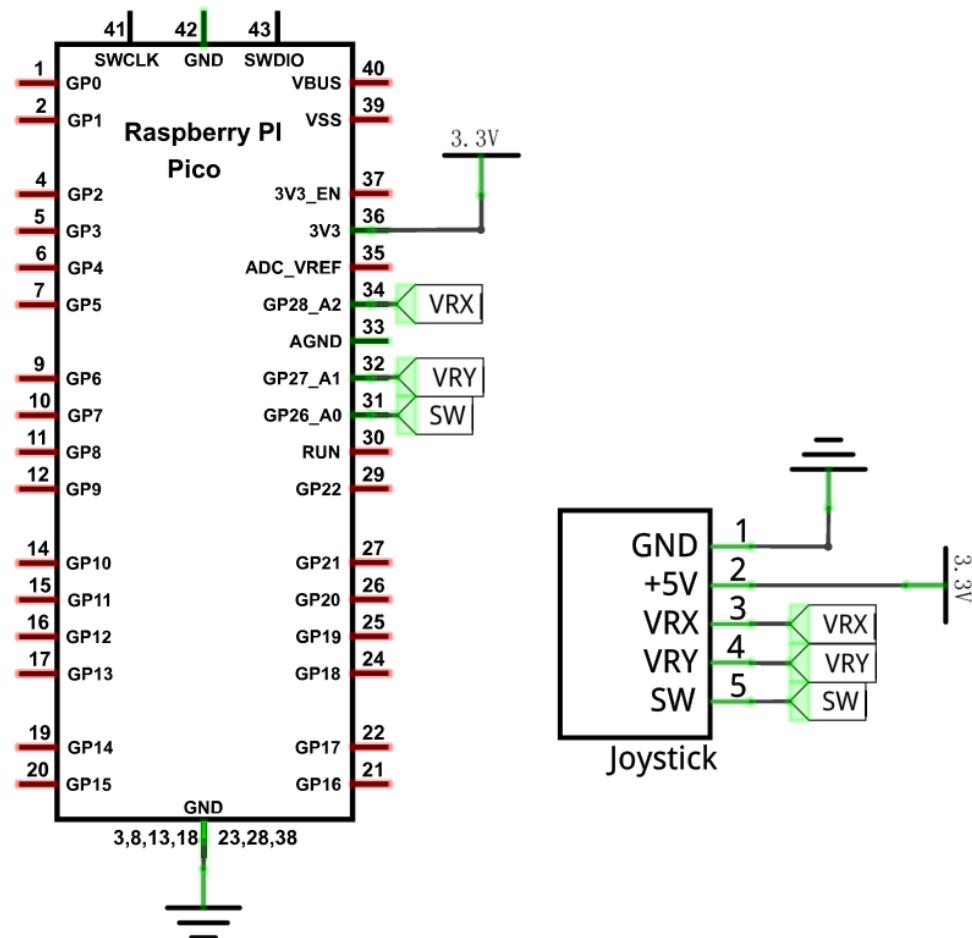

Hardware connection. If you need any support, please free to contact us via: support@freenove.com

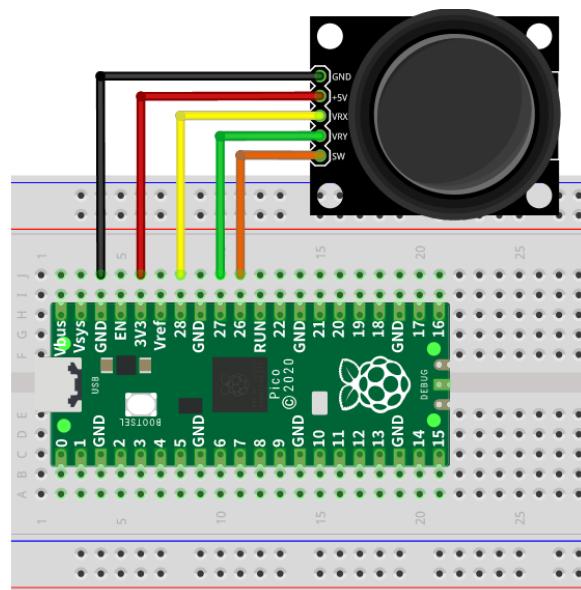

Sketch

In this project's code, we will read the ADC values of X and Y axes of the joystick, and read digital quality of the Z axis, then display these out in terminal.

Sketch_13.1_Joystick

The screenshot shows the Arduino IDE interface. The top menu bar includes File, Edit, Sketch, Tools, and Help. The main code editor window contains the following sketch:

```

1 int xyzPins[] = {28, 27, 26}; //x,y,z pins
2 void setup() {
3     Serial.begin(115200);
4     pinMode(xyzPins[2], INPUT_PULLUP); //z axis is a button.
5 }
6
7 void loop() {
8     int xVal = analogRead(xyzPins[0]);
9     int yVal = analogRead(xyzPins[1]);
10    int zVal = digitalRead(xyzPins[2]);
11    Serial.println("X,Y,Z: " + String(xVal) + ", " + String(yVal) + ", " + String(zVal));
12    delay(500);
13 }

```

The status bar at the bottom indicates "Done Saving." and "Loading into Flash: [=====] 100%". The terminal window below shows the output: "Raspberry Pi Pico on COM10".

Download the code to Pico, open the serial port monitor, the baud rate is 115200, as shown in the picture below, shift (moving) the joystick or pressing it down will make the data change.

The screenshot shows the serial monitor window titled "COM10". The output window displays a series of timestamped data lines:

```

17:26:22.074 -> X,Y,Z: 522, 523, 0
17:26:22.576 -> X,Y,Z: 517, 525, 1
17:26:23.074 -> X,Y,Z: 518, 520, 1
17:26:23.526 -> X,Y,Z: 5, 523, 1
17:26:24.024 -> X,Y,Z: 516, 524, 1
17:26:24.478 -> X,Y,Z: 1023, 527, 1
17:26:24.977 -> X,Y,Z: 516, 526, 1
17:26:25.476 -> X,Y,Z: 516, 6, 1
17:26:25.929 -> X,Y,Z: 520, 523, 1
17:26:26.430 -> X,Y,Z: 520, 1023, 1
17:26:26.888 -> X,Y,Z: 521, 522, 1
17:26:27.382 -> X,Y,Z: 522, 521, 0
17:26:27.836 -> X,Y,Z: 522, 520, 1
17:26:28.337 -> X,Y,Z: 518, 525, 1

```

The bottom of the window includes controls for "Autoscroll", "Show timestamp", "Newline", "115200 baud", and "Clear output".

Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)

The following is the code:

```
1 int xyzPins[] = {28, 27, 26}; //x, y, z pins
2
3 void setup() {
4     Serial.begin(115200);
5     pinMode(xyzPins[2], INPUT_PULLUP); //z axis is a button.
6 }
7
8 void loop() {
9     int xVal = analogRead(xyzPins[0]);
10    int yVal = analogRead(xyzPins[1]);
11    int zVal = digitalRead(xyzPins[2]);
12    Serial.println("X,Y,Z: " + String(xVal) + ", " + String(yVal) + ", " + String(zVal));
13    delay(500);
14 }
```

In the code, configure xyzPins[2] to pull-up input mode. In loop(), use analogRead () to read the value of axes X and Y and use digitalWrite () to read the value of axis Z, then display them.

```
5 pinMode(xyzPins[2], INPUT_PULLUP); //z axis is a button.
```

In the code, configure xyzPins[2] to pull-up input mode. In loop(), use analogRead () to read the value of axes X and Y and use digitalWrite () to read the value of axis Z, then display them.

```
9 int xVal = analogRead(xyzPins[0]);
10 int yVal = analogRead(xyzPins[1]);
11 int zVal = digitalRead(xyzPins[2]);
12 Serial.printf("X,Y,Z: %d, \t%d, \t%d\n", xVal, yVal, zVal);
13 delay(500);
```



Chapter 14 74HC595 & LED Bar Graph

We have used LED Bar Graph to make a flowing water light, in which 10 GPIO ports of Raspberry Pi Pico is occupied. More GPIO ports mean that more peripherals can be connected to Raspberry Pi Pico, so GPIO resource is very precious. Can we make flowing water light with less GPIO? In this chapter, we will learn a component, 74HC595, which can achieve the target.

Project 14.1 Flowing Water Light

Now let's learn how to use the 74HC595 IC Chip to make a flowing water light using less GPIO.


Component List

Raspberry Pi Pico x1		USB cable x1	
Breadboard x1			
74HC595 x1	LED Bar Graph x1	Resistor 220Ω x8	Jumper

Related Knowledge

74HC595

A 74HC595 chip is used to convert serial data into parallel data. A 74HC595 chip can convert the serial data of one byte into 8 bits, and send its corresponding level to each of the 8 ports correspondingly. With this characteristic, the 74HC595 chip can be used to expand the IO ports of Raspberry Pi Pico. At least 3 ports are required to control the 8 ports of the 74HC595 chip.

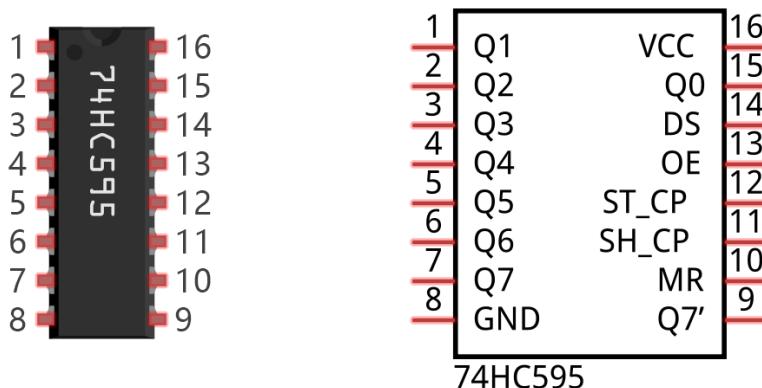


The ports of the 74HC595 chip are described as follows:

Pin name	GPIO number	Description
Q0-Q7	15, 1-7	Parallel data output
VCC	16	The positive electrode of power supply, the voltage is 2~6V
GND	8	The negative electrode of power supply
DS	14	Serial data Input
OE	13	Enable output, When this pin is in high level, Q0-Q7 is in high resistance state When this pin is in low level, Q0-Q7 is in output mode
ST_CP	12	Parallel Update Output: when its electrical level is rising, it will update the parallel data output.
SH_CP	11	Serial shift clock: when its electrical level is rising, serial data input register will do a shift.
MR	10	Remove shift register: When this pin is in low level, the content in shift register will be cleared.
Q7'	9	Serial data output: it can be connected to more 74HC595 in series.


For more detail, please refer to the datasheet on the 74HC595 chip.

Circuit

Schematic diagram

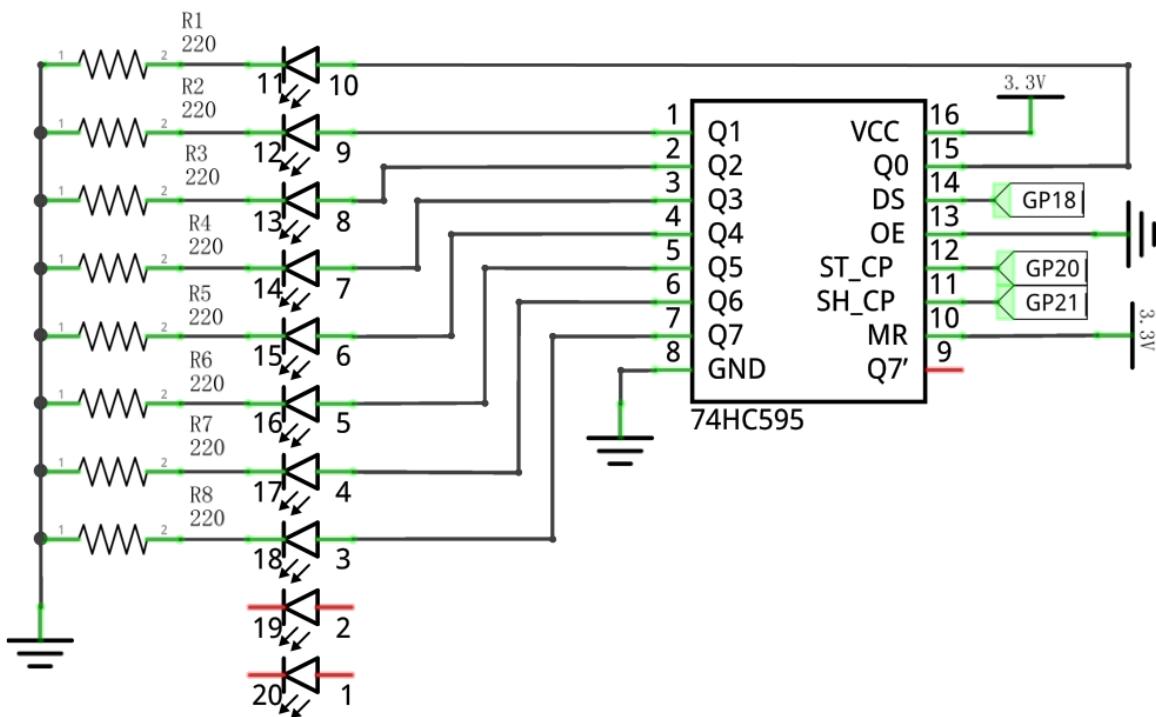

Hardware connection. If you need any support, please free to contact us via: support@freenove.com

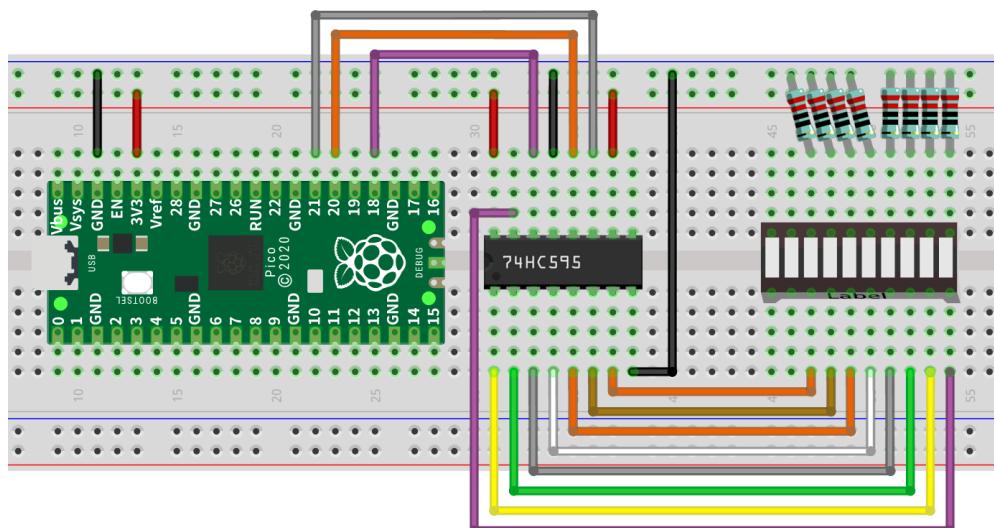

Sketch

In this project, we will make a flowing water light with a 74HC595 chip to learn about its functions.

Sketch_14.1_FlowingLight2

```

Sketch_14.1_FlowingLight02 | Arduino 1.8.16
File Edit Sketch Tools Help
Sketch_14.1_FlowingLight02
1 int dataPin = 18; // Pin connected to DS of 74HC595(Pin14)
2 int latchPin = 20; // Pin connected to ST_CP of 74HC595(Pin12)
3 int clockPin = 21; // Pin connected to SH_CP of 74HC595(Pin11)
4
5 void setup() {
6     // set pins to output
7     pinMode(latchPin, OUTPUT);
8     pinMode(clockPin, OUTPUT);
9     pinMode(dataPin, OUTPUT);
10 }
11
12 void loop() {
13     // Define a one-byte variable to use the 8 bits to represent the state of 8 LEDs of LED bar graph.
14     // This variable is assigned to 0x01, that is binary 00000001, which indicates only one LED light on.
15     byte x = 0x01; // Ob 0000 0001
16     for (int j = 0; j < 8; j++) { // Let led light up from right to left
17         writeTo595(LSBFIRST, x);
18         x <= 1; // make the variable move one bit to left once, then the bright LED move one step to the left once.
19         delay(100);
20     }
21     delay(100);
}
Compiling sketch...
Compiling sketch...
C:\Users\DESKTOP-LIN\AppData\Local\Arduino15\packages\arduino\tools\arm-none-eabi-gcc\7-2017q4/bin/arm-none-eabi-gcc
Raspberry Pi Pico on COM10

```

Download the code to Pico. You will see that LED bar graph starts with the flowing water pattern flashing from left to right and then back from right to left.

If you have any concerns, please contact us via: support@freenove.com

Any concerns? ✉ support@freenove.com

The following is the program code:

```

1 int dataPin = 18; // Pin connected to DS of 74HC595(Pin14)
2 int latchPin = 20; // Pin connected to ST_CP of 74HC595(Pin12)
3 int clockPin = 21; // Pin connected to SH_CP of 74HC595(Pin11)
4
5 void setup() { // set pins to output
6     pinMode(latchPin, OUTPUT);
7     pinMode(clockPin, OUTPUT);
8     pinMode(dataPin, OUTPUT);
9 }
10
11 void loop() {
12     // Define a variable to use the 8 bits to represent the state of 8 LEDs of LED bar graph.
13     // This variable is assigned to 0x01, which indicates only one LED light on.
14     byte x = 0x01; // 0b 0000 0001
15     for (int j = 0; j < 8; j++) { // Let led light up from right to left
16         writeTo595(LSBFIRST, x);
17         x <<= 1; // make the variable move one bit to left once, then the bright LED move one step
18         to the left once.
19         delay(100);
20     }
21     delay(100);
22     x = 0x80; // 0b 1000 0000
23     for (int j = 0; j < 8; j++) { // Let led light up from left to right
24         writeTo595(LSBFIRST, x);
25         x >>= 1;
26         delay(100);
27     }
28 }
29 void writeTo595(BitOrder order, byte _data) {
30     // Output low level to latchPin
31     digitalWrite(latchPin, LOW);
32     // Send serial data to 74HC595
33     shiftOut(dataPin, clockPin, order, _data);
34     // Output high level to latchPin, and 74HC595 will update the data to the parallel output
35     // port.
36     digitalWrite(latchPin, HIGH);
37 }
```

In the code, we configure three pins to control the 74HC595 chip and define a one-byte variable to control the state of the 8 LEDs (in the LED bar graph Module) through the 8 bits of the variable. The LEDs light ON when the corresponding bit is 1. If the variable is assigned to 0x01, that is 00000001 in binary, there will be only one LED ON.

14	byte x = 0x01; // 0b 0000 0001
----	--------------------------------

Any concerns? ✉ support@freenove.com

In the loop(), use "for" loop to send x to 74HC595 output pin to control the LED. In "for" loop, x will shift one bit to the LEFT in one cycle, then when data of x is sent to 74HC595, the LED that is turned ON will move one bit to the LEFT once.

```

15   for (int j = 0; j < 8; j++) { // Let led light up from right to left
16     writeTo595(LSBFIRST, x);
17     x <<= 1;
18     delay(50);
19 }
```

In second "for" loop, the situation is the same. The difference is that x is shift from 0x80 to the RIGHT in order.


The subfunction `writeTo595()` is used to write data to 74HC595 and immediately output on the port of 74HC595.

Reference


<< operator

"<<" is the left shift operator, which can make all bits of 1 byte shift by several bits to the left (high) direction and add 0 on the right (low). For example, shift binary 00000001 by 1 bit to left:

byte x = 1 << 1;




The result of x is 2 (binary 00000010).




There is another similar operator " >> ". For example, shift binary 00000001 by 1 bit to right:

byte x = 1 >> 1;



The result of x is 0 (00000000).



X <<= 1 is equivalent to x = x << 1 and x >>= 1 is equivalent to x = x >> 1

```
void shiftOut(uint8_t dataPin, uint8_t clockPin, uint8_t bitOrder, uint8_t val);
```

This is used to shift an 8-bit data value in with the data appearing on the dataPin and the clock being sent out on the clockPin. Order is as above. The data is sampled after the cPin goes high. (So clockPin high, sample data, clockPin low, repeat for 8 bits) The 8-bit value is returned by the function.

Parameters

dataPin: the pin on which to output each bit. Allowed data types: int.

clockPin: the pin to toggle once the dataPin has been set to the correct value. Allowed data types: int.

bitOrder: which order to shift out the bits; either MSBFIRST or LSBFIRST. (Most Significant Bit First, or, Least Significant Bit First).

value: the data to shift out. Allowed data types: byte.

For more details about shift function, please refer to:

<https://www.arduino.cc/reference/en/language/functions/advanced-io/shifout/>


Chapter 15 74HC595 & 7-Segment Display.

In this chapter, we will introduce the 7-Segment Display.

Project 15.1 7-Segment Display.

We will use 74HC595 to control 7-segment display and make it display hexadecimal character "0-F".


Component List

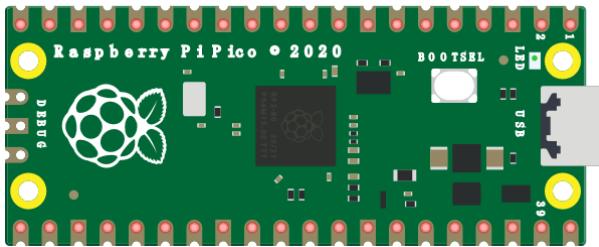Raspberry Pi Pico x1		USB cable x1
Breadboard x1		
74HC595 x1	7-segment display x1	Resistor 220Ω x8
		
		Jumper


Component Knowledge

7-segment display

A 7-Segment Display is a digital electronic display device. There is a figure "8" and a decimal point represented, which consists of 8 LEDs. The LEDs have a Common Anode and individual Cathodes. Its internal structure and pin designation diagram is shown below:

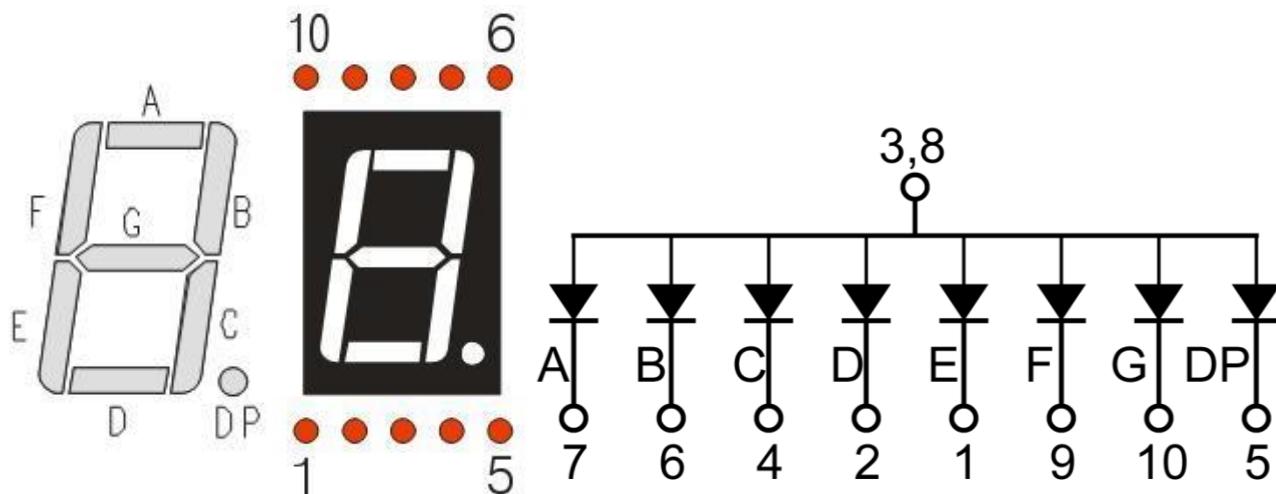

As we can see in the above circuit diagram, we can control the state of each LED separately. Also, by combining LEDs with different states of ON and OFF, we can display different characters (Numbers and Letters). For example, to display a "0": we need to turn ON LED segments A, B, C, D, E and F, and turn OFF LED segments G and DP.

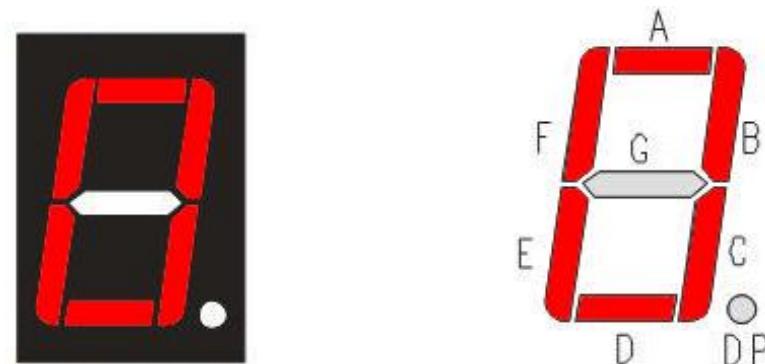

In this project, we will use a 7-Segment Display with a Common Anode. Therefore, when there is an input low level to an LED segment the LED will turn ON. Defining segment "A" as the lowest level and segment "DP" as the highest level, from high to low would look like this: "DP", "G", "F", "E", "D", "C", "B", "A". Character "0" corresponds to the code: $1100\ 0000_2 = 0xc0$.




For detailed code values, please refer to the following table (common anode).


CHAR	DP	G	F	E	D	C	B	A	Hex	ASCII
0	1	1	0	0	0	0	0	0	0xc0	1100 0000
1	1	1	1	1	1	0	0	1	0xf9	1111 1001
2	1	0	1	0	0	1	0	0	0xa4	1010 0100
3	1	0	1	1	0	0	0	0	0xb0	1011 0000
4	1	0	0	1	1	0	0	1	0x99	1001 1001
5	1	0	0	1	0	0	1	0	0x92	1001 0010
6	1	0	0	0	0	0	1	0	0x82	1000 0010
7	1	1	1	1	1	0	0	0	0xf8	1111 1000
8	1	0	0	0	0	0	0	0	0x80	1000 0000
9	1	0	0	1	0	0	0	0	0x90	1001 0000
A	1	0	0	0	1	0	0	0	0x88	1000 1000
B	1	0	0	0	0	0	1	1	0x83	1000 0011
C	1	1	0	0	0	1	1	0	0xc6	1100 0110
D	1	0	1	0	0	0	0	1	0xa1	1010 0001
E	1	0	0	0	0	1	1	0	0x86	1000 0110
F	1	0	0	0	1	1	1	0	0x8e	1000 1110

Circuit

Schematic diagram

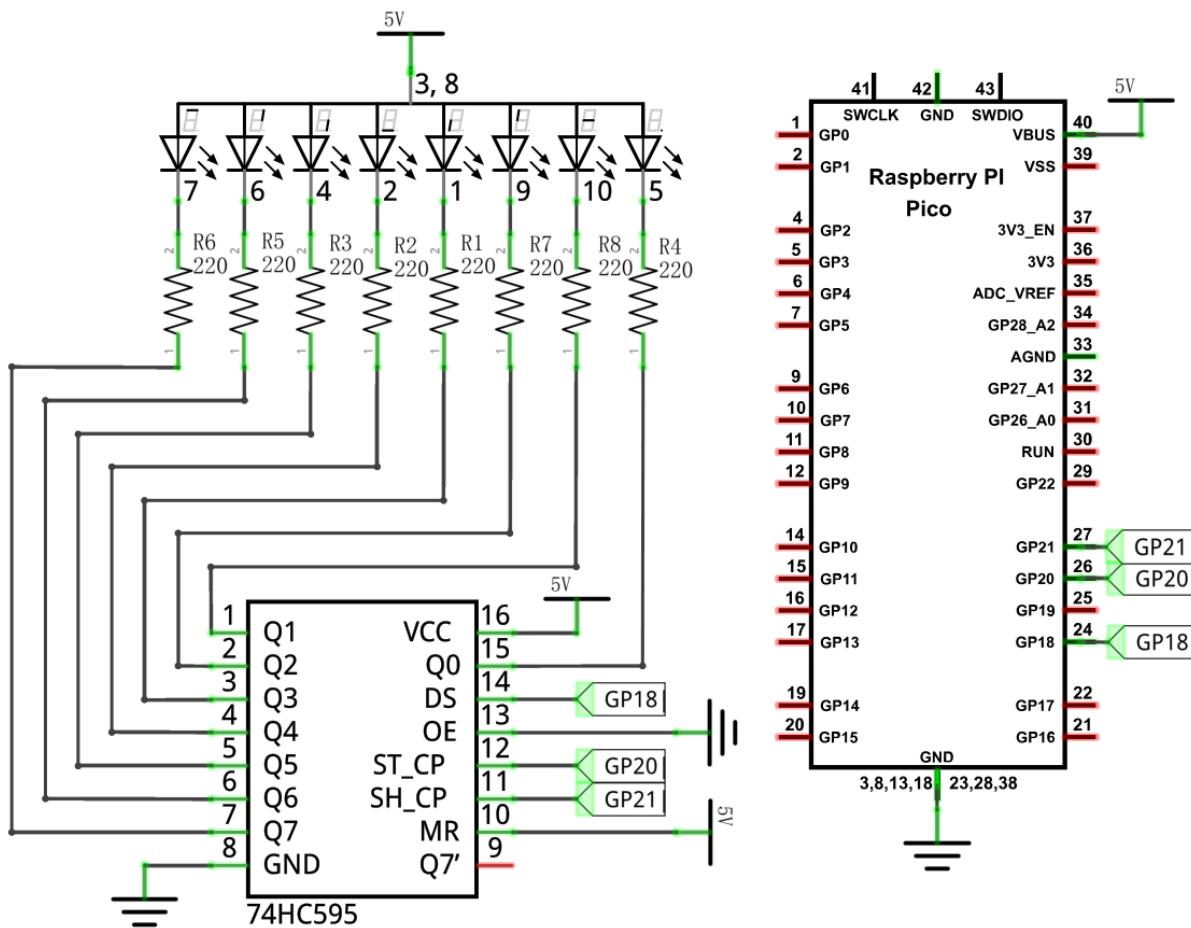

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

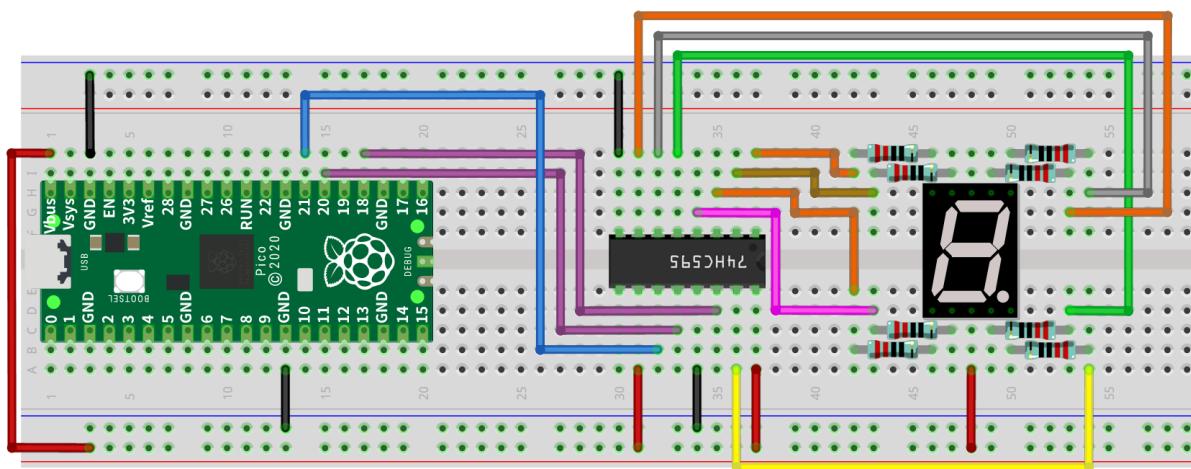



Sketch


In this section, the 74HC595 is used in the same way as in the previous section, but with different values transferred. We can learn how to master the digital display by sending the coded value of "0" - "F".

Sketch_15.1_7_Segment_Display

The screenshot shows the Arduino IDE interface with the following details:

- Title Bar:** Sketch_15.1_1_Digit_7-Segment_Display | Arduino 1.8.16
- Menu Bar:** File Edit Sketch Tools Help
- Toolbar:** Includes icons for Save, Run, Upload, and Download.
- Code Editor:** Displays the C++ code for the sketch. The code initializes pins, defines a character encoding table, and sets up a loop to display characters from 0 to F on a common-anode 7-segment display.
- Status Bar:** Shows the command line output: "Compiling sketch..." and the terminal output: "D:\arduino-1.8.16\arduino-builder -dump-prefs -logger=machine -hardware D:\arduino-1.8.16\hardw".
- Bottom Status Bar:** Shows the connection information: "1 ESP32 Wrover Module, Default 4MB with spiffs (1.2MB APP/1.5MB SPIFFS), QIO, 80MHz, 921600, None on COM4".

Verify and upload the code, and you'll see a 1-bit, 7-segment display displaying 0-f in a loop.

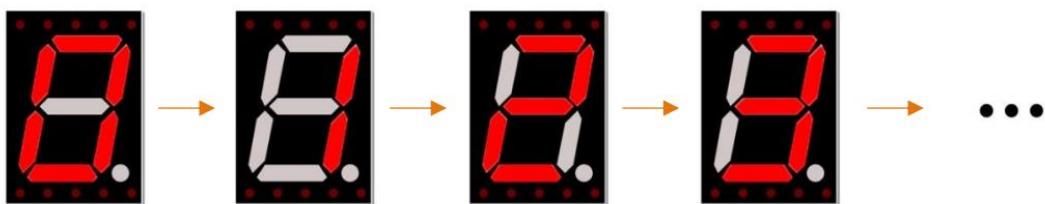

The following is the program code:

```

1 int dataPin = 18;           // Pin connected to DS of 74HC595 (Pin14)
2 int latchPin = 20;          // Pin connected to ST_CP of 74HC595 (Pin12)
3 int clockPin = 21;          // Pin connected to SH_CP of 74HC595 (Pin11)
4 // Define the encoding of characters 0-F for the common-anode 7-Segment Display
5 byte num[] = {
6     0xc0, 0xf9, 0xa4, 0xb0, 0x99, 0x92, 0x82, 0xf8,
7     0x80, 0x90, 0x88, 0x83, 0xc6, 0xa1, 0x86, 0x8e
8 };
9
10 void setup() {
11     // set pins to output
12     pinMode(latchPin, OUTPUT);
13     pinMode(clockPin, OUTPUT);
14     pinMode(dataPin, OUTPUT);
15 }
16
17 void loop() {
18     // display 0-F on digital tube
19     for (int i = 0; i < 16; i++) {
20         writeData(num[i]); // Send data to 74HC595
21         delay(1000);      // delay 1 second
22         writeData(0xff); // Clear the display content
23     }
24 }
25
26 void writeData(int value) {
27     // Make latchPin output low level
28     digitalWrite(latchPin, LOW);
29     // Send serial data to 74HC595
30     shiftOut(dataPin, clockPin, LSBFIRST, value);
31     // Make latchPin output high level
32     digitalWrite(latchPin, HIGH);
33 }
```

First, put encoding of “0”- “F” into the array.

```

4 // Define the encoding of characters 0-F for the common-anode 7-Segment Display
5 byte num[] = {
6     0xc0, 0xf9, 0xa4, 0xb0, 0x99, 0x92, 0x82, 0xf8,
7     0x80, 0x90, 0x88, 0x83, 0xc6, 0xa1, 0x86, 0x8e
8 };

```

Then, in the loop, we transfer the member of the “num” to 74HC595 by calling the writeData function, so that the digital tube displays what we want. After each display, “0xff” is used to eliminate the previous effect and prepare for the next display.

```

17 void loop() {
18     // display 0-F on digital tube
19     for (int i = 0; i < 16; i++) {
20         writeData(num[i]); // Send data to 74HC595
21         delay(1000);      // delay 1 second
22         writeData(0xff); // Clear the display content
23     }
24 }

```

In the shiftOut() function, whether to use LSBFIRST or MSBFIRST as the parameter depends on the physical situation.

```

26 void writeData(int value) {
27     // Make latchPin output low level
28     digitalWrite(latchPin, LOW);
29     // Send serial data to 74HC595
30     shiftOut(dataPin, clockPin, LSBFIRST, value);
31     // Make latchPin output high level, then 74HC595 will update data to parallel output
32     digitalWrite(latchPin, HIGH);
33 }

```

If you want to display the decimal point, make the highest bit of each array become 0, which can be implemented easily by num[i]&0x7f.

```

30 shiftOut(dataPin, clockPin, LSBFIRST, value & 0x7f);

```

Chapter 16 L293D & Motor

Project 16.1 Control Motor with Potentiometer

Control the direction and speed of the motor with a potentiometer.



Component List

Raspberry Pi Pico x1	USB cable x1
Breadboard x1	
Rotary potentiometer x1	Motor x1
L293D x1	
Jumper	Battery box x1

Component Knowledge

L293D

L293D is an IC Chip (Integrated Circuit Chip) with a 4-channel motor drive. You can drive a Unidirectional DC Motor with 4 ports or a Bi-Directional DC Motor with 2 ports or a Stepper Motor (Stepper Motors are covered later in this Tutorial).

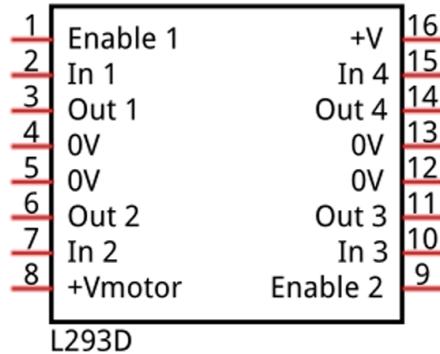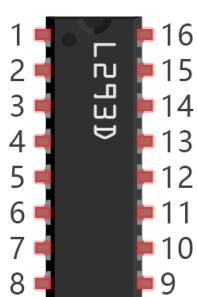


Port description of L293D module is as follows:

Pin name	Pin number	Description
In x	2, 7, 10, 15	Channel x digital signal input pin
Out x	3, 6, 11, 14	Channel x output pin, input high or low level according to In x pin, get connected to +Vmotor or 0V
Enable1	1	Channel 1 and channel 2 enable pin, high level enable
Enable2	9	Channel 3 and channel 4 enable pin, high level enable
0V	4, 5, 12, 13	Power cathode (GND)
+V	16	Positive electrode (VCC) of power supply, supply voltage 3.0~36V
+Vmotor	8	Positive electrode of load power supply, provide power supply for the Out pin x, the supply voltage is +3V~36V


For more details, please refer to the datasheet for this IC Chip.

When using L293D to drive DC motor, there are usually two connection options.

The following connection option uses one channel of the L293D, which can control motor speed through the PWM. However, the motor then can only rotate in one direction.

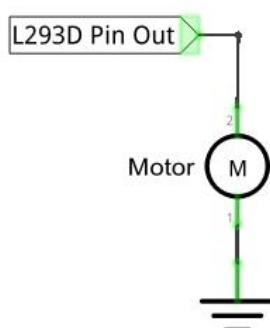


The following connection uses two channels of the L293D: one channel outputs the PWM wave, and the other channel connects to GND, therefore you can control the speed of the motor. When these two channel signals are exchanged, not only can they control the speed of motor, but also control the direction of the motor.

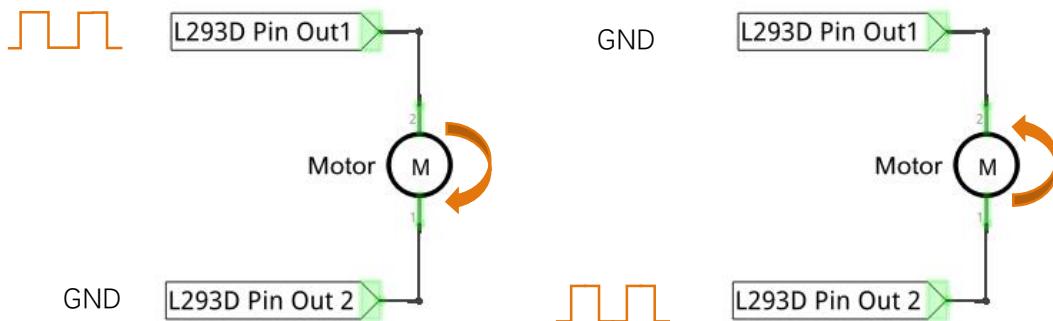


In practical use the motor is usually connected to channels 1 and 2 by outputting different levels to in1 and in2 to control the rotational direction of the motor, and output to the PWM wave to Enable1 port to control the motor's rotational speed. If the motor is connected to channel 3 and 4 by outputting different levels to in3 and in4 to control the motor's rotation direction, and output to the PWM wave to Enable2 pin to control the motor's rotational speed.

Circuit

Schematic diagram

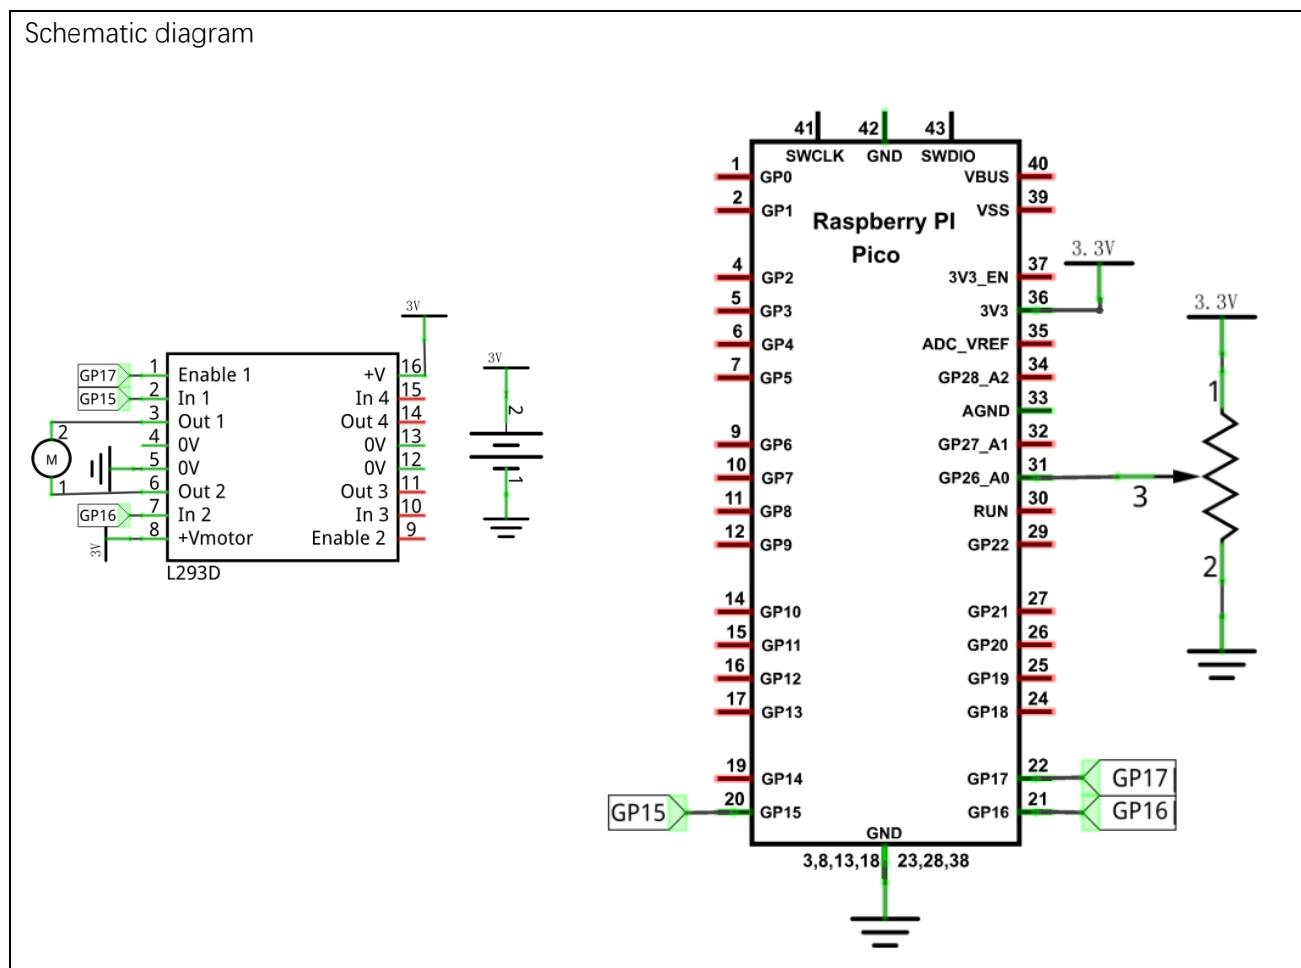


Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

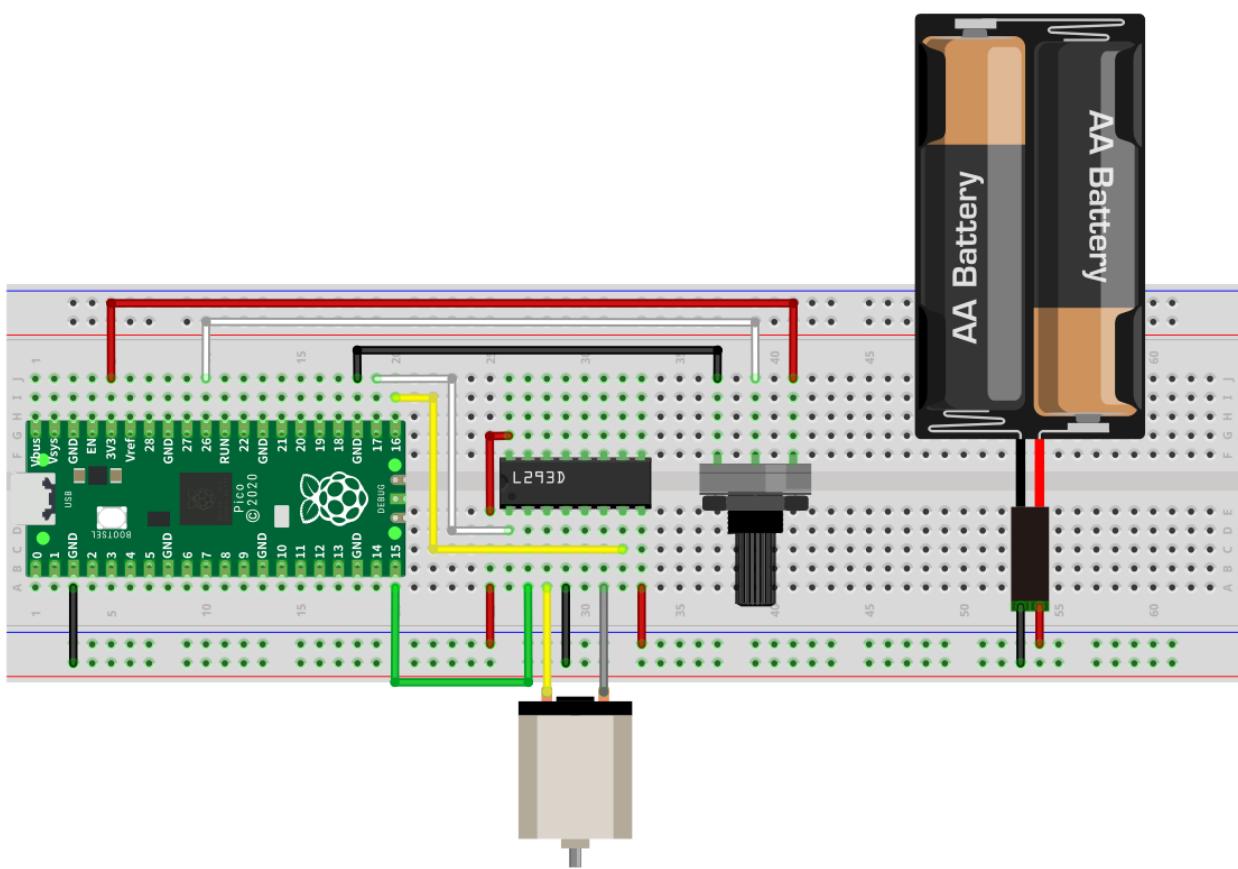

Any concerns?  support@freenove.com

Sketch

Sketch_16.1_Control_Motor_by_L293D

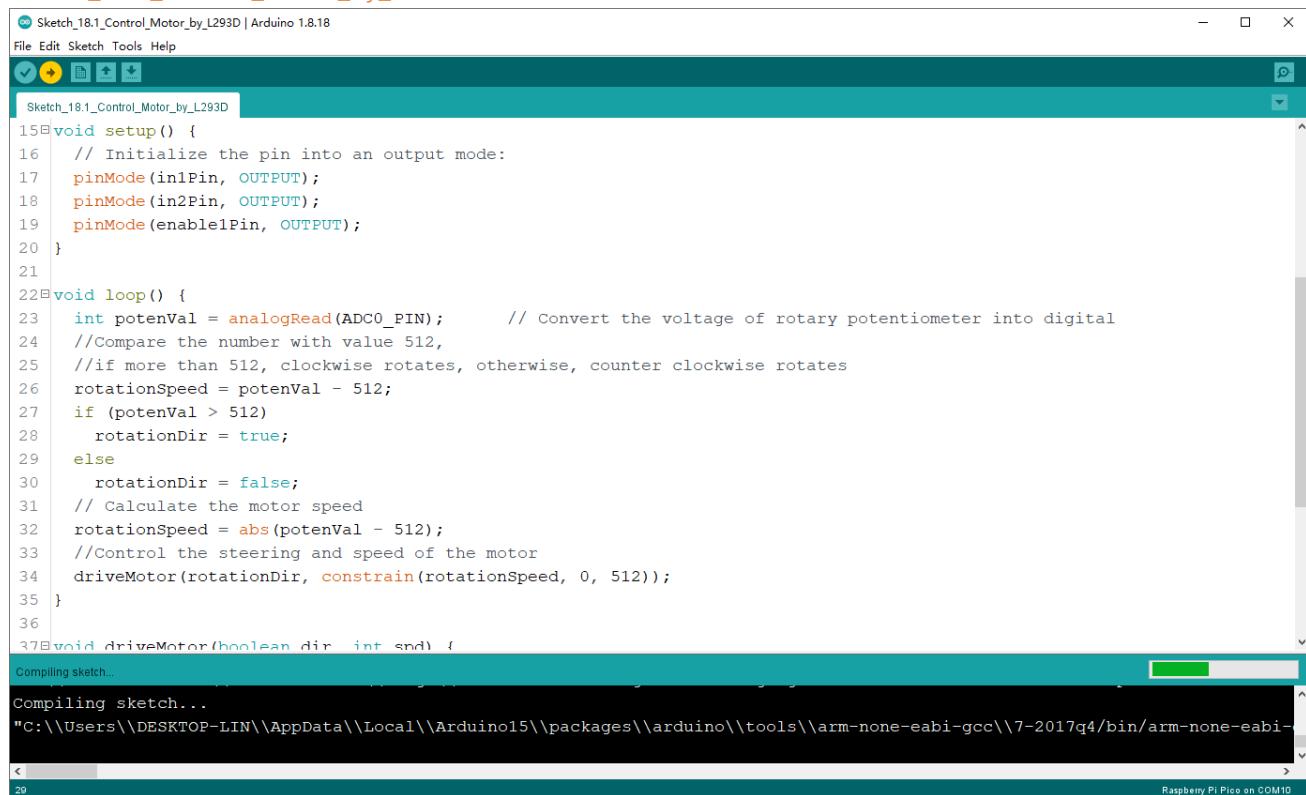



```

Sketch_16.1_Control_Motor_by_L293D | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_16.1_Control_Motor_by_L293D
15 void setup() {
16   // Initialize the pin into an output mode:
17   pinMode(in1Pin, OUTPUT);
18   pinMode(in2Pin, OUTPUT);
19   pinMode(enable1Pin, OUTPUT);
20 }
21
22 void loop() {
23   int potenVal = analogRead(ADC0_PIN);      // Convert the voltage of rotary potentiometer into digital
24   //Compare the number with value 512,
25   //if more than 512, clockwise rotates, otherwise, counter clockwise rotates
26   rotationSpeed = potenVal - 512;
27   if (potenVal > 512)
28     rotationDir = true;
29   else
30     rotationDir = false;
31   // Calculate the motor speed
32   rotationSpeed = abs(potenVal - 512);
33   //Control the steering and speed of the motor
34   driveMotor(rotationDir, constrain(rotationSpeed, 0, 512));
35 }
36
37 void driveMotor(boolean dir, int spd) {
Compiling sketch...
Compiling sketch...
"C:\Users\DESKTOP-LIN\AppData\Local\Arduino15\packages\arduino\tools\arm-none-eabi-gcc\7-2017q4/bin/arm-none-eabi-
29
Raspberry Pi Pico on COM10"

```

Download code to Pico, rotate the potentiometer in one direction and the motor speeds up slowly in one direction. And then rotate the potentiometer in the other direction and the motor will slow down to stop. And then rotate it in an inverse direction to accelerate the motor.

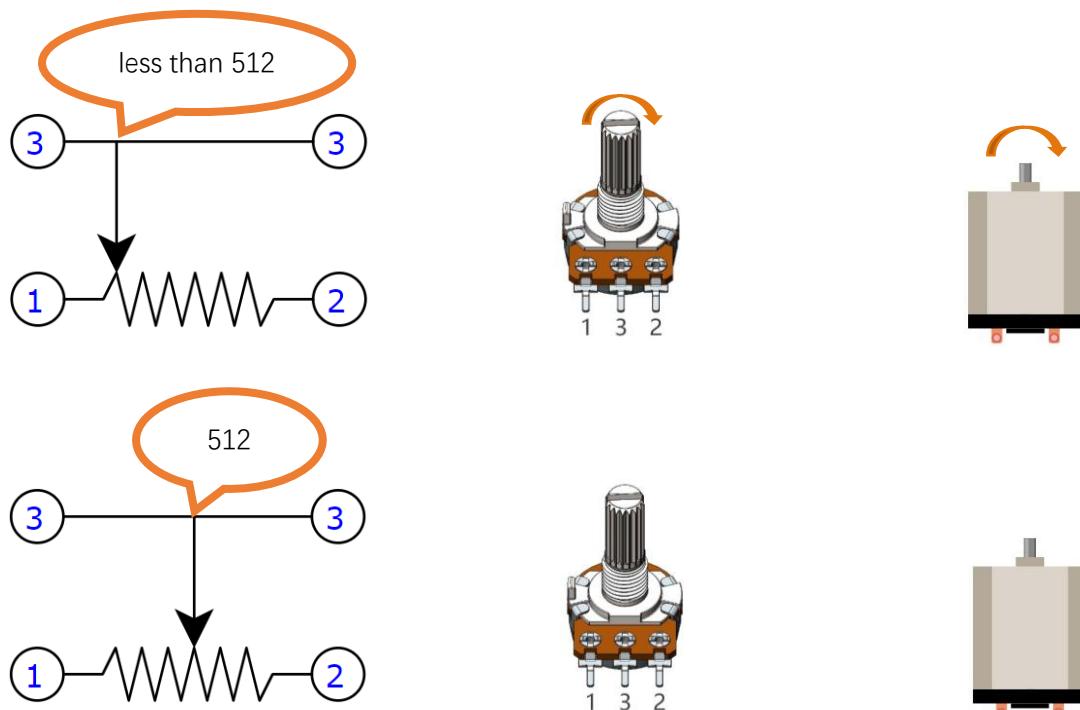

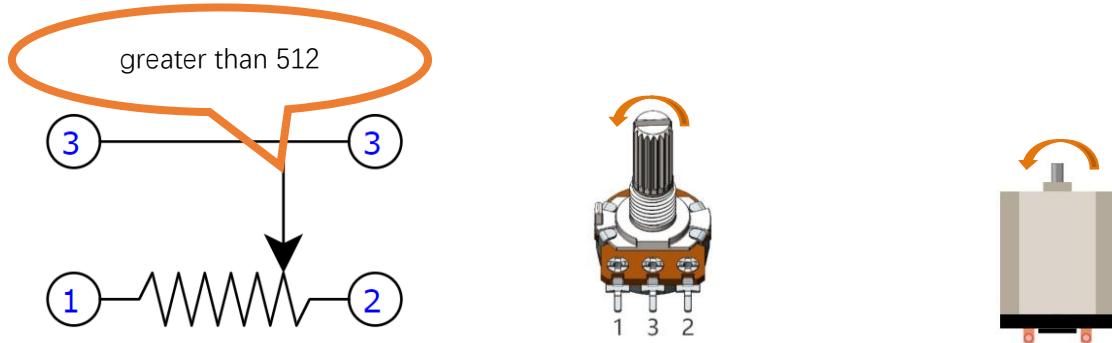

The following is the sketch:

```

1 int in1Pin = 15;           // Define L293D channel 1 pin
2 int in2Pin = 16;           // Define L293D channel 2 pin
3 int enable1Pin = 17;        // Define L293D enable 1 pin
4 int ADC0_PIN = 26;

5
6 boolean rotationDir; // Define a variable to save the motor's rotation direction
7 int rotationSpeed;    // Define a variable to save the motor rotation speed
8
9 void setup() {
10 // Initialize the pin into an output mode:
11 pinMode(in1Pin, OUTPUT);
12 pinMode(in2Pin, OUTPUT);
13 pinMode(enable1Pin, OUTPUT);
14 }
15
16 void loop() {
17 int potenVal = analogRead(ADC0_PIN);      // Convert the voltage of rotary potentiometer
into digital
18 //Compare the number with value 512,
19 //if more than 512, clockwise rotates, otherwise, counter clockwise rotates
20 rotationSpeed = potenVal - 512;
21 if (potenVal > 512)
22     rotationDir = true;
23 else
24     rotationDir = false;
25 // Calculate the motor speed
26 rotationSpeed = abs(potenVal - 512);
27 //Control the steering and speed of the motor
28 driveMotor(rotationDir, constrain(rotationSpeed, 0, 512));
29 }
30
31 void driveMotor(boolean dir, int spd) {
32 // Control motor rotation direction

```

```

33   if (dir) {
34     digitalWrite(in1Pin, HIGH);
35     digitalWrite(in2Pin, LOW);
36   }
37   else {
38     digitalWrite(in1Pin, LOW);
39     digitalWrite(in2Pin, HIGH);
40   }
41   // Control motor rotation speed
42   analogWrite(enable1Pin, spd);
43 }
```

The ADC of Pico has a 10-bit accuracy, corresponding to a range from 0 to 1023. In this program, set the number 512 as the midpoint. If the value of ADC is less than 512, make the motor rotate in one direction. If the value of ADC is greater than 512, make the motor rotate in the other direction. Subtract 512 from the ADC value and take the absolute value and use this result as the speed of the motor.

```

17   int potenVal = analogRead(ADC0_PIN);      // Convert the voltage of rotary potentiometer
into digital
18   //Compare the number with value 512,
19   //if more than 512, clockwise rotates, otherwise, counter clockwise rotates
20   rotationSpeed = potenVal - 512;
21   if (potenVal > 512)
22     rotationDir = true;
23   else
24     rotationDir = false;
25   // Calculate the motor speed
26   rotationSpeed = abs(potenVal - 512);
27   //Control the steering and speed of the motor
28   driveMotor(rotationDir, constrain(rotationSpeed, 0, 512));
```

Function `driveMotor` is used to control the rotation direction and speed of the motor. The `dir` represents direction while `spd` refers to speed.

```

31 void driveMotor(boolean dir, int spd) {
32   // Control motor rotation direction
33   if (dir) {
34     digitalWrite(in1Pin, HIGH);
35     digitalWrite(in2Pin, LOW);
36   }
37   else {
38     digitalWrite(in1Pin, LOW);
39     digitalWrite(in2Pin, HIGH);
40   }
41   // Control motor rotation speed
42   analogWrite(enable1Pin, spd);
43 }
```



Chapter 17 Servo

Previously, we learned how to control the speed and rotational direction of a Motor. In this chapter, we will learn about Servos which are a rotary actuator type motor that can be controlled to rotate to specific angles.

Project 17.1 Servo Sweep

First, we need to learn how to make a Servo rotate.


Component List

Raspberry Pi Pico x1	USB cable x1
A green printed circuit board (PCB) for the Raspberry Pi Pico. It features a central Broadcom SoC, a USB Type-C port, and several pins for connecting to a breadboard or other components.	Two standard black USB-A to USB-B cables, one male and one female, used for power and data transfer.
Breadboard x1	A schematic diagram of a breadboard, showing its grid of 60 columns and 10 rows of 2mm spaced holes. Columns are labeled A through J at the top and bottom, and rows are numbered 1 through 60 along the sides.
Servo x1	Jumper

Component Knowledge

Servo

Servo is a compact package which consists of a DC Motor, a set of reduction gears to provide torque, a sensor and control circuit board. Most Servos only have a 180-degree range of motion via their "horn". Servos can output higher torque than a simple DC Motor alone and they are widely used to control motion in model cars, model airplanes, robots, etc. Servos have three wire leads which usually terminate to a male or female 3-pin plug. Two leads are for electric power: Positive (2-VCC, Red wire), Negative (3-GND, Brown wire), and the signal line (1-Signal, Orange wire) as represented in the Servo provided in your Kit.

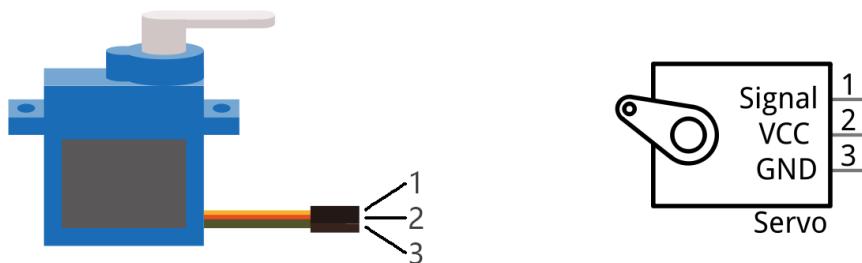

We will use a 50Hz PWM signal with a duty cycle in a certain range to drive the Servo. The time interval of 0.5ms-2.5ms of PWM single cycle high level corresponds to the Servo angle 0 degrees - 180 degrees linearly. Part of the corresponding values are as follows:


High level time	Servo angle
0.5ms	0 degree
1ms	45 degree
1.5ms	0 degree
2ms	45 degree
2.5ms	180 degree

When you change the Servo signal value, the Servo will rotate to the designated angle.


Circuit

Use caution when supplying power to the Servo, it should be 5V. Make sure you do not make any errors when connecting the Servo to the power supply.

Schematic diagram

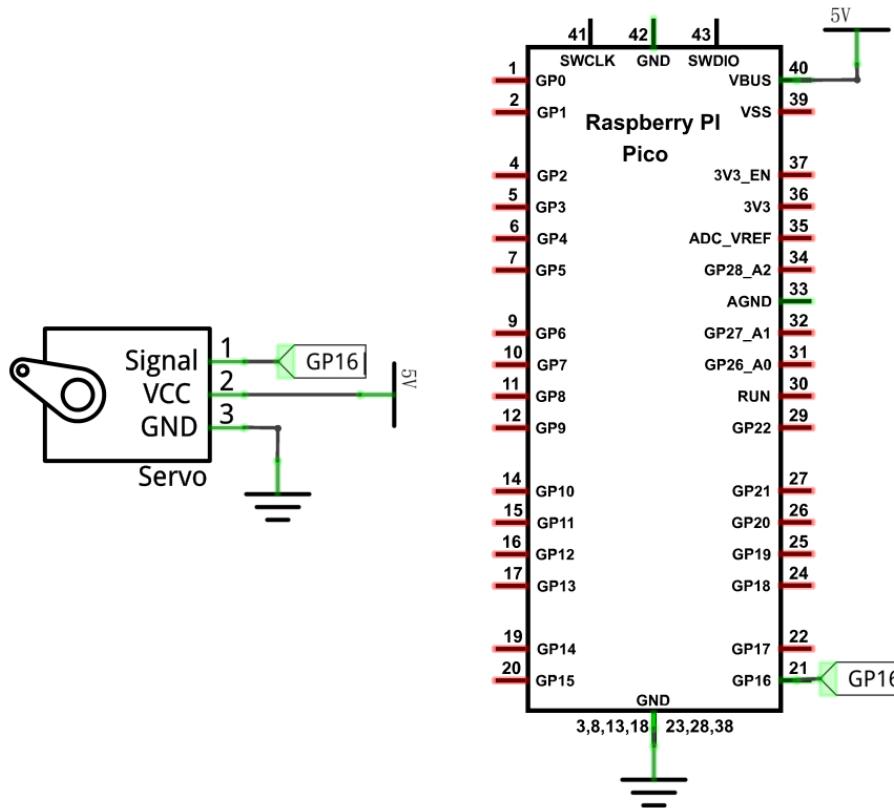

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

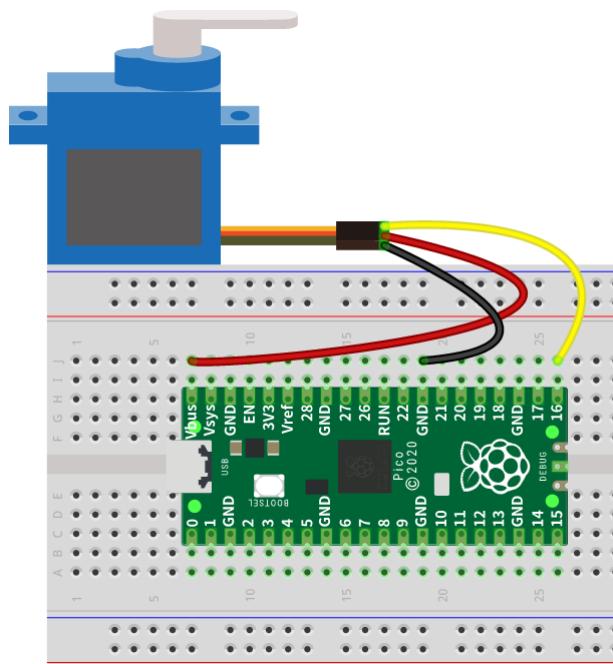


Any concerns? ✉ support@freenove.com

Sketch

How to install the library

If you haven't installed it yet, please do so before learning. The steps to add third-party Libraries are as follows: open arduino->Sketch->Include library-> Manage libraries. Enter " Servo" in the search bar and select "Servo" for installation. Refer to the following operations:

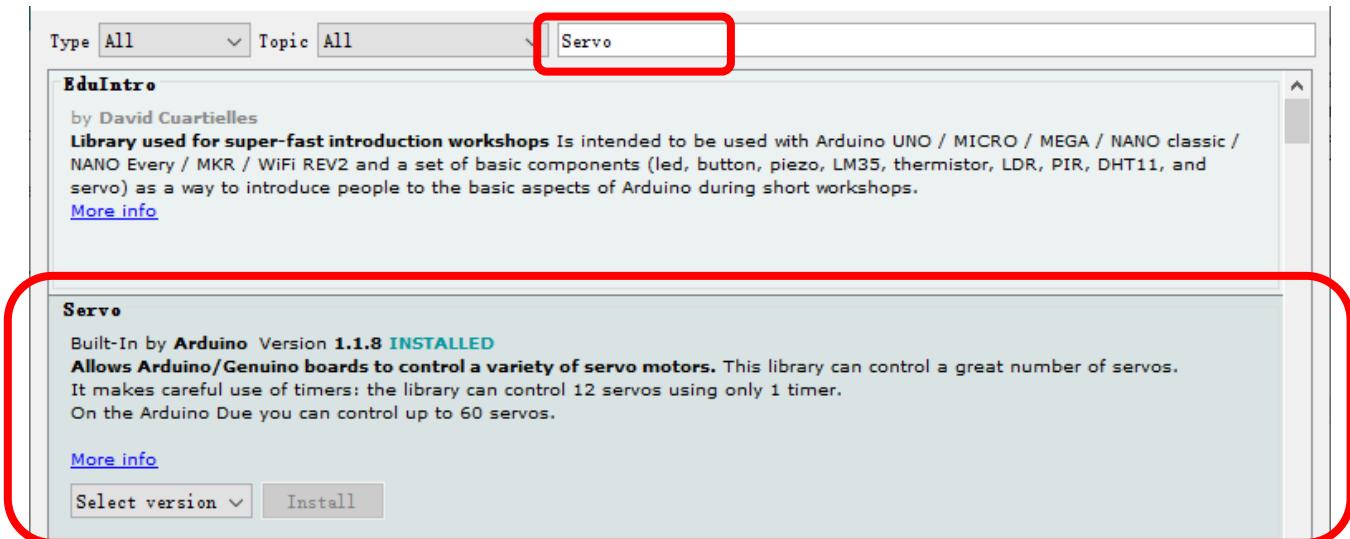

Use the Servo library to control the servo motor and let the servo motor rotate back and forth.

Sketch_17.1_Servo_Sweep


```

Sketch_19.1_Servo_Sweep | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_19.1_Servo_Sweep
7 #include <Servo.h>
8 #define servoPin 16
9
10 Servo myServo; // create servo object to control a servo
11 int pos = 0; // variable to store the servo position
12
13 void setup() {
14   myServo.attach(servoPin); // attaches the servo on pin 9 to the servo object
15 }
16
17 void loop() {
18   for (pos = 0; pos <= 180; pos += 1) { // goes from 0 degrees to 180 degrees
19     // in steps of 1 degree
20     myServo.write(pos); // tell servo to go to position in variable 'pos'
21     delay(15); // waits 15 ms for the servo to reach the position
22   }
23   for (pos = 180; pos >= 0; pos -= 1) { // goes from 180 degrees to 0 degrees
24     myServo.write(pos); // tell servo to go to position in variable 'pos'
25     delay(15); // waits 15 ms for the servo to reach the position
26   }
27 }

Compiling sketch...

```

Compile and upload the code to Pico, the servo will rotate from 0 degrees to 180 degrees and then reverse the direction to make it rotate from 180 degrees to 0 degrees and repeat these actions in an endless loop.

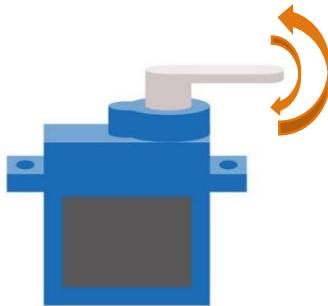

The following is the program code:

```

1 #include <Servo.h>
2 #define servoPin 16
3
4 Servo myServo; // create servo object to control a servo
5 int pos = 0; // variable to store the servo position
6
7 void setup() {
8     myServo.attach(servoPin); // attaches the servo on pin 9 to the servo object
9 }
10
11 void loop() {
12     for (pos = 0; pos <= 180; pos += 1) { // goes from 0 degrees to 180 degrees
13         // in steps of 1 degree
14         myServo.write(pos); // tell servo to go to position in variable 'pos'
15         delay(15); // waits 15 ms for the servo to reach the position
16     }
17     for (pos = 180; pos >= 0; pos -= 1) { // goes from 180 degrees to 0 degrees
18         myServo.write(pos); // tell servo to go to position in variable 'pos'
19         delay(15); // waits 15 ms for the servo to reach the position
20     }
21 }
```

Servo uses the Servo library, like the following reference to Servo library:

```
1 #include <Servo.h>
```

Servo library provides the Servo class that controls it. Servo class must be instantiated before using:

```
4 Servo myServo; // create servo object to control a servo
```

Set the control servo motor pin.

```
8 myServo.attach(servoPin); // attaches the servo on pin 9 to the servo object
```

After initializing the servo, you can control the servo to rotate to a specific angle:

```
17 myServo.write(posVal);
```

Reference

Servo Class

Servo class must be instantiated when used, that is, define an object of Servo type, for example:

Servo myservo;

Most other boards can define 12 objects of Servo type, namely, they can control up to 12 servos.

The function commonly used in the servo class is as follows:

myservo.attach(pin): Initialize the servo, the parameter is the port connected to servo signal line;



myservo.write(angle): Control servo to rotate to the specified angle; parameter here is to specify the angle.



Project 17.2 Servo Knob

Use a potentiometer to control the servo motor to rotate at any angle.


Component List

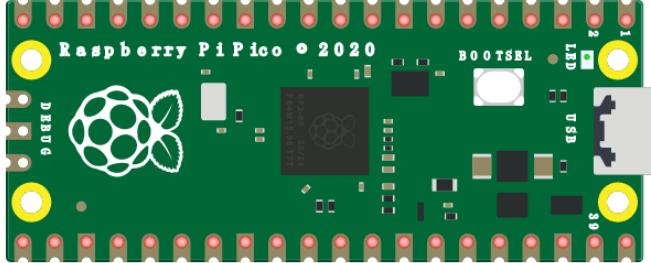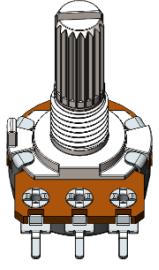Raspberry Pi Pico x1	USB cable x1	
Breadboard x1		
Servo x1	Jumper	Rotary potentiometer x1
		


Circuit

Use caution when supplying power to the Servo, it should be 5V. Make sure you do not make any errors when connecting the Servo to the power supply.

Schematic diagram

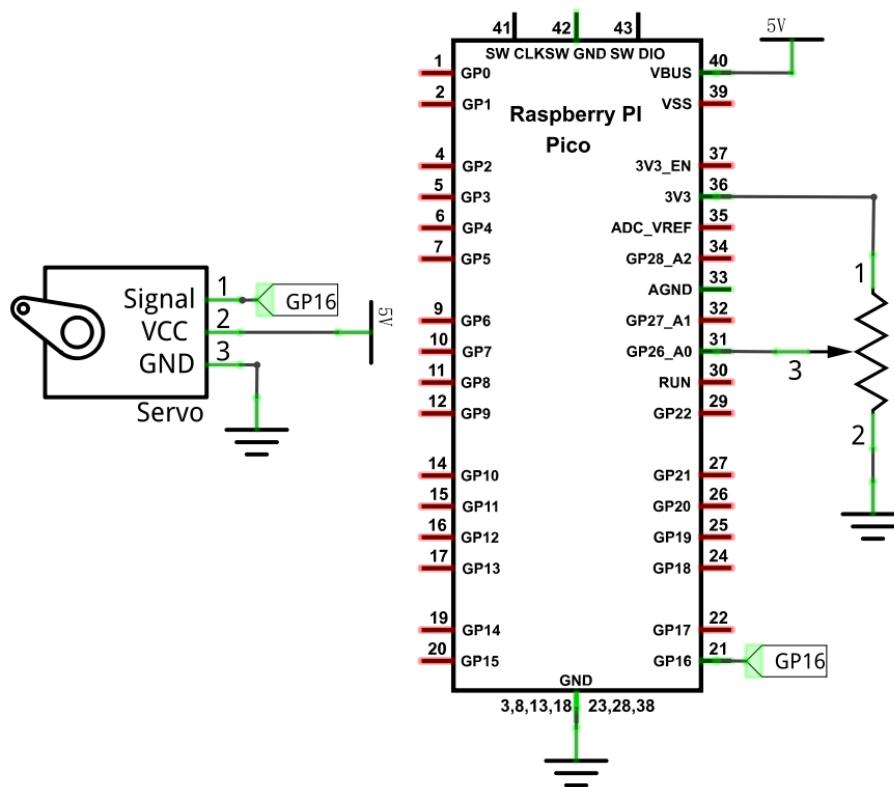

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

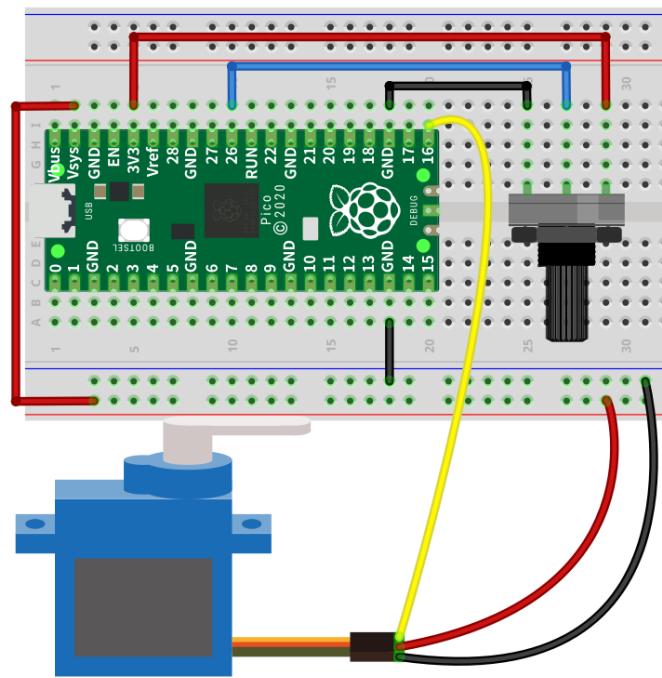

Any concerns? support@freenove.com



Sketch

Sketch_17.2_Control_Servo_by_Potentiometer


Now, write the code to detect the voltage of rotary potentiometer, and control servo to rotate to a different angle according to that.

```

1 #include <Servo.h>
2
3 #define servoPin 16          // define the pin of servo signal line
4 #define adcPin   26          // analog pin used to connect the potentiometer
5
6 Servo myservo;           // create servo object to control a servo
7 int potVal;              // variable to read the potValue from the analog pin
8
9 void setup() {
10    myservo.attach(servoPin); // attaches the servo on servoPin to the servo object
11 }
12
13 void loop() {
14    potVal = analogRead(adcPin);      // reads the potValue of the potentiometer
15    potVal = map(potVal, 0, 1023, 0, 180); // scale it to use it with the servo
16    myservo.write(potVal);           // sets the servo position
17    delay(15);                    // waits for the servo to get there
18 }
```

In the code, we obtain the ADC value of GP26, and map it to the servo angle.

Verify and upload the code, turn the potentiometer shaft, then the servo will rotate to a corresponding angle.

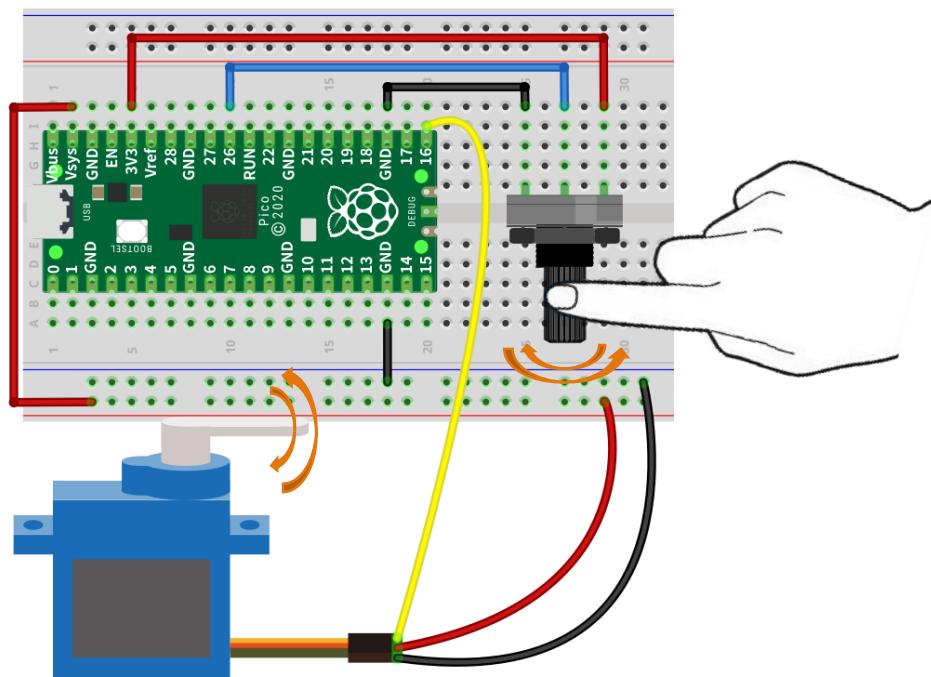





Chapter 18 LCD1602

In this chapter, we will learn about the LCD1602 Display Screen.

Project 18.1 LCD1602

In this section we learn how to use LCD1602 to display something.

Component List

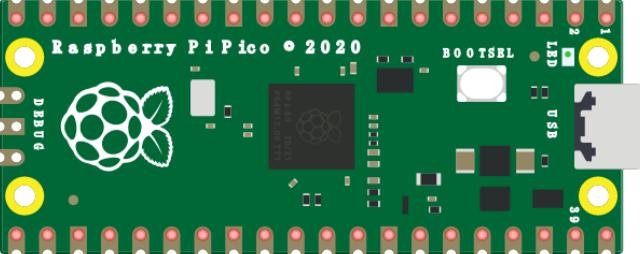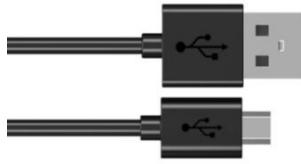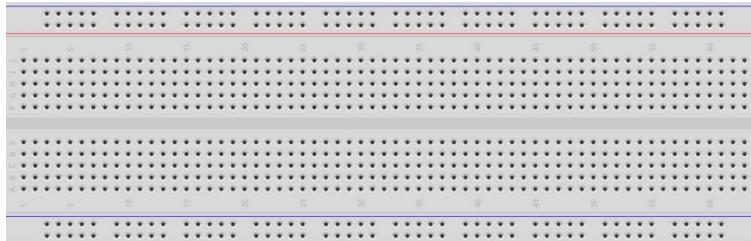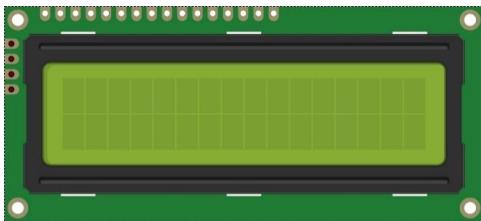Raspberry Pi Pico x1		USB cable x1	
Breadboard x1			
LCD1602 Module x1		Jumper	




Component Knowledge

I2C communication


I2C (Inter-Integrated Circuit) is a two-wire serial communication mode, which can be used for the connection of micro controllers and their peripheral equipment. Devices using I2C communication must be connected to the serial data (SDA) line, and serial clock (SCL) line (called I2C bus). Each device has a unique address and can be used as a transmitter or receiver to communicate with devices connected to the bus.

LCD1602 communication

The LCD1602 Display Screen can display 2 lines of characters in 16 columns. It is capable of displaying numbers, letters, symbols, ASCII code and so on. As shown below is a monochrome LCD1602 Display Screen along with its circuit pin diagram.

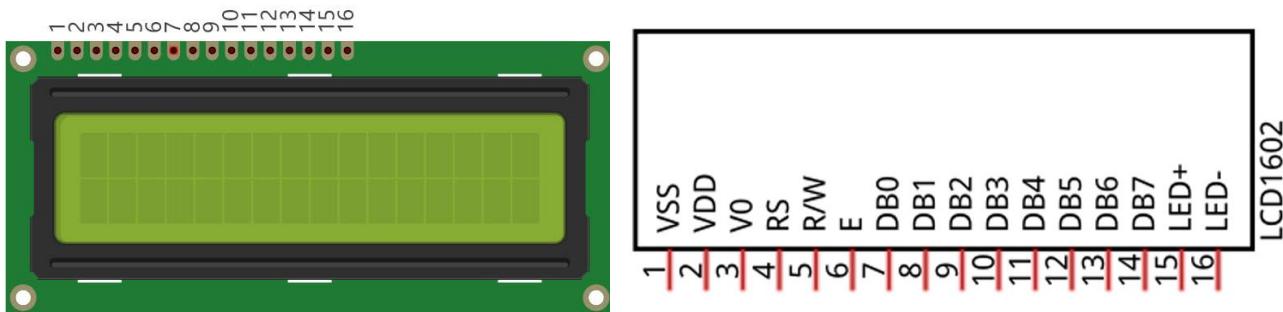


I2C LCD1602 Display Screen integrates an I2C interface, which connects the serial-input & parallel-output module to the LCD1602 Display Screen. This allows us to use only 4 lines to operate the LCD1602.

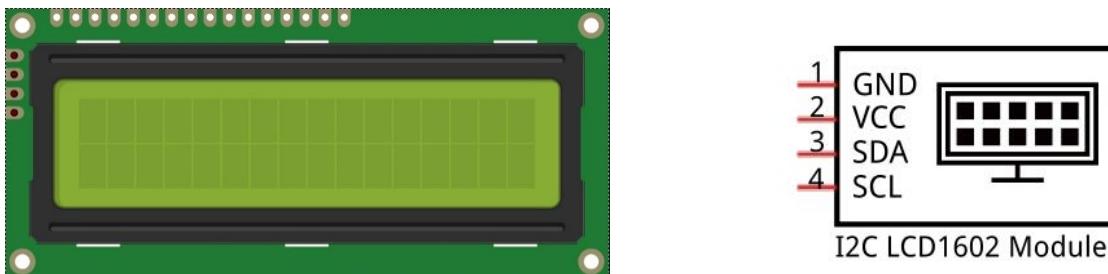


The serial-to-parallel IC chip used in this module is PCF8574T (PCF8574AT), and its default I2C address is 0x27(0x3F).

Below is the PCF8574 pin schematic diagram and the block pin diagram:

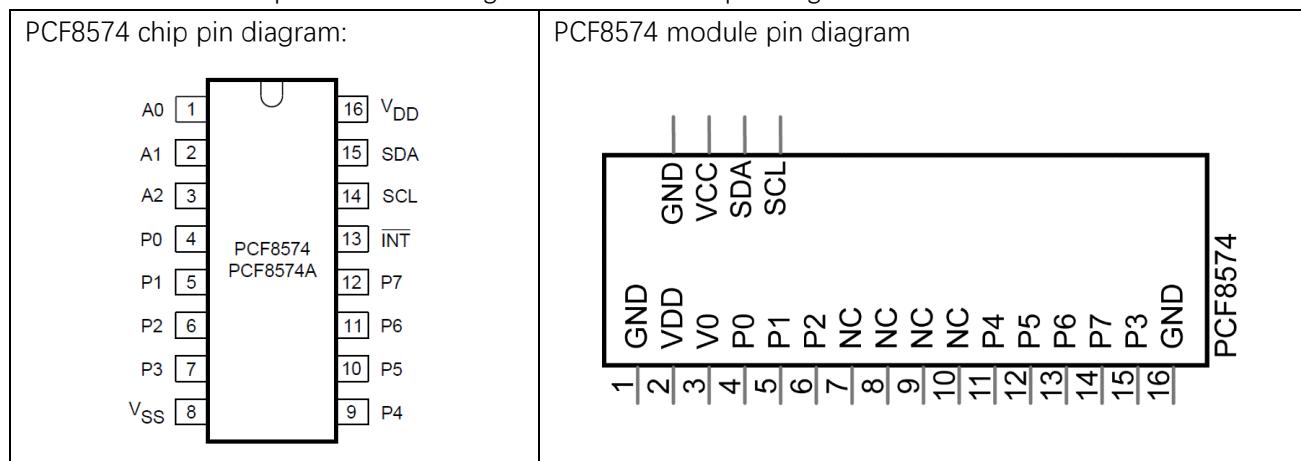


PCF8574 module pin and LCD1602 pin are corresponding to each other and connected with each other:

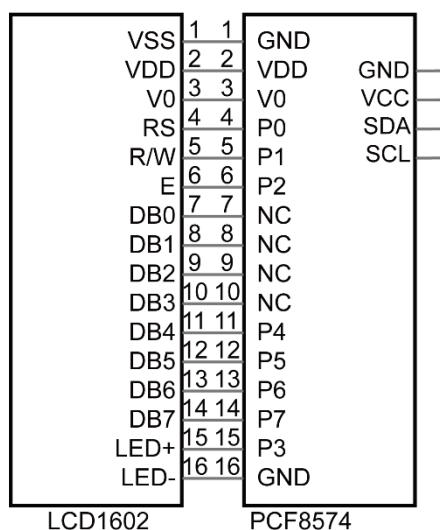


So we only need 4 pins to control the 16 pins of the LCD1602 Display Screen through the I2C interface. In this project, we will use the I2C LCD1602 to display some static characters and dynamic variables.

Circuit

Schematic diagram

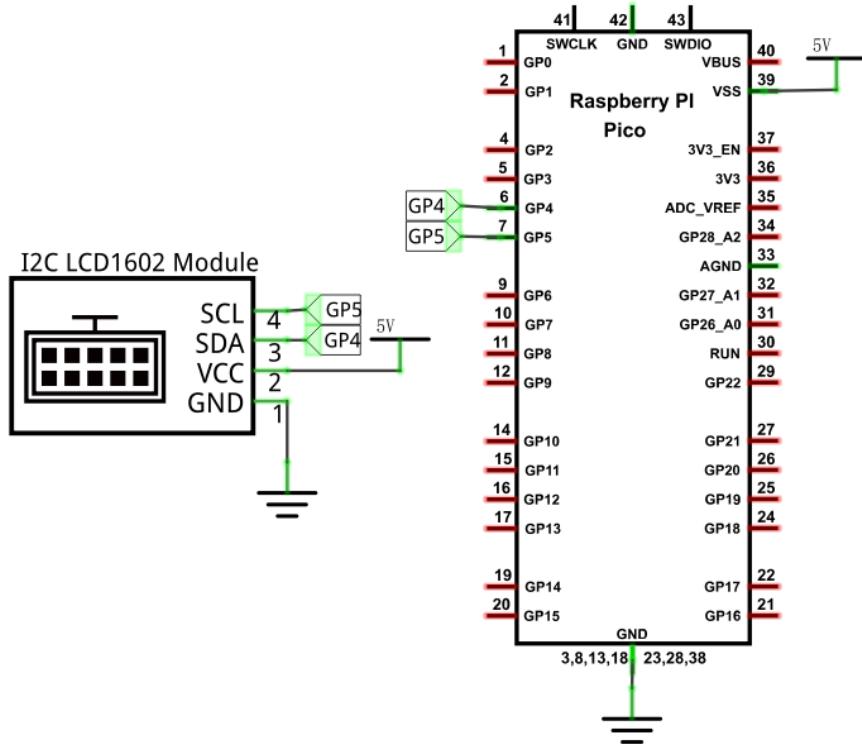

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

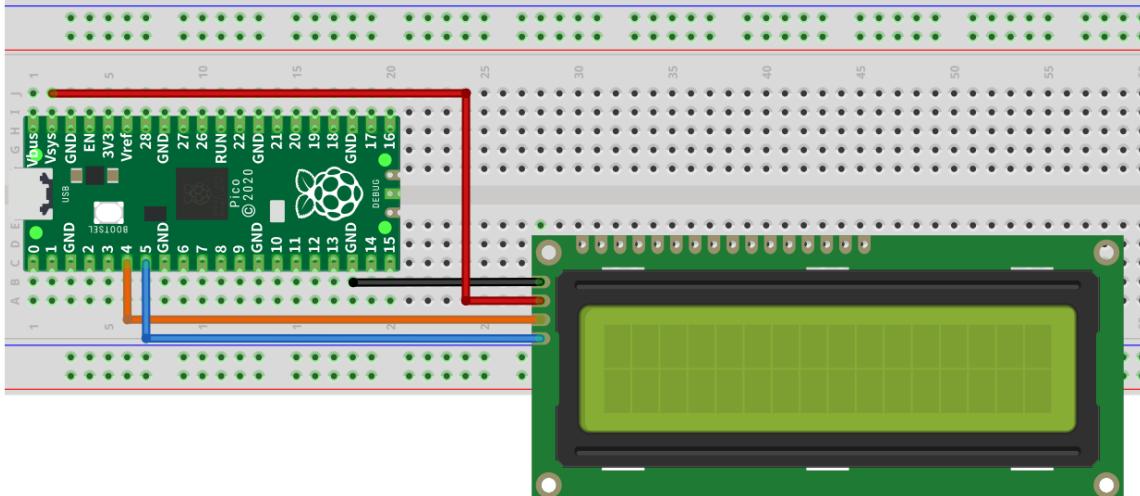


Any concerns? ✉ support@freenove.com

Sketch

How to install the library

We use the third party library **LiquidCrystal I2C**. If you haven't installed it yet, please do so before learning. The steps to add third-party Libraries are as follows: open arduino->Sketch->Include library-> Manage libraries. Enter " LiquidCrystal I2C" in the search bar and select " LiquidCrystal I2C " for installation.

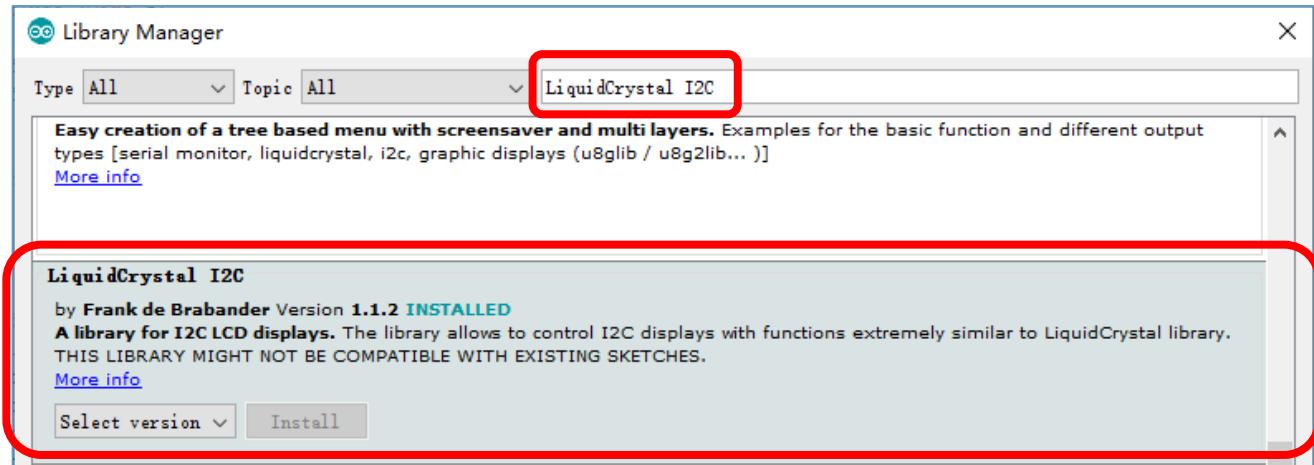

Use I2C LCD 1602 to display characters and variables.

Sketch_18.1_Display_the_string_on_LCD1602

```

Sketch_21.1_Display_the_string_on_LCD1602 | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_21.1_Display_the_string_on_LCD1602
7 #include <LiquidCrystal_I2C.h>
8
9 /*
10  * note:If lcd1602 uses PCF8574T, IIC's address is 0x27,
11  *       or lcd1602 uses PCF8574AT, IIC's address is 0x3F.
12 */
13 LiquidCrystal_I2C lcd(0x27,16,2);
14
15 void setup() {
16   lcd.init(); // LCD driver initialization
17   lcd.backlight(); // Open the backlight
18   lcd.setCursor(0,0); // Move the cursor to row 0, column 0
19   lcd.print("hello world"); // The print content is displayed on the LCD
20 }
21
22 void loop() {
23   lcd.setCursor(0,1); // Move the cursor to row 1, column 0
24   lcd.print("Counter:");
25   lcd.print(millis() / 1000);
26   delay(1000);
27 }

```



Compile and upload the code to Pico and the LCD1602 displays characters.



So far, at this writing, we have two types of LCD1602 on sale. One needs to adjust the backlight, and the other does not.

The LCD1602 that does not need to adjust the backlight is shown in the figure below.



If the LCD1602 you received is the following one, and you cannot see anything on the display or the display is not clear, try rotating the white knob on back of LCD1602 slowly, which adjusts the contrast, until the screen can display clearly.



The following is the program code:

```

1 #include <LiquidCrystal_I2C.h>
2 /*
3  * note: If lcd1602 uses PCF8574T, IIC's address is 0x27,
4  *       or lcd1602 uses PCF8574AT, IIC's address is 0x3F.
5 */
6 LiquidCrystal_I2C lcd(0x27, 16, 2);
7
8 void setup() {
9     lcd.init(); // LCD driver initialization
10    lcd.backlight(); // Open the backlight
11    lcd.setCursor(0, 0); // Move the cursor to row 0, column 0
12    lcd.print("hello world"); // The print content is displayed on the LCD
13 }
14
15 void loop() {
16     lcd.setCursor(0, 1); // Move the cursor to row 1, column 0

```

Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)

```
17 lcd.print("Counter:");           // The count is displayed every second  
18 lcd.print(millis() / 1000);  
19 delay(1000);  
20 }
```

Include header file of Liquid Crystal Display (LCD)1602.

```
1 #include <LiquidCrystal_I2C.h>
```

Instantiate the I2C LCD1602 screen. It should be noted here that if your LCD driver chip uses PCF8574T, set the I2C address to 0x27, and if uses PCF8574AT, set the I2C address to 0x3F.

```
7 LiquidCrystal_I2C lcd(0x27, 16, 2);
```



Initialize LCD1602 and turn on the backlight of LCD.

```
10 lcd.init();           // LCD driver initialization  
11 lcd.backlight();     // Turn on the backlight
```

Move the cursor to the first row, first column, and then display the character.

```
12 lcd.setCursor(0,0);    // Move the cursor to row 0, column 0  
13 lcd.print("hello, world!"); // The print content is displayed on the LCD
```

Print the number on the second line of LCD1602.

```
16 void loop(){  
17     lcd.setCursor(0,1);      // Move the cursor to row 1, column 0  
18     lcd.print("Counter:");   // The count is displayed every second  
19     lcd.print(millis() / 1000);  
20     delay(1000);  
21 }
```

Reference

class LiquidCrystal

The LiquidCrystal class can manipulate common LCD screens. The first step is defining an object of LiquidCrystal, for example:

```
LiquidCrystal_I2C lcd(0x27, 16, 2);
```

Instantiate the Lcd1602 and set the I2C address to 0x27, with 16 columns per row and 2 rows per column.

init();

Initializes the Lcd1602's device

backlight();

Turn on Lcd1602's backlight.

setCursor(column, row);

Sets the screen's column and row.

column: The range is 0 to 15.

row: The range is 0 to 1.

print(String);

Print the character string on Lcd1602




Chapter 19 Ultrasonic Ranging

In this chapter, we learn a module which use ultrasonic to measure distance, HC SR04.

Project 19.1 Ultrasonic Ranging


In this project, we use ultrasonic ranging module to measure distance, and print out the data in the terminal.

Component List

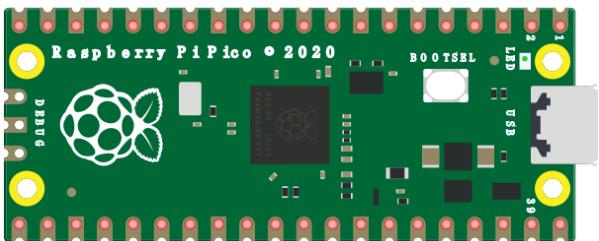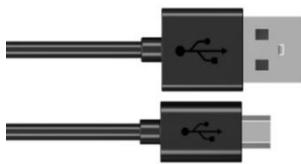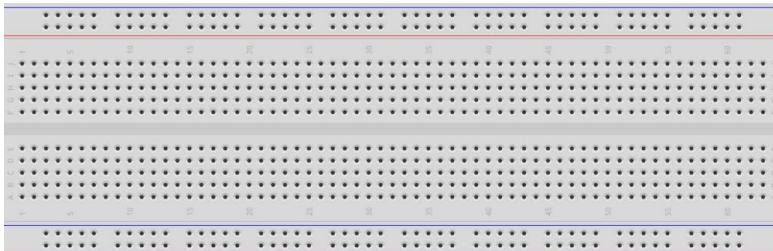
Raspberry Pi Pico x1		USB cable x1	
Breadboard x1			
Jumper		HC SR04 x1	

Component Knowledge

The Ultrasonic Ranging Module uses the principle that ultrasonic waves will reflect when they encounter any obstacles. This is possible by counting the time interval between when the ultrasonic wave is transmitted to when the ultrasonic wave reflects back after encountering an obstacle. Time interval counting will end after an ultrasonic wave is received, and the time difference (delta) is the total time of the ultrasonic wave's journey from being transmitted to being received. Because the speed of sound in air is a constant, and is about $v=340\text{m/s}$, we can calculate the distance between the Ultrasonic Ranging Module and the obstacle: $s=vt/2$.

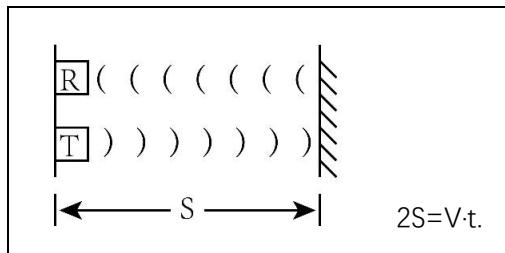

The HC-SR04 Ultrasonic Ranging Module integrates both an ultrasonic transmitter and a receiver. The transmitter is used to convert electrical signals (electrical energy) into high frequency (beyond human hearing) sound waves (mechanical energy) and the function of the receiver is opposite of this. The picture and the diagram of the HC SR04 Ultrasonic Ranging Module are shown below:

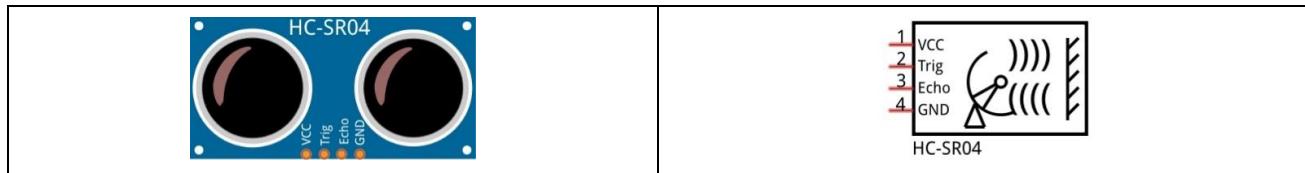

Pin description:

Pin	Description
VCC	power supply pin
Trig	trigger pin
Echo	Echo pin
GND	GND

Technical specs:


Working voltage: 5V

Working current: 12mA

Minimum measured distance: 2cm

Maximum measured distance: 200cm

Instructions for Use: output a high-level pulse in Trig pin lasting for least 10us, the module begins to transmit ultrasonic waves. At the same time, the Echo pin is pulled up. When the module receives the returned ultrasonic waves from encountering an obstacle, the Echo pin will be pulled down. The duration of high level in the Echo pin is the total time of the ultrasonic wave from transmitting to receiving, $s=vt/2$.

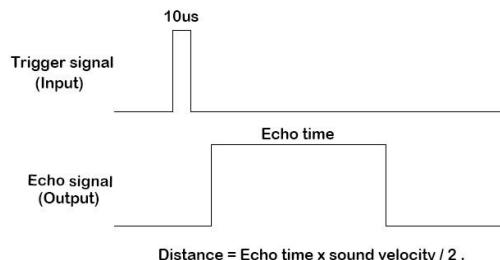


Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)


Circuit

Note that the voltage of ultrasonic module is 5V in the circuit.

Schematic diagram

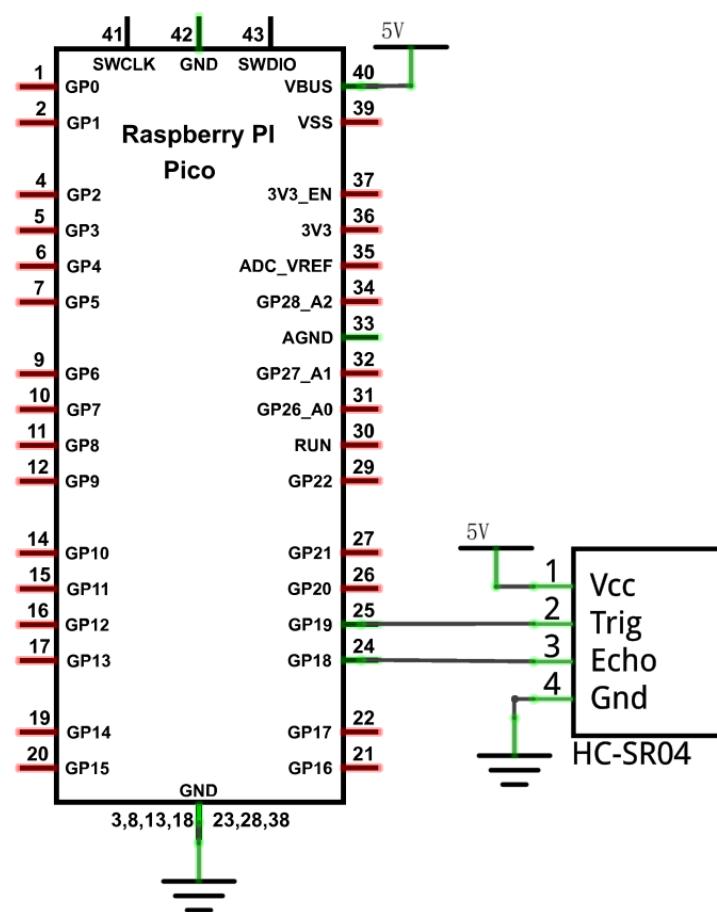

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

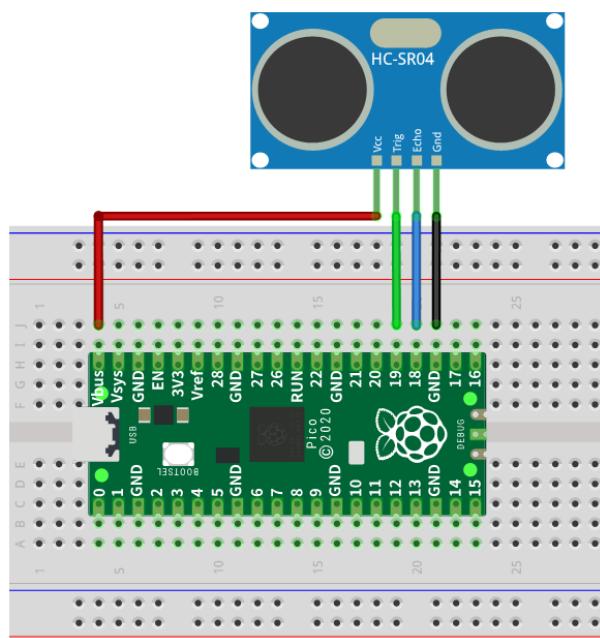

Any concerns? ✉ support@freenove.com




Sketch

Sketch_19.1_Ultrasonic_Ranging

The screenshot shows the Arduino IDE interface with the sketch titled "Sketch_19.1_Ultrasonic_Ranging". The code implements ultrasonic ranging using pins 19 and 18, with a maximum distance of 700 cm. It includes a setup function to initialize pins and a loop function to continuously ping and print the distance via Serial monitor at 115200 baud.

```
#define trigPin 19 // define TrigPin
#define echoPin 18 // define EchoPin.
#define MAX_DISTANCE 700 // Maximum sensor distance is rated at 400-500cm.
//timeOut= 2*MAX_DISTANCE /100 /340 *1000000 = MAX_DISTANCE*58.8
float timeOut = MAX_DISTANCE * 60;
int soundVelocity = 340; // define sound speed=340m/s
void setup() {
    pinMode(trigPin,OUTPUT); // set trigPin to output mode
    pinMode(echoPin,INPUT); // set echoPin to input mode
    Serial.begin(115200); // Open serial monitor at 115200 baud to see ping results.
}
void loop() {
    delay(100); // Wait 100ms between pings (about 20 pings/sec).
    Serial.print("Distance: ");
    Serial.print(getSonar()); // Send ping, get distance in cm and print result
    Serial.println("cm");
}
float getSonar() {
    unsigned long pingTime;
    float distance;
    // make trigPin output high level lasting for 10µs to trigger HC-SR04
    digitalWrite(trigPin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigPin, LOW);
    // Wait HC-SR04 returning to the high level and measure out this waiting time
    pingTime = pulseIn(echoPin, HIGH, timeOut);
    // calculate the distance according to the time
    distance = (float)pingTime * soundVelocity / 2 / 10000;
    return distance; // return the distance value
}
```

Download the code to Pico, open the serial monitor, set the baud rate to 115200 and you can use it to measure the distance between the ultrasonic module and the object, as shown in the following picture:

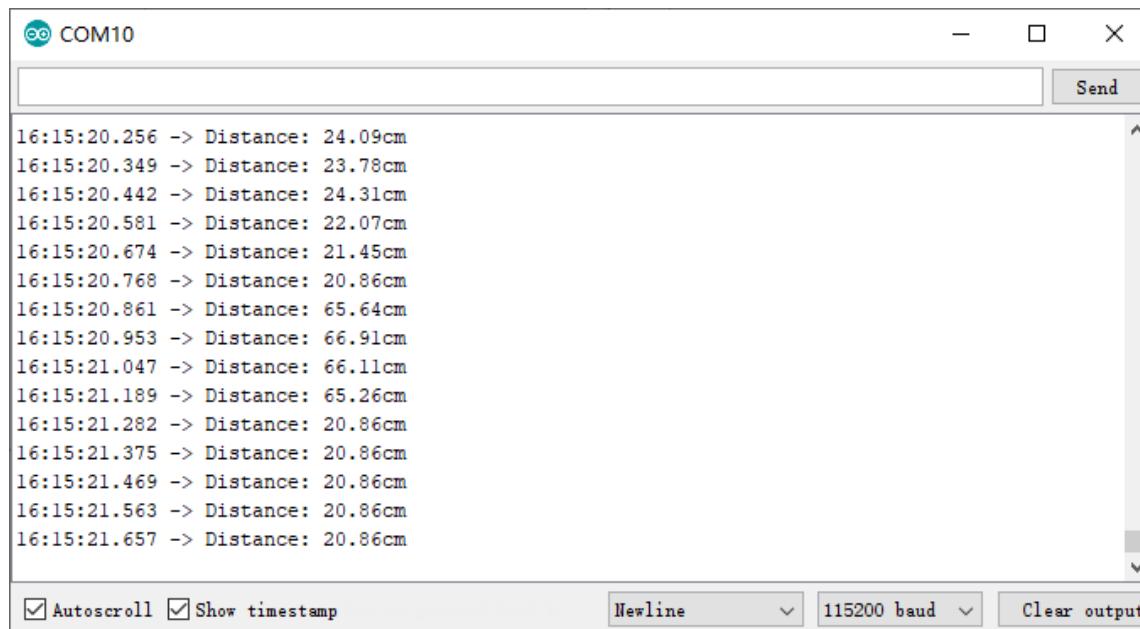

The following is the program code:

```

1 #define trigPin 19 // define trigPin
2 #define echoPin 18 // define echoPin.
3 #define MAX_DISTANCE 700 // Maximum sensor distance is rated at 400–500cm.
4 //timeOut= 2*MAX_DISTANCE /100 /340 *1000000 = MAX_DISTANCE*58.8
5 float timeOut = MAX_DISTANCE * 60;
6 int soundVelocity = 340; // define sound speed=340m/s
7
8 void setup() {
9     pinMode(trigPin,OUTPUT);// set trigPin to output mode
10    pinMode(echoPin,INPUT); // set echoPin to input mode
11    Serial.begin(115200); // Open serial monitor at 115200 baud to see ping results.
12 }
13
14 void loop() {
15     delay(100); // Wait 100ms between pings (about 20 pings/sec).
16     Serial.printf("Distance: ");
17     Serial.print(getSonar()); // Send ping, get distance in cm and print result
18     Serial.println("cm");
19 }
20
21 float getSonar() {
22     unsigned long pingTime;
23     float distance;
24     // make trigPin output high level lasting for 10us to trigger HC_SR04
25     digitalWrite(trigPin, HIGH);
26     delayMicroseconds(10);
27     digitalWrite(trigPin, LOW);

```

```

28 // Wait HC-SR04 returning to the high level and measure out this waiting time
29 pingTime = pulseIn(echoPin, HIGH, timeOut);
30 // calculate the distance according to the time
31 distance = (float)pingTime * soundVelocity / 2 / 10000;
32 return distance; // return the distance value
33 }
```

First, define the pins and the maximum measurement distance.

```

1 #define trigPin 19 // define trigPin
2 #define echoPin 18 // define echoPin.
3 #define MAX_DISTANCE 700           //define the maximum measured distance
```

If the module does not return high level, we cannot wait for this forever, so we need to calculate the time period for the maximum distance, that is, time Out. timeOut= $2 \times \text{MAX_DISTANCE} / 100 / 340 \times 1000000$. The result of the constant part in this formula is approximately 58.8.

```
5 float timeOut = MAX_DISTANCE * 60;
```

Subfunction getSonar () function is used to start the ultrasonic module to begin measuring, and return the measured distance in cm units. In this function, first let trigPin send 10us high level to start the ultrasonic module. Then use pulseIn () to read the ultrasonic module and return the duration time of high level. Finally, the measured distance according to the time is calculated.

```

21 float getSonar() {
22     unsigned long pingTime;
23     float distance;
24     // make trigPin output high level lasting for 10 μs to trigger HC_SR04?
25     digitalWrite(trigPin, HIGH);
26     delayMicroseconds(10);
27     digitalWrite(trigPin, LOW);
28     // Wait HC-SR04 returning to the high level and measure out this waiting time
29     pingTime = pulseIn(echoPin, HIGH, timeOut);
30     // calculate the distance according to the time
31     distance = (float)pingTime * soundVelocity / 2 / 10000;
32     return distance; // return the distance value
33 }
```

Lastly, in loop() function, get the measurement distance and display it continually.

```

14 void loop() {
15     delay(100); // Wait 100ms between pings (about 20 pings/sec).
16     Serial.printf("Distance: ");
17     Serial.print(getSonar()); // Send ping, get distance in cm and print result
18     Serial.println("cm");
19 }
```

About function pulseIn ():

int pulseIn(int pin, int level, int timeout);

pin: the number of the Arduino pin on which you want to read the pulse. Allowed data types: int.

value: type of pulse to read: either HIGH or LOW. Allowed data types: int.

timeout (optional): the number of microseconds to wait for the pulse to start; default is one second.

Project 19.2 Ultrasonic Ranging

Component List and Circuit


Component List and Circuit are the same as the previous section.

Sketch


How to install the library

We use the third party library UltrasonicSensor. If you haven't installed it yet, please do so before learning. The steps to add third-party Libraries are as follows: open arduino->Sketch->Include library-> Manage libraries. Enter "UltrasonicSensor" in the search bar and select "UltrasonicSensor" for installation.

Refer to the following operations:

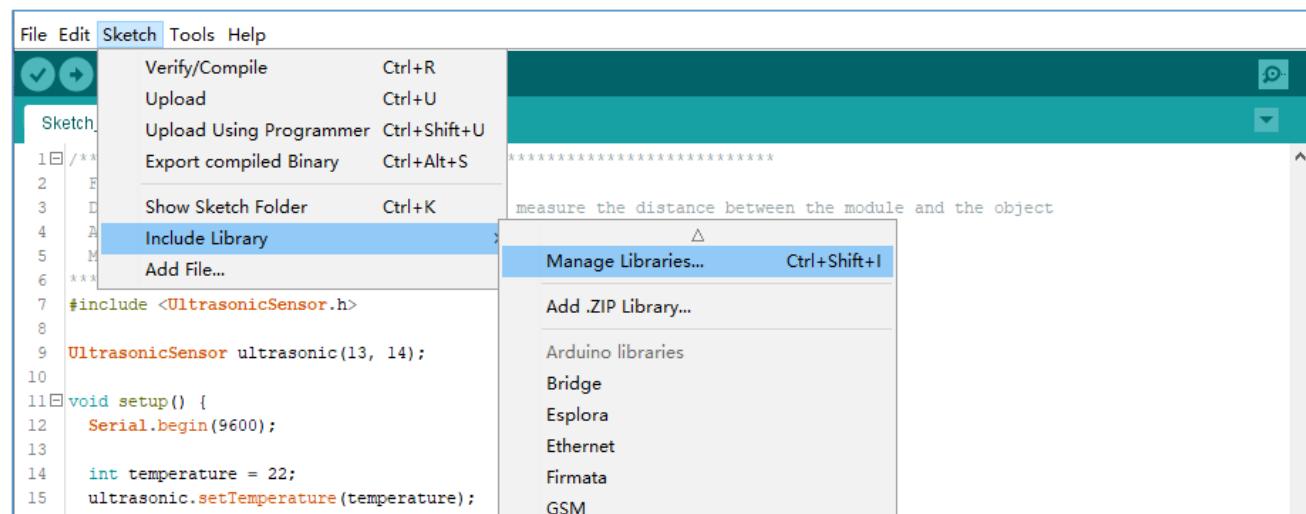


Sketch_19.2_Ultrasonic_Ranging

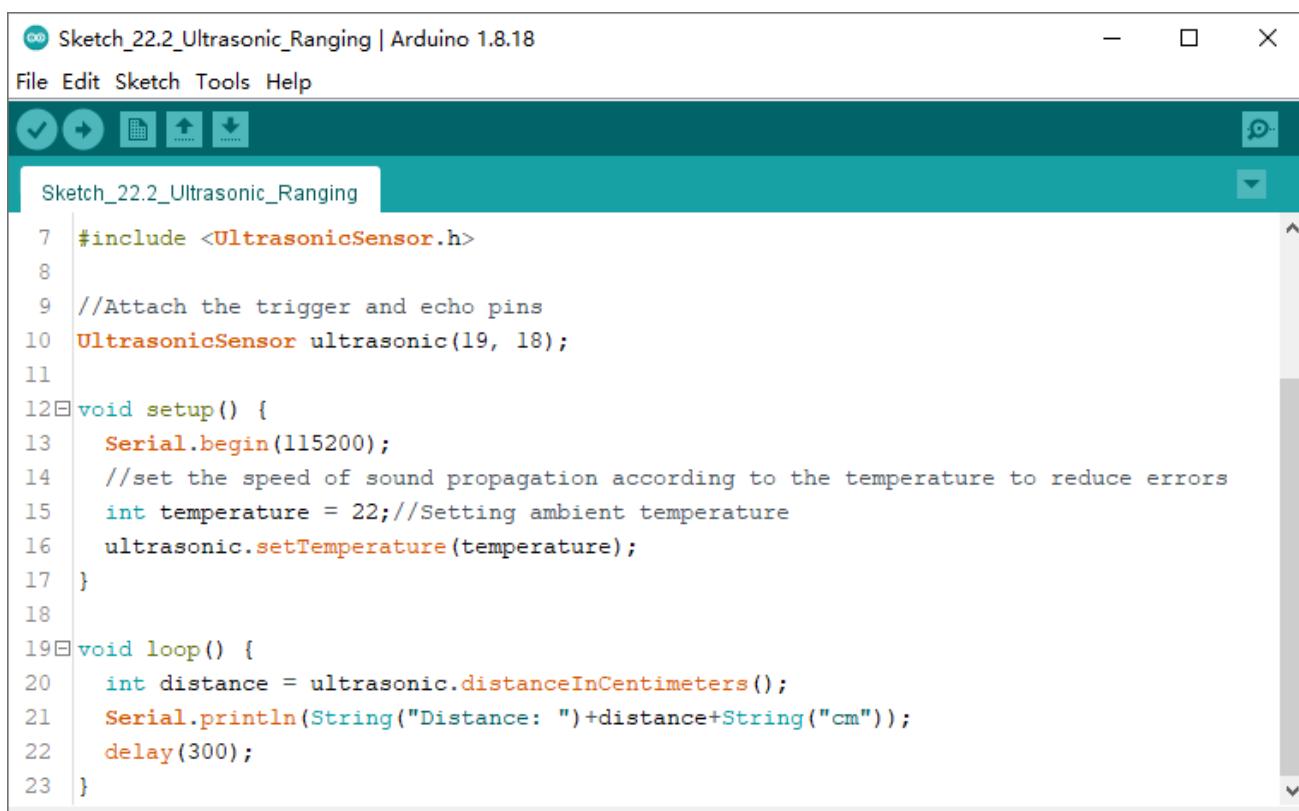

The screenshot shows the Arduino IDE interface with the sketch titled "Sketch_22.2_Ultrasonic_Ranging". The code includes the necessary library inclusion, pin definitions, setup function for serial communication and ultrasonic sensor configuration, and a loop function that prints the measured distance to the serial monitor.

```
#include <UltrasonicSensor.h>
//Attach the trigger and echo pins
UltrasonicSensor ultrasonic(19, 18);
void setup() {
    Serial.begin(115200);
    //set the speed of sound propagation according to the temperature to reduce errors
    int temperature = 22;//Setting ambient temperature
    ultrasonic.setTemperature(temperature);
}
void loop() {
    int distance = ultrasonic.distanceInCentimeters();
    Serial.println(String("Distance: ")+distance+String("cm"));
    delay(300);
}
```

Upload the sketch to Pico, open the serial monitor and set the baud rate to 115200. Use the ultrasonic module to measure distance, as shown in the following picture:

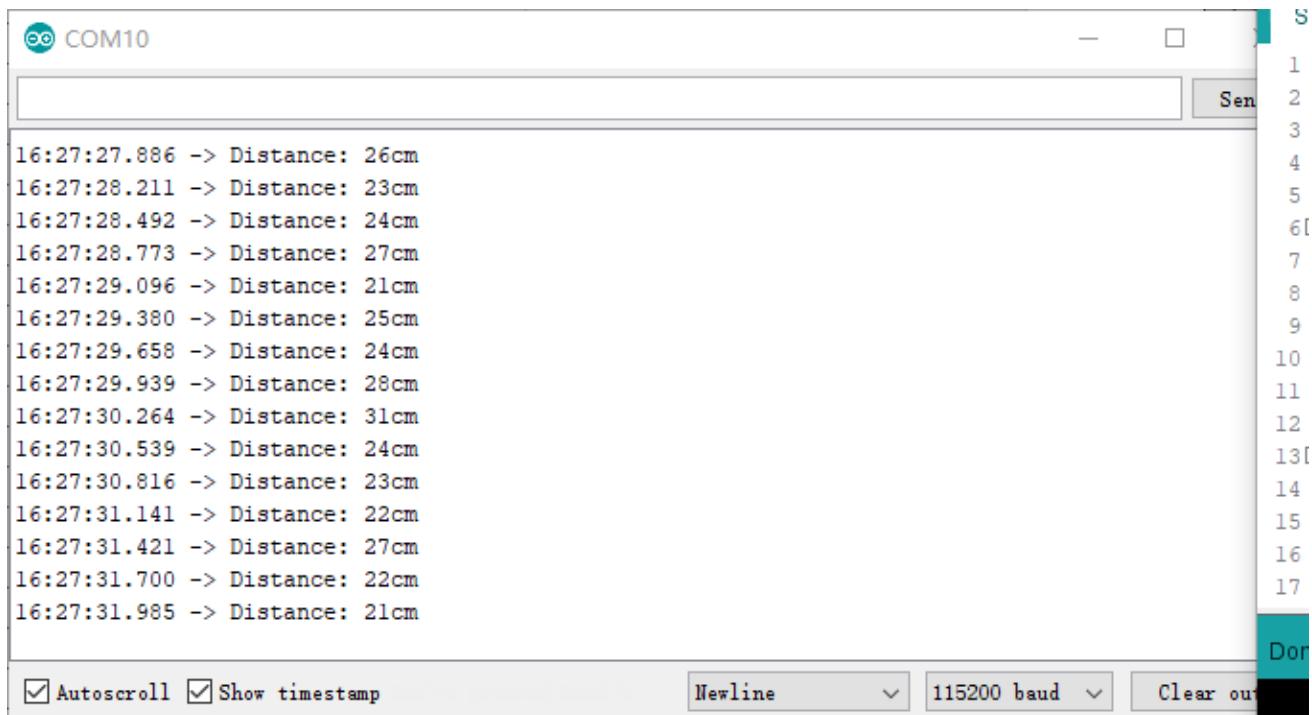

The screenshot shows the Serial Monitor window with the port set to COM10. The window displays a series of timestamped distance measurements in centimeters, indicating the fluctuation in distance over time.

Timestamp	Distance (cm)
16:27:27.886	26cm
16:27:28.211	23cm
16:27:28.492	24cm
16:27:28.773	27cm
16:27:29.096	21cm
16:27:29.380	25cm
16:27:29.658	24cm
16:27:29.939	28cm
16:27:30.264	31cm
16:27:30.539	24cm
16:27:30.816	23cm
16:27:31.141	22cm
16:27:31.421	27cm
16:27:31.700	22cm
16:27:31.985	21cm

The following is the program code:

```

1 #include <UltrasonicSensor.h>
2
3 //Attach the trigger and echo pins
4 UltrasonicSensor ultrasonic(19, 18);
5
6 void setup() {
7   Serial.begin(115200);
8   //set the speed of sound propagation according to the temperature to reduce errors
9   int temperature = 22; //Setting ambient temperature
10  ultrasonic.setTemperature(temperature);
11 }
12
13 void loop() {
14   int distance = ultrasonic.distanceInCentimeters();
15   Serial.print(String("Distance: ")+distance+String("cm\n"));
16   delay(300);
17 }
```

First, add UltrasonicSensor library.

```
1 #include <UltrasonicSensor.h>
```

Define an ultrasonic object and associate it with the pins.

```
4 UltrasonicSensor ultrasonic(19, 18);
```

Set the ambient temperature to make the module measure more accurately.

```
10 ultrasonic.setTemperature(temperature);
```

Use the distanceInCentimeters function to get the distance measured by the ultrasound and print it out through the serial port.

```

13 void loop() {
14   int distance = ultrasonic.distanceInCentimeters();
15   Serial.print(String("Distance: ")+distance+String("cm\n"));
16   delay(300);
17 }
```

Reference

class UltrasonicSensor

class UltrasonicSensor must be instantiated when used, that is, define an object of Servo type, for example:

UltrasonicSensor ultrasonic(19, 18);

setTemperature(value): The speed of sound propagation is different at different temperatures. In order to get more accurate data, this function needs to be called. **value** is the temperature value of the current environment.

distanceInCentimeters(): The ultrasonic distance acquisition function returns the value in centimeters.

distanceInMillimeters(): The ultrasonic distance acquisition function returns the value in millimeter.



Chapter 20 Infrared Remote

In this chapter, we'll learn how to use an infrared remote control, and control an LED.

Project 20.1 Infrared Remote Control

First, we need to understand how infrared remote control works, then get the command sent from infrared remote control.

Component List

Raspberry Pi Pico x1	A green printed circuit board with a central Broadcom SoC, labeled "Raspberry Pi Pico • 2020". It has various pins, a USB port, and a power jack.	USB cable x1	Two standard black USB-A to USB-B cables.
Breadboard x1	A breadboard with numbered pins from 1 to 40 along the top and bottom edges, and lettered columns A through H in the center.		
Jumper	A long, thin black wire with two small black caps at the ends.		
Infrared Remote x1	A small grey remote control device with a single infrared LED on the left side.	Resistor 10kΩ x1	A cylindrical component with a red band indicating its value.
	A diagram showing the layout of buttons on an infrared remote, including numbers 0-9, arrows, and special functions like TEST, C, and MENU.		

Component Knowledge


Infrared Remote

An infrared(IR) remote control is a device with a certain number of buttons. Pressing down different buttons will make the infrared emission tube, which is located in the front of the remote control, send infrared ray with different command. Infrared remote control technology is widely used in electronic products such as TV, air conditioning, etc. Thus making it possible for you to switch TV programs and adjust the temperature of the air conditioning when away from them. The remote control we use is shown below:



Infrared receiver

An infrared(IR) receiver is a component which can receive the infrared light, so we can use it to detect the signal emitted by the infrared remote control. DATA pin here outputs the received infrared signal.

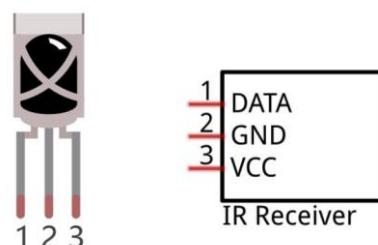




When you use the infrared remote control, it sends a key value to the receiving circuit according to the pressed key. We can program the Raspberry Pi Pico to do things like lighting, when a key value is received.

The following is the key value that the receiving circuit will receive when each key of the infrared remote control is pressed.


ICON	KEY Value	ICON	KEY Value
	FFA25D		FFB04F
	FFE21D		FF30CF
	FF22DD		FF18E7
	FF02FD		FF7A85
	FFC23D		FF10EF
	FFE01F		FF38C7
	FFA857		FF5AA5
	FF906F		FF42BD
	FF6897		FF4AB5
	FF9867		FF52AD

Circuit

Schematic diagram

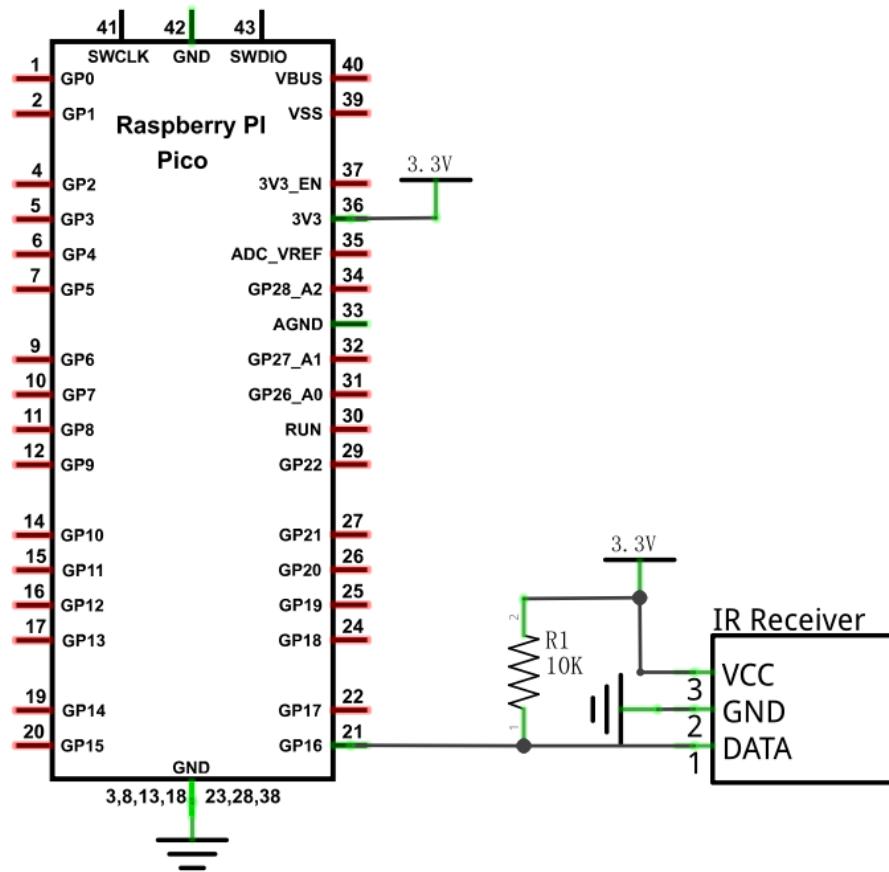

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

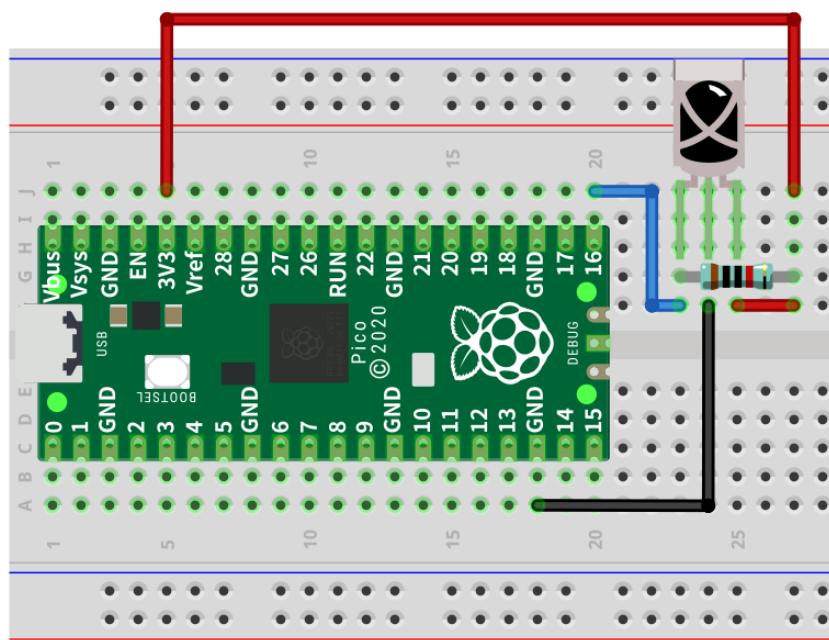

Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)



Sketch

This sketch uses the infrared receiving tube to receive the value sent from the infrared remote control, and print it out via the serial port.

Sketch_20.1_Infrared_Remote_Control

```

Sketch_24.1_Infrared_Remote_Control | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_24.1_Infrared_Remote_Control IR.cpp IR.h
7 #include "IR.h"
8 #define IR_Pin 16
9
10 void setup() {
11   Serial.begin(115200);
12   IR_Init(IR_Pin);
13 }
14
15 void loop() {
16   if(flagCode) {
17     int irValue = IR_Decode(flagCode);
18     Serial.println(irValue, HEX);
19     IR_Release();
20   }
21 }

```

Compiling sketch...

D:\arduino-1.8.18\arduino-builder -dump-prefs -logger=machine -hardware D:\arduino-1.8.18\hardware -hardware

Raspberry Pi Pico on COM10

Download the code to Pico, open the serial port monitor, set the baud rate to 115200, press the IR remote control, the pressed keys value will be printed out through the serial port.

Time	Value
08:28:24.330	-> FFFFFFFF
08:28:24.655	-> FFFFFFFF
08:28:24.980	-> FFFFFFFF
08:28:26.135	-> FF6897
08:28:27.757	-> FF6897
08:28:28.128	-> FFFFFFFF
08:28:28.456	-> FFFFFFFF
08:28:29.625	-> FF6897
08:28:29.998	-> FFFFFFFF
08:28:30.322	-> FFFFFFFF
08:28:31.445	-> FFE01F
08:28:31.814	-> FFFFFFFF
08:28:32.137	-> FFFFFFFF

Short press the key

Long press the key

Autoscroll Show timestamp Newline 115200 baud Clear output

Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)

IR.cpp

```
1 #include "IR.h"
2
3 int logList[32];
4 unsigned long startTime;
5 int endTime, end2Time;
6 int flagCode = 0;
7 int irPin;
8 bool irState = true;
9
10 void IR_Init(int pin) {
11     irPin = pin;
12     pinMode(irPin, INPUT_PULLUP);
13     attachInterrupt(digitalPinToInterrupt(irPin), IR_Read, CHANGE);
14 }
15
16 void IR_Read() {
17     if (irState == true) {
18         unsigned long lowTime, highTime, intervalTime;
19         int num = 0;
20         while (digitalRead(irPin) == LOW) {
21             startTime = micros();
22             while (digitalRead(irPin) == LOW) {
23                 lowTime = micros();
24             }
25             intervalTime = lowTime - startTime;
26             while (digitalRead(irPin) == HIGH) {
27                 highTime = micros();
28                 intervalTime = highTime - lowTime;
29                 if (intervalTime > 10000) {
30                     end2Time = millis();
31                     if (num == 32) {
32                         flagCode = 1;
33                         endTime = millis();
34                     }
35                     else if (num == 0 && end2Time - endTime > 300 && end2Time - endTime < 400) {
36                         flagCode = 2;
37                         endTime = millis();
38                     }
39                     return;
40                 }
41             }
42             if (intervalTime < 2000) {
43                 if (intervalTime < 700) {
```

```

44         logList[num ++] = 0;
45     }
46     else {
47         logList[num ++] = 1;
48     }
49 }
50 }
51 }
52 }

53

54 unsigned long IR_Decode(int &code) {
55     unsigned long irData = 0;
56     irState=false;
57     if (code == 1) {
58         code = 0;
59         for (int i = 0; i < 32; i++) {
60             if (logList[i] == 0) {
61                 irData <<= 1;
62             }
63             else {
64                 irData <<= 1;
65                 irData++;
66             }
67             logList[i] = 0;
68         }
69     }
70     if (code == 2) {
71         code = 0;
72         irData = 0xffffffff;
73     }
74     return irData;
75 }
76 }

77

78 void IR_Release() {
79     irState=true;
80 }
```

When the IR_Init() function is called, Pico initializes the infrared received pin and sets the external interrupt, associating it with the IR_Read() function. Every time the infrared receives data, external interrupt calls IR_Read() function to receive data, and resets the bit flag.

	<pre> extern int flagCode; void IR_Init(int pin); void IR_Read();</pre>
--	---

You can check whether flagCode has been reset, If it is reset, call IR_Decode() to decode the infrared data.

Note: once IR_Decode() is called, infrared receiver won't receive data until IR_Release() is called.

```
unsigned long IR_Decode(int &code);  
void IR_Release();
```

The following is the program code:

```
1 #include "IR.h"  
2 #define IR_Pin 16  
3  
4 void setup() {  
5     Serial.begin(115200);  
6     IR_Init(IR_Pin);  
7 }  
8  
9 void loop() {  
10    if(flagCode){  
11        int irValue = IR_Decode(flagCode);  
12        Serial.println(irValue, HEX);  
13        IR_Release();  
14    }  
15 }
```

IR_Init() is called to initialize infrared receiving pin GP16, enable external interrupt and associate it with GP16.

```
6     IR_Init(IR_Pin);
```

In loop(), determines whether infrared bit flag is reset. If it is, IR_Decode() is called to decode the data and print them out via serial monitor.



After using the infrared decoding function IR_Decode(), you need to call IR_Release() to release the infrared data receiving function. Otherwise, it won't receiver new infrared data again.

```
10 if(flagCode){  
11     int irValue = IR_Decode(flagCode);  
12     Serial.println(irValue, HEX);  
13     IR_Release();  
14 }
```

Project 20.2 Control LED through Infrared Remote

In this project, we will control the brightness of LED lights through an infrared remote control.


Component List

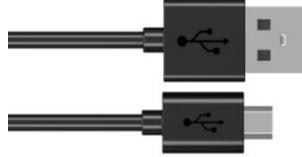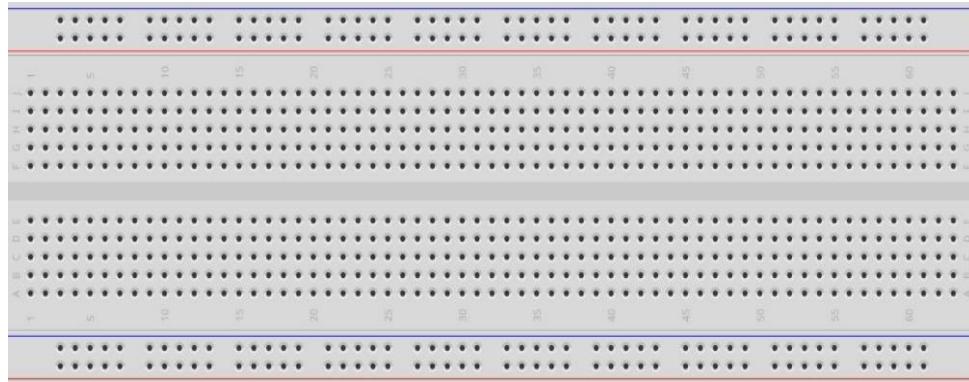Raspberry Pi Pico x1	USB cable x1
	
Breadboard x1	
Jumper	Infrared Remote x1 (May need CR2025 battery x1, please check the battery holder)
LED x1	Active buzzer x1
	
Resistor 1kΩ x2	
Infrared receiver x1	NPN transistor x1 (S8050)
	
Resistor 10kΩ x1	


Any concerns? ✉ support@freenove.com

Circuit

Schematic diagram

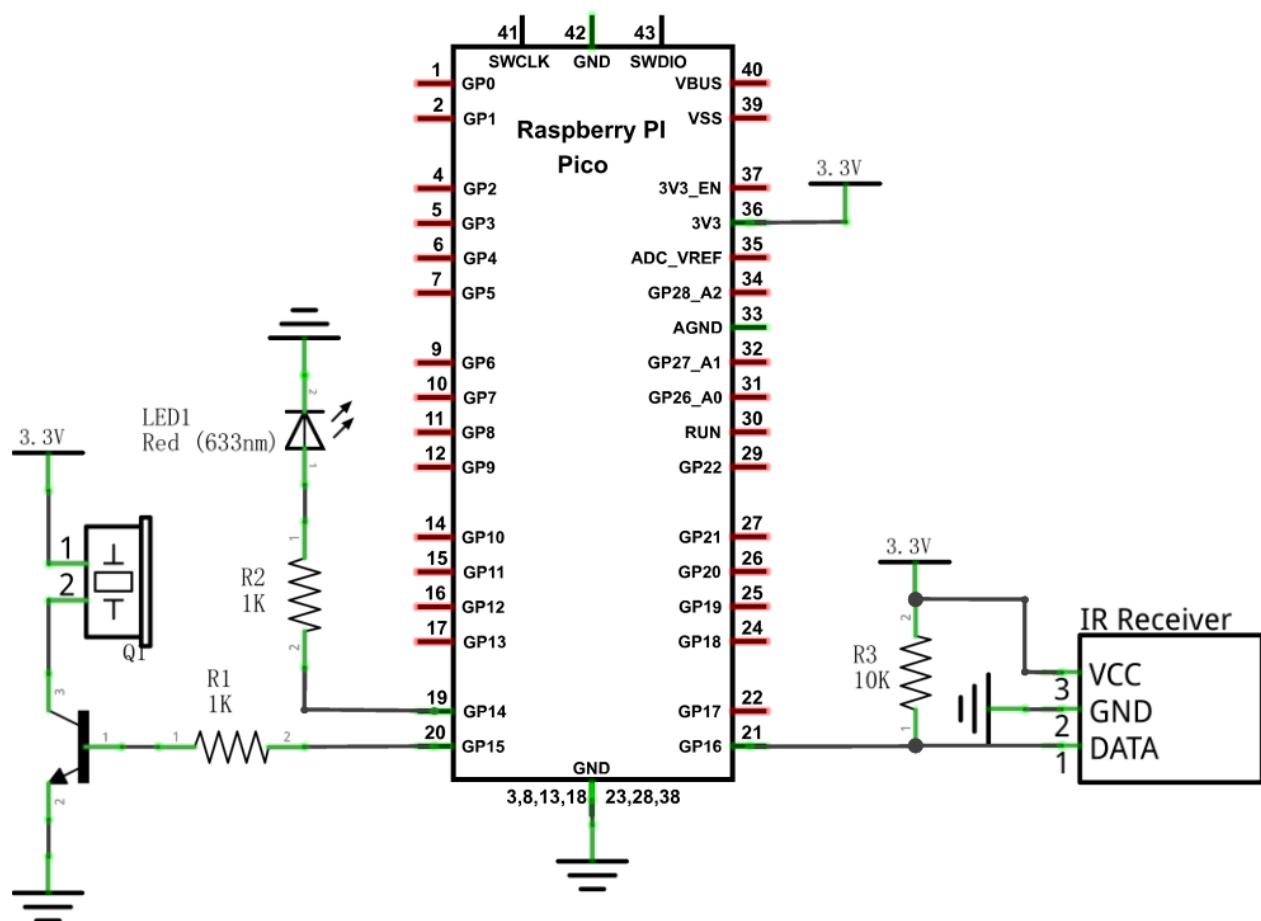

Hardware connection. If you need any support, please feel free to contact us via: support@freenove.com

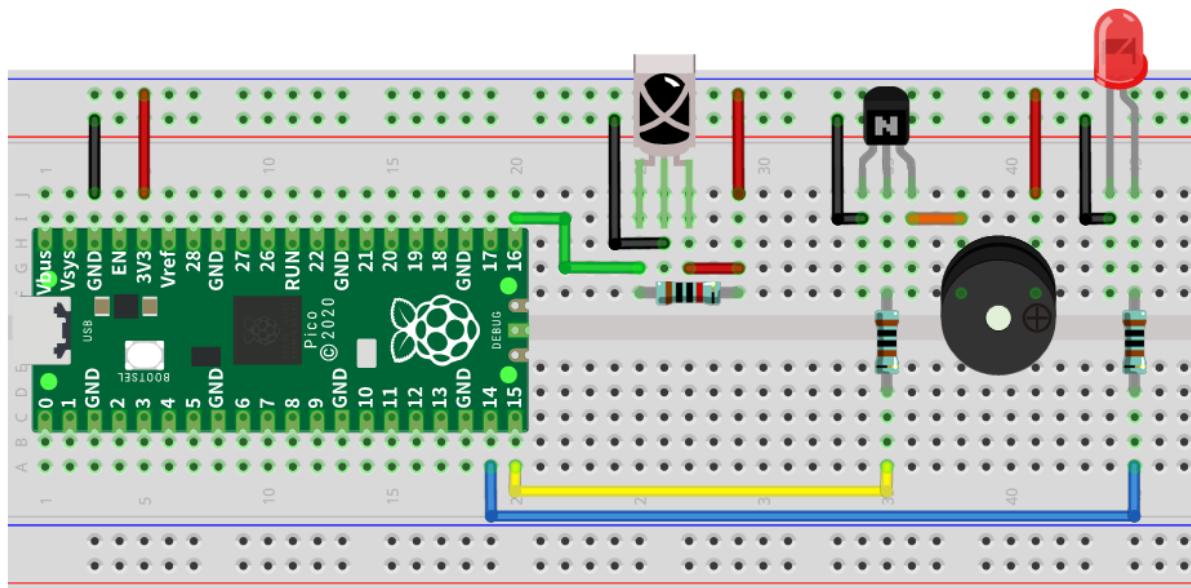



Sketch


The sketch controls the brightness of the LED by determining the key value of the infrared received.

[Sketch_20.2_Control_LED_through_Infrared_Remote](#)

```
Sketch_24.2_Control_LED_through_Infrared_Remote | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_24.2_Control_LED_through_Infrared_Remote IR.cpp IR.h
13 void setup() {
14   Serial.begin(115200);
15   IR_Init(irPin);
16   pinMode(ledPin, OUTPUT);
17   pinMode(buzzerPin, OUTPUT);
18 }
19
20 void loop() {
21   if(flagCode){
22     int irValue = IR_Decode(flagCode);
23     Serial.println(irValue, HEX);
24     handleControl(irValue);
25     IR_Release();
26   }
27 }
28
29 void handleControl(unsigned long value) {
30   digitalWrite(buzzerPin, HIGH);
31   delay(100);
32   digitalWrite(buzzerPin, LOW);
33   // Handle the commands
34   switch (value) {
35     case 0xFF6897:           // Receive the number '0'
36       analogWrite(ledPin, 0); // Turn off LED
37   }
38 }
```

Compile and upload the code to the Pico. When pressing "0", "1", "2", "3" of the infrared remote control, the buzzer will sound once, and the brightness of the LED light will change correspondingly.

Rendering:

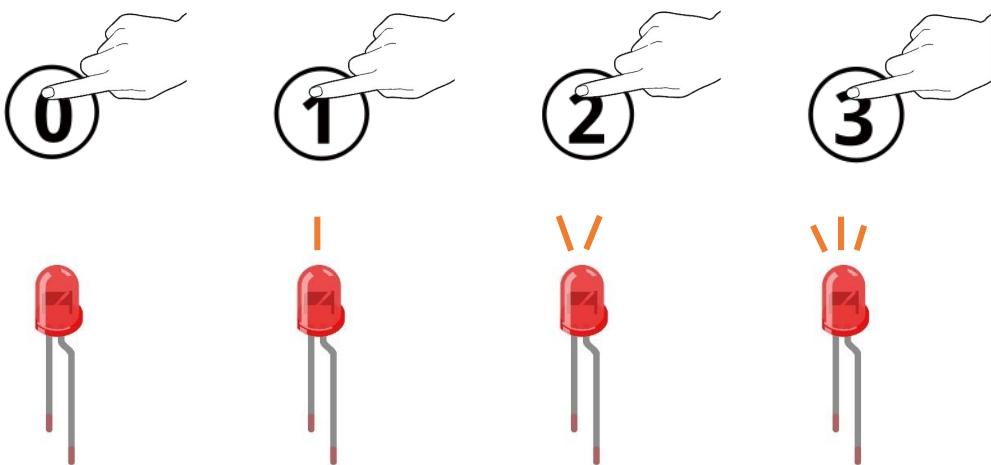

The following is the program code:

```
1 #include "IR.h"
2
3 #define irPin 16
4 #define ledPin 14
5 #define buzzerPin 15
6
7 void setup() {
8     Serial.begin(115200);
9     IR_Init(irPin);
10    pinMode(ledPin, OUTPUT);
11    pinMode(buzzerPin, OUTPUT);
12 }
13
14 void loop() {
15     if(flagCode) {
16         int irValue = IR_Decode(flagCode);
17         Serial.println(irValue, HEX);
18         handleControl(irValue);
19         IR_Release();
20     }
21 }
22
23 void handleControl(unsigned long value) {
24     digitalWrite(buzzerPin, HIGH);
25     delay(100);
26     digitalWrite(buzzerPin, LOW);
27     // Handle the commands
28     switch (value) {
29         case 0xFF6897:           // Receive the number '0'
30             analogWrite(ledPin, 0); // Turn off LED
31             break;
32         case 0xFF30CF:           // Receive the number '1'
33             analogWrite(ledPin, 50); // Dimmest brightness
34             break;
35         case 0xFF18E7:           // Receive the number '2'
36             analogWrite(ledPin, 100); // Medium brightness
37             break;
38         case 0xFF7A85:           // Receive the number '3'
39             analogWrite(ledPin, 255); // Strongest brightness
40             break;
41     }
42 }
```



The handleControl() function is used to execute events corresponding to infrared code values. Every time when the function is called, the buzzer sounds once and determine the brightness of the LED based on the infrared key value. If the key value is not "0", "1", "2", "3", the buzzer sounds once, but the brightness of LED will not change.

```

23 void handleControl(unsigned long value) {
24     digitalWrite(buzzerPin, HIGH);
25     delay(100);
26     digitalWrite(buzzerPin, LOW);
27     // Handle the commands
28     switch (value) {
29         case 0xFF6897:           // Receive the number '0'
30             analogWrite(ledPin, 0); // Turn off LED
31             break;
32         case 0xFF30CF:           // Receive the number '1'
33             analogWrite(ledPin, 50); // Dimmest brightness
34             break;
35         case 0xFF18E7:           // Receive the number '2'
36             analogWrite(ledPin, 100); // Medium brightness
37             break;
38         case 0xFF7A85:           // Receive the number '3'
39             analogWrite(ledPin, 255); // Strongest brightness
40             break;
41     }
42 }
```

In the loop() function, each time the infrared data is received, it is decoded and printed out through the serial monitor, and the handleControl() function is called to control the LED and buzzer to execute the corresponding code.

```

14 void loop() {
15     if(flagCode) {
16         int irValue = IR_Decode(flagCode);
17         Serial.println(irValue, HEX);
18         handleControl(irValue);
19         IR_Release();
20     }
21 }
```


Chapter 21 WiFi Working Modes (Only for Pico W)

The biggest difference between the raspberry pi ico and the raspberry pie Pico W is that the raspberry pi pico W is equipped with a WiFi function module. At the beginning of this chapter, we will learn about the WiFi function of Pico W of Raspberry Pi.

If you have Pico in your hand, please change it to Pico W before continuing to learn.

Project 21.1 Station mode

Component List

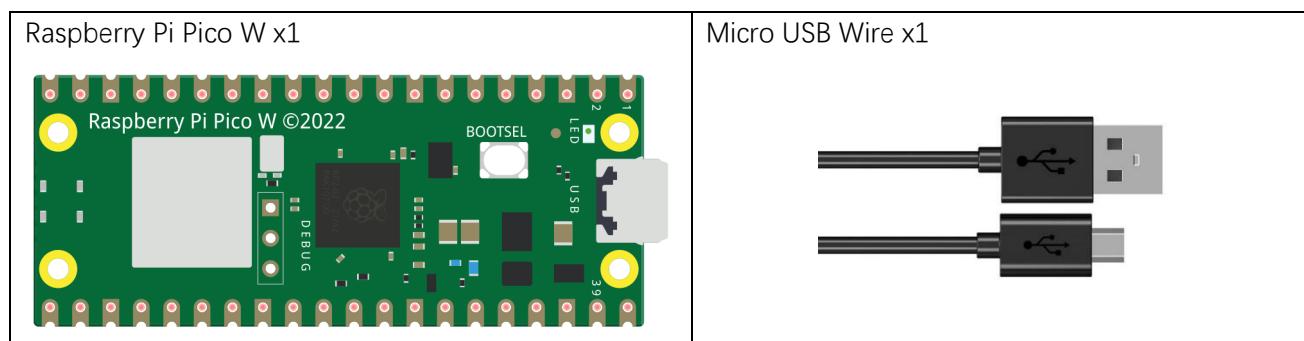


Component knowledge

Wireless

Pico W has an on-board 2.4GHz wireless interface using an Infineon CYW43439. The antenna is an onboard antenna licensed from ABRACON (formerly ProAnt). The wireless interface is connected via SPI to the RP2040.


Station mode

When Pico W selects Station mode, it acts as a WiFi client. It can connect to the router network and communicate with other devices on the router via WiFi connection. As shown below, the PC is connected to the router, and if Pico W wants to communicate with the PC, it needs to be connected to the router.

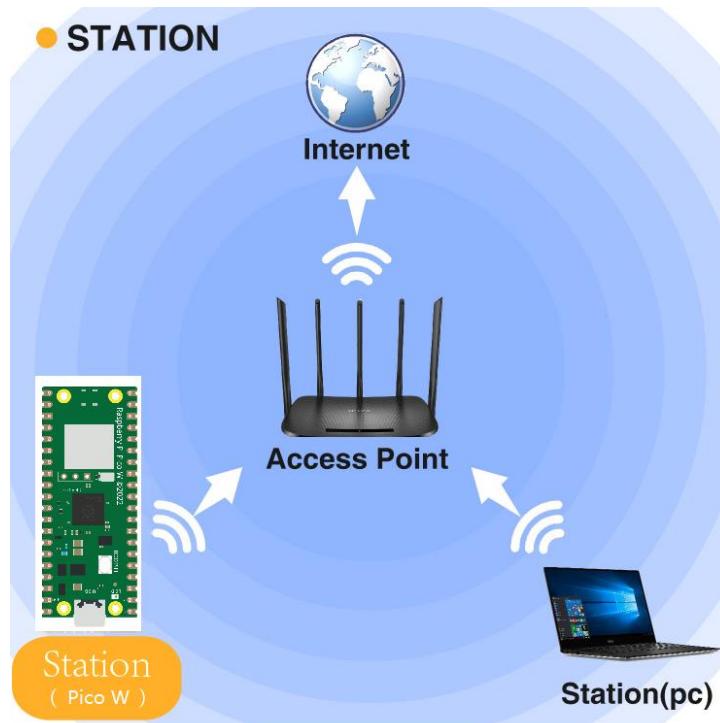


Circuit

Connect Pico W to the computer using the USB cable.

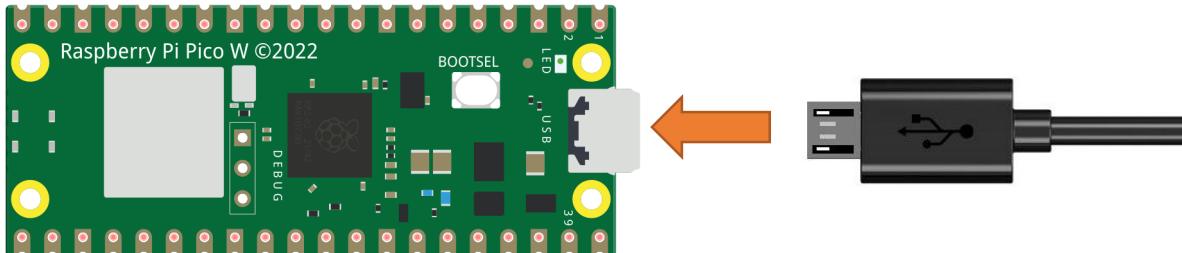

Sketch

Sketch_21.1_Station_mode

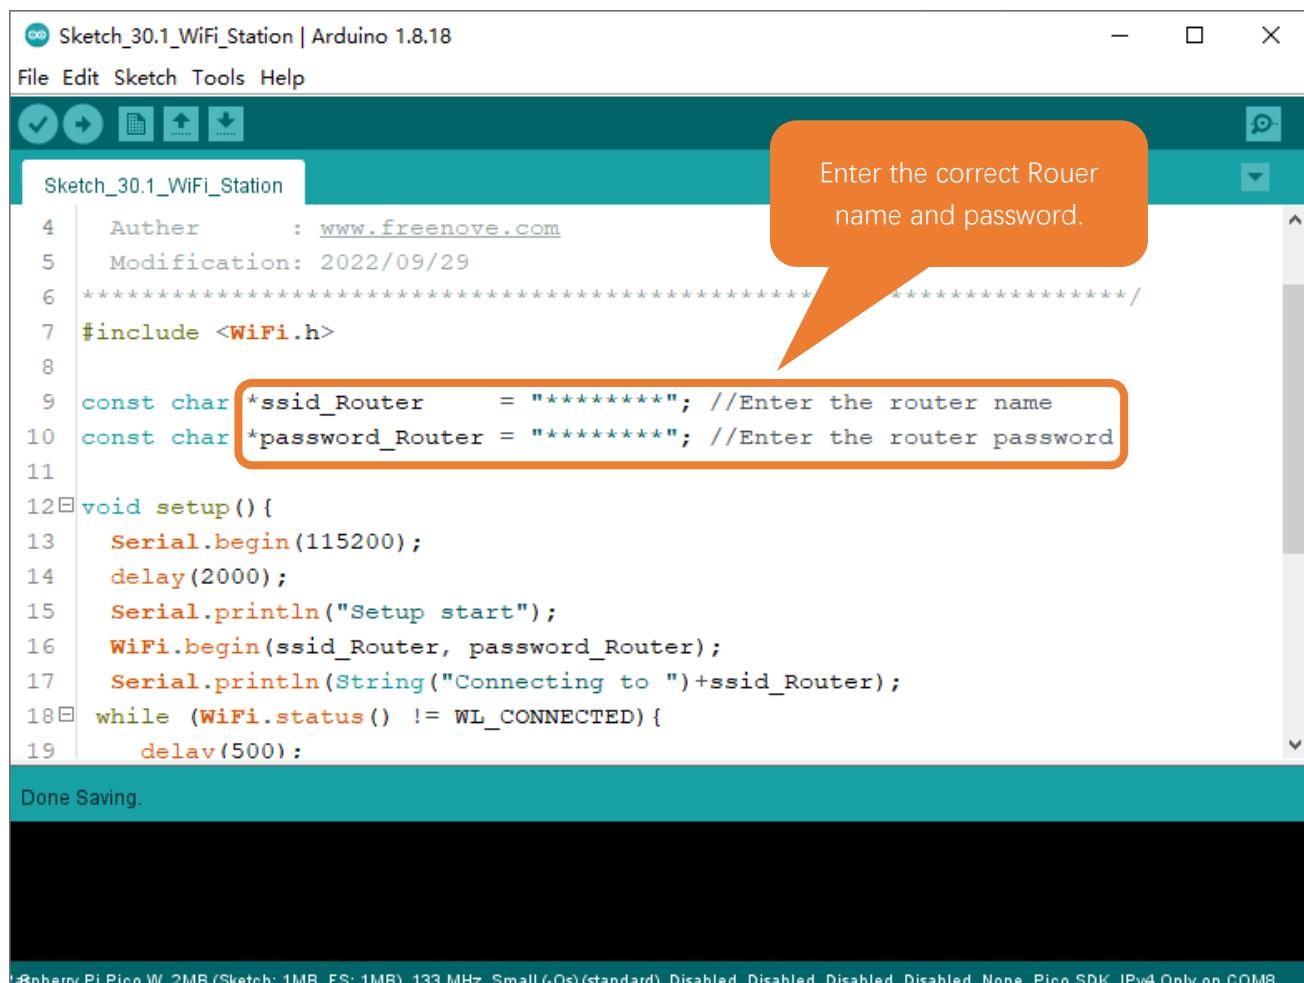


```
Sketch_30.1_WiFi_Station | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_30.1_WiFi_Station
4 Author : www.freenove.com
5 Modification: 2022/09/29
6 ****
7 #include <WiFi.h>
8
9 const char *ssid_Router      = "*****"; //Enter the router name
10 const char *password_Router = "*****"; //Enter the router password
11
12 void setup(){
13     Serial.begin(115200);
14     delay(2000);
15     Serial.println("Setup start");
16     WiFi.begin(ssid_Router, password_Router);
17     Serial.println(String("Connecting to ")+ssid_Router);
18     while (WiFi.status() != WL_CONNECTED){
19         delay(500);
}
Done Saving.
```

Enter the correct Router name and password.

Raspberry Pi Pico W, 2MB (Sketch: 1MB, FS: 1MB), 133 MHz, Small (-Os) (standard), Disabled, Disabled, Disabled, None, Pico SDK, IPv4 Only on COMB

Because the names and passwords of routers are different, before the Sketch runs, users need to enter the correct router's name and password in the box as shown in the illustration above.

After making sure the router name and password are entered correctly, compile and upload codes to Pico W, open serial monitor and set baud rate to 115200. And then it will display as follows:

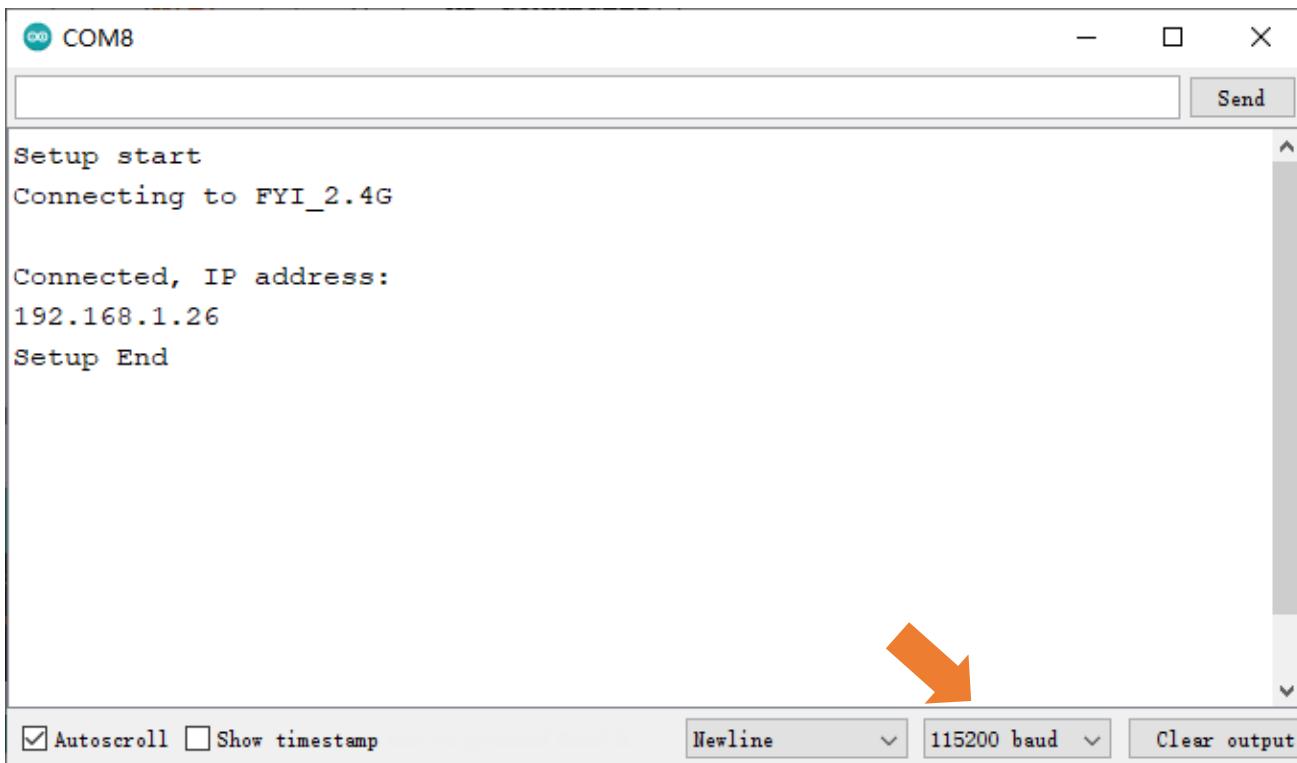

When PICO W successfully connects to "ssid_Router", serial monitor will print out the IP address assigned to PICO W by the router.

The following is the program code:

```
1 #include <WiFi.h>
2
3 const char *ssid_Router      = "*****"; //Enter the router name
4 const char *password_Router = "*****"; //Enter the router password
5
6 void setup() {
7     Serial.begin(115200);
8     delay(2000);
9     Serial.println("Setup start");
10    WiFi.begin(ssid_Router, password_Router);
11    Serial.println(String("Connecting to ") + ssid_Router);
12    while (WiFi.status() != WL_CONNECTED) {
13        delay(500);
14        Serial.print(".");
15    }
16    Serial.println("\nConnected, IP address: ");
17    Serial.println(WiFi.localIP());
18    Serial.println("Setup End");
19 }
20 void loop() {
21 }
```

Include the WiFi Library header file of Pico W.

```
1 #include <WiFi.h>
```

Enter correct router name and password.

```
3 const char *ssid_Router = "*****"; //Enter the router name  
4 const char *password_Router = "*****"; //Enter the router password
```

Set Pico W in Station mode and connect it to your router.

```
10 WiFi.begin(ssid_Router, password_Router);
```

Check whether Pico W has connected to router successfully every 0.5s.

```
12 while (WiFi.status() != WL_CONNECTED) {  
13     delay(500);  
14     Serial.print(".");  
15 }
```

Serial monitor prints out the IP address assigned to Pico W.

```
17 Serial.println(WiFi.localIP());
```

Reference

Class Station

Every time when using WiFi, you need to include header file "WiFi.h".

begin(ssid, password,channel, bssid, connect): PICO W is used as Station to connect hotspot.

ssid: WiFi hotspot name

password: WiFi hotspot password

channel: WiFi hotspot channel number; communicating through specified channel; optional parameter

bssid: mac address of WiFi hotspot, optional parameter

connect: boolean optional parameter, defaulting to true. If set as false, then PICO W won't connect WiFi.

config(local_ip, gateway, subnet, dns1, dns2): set static local IP address.

local_ip: station fixed IP address.

subnet: subnet mask

dns1,dns2: optional parameter. define IP address of domain name server

status: obtain the connection status of WiFi

local IP(): obtain IP address in Station mode

disconnect(): disconnect wifi



Project 21.2 AP mode


Component List & Circuit

Component List & Circuit are the same as in Section 30.1.

Component knowledge


AP mode

When PICO W selects AP mode, it creates a hotspot network that is separate from the Internet and waits for other WiFi devices to connect. As shown in the figure below, PICO W is used as a hotspot. If a mobile phone or PC wants to communicate with PICO W, it must be connected to the hotspot of PICO W. Only after a connection is established with PICO W can they communicate.

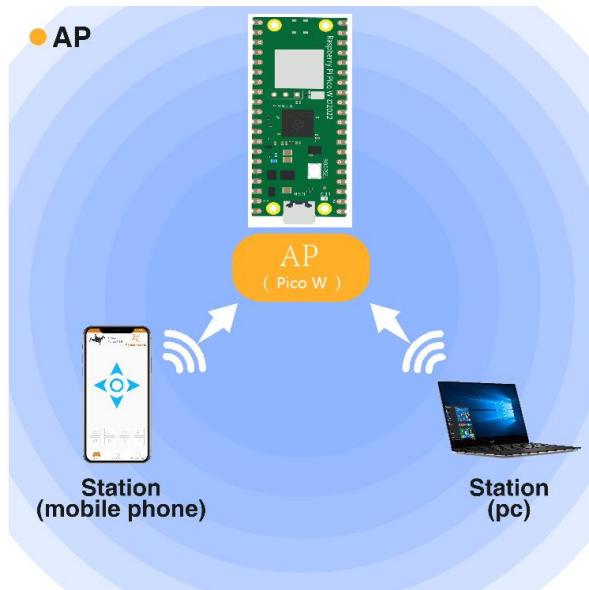


Circuit

Connect Pico W to the computer using the USB cable.

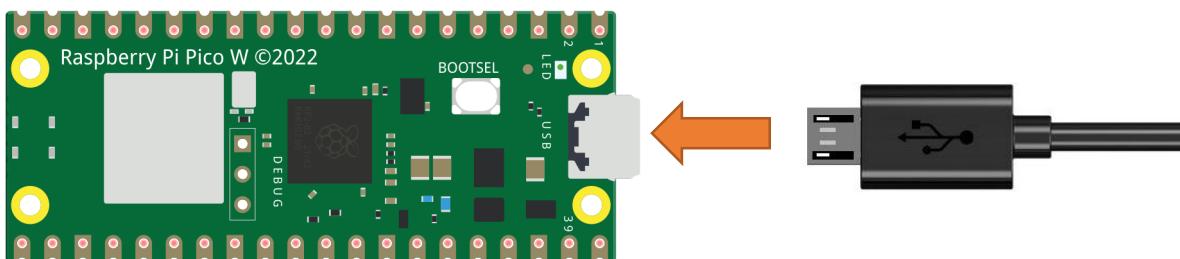

Sketch

Sketch_21.2_AP_mode

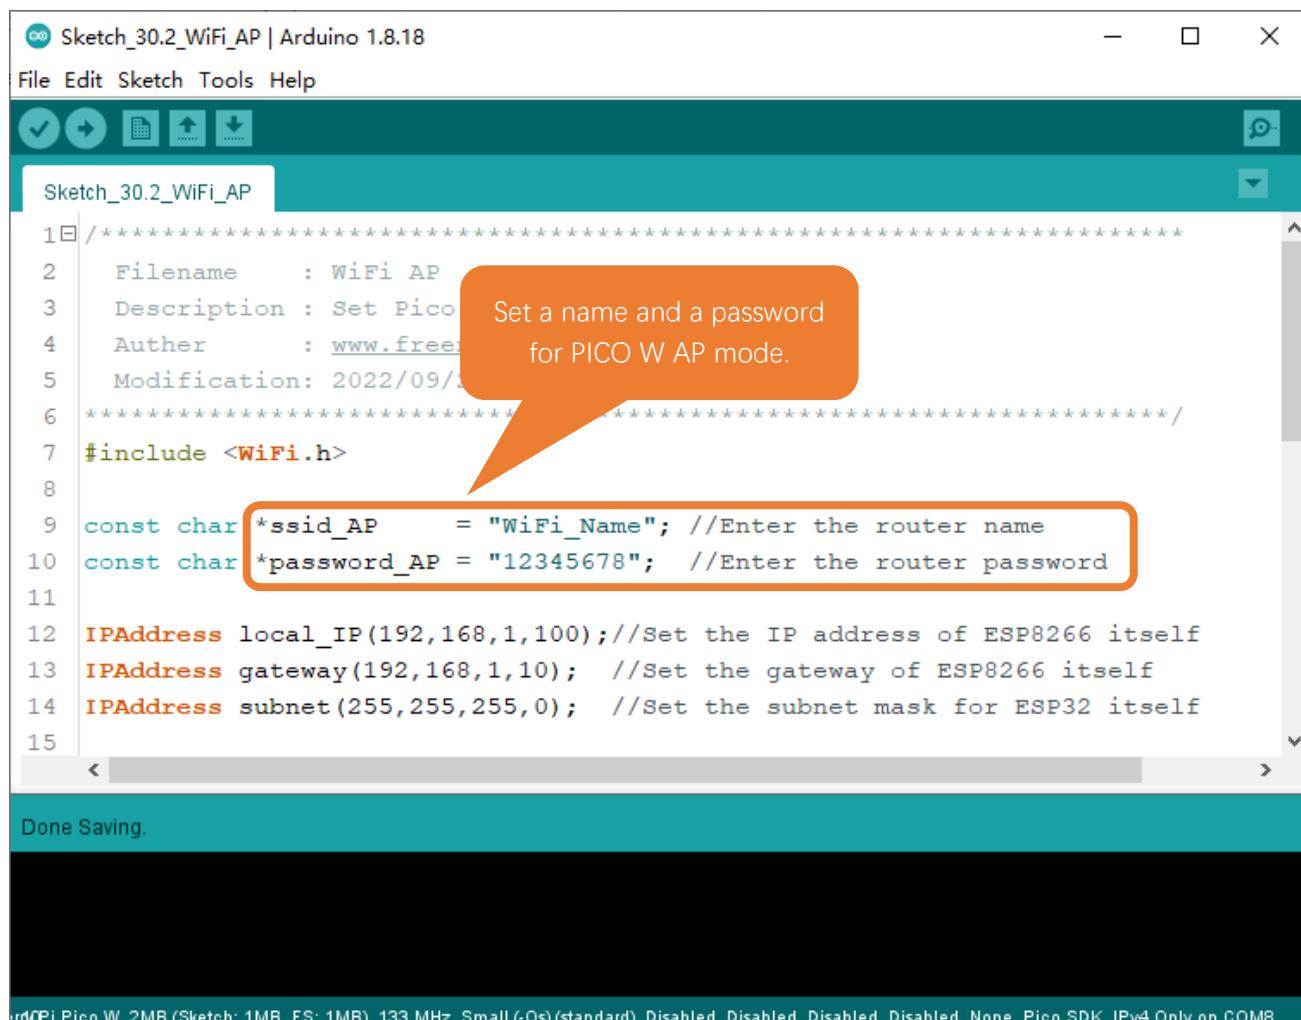

```
Sketch_30.2_WiFi_AP | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_30.2_WiFi_AP
1 // ****
2   Filename      : WiFi AP
3   Description   : Set Pico
4   Author        : www.freenove.com
5   Modification  : 2022/09/21
6 ****
7 #include <WiFi.h>
8
9 const char *ssid_AP      = "WiFi_Name"; //Enter the router name
10 const char *password_AP = "12345678"; //Enter the router password
11
12 IPAddress local_IP(192,168,1,100); //Set the IP address of ESP8266 itself
13 IPAddress gateway(192,168,1,10); //Set the gateway of ESP8266 itself
14 IPAddress subnet(255,255,255,0); //Set the subnet mask for ESP32 itself
15
```

Done Saving.

ESP32 Pico W, 2MB (Sketch: 1MB, FS: 1MB), 133 MHz, Small (-Os) (standard), Disabled, Disabled, Disabled, None, Pico SDK, IPv4 Only on COMB

A callout bubble points to the line of code: `const char *ssid_AP = "WiFi_Name"; //Enter the router name`. The text inside the bubble reads: "Set a name and a password for PICO W AP mode."

Before the Sketch runs, you can make any changes to the AP name and password for PICO W in the box as shown in the illustration above. Of course, you can leave it alone by default.



Compile and upload codes to PICO W, open the serial monitor and set the baud rate to 115200. And then it will display as follows.


```

COM8
Setting soft-AP configuration ...
Ready
Setting soft-AP ...
Ready
Soft-AP IP address = 192.168.1.10
MAC address = 28:cd:c1:01:c5:66
Setup End

```

Autoscroll Show timestamp Newline 115200 baud Clear output

When observing the print information of the serial monitor, turn on the WiFi scanning function of your phone, and you can see the ssid_AP on PICO W, which is called "WiFi_Name" in this Sketch. You can enter the password "12345678" to connect it or change its AP name and password by modifying Sketch.

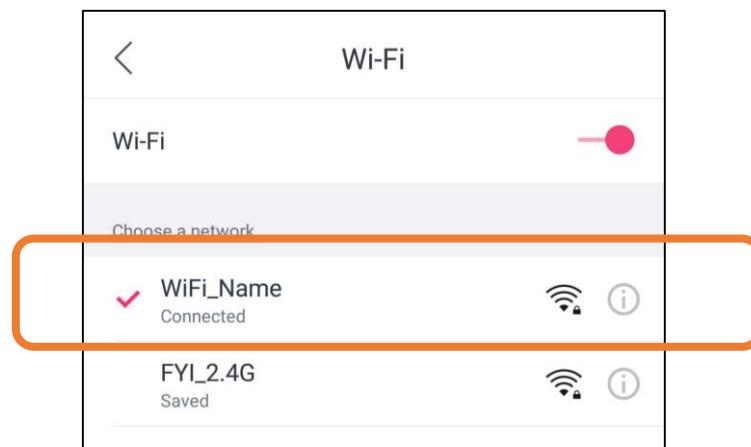

Note:

1. Every time you change the WiFi name and password in the code, please power off and then on again, and then upload the code. It is possible that the WiFi name and password have not actually changed due to the direct uploading of code without power. This is because Pico W WiFi module and RP2040 chip are separated. Only when the power is cut off can the WiFi name and password be flashed to the WiFi module again.
2. Pico W executes this code only to open a WiFi hotspot, and does not configure the code related to online data transmission, so the mobile phone will display no data after connection.

The following is the program code:

```

1 #include <WiFi.h>
2
3 const char *ssid_AP      = "WiFi_Name"; //Enter the router name
4 const char *password_AP = "12345678"; //Enter the router password
5
6 IPAddress local_IP(192, 168, 1, 100); //Set the IP address of PICO W itself
7 IPAddress gateway(192, 168, 1, 10); //Set the gateway of PICO W itself
8 IPAddress subnet(255, 255, 255, 0); //Set the subnet mask for PICO W itself
9
10 void setup() {
11     Serial.begin(115200);
12     delay(2000);
13     Serial.println("Setting soft-AP configuration ... ");
14     WiFi.disconnect();
15     WiFi.mode(WIFI_AP);
16     Serial.println(WiFi.softAPConfig(local_IP, gateway, subnet) ? "Ready" : "Failed!");
17     Serial.println("Setting soft-AP ... ");
18     boolean result = WiFi.softAP(ssid_AP, password_AP);
19     if(result) {
20         Serial.println("Ready");
21         Serial.println(String("Soft-AP IP address = ") + WiFi.softAPIP().toString());
22         Serial.println(String("MAC address = ") + WiFi.softAPmacAddress().c_str());
23     } else {
24         Serial.println("Failed!");
25     }
26     Serial.println("Setup End");
27 }
28
29 void loop() {
30 }
```

Include WiFi Library header file of PICO W.

```
1 #include <WiFi.h>
```

Enter correct AP name and password.

```
3 const char *ssid_AP      = "WiFi_Name"; //Enter the router name
4 const char *password_AP = "12345678"; //Enter the router password
```

Set PICO W in AP mode.

```
15 WiFi.mode(WIFI_AP);
```

Configure IP address, gateway and subnet mask for PICO W.

```
16 WiFi.softAPConfig(local_IP, gateway, subnet)
```

Turn on an AP in PICO W, whose name is set by ssid_AP and password is set by password_AP.

```
18 WiFi.softAP(ssid_AP, password_AP);
```



Check whether the AP is turned on successfully. If yes, print out IP and MAC address of AP established by PICO W. If no, print out the failure prompt.

```
19 if(result){  
20     Serial.println("Ready");  
21     Serial.println(String("Soft-AP IP address = ") + WiFi.softAPIP().toString());  
22     Serial.println(String("MAC address = ") + WiFi.softAPmacAddress().c_str());  
23 }else{  
24     Serial.println("Failed!");  
25 }  
26 Serial.println("Setup End");
```

Reference

Class AP

Every time when using WiFi, you need to include header file "WiFi.h".

softAP(ssid, password, channel, ssid_hidden, max_connection):

ssid: WiFi hotspot name

password: WiFi hotspot password

channel: Number of WiFi connection channels, range 1-13. The default is 1.

ssid_hidden: Whether to hide WiFi name from scanning by other devices. The default is not hide.

max_connection: Maximum number of WiFi connected devices. The range is 1-4. The default is 4.

softAPConfig(local_ip, gateway, subnet): set static local IP address.

local_ip: station fixed IP address.

Gateway: gateway IP address

subnet: subnet mask

softAP(): obtain IP address in AP mode

softAPdisconnect (): disconnect AP mode.

Project 21.3 AP+Station mode

Component List & Circuit

Component List & Circuit are the same as in Section 30.1.


Component knowledge

AP+Station mode

In addition to AP mode and station mode, PICO W can also use AP mode and station mode at the same time. This mode contains the functions of the previous two modes. Turn on PICO W's station mode, connect it to the router network, and it can communicate with the Internet via the router. At the same time, turn on its AP mode to create a hotspot network. Other WiFi devices can choose to connect to the router network or the hotspot network to communicate with PICO W.


Circuit

Connect Pico W to the computer using the USB cable.

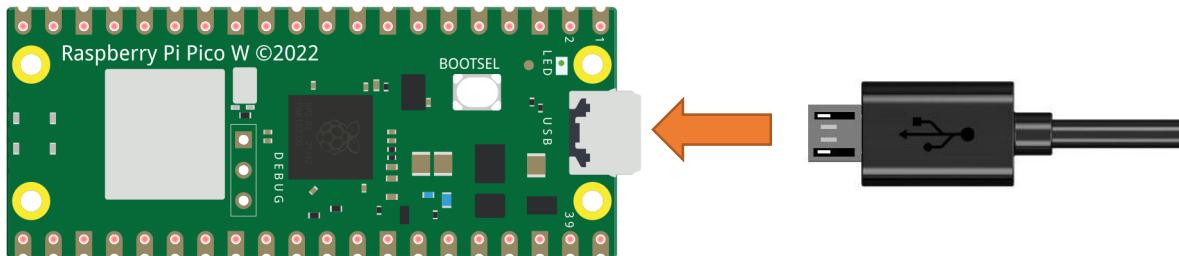

Sketch

Sketch_21.3_AP_Station_mode

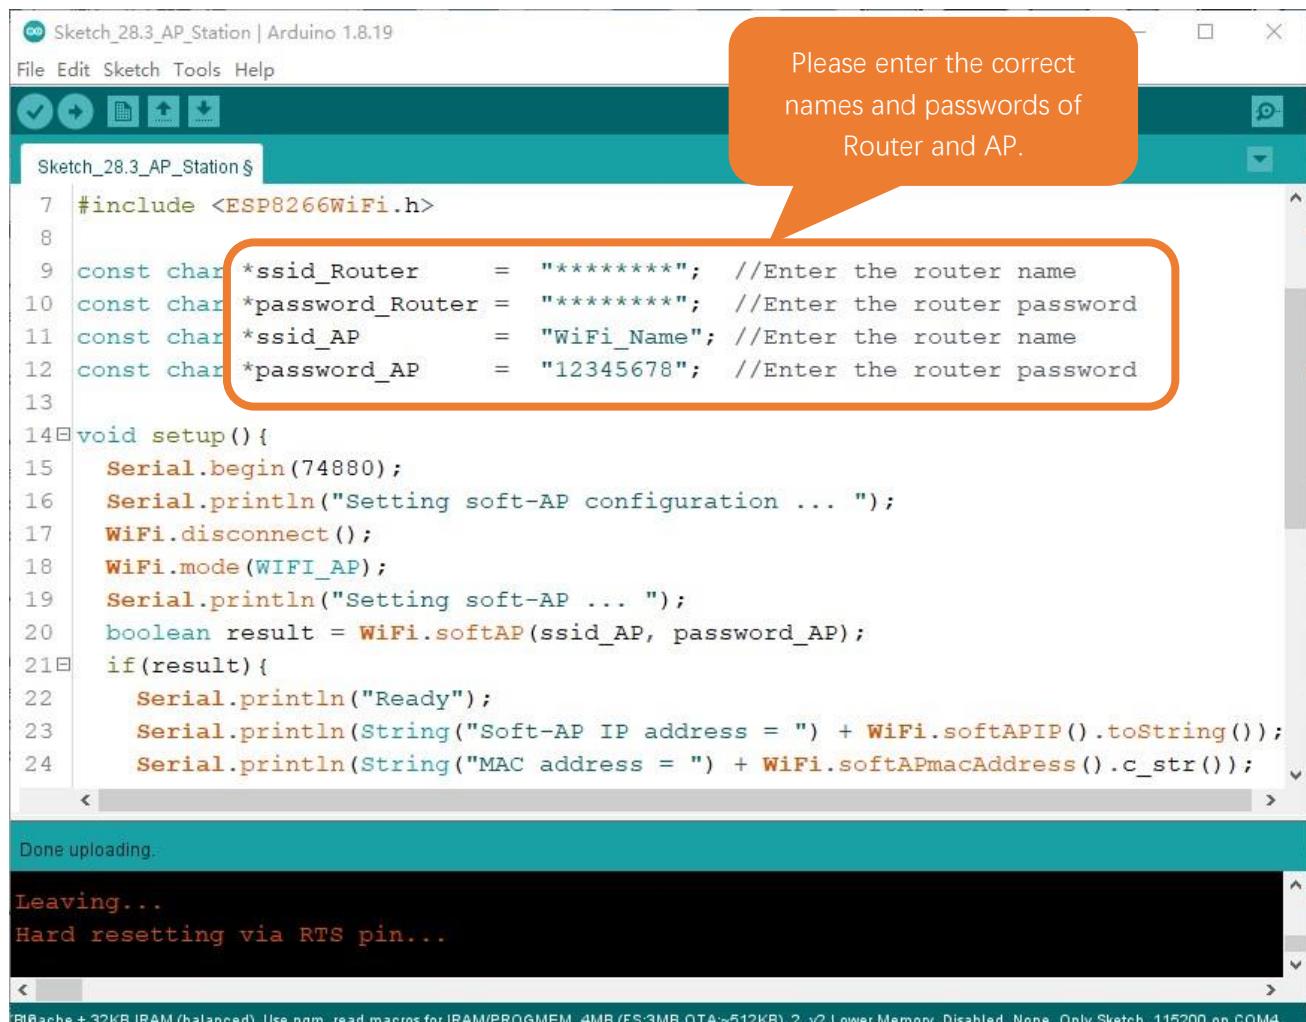

The screenshot shows the Arduino IDE interface with the sketch file "Sketch_21.3_AP_Station_mode" open. The code includes declarations for router and AP names and passwords, and a setup function that prints configuration details to the Serial monitor. A callout bubble highlights the configuration section of the code, which consists of four lines of code enclosed in a red box. The text in the callout bubble reads: "Please enter the correct names and passwords of Router and AP."

```
#include <ESP8266WiFi.h>
const char *ssid_Router      = "*****"; //Enter the router name
const char *password_Router = "*****"; //Enter the router password
const char *ssid_AP          = "WiFi_Name"; //Enter the router name
const char *password_AP      = "12345678"; //Enter the router password
void setup() {
    Serial.begin(74880);
    Serial.println("Setting soft-AP configuration ... ");
    WiFi.disconnect();
    WiFi.mode(WIFI_AP);
    Serial.println("Setting soft-AP ... ");
    boolean result = WiFi.softAP(ssid_AP, password_AP);
    if(result){
        Serial.println("Ready");
        Serial.println(String("Soft-AP IP address = ") + WiFi.softAPIP().toString());
        Serial.println(String("MAC address = ") + WiFi.softAPmacAddress().c_str());
    }
}
```


Done uploading.

Leaving...
Hard resetting via RTS pin...

808ache + 32KB IRAM (balanced). Use pgm_read macros for IRAM/PROGMEM, 4MB (FS:3MB OTA:~512KB), 2, v2 Lower Memory, Disabled, None, Only Sketch, 115200 on COM4

It is analogous to Project 21.1 and Project 21.2. Before running the Sketch, you need to modify ssid_Router, password_Router, ssid_AP and password_AP shown in the box of the illustration above.

After making sure that Sketch is modified correctly, compile and upload codes to PICO W, open serial monitor and set baud rate to 115200. And then it will display as follows:

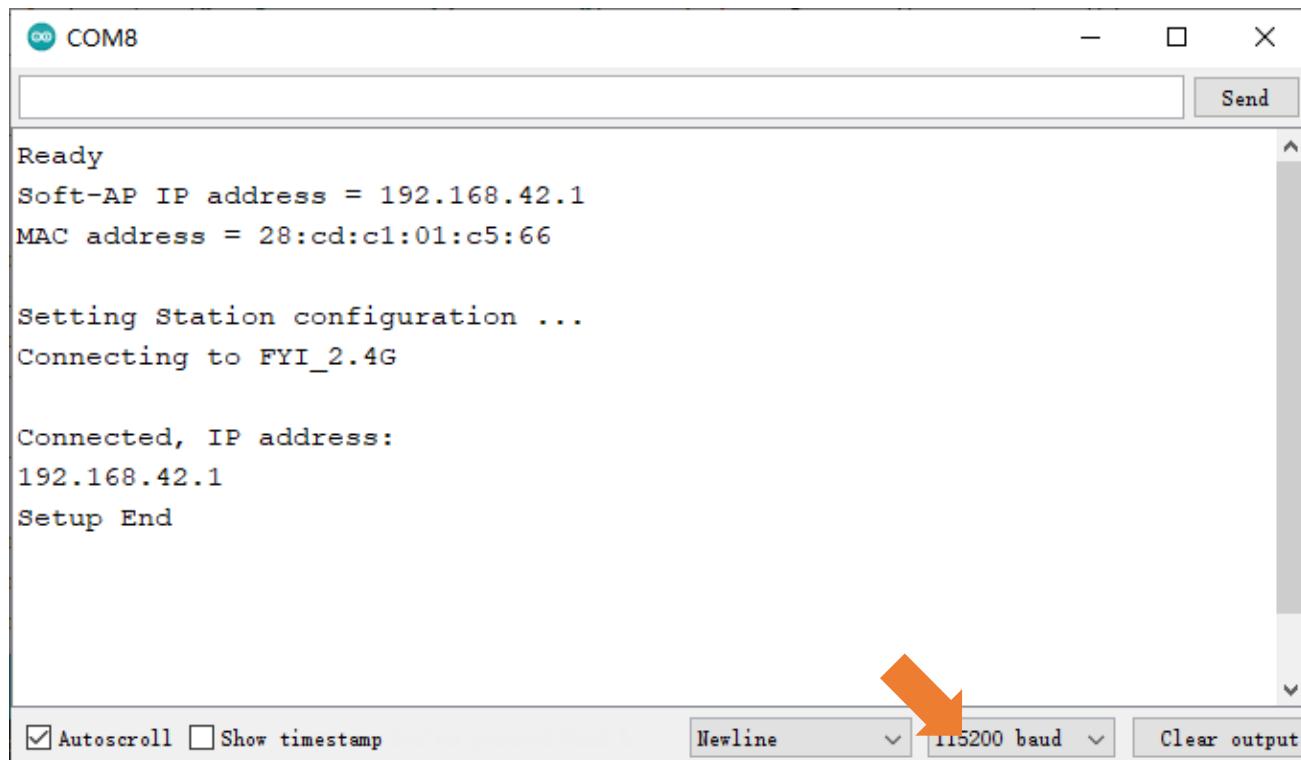

```

COM8
Ready
Soft-AP IP address = 192.168.42.1
MAC address = 28:cd:c1:01:c5:66


Setting Station configuration ...
Connecting to FYI_2.4G

Connected, IP address:
192.168.42.1
Setup End

```

Autoscroll Show timestamp Newline 115200 baud Clear output

When observing the print information of the serial monitor, turn on the WiFi scanning function of your phone, and you can see the ssid_AP on PICO W.

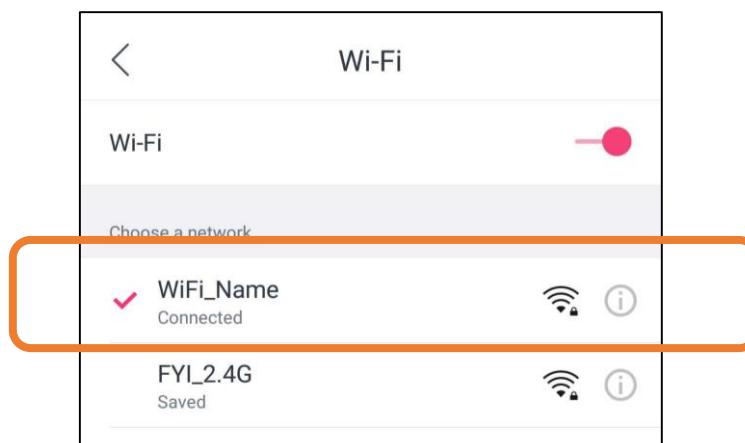

The following is the program code:

```

1 #include <WiFi.h>
2
3 const char *ssid_Router      = "*****"; //Enter the router name
4 const char *password_Router = "*****"; //Enter the router password
5 const char *ssid_AP          = "WiFi_Name"; //Enter the AP name
6 const char *password_AP      = "12345678"; //Enter the AP password
7
8 void setup() {

```



```
9   Serial.begin(115200);
10  Serial.println("Setting soft-AP configuration ... ");
11  WiFi.disconnect();
12  WiFi.mode(WIFI_AP);
13  Serial.println("Setting soft-AP ... ");
14  boolean result = WiFi.softAP(ssid_AP, password_AP);
15  if(result){
16      Serial.println("Ready");
17      Serial.println(String("Soft-AP IP address = ") + WiFi.softAPIP().toString());
18      Serial.println(String("MAC address = ") + WiFi.softAPmacAddress().c_str());
19  }else{
20      Serial.println("Failed!");
21  }
22
23  Serial.println("\nSetting Station configuration ... ");
24  WiFi.begin(ssid_Router, password_Router);
25  Serial.println(String("Connecting to ") + ssid_Router);
26  while (WiFi.status() != WL_CONNECTED) {
27      delay(500);
28      Serial.print(".");
29  }
30  Serial.println("\nConnected, IP address: ");
31  Serial.println(WiFi.localIP());
32  Serial.println("Setup End");
33 }
34
35 void loop() {
36 }
```


Chapter 22 TCP/IP (Only for Pico W)

In this chapter, we will introduce how PICO W implements network communications based on TCP/IP protocol. There are two roles in TCP/IP communication, namely Server and Client, which will be implemented respectively with two projects in this chapter.

Project 22.1 As Client

In this section, PICO W is used as Client to connect Server on the same LAN and communicate with it.

Component List

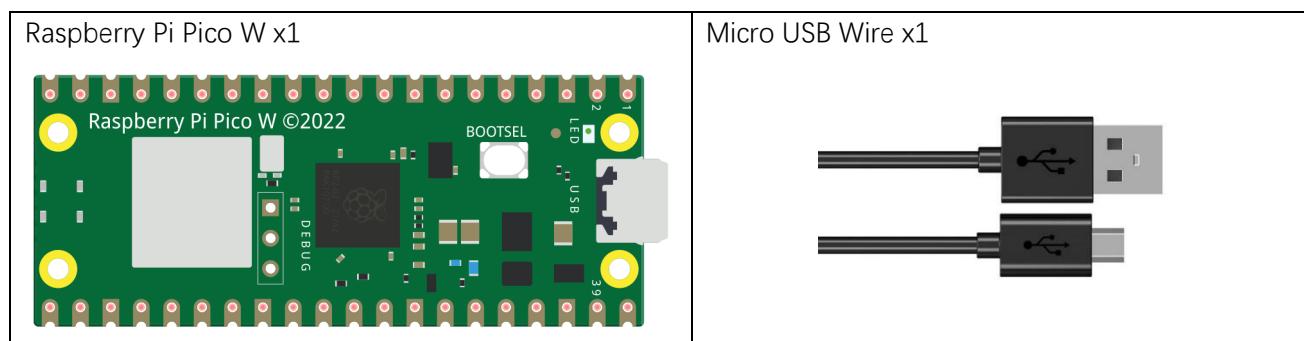


Component knowledge

TCP connection


Before transmitting data, TCP needs to establish a logical connection between the sending end and the receiving end. It provides reliable and error-free data transmission between the two computers. In the TCP connection, the client and the server must be clarified. The client sends a connection request to the server, and each time such a request is proposed, a "three-times handshake" is required.

Three-times handshake: In the TCP protocol, during the preparation phase of sending data, the client and the server interact three times to ensure the reliability of the connection, which is called "three-times handshake". The first handshake, the client sends a connection request to the server and waits for the server to confirm. The second handshake, the server sends a response back to the client informing that it has received the connection request.

The third handshake, the client sends a confirmation message to the server again to confirm the connection.

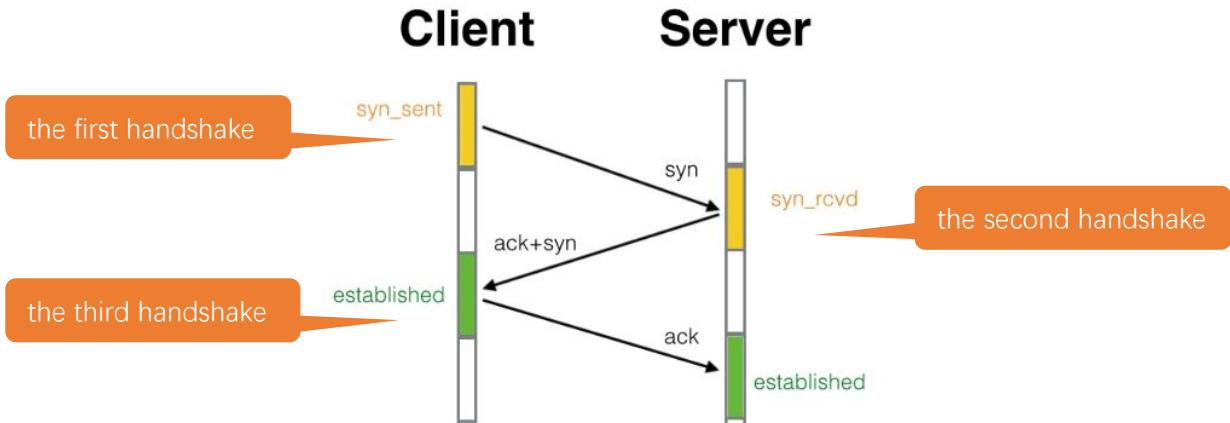

TCP is a connection-oriented, low-level transmission control protocol. After TCP establishes a connection, the client and server can send and receive messages to each other, and the connection will always exist as long as the client or server does not initiate disconnection. Each time one party sends a message, the other party will reply with an ack signal.

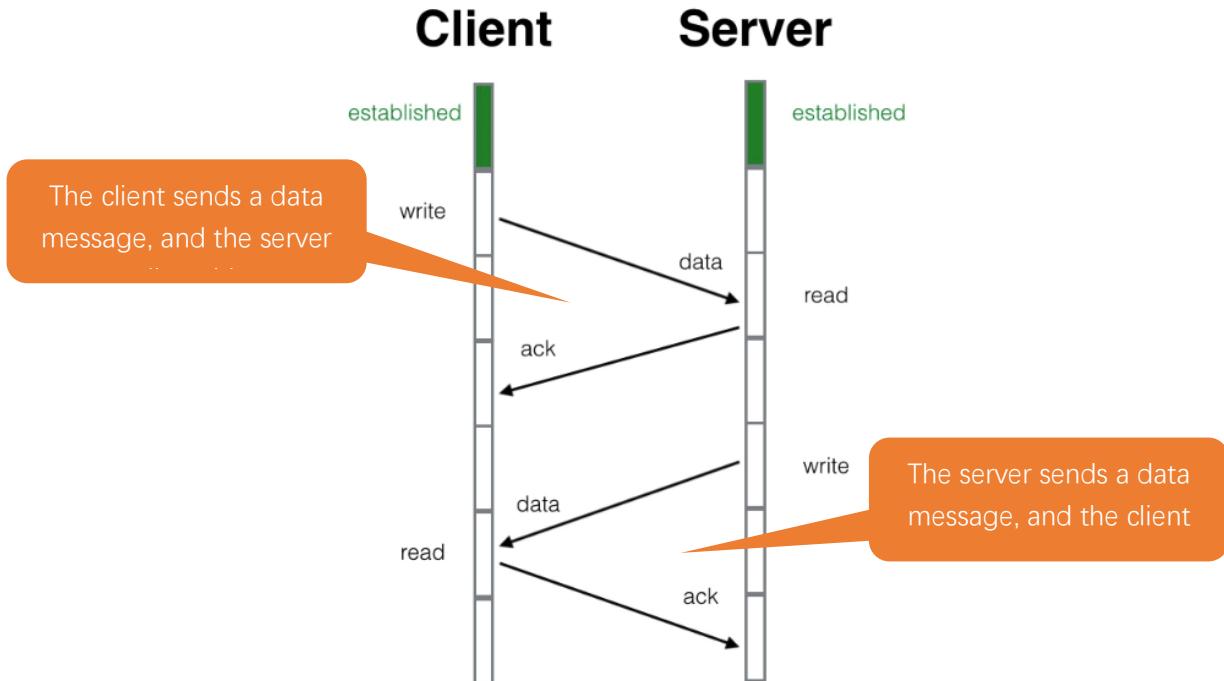

Install Processing

In this tutorial, we use Processing to build a simple TCP/IP communication platform.

If you've not installed Processing, you can download it by clicking <https://processing.org/download/>. You can choose an appropriate version to download according to your PC system.


The screenshot shows the official Processing website. At the top, there's a navigation bar with links for 'Processing', 'p5.js', 'Processing.py', 'Processing for Android', 'Processing for Pi', and 'Processing Foundation'. Below the navigation bar is a large banner with the word 'Processing' and a search bar. On the left side, there's a sidebar with links for 'Cover', 'Download', 'Donate', 'Exhibition', 'Reference', 'Libraries', 'Tools', 'Environment', 'Tutorials', 'Examples', 'Books', 'Overview', and 'People'. In the center, there's a large 'P' logo inside a circle. To the right of the logo, it says '3.5.4 (17 January 2020)' and provides download links for 'Windows 64-bit', 'Windows 32-bit', 'Linux 64-bit', and 'Mac OS X'. Below these links, there's a note about changes in 3.0 and a link to the 'list of revisions'.

Unzip the downloaded file to your computer. Click "processing.exe" as the figure below to run this software.


core	2020/1/17 12:16
java	2020/1/17 12:17
lib	2020/1/17 12:16
modes	2020/1/17 12:16
tools	2020/1/17 12:16
processing.exe	2020/1/17 12:16
processing-java.exe	2020/1/17 12:16
revisions.txt	2020/1/17 12:16

Use Server mode for communication

Open the “**Freenove_Super_Starter_Kit_for_Raspberry_Pi_Pico\Sketches\Sketch_22.1_WiFiClient\sketchWiFi\sketchWiFi.pde**”, and click “Run”.

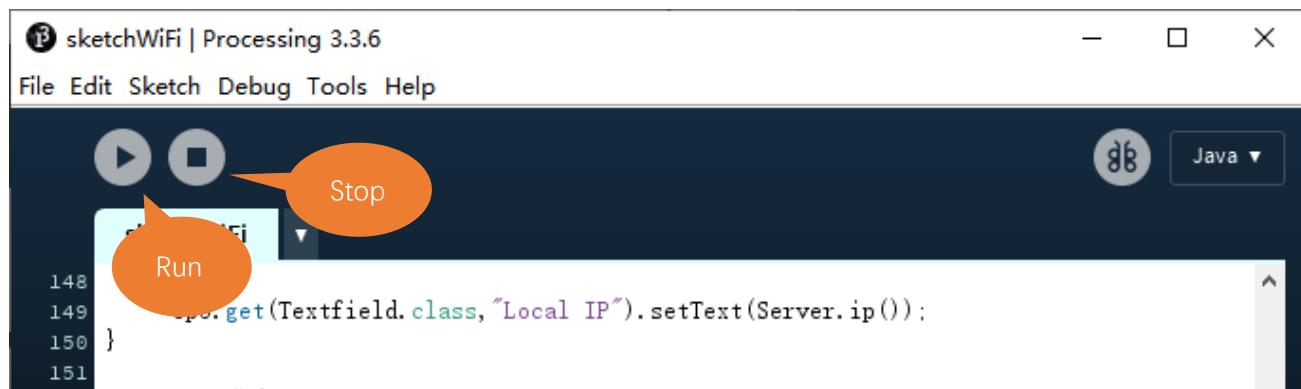


The new pop-up interface is as follows. If PICO W is used as client, select TCP SERVER mode for sketchWiFi.

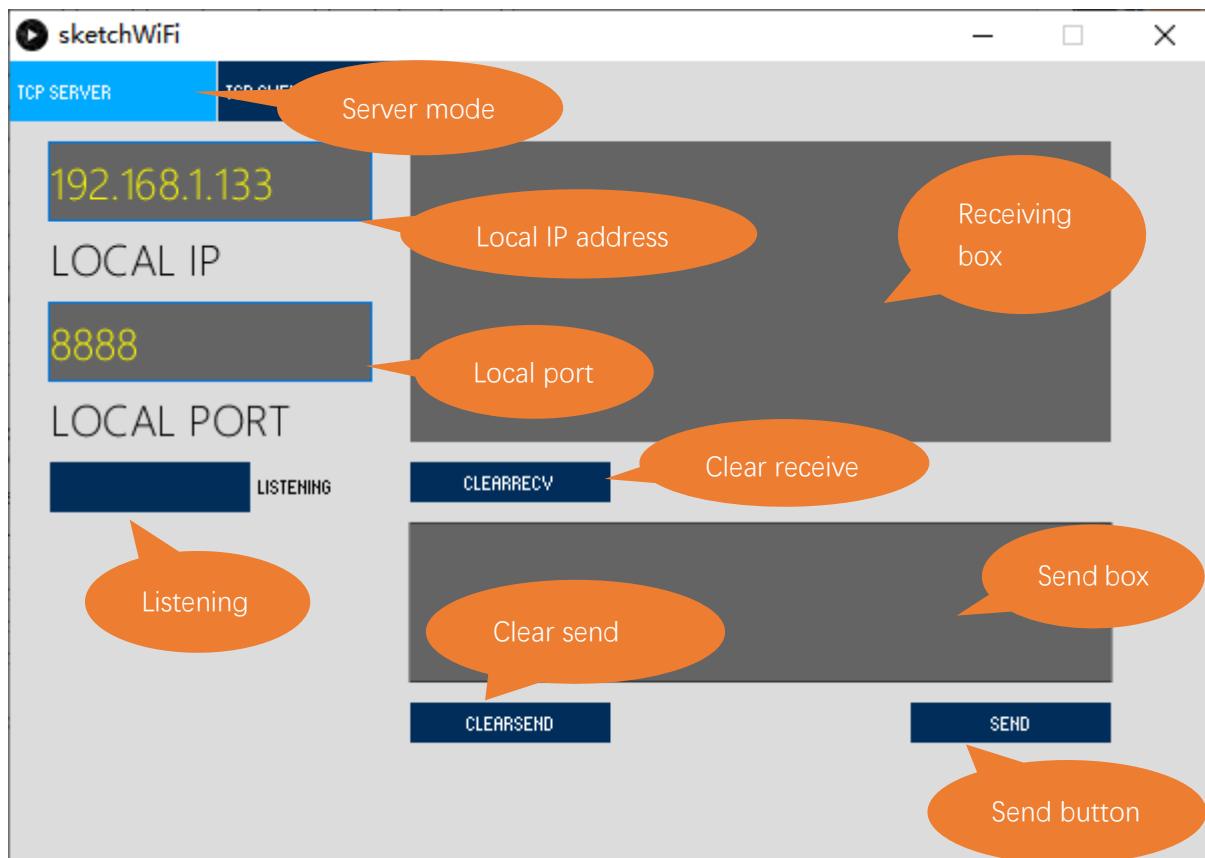

When sketchWiFi selects TCP SERVER mode, Pico W Sketch needs to be changed according to sketchWiFi's displaying of LOCAL IP or LOCAL PORT.

If PICO W serves as server, select TCP CLIENT mode for sketchWiFi.

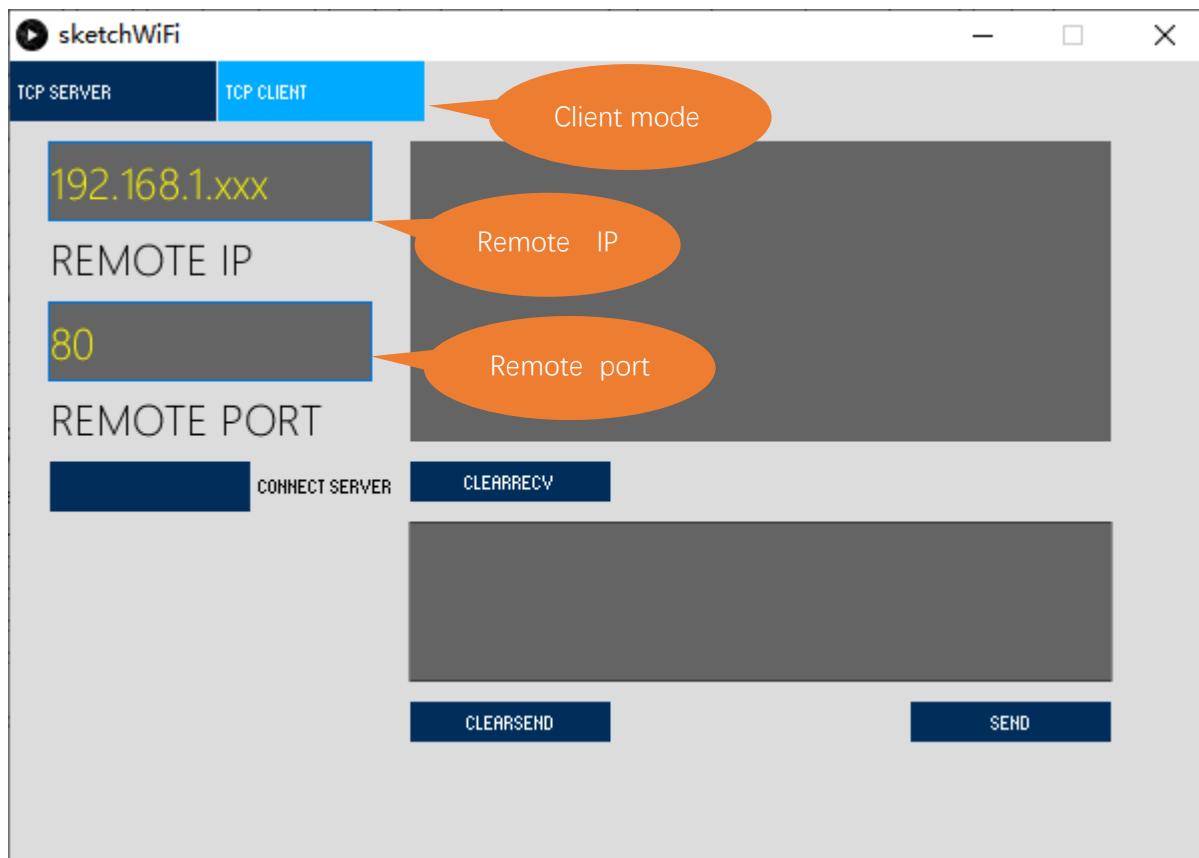

When sketchWiFi selects TCP CLIENT mode, the LOCAL IP and LOCAL PORT of sketchWiFi need to be changed according to the IP address and port number printed by the serial monitor.

Mode selection: select **Server mode/Client mode**.

IP address: In server mode, this option does not need to be filled in, and the computer will automatically obtain the IP address.

In client mode, fill in the remote IP address to be connected.

Port number: In server mode, fill in a port number for client devices to make an access connection.

In client mode, fill in port number given by the Server devices to make an access connection.

Start button: In server mode, push the button, then the computer will serve as server and open a port number for client to make access connection. During this period, the computer will keep monitoring.

In client mode, before pushing the button, please make sure the server is on, remote IP address and remote port number is correct; push the button, and the computer will make access connection to the remote port number of the remote IP as a client.

clear receive: clear out the content in the receiving text box


clear send: clear out the content in the sending text box

Sending button: push the sending button, the computer will send the content in the text box to others.



Circuit


Connect Pico W to the computer using the USB cable.

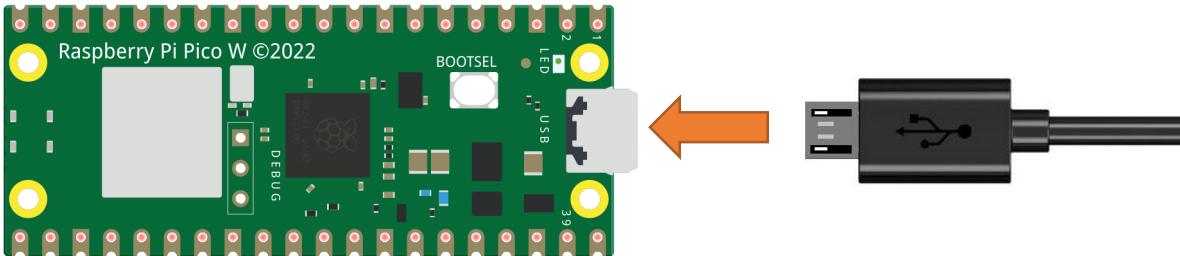


Sketch

If you have not installed “ControlP5”, please follow the following steps to continue the installation, if you have installed, please skip this section.


Open Processing.

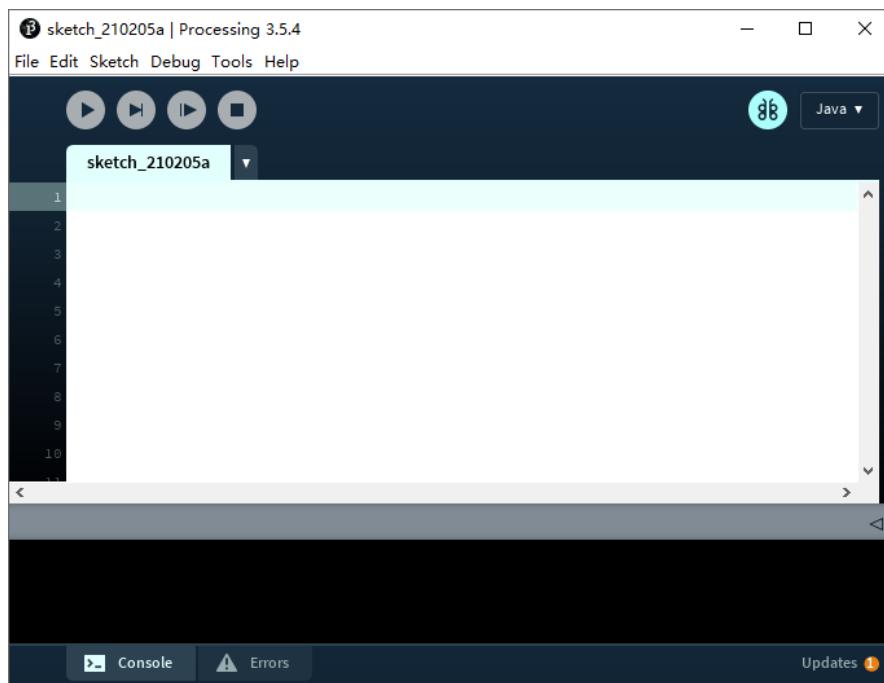


Click Add Tool under Tools.

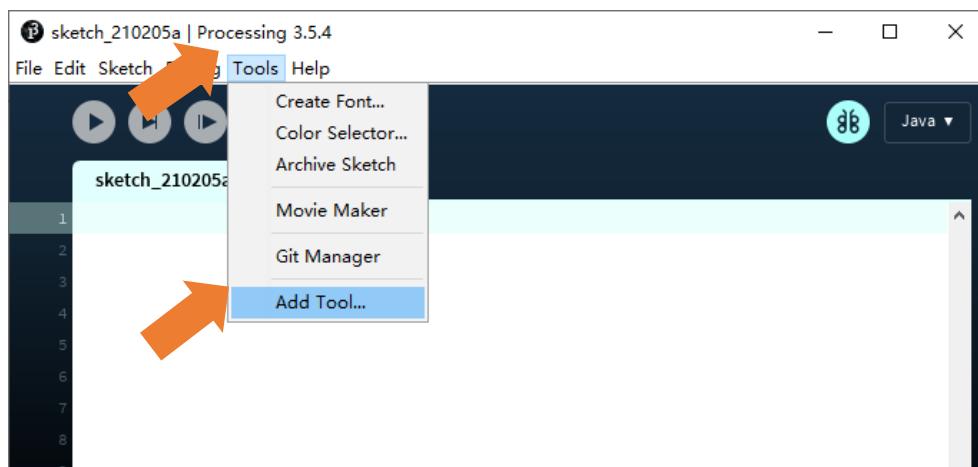


Select Libraries in the pop-up window.

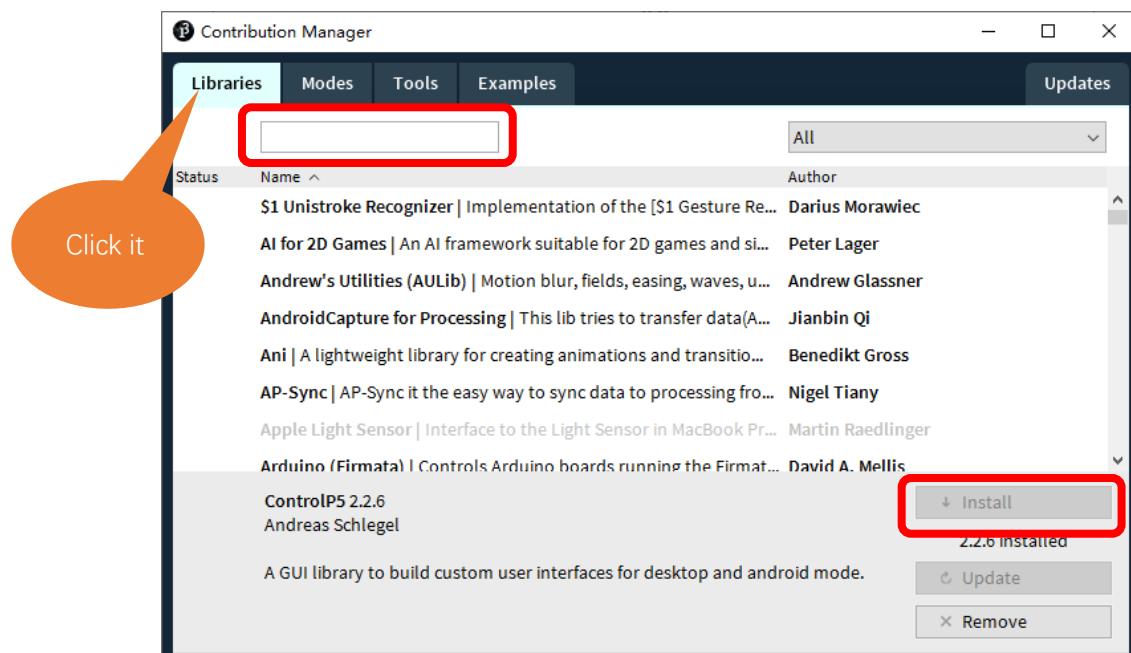

Input "ControlP5" in the searching box, and then select the option as below. Click "Install" and wait for the installation to finish.

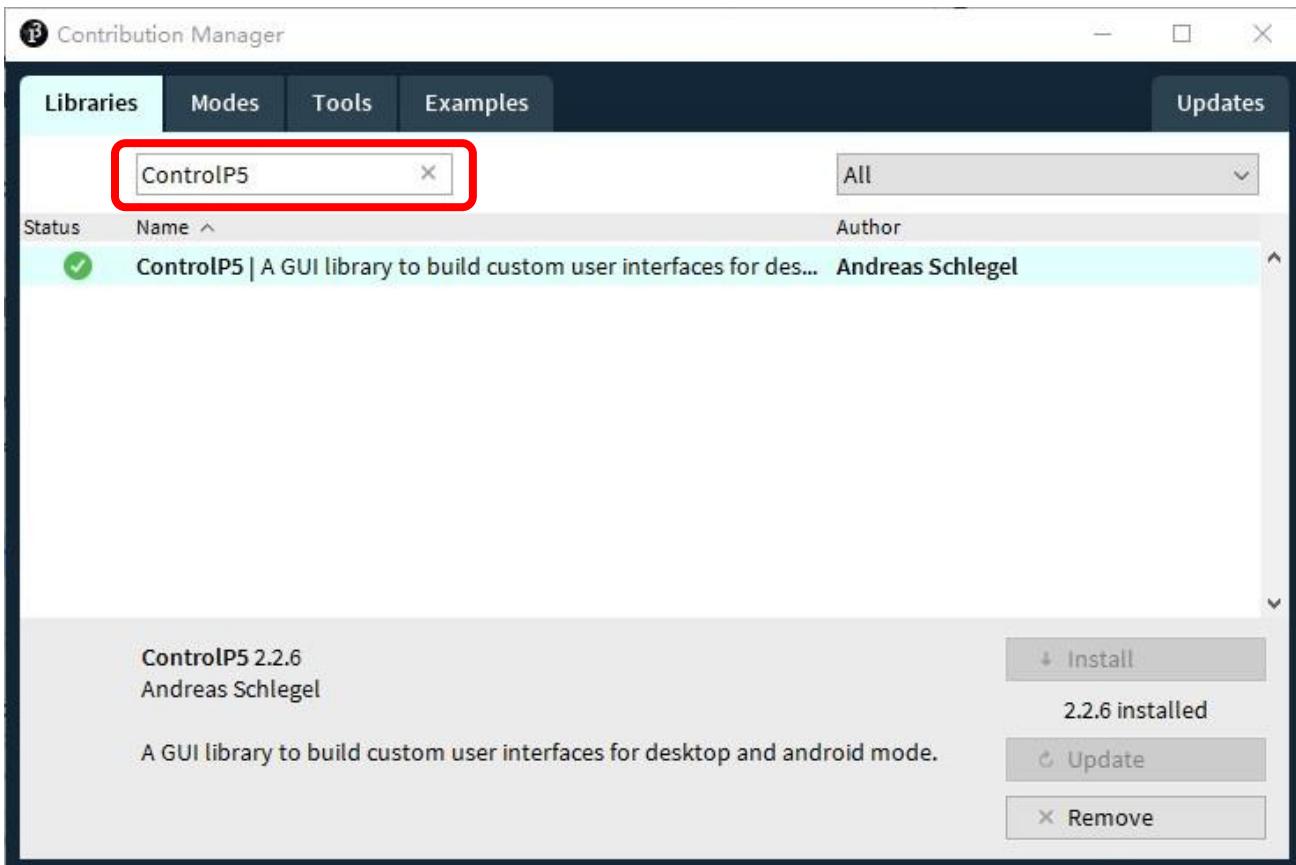


You can also click Add Library under 'Import Library' under 'Sketch'.

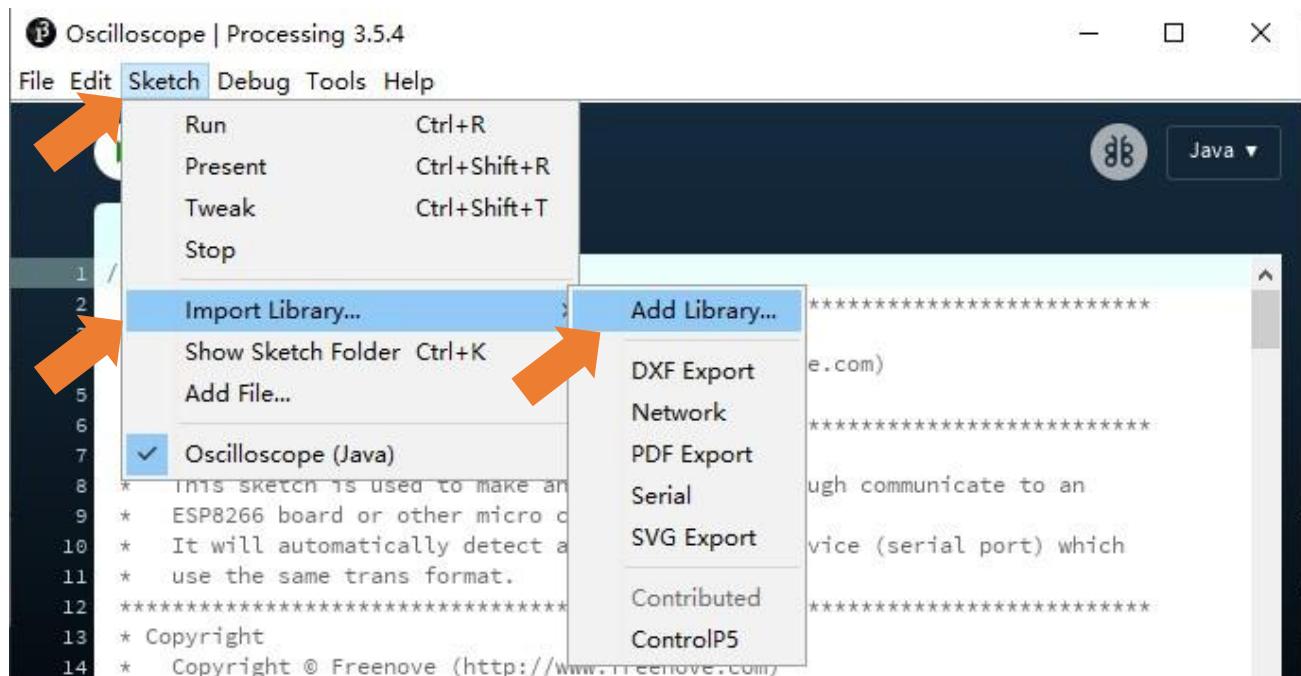


Sketch_22.1_As Client


Before running the Sketch, please open “sketchWiFi.pde.” first, and click “Run”.

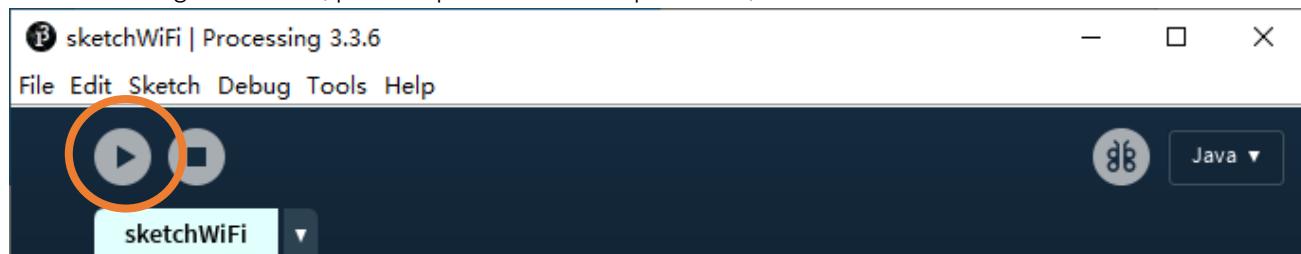


The newly pop up window will use the computer's IP address by default and open a data monitor port.

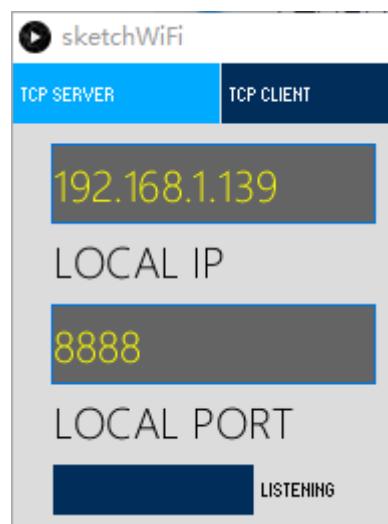

Click LISTENING, turn on TCP SERVER's data listening function and wait for PICO W to connect.

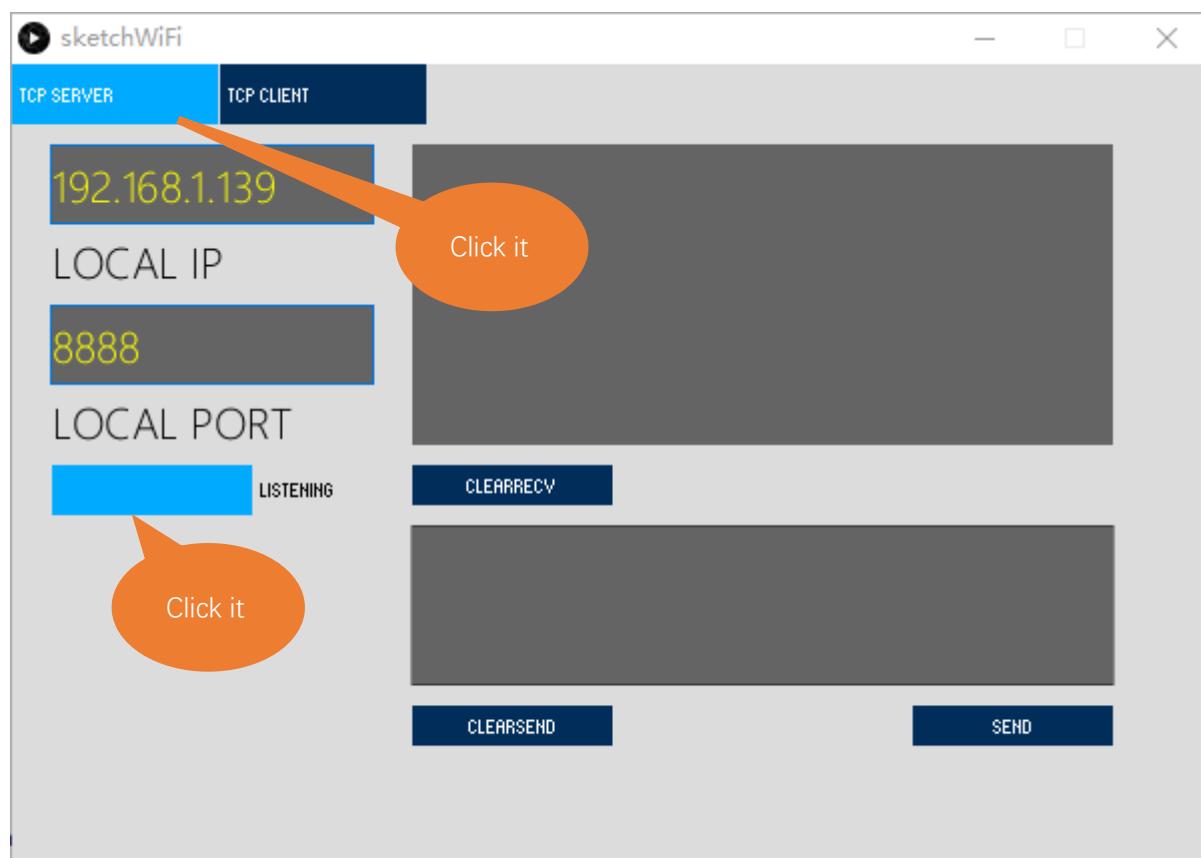

Next, open Sketch_22.1_WiFiClient.ino. Before running it, please change the following information based on "LOCAL IP" and "LOCAL PORT" in the figure above.

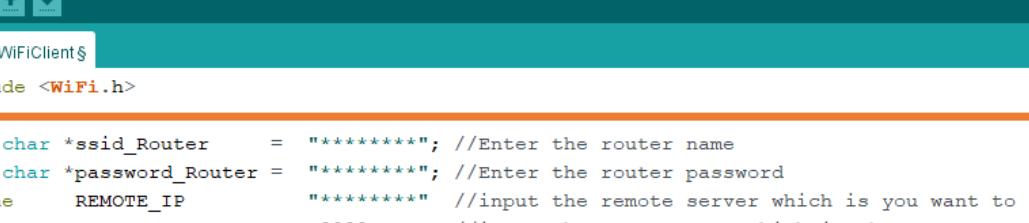

```
Sketch_31.1_WiFiClient | Arduino 1.8.18
File Edit Sketch Tools Help

Sketch_31.1_WiFiClient§


7 #include <WiFi.h>
8
9 const char *ssid_Router      = "*****"; //Enter the router name
10 const char *password_Router = "*****"; //Enter the router password
11 #define    REMOTE_IP          "*****"   //input the remote server which is you want to connect
12 #define    REMOTE_PORT        8888     //input the remote port which is the remote provide
13 WiFiClient client;
14

Flashing F: (RPI-RP2)
Wrote 690688 bytes to F:/NEW.UF2


11 Raspberry Pi Pico W, 2MB (no FS), 133 MHz, Small (-Os) (standard), Disabled, Disabled, Disabled, Disabled, None, Pico SDK, IPv4 Only on COMB
```

REMOTE_IP needs to be filled in according to the interface of sketchWiFi.pde. Taking this tutorial as an example, its REMOTE IP is "192.168.1.139". Generally, by default, the ports do not need to change its value.

Compile and upload code to PICO W, open the serial monitor and set the baud rate to 115200. PICO W connects router, obtains IP address and sends access request to server IP address on the same LAN till the connection is successful. When connect successfully, PICO W can send messages to server.

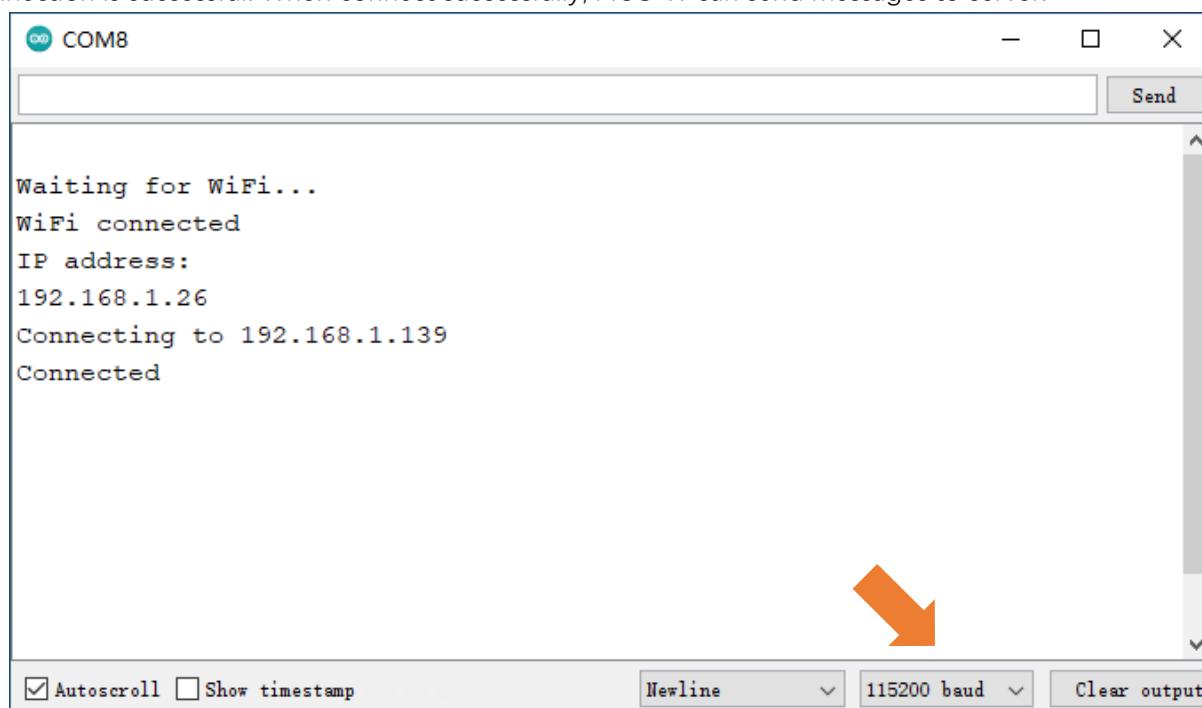

PICO W connects with TCP SERVER, and TCP SERVER receives messages from PICO W, as shown in the figure below.

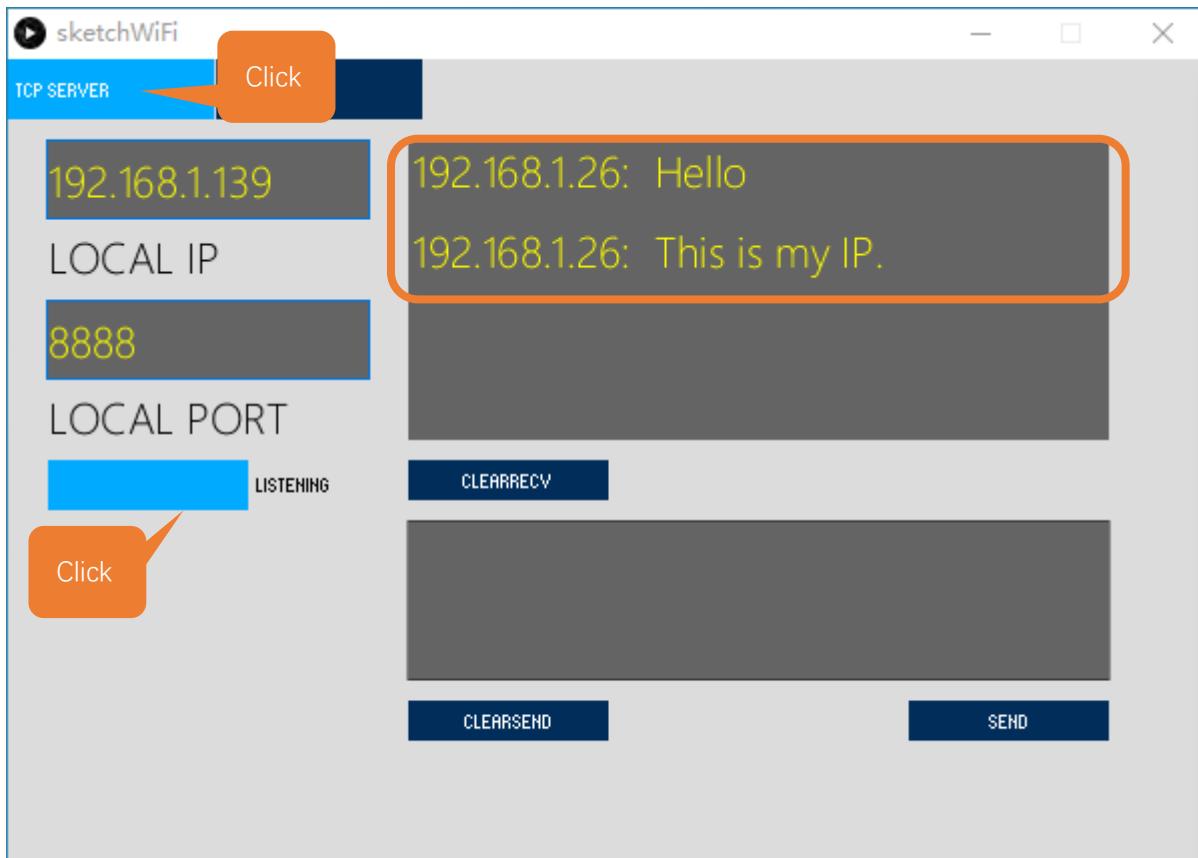

At this point, you can send data to Pico W through sketchWiFi. Pico W will send the received data back to sketchWiFi after receiving it.

The following is the program code:

```
1 #include <WiFi.h>
2
3 const char *ssid_Router      = "*****"; //Enter the router name
4 const char *password_Router = "*****"; //Enter the router password
5 #define    REMOTE_IP        "*****"   //input the remote server which is you want to connect
6 #define    REMOTE_PORT       8888      //input the remote port which is the remote provide
7 WiFiClient client;
8
9 void setup() {
10   Serial.begin(115200);
11   delay(10);
12
13   WiFi.begin(ssid_Router, password_Router);
14   Serial.print("\nWaiting for WiFi... ");
15   while (WiFi.status() != WL_CONNECTED) {
16     Serial.print(".");
17     delay(500);
18   }
19   Serial.println("");
20   Serial.println("WiFi connected");
21   Serial.println("IP address: ");
22   Serial.println(WiFi.localIP());
23   delay(500);
24
25   Serial.print("Connecting to ");
26   Serial.println(REMOTE_IP);
27
28   while (!client.connect(REMOTE_IP, REMOTE_PORT)) {
29     Serial.println("Connection failed.");
30     Serial.println("Waiting a moment before retrying... ");
31   }
32   Serial.println("Connected");
33   client.print("Hello\n");
34   client.print("This is my IP. \n");
35
36 void loop() {
37   if (client.available() > 0) {
38     delay(20);
39     //read back one line from the server
40     String line = client.readString();
41     Serial.println(REMOTE_IP + String(":") + line);
42   }
}
```

```

43   if (Serial.available() > 0) {
44     delay(20);
45     String line = Serial.readString();
46     client.print(line);
47   }
48   if (client.connected () == 0) {
49     client.stop();
50     WiFi.disconnect();
51   }
52 }
```

Add WiFi function header file.

```
1 #include <WiFi.h>
```

Enter the actual router name, password, remote server IP address, and port number.

```

3 const char *ssid_Router      = "*****"; //Enter the router name
4 const char *password_Router = "*****"; //Enter the router password
5 #define    REMOTE_IP        "*****"  //input the remote server which is you want to connect
6 #define    REMOTE_PORT       8888     //input the remote port which is the remote provide
```

Apply for the method class of WiFiClient.

```
7 WiFiClient client;
```

Connect specified WiFi until it is successful. If the name and password of WiFi are correct but it still fails to connect. Please disconnect the power supply and try again several times.

```

13 WiFi.begin(ssid_Router, password_Router);
14 Serial.print("\nWaiting for WiFi... ");
15 while (WiFi.status() != WL_CONNECTED) {
16   Serial.print(".");
17   delay(500);
18 }
```

Send connection request to remote server until connect successfully. When connect successfully, print out the connecting prompt on the serial monitor and send messages to remote server.

```

28 while (!client.connect(REMOTE_IP, REMOTE_PORT)) {//Connect to Server
29   Serial.println("Connection failed.");
30   Serial.println("Waiting a moment before retrying... ");
31 }
32 Serial.println("Connected");
33 client.print("Hello\n");
```

When PICO W receive messages from servers, it will print them out via serial port; Users can also send messages to servers from serial port.

```

37 if (client.available() > 0) {
38   delay(20);
39   //read back one line from the server
40   String line = client.readString();
41   Serial.println(REMOTE_IP + String(":") + line);
42 }
43 if (Serial.available() > 0) {
```

```
44     delay(20);  
45     String line = Serial.readString();  
46     client.print(line);  
47 }
```

If the server is disconnected, turn off WiFi of PICO W.

```
48 if (client.connected () == false) {  
49     client.stop();  
50     WiFi.disconnect();  
51 }
```

Reference

Class Client

Every time when using Client, you need to include header file "WiFi.h"

connect(ip, port, timeout)/connect(*host, port, timeout): establish a TCP connection.

ip, *host: ip address of target server

port: port number of target server

timeout: connection timeout

connected(): judge whether client is connecting. If return value is 1, then connect successfully; If return value is 0, then fail to connect.

stop(): stop tcp connection

print(): send data to server connecting to client

available(): return to the number of bytes readable in receive buffer, if no, return to 0 or -1.


read(): read one byte of data in receive buffer

readString(): read string in receive buffer

Project 22.2 As Server


In this section, PICO W is used as a server to wait for the connection and communication of client on the same LAN.

Component List

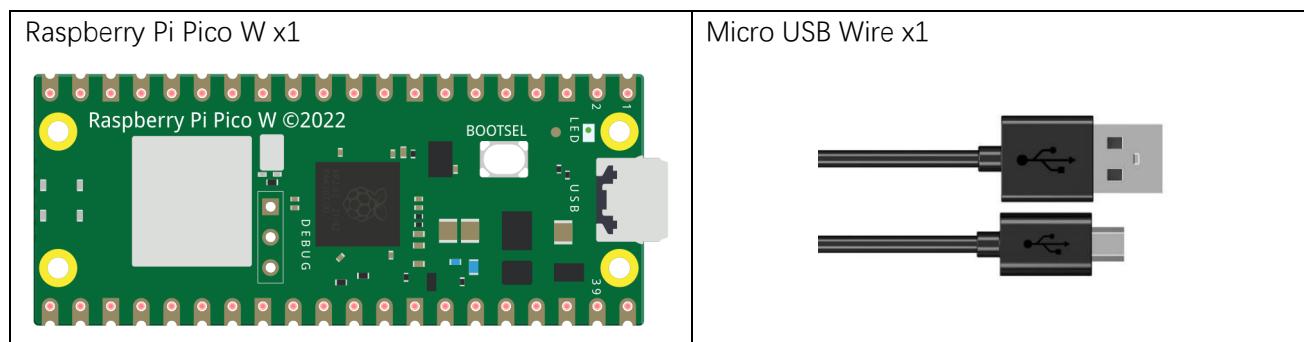

Circuit


Connect Pico W to the computer using the USB cable.

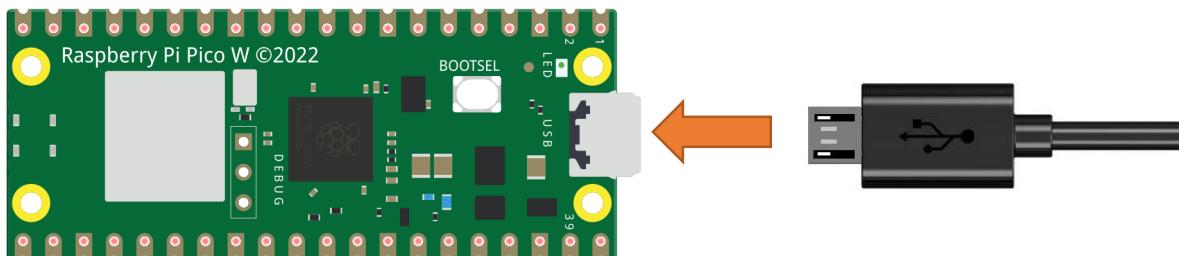

Sketch

Before running Sketch, please modify the contents of the box below first.

[Sketch_22.2_As_Server](#)

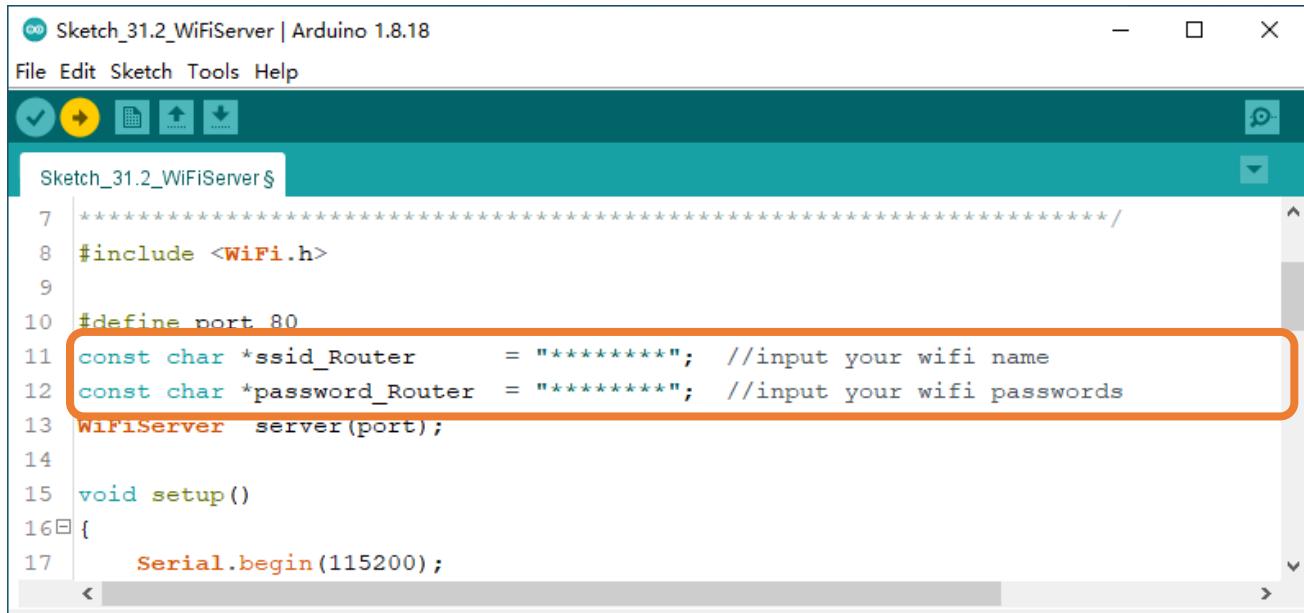


```

Sketch_31.2_WiFiServer | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_31.2_WiFiServer $ 7 ****
8 #include <WiFi.h>
9
10 #define port 80
11 const char *ssid_Router      = "*****"; //input your wifi name
12 const char *password_Router = "*****"; //input your wifi passwords
13 WiFiServer server(port);
14
15 void setup()
16 {
17     Serial.begin(115200);

```

Compile and upload code to PICO W board, open the serial monitor and set the baud rate to 115200. Turn on server mode for PICO W, waiting for the connection of other devices on the same LAN. Once a device connects to server successfully, they can send messages to each other.

If the Pico W fails to connect to router, please disconnect the power supply and try again several times.

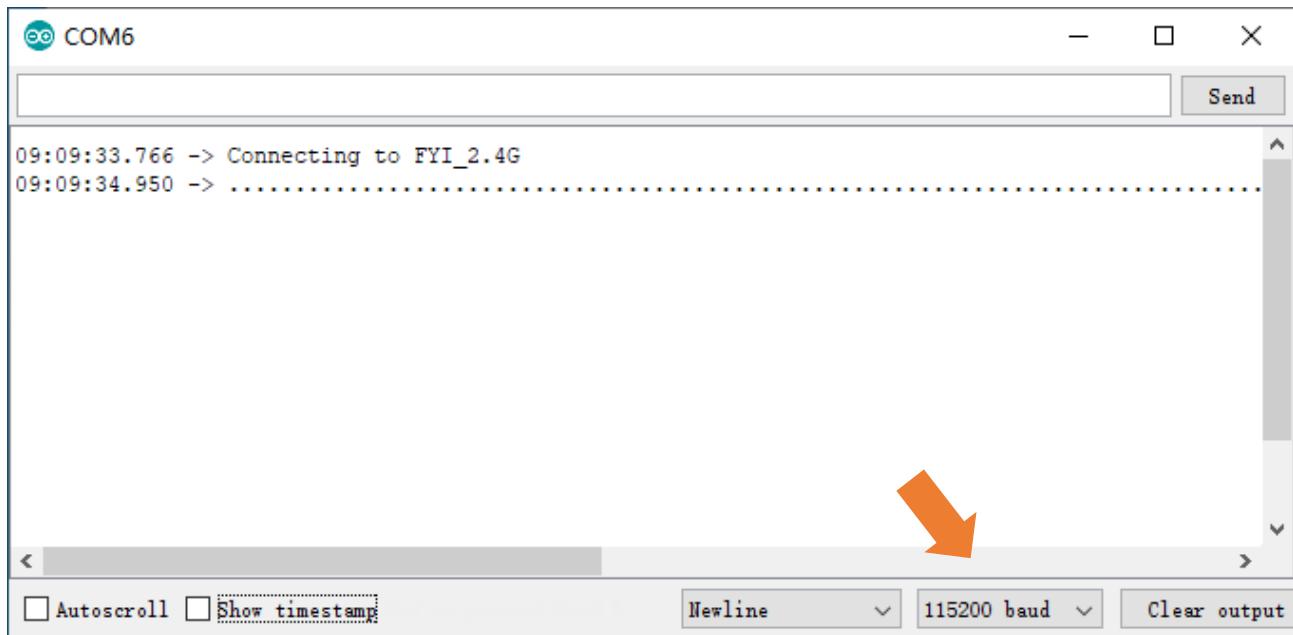


```

COM6
09:09:33.766 -> Connecting to FYI_2.4G
09:09:34.950 -> .....

```

Autoscroll Show timestamp Newline 115200 baud Clear output


Serial Monitor

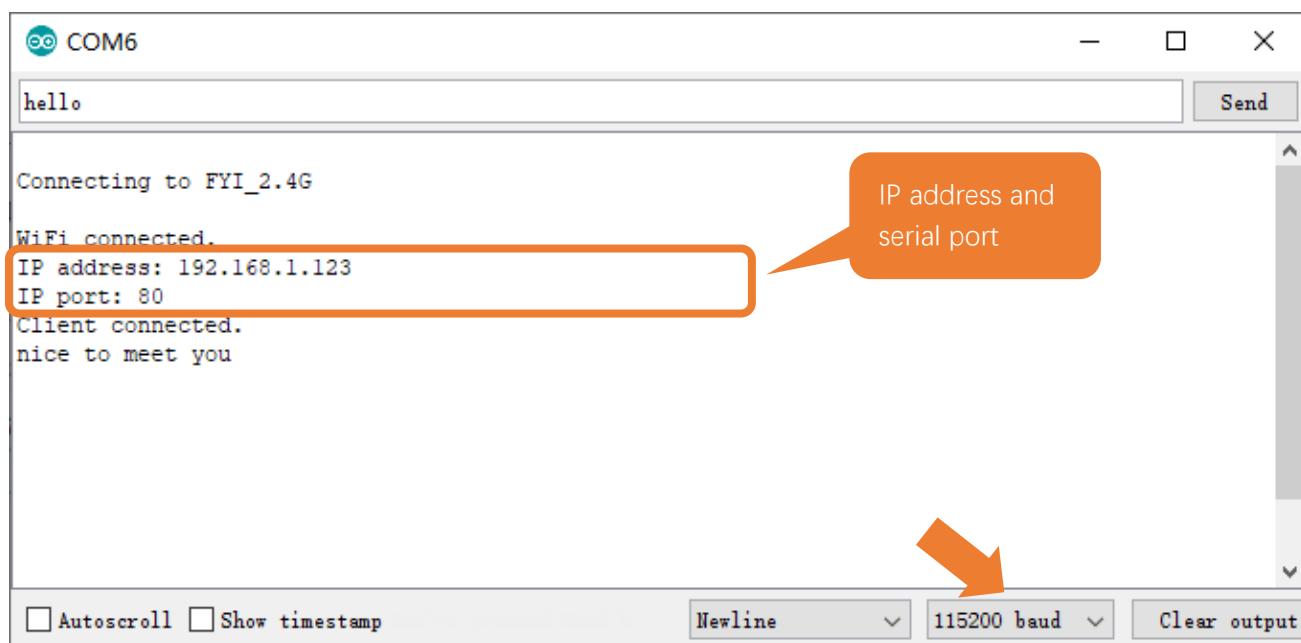

Processing:

Open the "Freenove_Super_Starter_Kit_for_Raspberry_Pi_Pico\C\Sketches\Sketch_22.2_WiFiServer\sketchWiFi\sketchWiFi.pde".

Based on the messages printed by the serial monitor, enter correct IP address and serial port in Processing to establish connection and make communication.

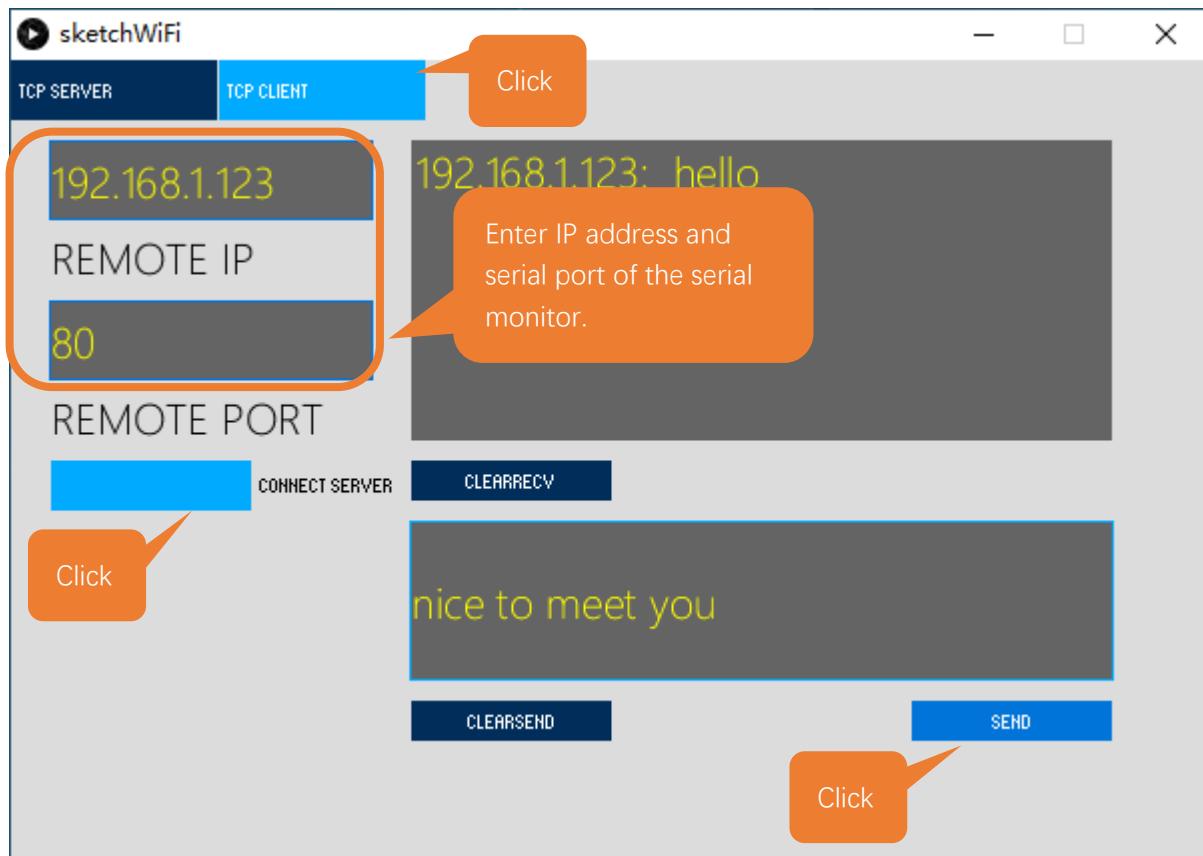

The following is the program code:

```

1 #include <WiFi.h>
2
3 #define port 80
4 const char *ssid_Router      = "*****"; //input your wifi name
5 const char *password_Router = "*****"; //input your wifi passwords
6 WiFiServer server(port);
7
8 void setup()
9 {
10    Serial.begin(115200);
11    Serial.printf("\nConnecting to ");
12    Serial.println(ssid_Router);
13    WiFi.disconnect();
14    WiFi.begin(ssid_Router, password_Router);
15    delay(1000);
16    while (WiFi.status() != WL_CONNECTED) {
17        delay(500);
18        Serial.print(".");
19    }
20    Serial.println("");
21    Serial.println("WiFi connected.");
22    Serial.print("IP address: ");
23    Serial.println(WiFi.localIP());
24    Serial.printf("IP port: %d\n", port);
25    server.begin(port);
26 }
27
28 void loop() {
29    WiFiClient client = server.available();           // listen for incoming clients
30    if (client) {                                     // if you get a client
31        Serial.println("Client connected.");
32        while (client.connected()) {                  // loop while the client's connected
33            if (client.available()) {                 // if there's bytes to read from the
34                Serial.println(client.readStringUntil('\n'));// print it out the serial monitor
35                while (client.read() > 0);             // clear the wifi receive area cache
36            }
37            if (Serial.available()) {                  // if there's bytes to read from the
38                client.print(Serial.readStringUntil('\n'));// print it out the client.
39                while (Serial.read() > 0);             // clear the wifi receive area cache
40            }
41        }
42    }
43 }
```

```

42     client.stop();                                // stop the client connecting.
43     Serial.println("Client Disconnected.");
44 }
45 }
```

Apply for method class of WiFiServer.

```

6 WiFiServer server(port);           //Apply for a Server object whose port number is 80
```

Connect specified WiFi until it is successful. If the name and password of WiFi are correct but it still fails to connect, please disconnect the power supply and try again several times.

```

13 WiFi.disconnect();
14 WiFi.begin(ssid_Router, password_Router);
15 delay(1000);
16 while (WiFi.status() != WL_CONNECTED) {
17     delay(500);
18     Serial.print(".");
19 }
20 Serial.println("");
21 Serial.println("WiFi connected.");
```

Print out the IP address and port number of PICO W.

```

22 Serial.print("IP address: ");
23 Serial.println(WiFi.localIP());          //print out IP address of PICO W
24 Serial.printf("IP port: %d\n", port);    //Print out PICO W's port number
```

Turn on server mode of PICO W.

```

25 server.begin();                         //Turn ON PICO W as Server mode
```

When PICO W receive messages from servers, it will print them out via serial port; Users can also send messages to servers from serial port.

```

33     if (client.available()) {                // if there's bytes to read from the
client
34         Serial.println(client.readStringUntil('\n')); // print it out the serial monitor
35         while(client.read()>0);                  // clear the wifi receive area cache
36     }
37     if(Serial.available()){                  // if there's bytes to read from the
serial monitor
38         client.print(Serial.readStringUntil('\n'));// print it out the client.
39         while(Serial.read()>0);                  // clear the wifi receive area cache
40     }
```



Reference

Class Server

Every time use Server functionality, we need to include header file "WiFi.h".

WiFiServer(uint16_t port=80, uint8_t max_clients=4): create a TCP Server.

port: ports of Server; range from 0 to 65535 with the default number as 80.

max_clients: maximum number of clients with default number as 4.

begin(port): start the TCP Server.

port: ports of Server; range from 0 to 65535 with the default number as 0.

setNoDelay(bool nodelay): whether to turn off the delay sending functionality.

nodelay: true stands for forbidden Nagle algorithm.

close(): close tcp connection.

stop(): stop tcp connection.


Chapter 23 Control LED with Web (Only for Pico W)

In this chapter, we will use PICO W to make a simple smart home. We will learn how to control LED lights through web pages.

Project 23.1 Control the LED with Web

In this project, we need to build a Web Service and then use PICO W to control the LED through the Web browser of the phone or PC. Through this example, you can remotely control the appliances in your home to achieve smart home.

Component List

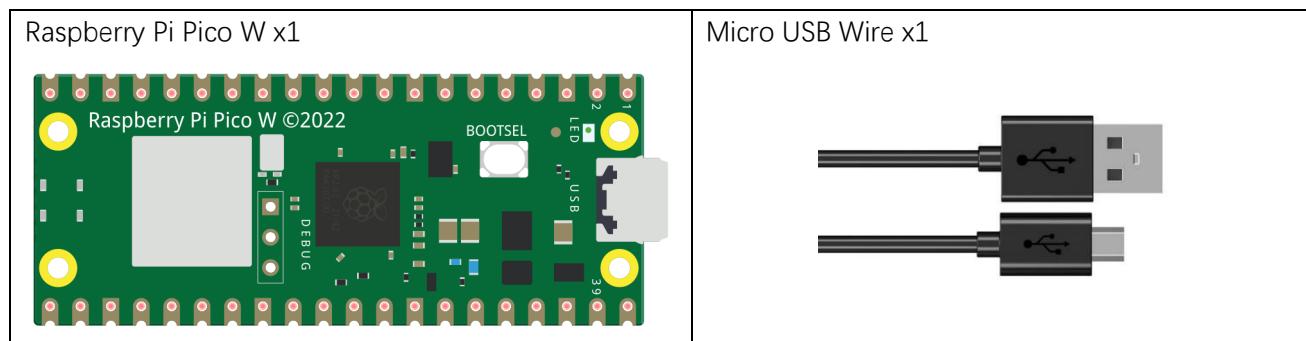

Component knowledge


HTML

HyperText Markup Language (HTML) is a standard Markup Language for creating web pages. It includes a set of tags that unify documents on the network and connect disparate Internet resources into a logical whole. HTML text is descriptive text composed of HTML commands that describe text, graphics, animations, sounds, tables, links, etc. The extension of the HTML file is HTM or HTML. Hyper Text is a way to organize information. It uses hyperlinks to associate words and charts in Text with other information media. These related information media may be in the same Text, other files, or files located on a remote computer. This way of organizing information connects the information resources distributed in different places, which is convenient for people to search and retrieve information.

The nature of the Web is hypertext Markup Language (HTML), which can be combined with other Web technologies (e.g., scripting languages, common gateway interfaces, components, etc.) to create powerful Web pages. Thus, HYPERtext Markup Language (HTML) is the foundation of World Wide Web (Web) programming, that is, the World Wide Web is based on hypertext. Hypertext Markup Language is called hypertext Markup language because the text contains so-called "hyperlink" points.

You can build your own WEB site using HTML, which runs on the browser and is parsed by the browser.

Example analysis is shown in the figure below:

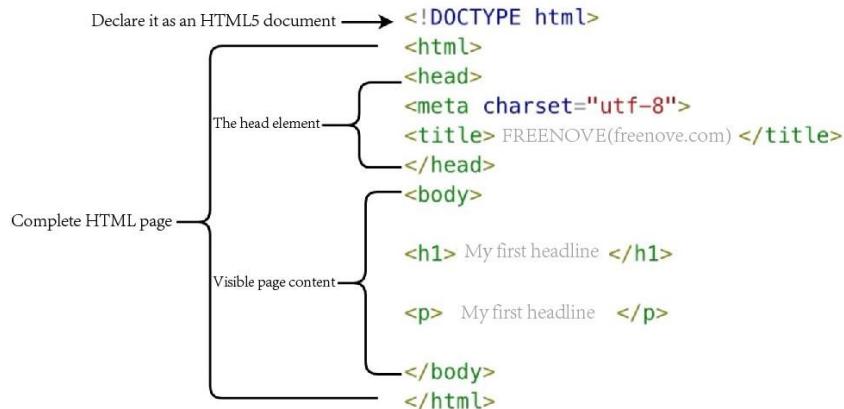

<!DOCTYPE html>: Declare it as an HTML5 document

<html>: Is the root element of an HTML page

<head>: Contains meta data for the document, such as < meta charset="utf-8">. Define the web page encoding format to UTF-8.

<title>: Notes the title of the document

<body>: Contains visible page content


<h1>: Define a big heading

<p>: Define a paragraph

For more information, please visit: <https://developer.mozilla.org/en-US/docs/Web/HTML>

Circuit

Connect Pico W to the computer using the USB cable.

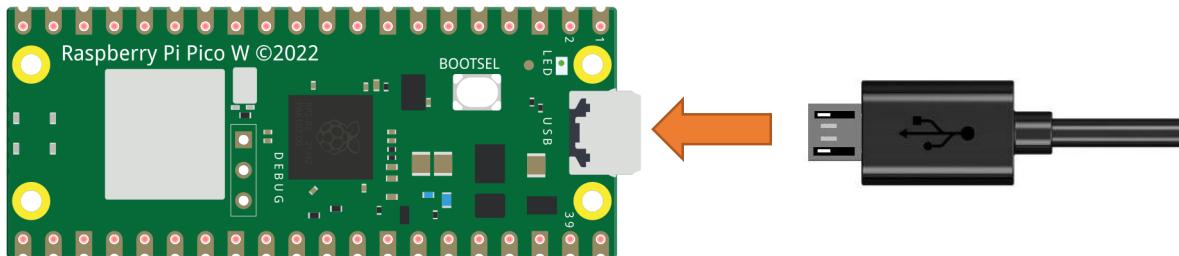

Sketch

Sketch_23.1_Control_the_LED_with_Web

The screenshot shows the Arduino IDE interface with the sketch named "Sketch_23.1_Control_the_LED_with_Web". The code is written in C++ and includes comments for network setup and web server configuration. A callout bubble highlights the network credentials section (lines 13-15), which is annotated with the text "Enter the correct Router name and password."

```


Sketch_23.1_Control_the_LED_with_Web | Arduino 1.8.18
File Edit Sketch Tools Help
Sketch_23.1_Control_the_LED_with_Web
10 // *****
11 #include <WiFi.h>
12
13 // Replace with your network credentials
14 const char* ssid      = "*****";
15 const char* password = "*****";
16
17 // Set web server port number to 80
18 WiFiServer server(80);
19 // Variable to store the HTTP request
20 String header;
21 // Auxiliar variables to store the current output state
22 String PIN_LEDState = "OFF";
23
24 // Current time
25 unsigned long currentTime = millis();
26 // Previous time
27 unsigned long previousTime = 0;
28 // Define timeout time in milliseconds (example: 2000ms = 2s)
29 const long timeoutTime = 2000;
30
31 void setup() {
32   Serial.begin(115200);
33   // Initialize the output variables as outputs
34   pinMode(LED_BUILTIN, OUTPUT);
35   digitalWrite(LED_BUILTIN, LOW);
36
37   // Connect to Wi-Fi network with SSID and password
38   Serial.print("Connecting to ");
39
40   WiFi.begin(ssid, password);
41
42   // Wait for connection
43   while (WiFi.status() != WL_CONNECTED) {
44     delay(1000);
45     Serial.print(".");
46   }
47
48   Serial.println("Connected to WiFi!");
49
50   // Start the web server
51   server.begin();
52
53   // Turn on the LED
54   digitalWrite(LED_BUILTIN, HIGH);
55
56   // Print a message to the serial monitor
57   Serial.println("LED turned ON");
58
59   // Set the LED state to OFF
60   PIN_LEDState = "OFF";
61
62   // Print the current LED state
63   Serial.println("Current LED State: " + PIN_LEDState);
64
65   // Set the LED state to ON
66   PIN_LEDState = "ON";
67
68   // Print the current LED state
69   Serial.println("Current LED State: " + PIN_LEDState);
70
71   // Turn off the LED
72   digitalWrite(LED_BUILTIN, LOW);
73
74   // Print a message to the serial monitor
75   Serial.println("LED turned OFF");
76
77   // Set the LED state to OFF
78   PIN_LEDState = "OFF";
79
80   // Print the current LED state
81   Serial.println("Current LED State: " + PIN_LEDState);
82
83   // Turn on the LED
84   digitalWrite(LED_BUILTIN, HIGH);
85
86   // Print a message to the serial monitor
87   Serial.println("LED turned ON");
88
89   // Set the LED state to ON
90   PIN_LEDState = "ON";
91
92   // Print the current LED state
93   Serial.println("Current LED State: " + PIN_LEDState);
94
95   // Turn off the LED
96   digitalWrite(LED_BUILTIN, LOW);
97
98   // Print a message to the serial monitor
99   Serial.println("LED turned OFF");
100
101   // Set the LED state to OFF
102   PIN_LEDState = "OFF";
103
104   // Print the current LED state
105   Serial.println("Current LED State: " + PIN_LEDState);
106
107   // Turn on the LED
108   digitalWrite(LED_BUILTIN, HIGH);
109
110   // Print a message to the serial monitor
111   Serial.println("LED turned ON");
112
113   // Set the LED state to ON
114   PIN_LEDState = "ON";
115
116   // Print the current LED state
117   Serial.println("Current LED State: " + PIN_LEDState);
118
119   // Turn off the LED
120   digitalWrite(LED_BUILTIN, LOW);
121
122   // Print a message to the serial monitor
123   Serial.println("LED turned OFF");
124
125   // Set the LED state to OFF
126   PIN_LEDState = "OFF";
127
128   // Print the current LED state
129   Serial.println("Current LED State: " + PIN_LEDState);
130
131   // Turn on the LED
132   digitalWrite(LED_BUILTIN, HIGH);
133
134   // Print a message to the serial monitor
135   Serial.println("LED turned ON");
136
137   // Set the LED state to ON
138   PIN_LEDState = "ON";
139
140   // Print the current LED state
141   Serial.println("Current LED State: " + PIN_LEDState);
142
143   // Turn off the LED
144   digitalWrite(LED_BUILTIN, LOW);
145
146   // Print a message to the serial monitor
147   Serial.println("LED turned OFF");
148
149   // Set the LED state to OFF
150   PIN_LEDState = "OFF";
151
152   // Print the current LED state
153   Serial.println("Current LED State: " + PIN_LEDState);
154
155   // Turn on the LED
156   digitalWrite(LED_BUILTIN, HIGH);
157
158   // Print a message to the serial monitor
159   Serial.println("LED turned ON");
160
161   // Set the LED state to ON
162   PIN_LEDState = "ON";
163
164   // Print the current LED state
165   Serial.println("Current LED State: " + PIN_LEDState);
166
167   // Turn off the LED
168   digitalWrite(LED_BUILTIN, LOW);
169
170   // Print a message to the serial monitor
171   Serial.println("LED turned OFF");
172
173   // Set the LED state to OFF
174   PIN_LEDState = "OFF";
175
176   // Print the current LED state
177   Serial.println("Current LED State: " + PIN_LEDState);
178
179   // Turn on the LED
180   digitalWrite(LED_BUILTIN, HIGH);
181
182   // Print a message to the serial monitor
183   Serial.println("LED turned ON");
184
185   // Set the LED state to ON
186   PIN_LEDState = "ON";
187
188   // Print the current LED state
189   Serial.println("Current LED State: " + PIN_LEDState);
190
191   // Turn off the LED
192   digitalWrite(LED_BUILTIN, LOW);
193
194   // Print a message to the serial monitor
195   Serial.println("LED turned OFF");
196
197   // Set the LED state to OFF
198   PIN_LEDState = "OFF";
199
200   // Print the current LED state
201   Serial.println("Current LED State: " + PIN_LEDState);
202
203   // Turn on the LED
204   digitalWrite(LED_BUILTIN, HIGH);
205
206   // Print a message to the serial monitor
207   Serial.println("LED turned ON");
208
209   // Set the LED state to ON
210   PIN_LEDState = "ON";
211
212   // Print the current LED state
213   Serial.println("Current LED State: " + PIN_LEDState);
214
215   // Turn off the LED
216   digitalWrite(LED_BUILTIN, LOW);
217
218   // Print a message to the serial monitor
219   Serial.println("LED turned OFF");
220
221   // Set the LED state to OFF
222   PIN_LEDState = "OFF";
223
224   // Print the current LED state
225   Serial.println("Current LED State: " + PIN_LEDState);
226
227   // Turn on the LED
228   digitalWrite(LED_BUILTIN, HIGH);
229
230   // Print a message to the serial monitor
231   Serial.println("LED turned ON");
232
233   // Set the LED state to ON
234   PIN_LEDState = "ON";
235
236   // Print the current LED state
237   Serial.println("Current LED State: " + PIN_LEDState);
238
239   // Turn off the LED
240   digitalWrite(LED_BUILTIN, LOW);
241
242   // Print a message to the serial monitor
243   Serial.println("LED turned OFF");
244
245   // Set the LED state to OFF
246   PIN_LEDState = "OFF";
247
248   // Print the current LED state
249   Serial.println("Current LED State: " + PIN_LEDState);
250
251   // Turn on the LED
252   digitalWrite(LED_BUILTIN, HIGH);
253
254   // Print a message to the serial monitor
255   Serial.println("LED turned ON");
256
257   // Set the LED state to ON
258   PIN_LEDState = "ON";
259
260   // Print the current LED state
261   Serial.println("Current LED State: " + PIN_LEDState);
262
263   // Turn off the LED
264   digitalWrite(LED_BUILTIN, LOW);
265
266   // Print a message to the serial monitor
267   Serial.println("LED turned OFF");
268
269   // Set the LED state to OFF
270   PIN_LEDState = "OFF";
271
272   // Print the current LED state
273   Serial.println("Current LED State: " + PIN_LEDState);
274
275   // Turn on the LED
276   digitalWrite(LED_BUILTIN, HIGH);
277
278   // Print a message to the serial monitor
279   Serial.println("LED turned ON");
280
281   // Set the LED state to ON
282   PIN_LEDState = "ON";
283
284   // Print the current LED state
285   Serial.println("Current LED State: " + PIN_LEDState);
286
287   // Turn off the LED
288   digitalWrite(LED_BUILTIN, LOW);
289
290   // Print a message to the serial monitor
291   Serial.println("LED turned OFF");
292
293   // Set the LED state to OFF
294   PIN_LEDState = "OFF";
295
296   // Print the current LED state
297   Serial.println("Current LED State: " + PIN_LEDState);
298
299   // Turn on the LED
300   digitalWrite(LED_BUILTIN, HIGH);
301
302   // Print a message to the serial monitor
303   Serial.println("LED turned ON");
304
305   // Set the LED state to ON
306   PIN_LEDState = "ON";
307
308   // Print the current LED state
309   Serial.println("Current LED State: " + PIN_LEDState);
310
311   // Turn off the LED
312   digitalWrite(LED_BUILTIN, LOW);
313
314   // Print a message to the serial monitor
315   Serial.println("LED turned OFF");
316
317   // Set the LED state to OFF
318   PIN_LEDState = "OFF";
319
320   // Print the current LED state
321   Serial.println("Current LED State: " + PIN_LEDState);
322
323   // Turn on the LED
324   digitalWrite(LED_BUILTIN, HIGH);
325
326   // Print a message to the serial monitor
327   Serial.println("LED turned ON");
328
329   // Set the LED state to ON
330   PIN_LEDState = "ON";
331
332   // Print the current LED state
333   Serial.println("Current LED State: " + PIN_LEDState);
334
335   // Turn off the LED
336   digitalWrite(LED_BUILTIN, LOW);
337
338   // Print a message to the serial monitor
339   Serial.println("LED turned OFF");
340
341   // Set the LED state to OFF
342   PIN_LEDState = "OFF";
343
344   // Print the current LED state
345   Serial.println("Current LED State: " + PIN_LEDState);
346
347   // Turn on the LED
348   digitalWrite(LED_BUILTIN, HIGH);
349
350   // Print a message to the serial monitor
351   Serial.println("LED turned ON");
352
353   // Set the LED state to ON
354   PIN_LEDState = "ON";
355
356   // Print the current LED state
357   Serial.println("Current LED State: " + PIN_LEDState);
358
359   // Turn off the LED
360   digitalWrite(LED_BUILTIN, LOW);
361
362   // Print a message to the serial monitor
363   Serial.println("LED turned OFF");
364
365   // Set the LED state to OFF
366   PIN_LEDState = "OFF";
367
368   // Print the current LED state
369   Serial.println("Current LED State: " + PIN_LEDState);
370
371   // Turn on the LED
372   digitalWrite(LED_BUILTIN, HIGH);
373
374   // Print a message to the serial monitor
375   Serial.println("LED turned ON");
376
377   // Set the LED state to ON
378   PIN_LEDState = "ON";
379
380   // Print the current LED state
381   Serial.println("Current LED State: " + PIN_LEDState);
382
383   // Turn off the LED
384   digitalWrite(LED_BUILTIN, LOW);
385
386   // Print a message to the serial monitor
387   Serial.println("LED turned OFF");
388
389   // Set the LED state to OFF
390   PIN_LEDState = "OFF";
391
392   // Print the current LED state
393   Serial.println("Current LED State: " + PIN_LEDState);
394
395   // Turn on the LED
396   digitalWrite(LED_BUILTIN, HIGH);
397
398   // Print a message to the serial monitor
399   Serial.println("LED turned ON");
400
401   // Set the LED state to ON
402   PIN_LEDState = "ON";
403
404   // Print the current LED state
405   Serial.println("Current LED State: " + PIN_LEDState);
406
407   // Turn off the LED
408   digitalWrite(LED_BUILTIN, LOW);
409
410   // Print a message to the serial monitor
411   Serial.println("LED turned OFF");
412
413   // Set the LED state to OFF
414   PIN_LEDState = "OFF";
415
416   // Print the current LED state
417   Serial.println("Current LED State: " + PIN_LEDState);
418
419   // Turn on the LED
420   digitalWrite(LED_BUILTIN, HIGH);
421
422   // Print a message to the serial monitor
423   Serial.println("LED turned ON");
424
425   // Set the LED state to ON
426   PIN_LEDState = "ON";
427
428   // Print the current LED state
429   Serial.println("Current LED State: " + PIN_LEDState);
430
431   // Turn off the LED
432   digitalWrite(LED_BUILTIN, LOW);
433
434   // Print a message to the serial monitor
435   Serial.println("LED turned OFF");
436
437   // Set the LED state to OFF
438   PIN_LEDState = "OFF";
439
440   // Print the current LED state
441   Serial.println("Current LED State: " + PIN_LEDState);
442
443   // Turn on the LED
444   digitalWrite(LED_BUILTIN, HIGH);
445
446   // Print a message to the serial monitor
447   Serial.println("LED turned ON");
448
449   // Set the LED state to ON
450   PIN_LEDState = "ON";
451
452   // Print the current LED state
453   Serial.println("Current LED State: " + PIN_LEDState);
454
455   // Turn off the LED
456   digitalWrite(LED_BUILTIN, LOW);
457
458   // Print a message to the serial monitor
459   Serial.println("LED turned OFF");
460
461   // Set the LED state to OFF
462   PIN_LEDState = "OFF";
463
464   // Print the current LED state
465   Serial.println("Current LED State: " + PIN_LEDState);
466
467   // Turn on the LED
468   digitalWrite(LED_BUILTIN, HIGH);
469
470   // Print a message to the serial monitor
471   Serial.println("LED turned ON");
472
473   // Set the LED state to ON
474   PIN_LEDState = "ON";
475
476   // Print the current LED state
477   Serial.println("Current LED State: " + PIN_LEDState);
478
479   // Turn off the LED
480   digitalWrite(LED_BUILTIN, LOW);
481
482   // Print a message to the serial monitor
483   Serial.println("LED turned OFF");
484
485   // Set the LED state to OFF
486   PIN_LEDState = "OFF";
487
488   // Print the current LED state
489   Serial.println("Current LED State: " + PIN_LEDState);
490
491   // Turn on the LED
492   digitalWrite(LED_BUILTIN, HIGH);
493
494   // Print a message to the serial monitor
495   Serial.println("LED turned ON");
496
497   // Set the LED state to ON
498   PIN_LEDState = "ON";
499
500   // Print the current LED state
501   Serial.println("Current LED State: " + PIN_LEDState);
502
503   // Turn off the LED
504   digitalWrite(LED_BUILTIN, LOW);
505
506   // Print a message to the serial monitor
507   Serial.println("LED turned OFF");
508
509   // Set the LED state to OFF
510   PIN_LEDState = "OFF";
511
512   // Print the current LED state
513   Serial.println("Current LED State: " + PIN_LEDState);
514
515   // Turn on the LED
516   digitalWrite(LED_BUILTIN, HIGH);
517
518   // Print a message to the serial monitor
519   Serial.println("LED turned ON");
520
521   // Set the LED state to ON
522   PIN_LEDState = "ON";
523
524   // Print the current LED state
525   Serial.println("Current LED State: " + PIN_LEDState);
526
527   // Turn off the LED
528   digitalWrite(LED_BUILTIN, LOW);
529
530   // Print a message to the serial monitor
531   Serial.println("LED turned OFF");
532
533   // Set the LED state to OFF
534   PIN_LEDState = "OFF";
535
536   // Print the current LED state
537   Serial.println("Current LED State: " + PIN_LEDState);
538
539   // Turn on the LED
540   digitalWrite(LED_BUILTIN, HIGH);
541
542   // Print a message to the serial monitor
543   Serial.println("LED turned ON");
544
545   // Set the LED state to ON
546   PIN_LEDState = "ON";
547
548   // Print the current LED state
549   Serial.println("Current LED State: " + PIN_LEDState);
550
551   // Turn off the LED
552   digitalWrite(LED_BUILTIN, LOW);
553
554   // Print a message to the serial monitor
555   Serial.println("LED turned OFF");
556
557   // Set the LED state to OFF
558   PIN_LEDState = "OFF";
559
560   // Print the current LED state
561   Serial.println("Current LED State: " + PIN_LEDState);
562
563   // Turn on the LED
564   digitalWrite(LED_BUILTIN, HIGH);
565
566   // Print a message to the serial monitor
567   Serial.println("LED turned ON");
568
569   // Set the LED state to ON
570   PIN_LEDState = "ON";
571
572   // Print the current LED state
573   Serial.println("Current LED State: " + PIN_LEDState);
574
575   // Turn off the LED
576   digitalWrite(LED_BUILTIN, LOW);
577
578   // Print a message to the serial monitor
579   Serial.println("LED turned OFF");
580
581   // Set the LED state to OFF
582   PIN_LEDState = "OFF";
583
584   // Print the current LED state
585   Serial.println("Current LED State: " + PIN_LEDState);
586
587   // Turn on the LED
588   digitalWrite(LED_BUILTIN, HIGH);
589
590   // Print a message to the serial monitor
591   Serial.println("LED turned ON");
592
593   // Set the LED state to ON
594   PIN_LEDState = "ON";
595
596   // Print the current LED state
597   Serial.println("Current LED State: " + PIN_LEDState);
598
599   // Turn off the LED
600   digitalWrite(LED_BUILTIN, LOW);
601
602   // Print a message to the serial monitor
603   Serial.println("LED turned OFF");
604
605   // Set the LED state to OFF
606   PIN_LEDState = "OFF";
607
608   // Print the current LED state
609   Serial.println("Current LED State: " + PIN_LEDState);
610
611   // Turn on the LED
612   digitalWrite(LED_BUILTIN, HIGH);
613
614   // Print a message to the serial monitor
615   Serial.println("LED turned ON");
616
617   // Set the LED state to ON
618   PIN_LEDState = "ON";
619
620   // Print the current LED state
621   Serial.println("Current LED State: " + PIN_LEDState);
622
623   // Turn off the LED
624   digitalWrite(LED_BUILTIN, LOW);
625
626   // Print a message to the serial monitor
627   Serial.println("LED turned OFF");
628
629   // Set the LED state to OFF
630   PIN_LEDState = "OFF";
631
632   // Print the current LED state
633   Serial.println("Current LED State: " + PIN_LEDState);
634
635   // Turn on the LED
636   digitalWrite(LED_BUILTIN, HIGH);
637
638   // Print a message to the serial monitor
639   Serial.println("LED turned ON");
640
641   // Set the LED state to ON
642   PIN_LEDState = "ON";
643
644   // Print the current LED state
645   Serial.println("Current LED State: " + PIN_LEDState);
646
647   // Turn off the LED
648   digitalWrite(LED_BUILTIN, LOW);
649
650   // Print a message to the serial monitor
651   Serial.println("LED turned OFF");
652
653   // Set the LED state to OFF
654   PIN_LEDState = "OFF";
655
656   // Print the current LED state
657   Serial.println("Current LED State: " + PIN_LEDState);
658
659   // Turn on the LED
660   digitalWrite(LED_BUILTIN, HIGH);
661
662   // Print a message to the serial monitor
663   Serial.println("LED turned ON");
664
665   // Set the LED state to ON
666   PIN_LEDState = "ON";
667
668   // Print the current LED state
669   Serial.println("Current LED State: " + PIN_LEDState);
670
671   // Turn off the LED
672   digitalWrite(LED_BUILTIN, LOW);
673
674   // Print a message to the serial monitor
675   Serial.println("LED turned OFF");
676
677   // Set the LED state to OFF
678   PIN_LEDState = "OFF";
679
680   // Print the current LED state
681   Serial.println("Current LED State: " + PIN_LEDState);
682
683   // Turn on the LED
684   digitalWrite(LED_BUILTIN, HIGH);
685
686   // Print a message to the serial monitor
687   Serial.println("LED turned ON");
688
689   // Set the LED state to ON
690   PIN_LEDState = "ON";
691
692   // Print the current LED state
693   Serial.println("Current LED State: " + PIN_LEDState);
694
695   // Turn off the LED
696   digitalWrite(LED_BUILTIN, LOW);
697
698   // Print a message to the serial monitor
699   Serial.println("LED turned OFF");
700
701   // Set the LED state to OFF
702   PIN_LEDState = "OFF";
703
704   // Print the current LED state
705   Serial.println("Current LED State: " + PIN_LEDState);
706
707   // Turn on the LED
708   digitalWrite(LED_BUILTIN, HIGH);
709
710   // Print a message to the serial monitor
711   Serial.println("LED turned ON");
712
713   // Set the LED state to ON
714   PIN_LEDState = "ON";
715
716   // Print the current LED state
717   Serial.println("Current LED State: " + PIN_LEDState);
718
719   // Turn off the LED
720   digitalWrite(LED_BUILTIN, LOW);
721
722   // Print a message to the serial monitor
723   Serial.println("LED turned OFF");
724
725   // Set the LED state to OFF
726   PIN_LEDState = "OFF";
727
728   // Print the current LED state
729   Serial.println("Current LED State: " + PIN_LEDState);
730
731   // Turn on the LED
732   digitalWrite(LED_BUILTIN, HIGH);
733
734   // Print a message to the serial monitor
735   Serial.println("LED turned ON");
736
737   // Set the LED state to ON
738   PIN_LEDState = "ON";
739
740   // Print the current LED state
741   Serial.println("Current LED State: " + PIN_LEDState);
742
743   // Turn off the LED
744   digitalWrite(LED_BUILTIN, LOW);
745
746   // Print a message to the serial monitor
747   Serial.println("LED turned OFF");
748
749   // Set the LED state to OFF
750   PIN_LEDState = "OFF";
751
752   // Print the current LED state
753   Serial.println("Current LED State: " + PIN_LEDState);
754
755   // Turn on the LED
756   digitalWrite(LED_BUILTIN, HIGH);
757
758   // Print a message to the serial monitor
759   Serial.println("LED turned ON");
760
761   // Set the LED state to ON
762   PIN_LEDState = "ON";
763
764   // Print the current LED state
765   Serial.println("Current LED State: " + PIN_LEDState);
766
767   // Turn off the LED
768   digitalWrite(LED_BUILTIN, LOW);
769
770   // Print a message to the serial monitor
771   Serial.println("LED turned OFF");
772
773   // Set the LED state to OFF
774   PIN_LEDState = "OFF";
775
776   // Print the current LED state
777   Serial.println("Current LED State: " + PIN_LEDState);
778
779   // Turn on the LED
780   digitalWrite(LED_BUILTIN, HIGH);
781
782   // Print a message to the serial monitor
783   Serial.println("LED turned ON");
784
785   // Set the LED state to ON
786   PIN_LEDState = "ON";
787
788   // Print the current LED state
789   Serial.println("Current LED State: " + PIN_LEDState);
790
791   // Turn off the LED
792   digitalWrite(LED_BUILTIN, LOW);
793
794   // Print a message to the serial monitor
795   Serial.println("LED turned OFF");
796
797   // Set the LED state to OFF
798   PIN_LEDState = "OFF";
799
800   // Print the current LED state
801   Serial.println("Current LED State: " + PIN_LEDState);
802
803   // Turn on the LED
804   digitalWrite(LED_BUILTIN, HIGH);
805
806   // Print a message to the serial monitor
807   Serial.println("LED turned ON");
808
809   // Set the LED state to ON
810   PIN_LEDState = "ON";
811
812   // Print the current LED state
813   Serial.println("Current LED State: " + PIN_LEDState);
814
815   // Turn off the LED
816   digitalWrite(LED_BUILTIN, LOW);
817
818   // Print a message to the serial monitor
819   Serial.println("LED turned OFF");
820
821   // Set the LED state to OFF
822   PIN_LEDState = "OFF";
823
824   // Print the current LED state
825   Serial.println("Current LED State: " + PIN_LEDState);
826
827   // Turn on the LED
828   digitalWrite(LED_BUILTIN, HIGH);
829
830   // Print a message to the serial monitor
831   Serial.println("LED turned ON");
832
833   // Set the LED state to ON
834   PIN_LEDState = "ON";
835
836   // Print the current LED state
837   Serial.println("Current LED State: " + PIN_LEDState);
838
839   // Turn off the LED
840   digitalWrite(LED_BUILTIN, LOW);
841
842   // Print a message to the serial monitor
843   Serial.println("LED turned OFF");
844
845   // Set the LED state to OFF
846   PIN_LEDState = "OFF";
847
848   // Print the current LED state
849   Serial.println("Current LED State: " + PIN_LEDState);
850
851   // Turn on the LED
852   digitalWrite(LED_BUILTIN, HIGH);
853
854   // Print a message to the serial monitor
855   Serial.println("LED turned ON");
856
857   // Set the LED state to ON
858   PIN_LEDState = "ON";
859
860   // Print the current LED state
861   Serial.println("Current LED State: " + PIN_LEDState);
862
863   // Turn off the LED
864   digitalWrite(LED_BUILTIN, LOW);
865
866   // Print a message to the serial monitor
867   Serial.println("LED turned OFF");
868
869   // Set the LED state to OFF
870   PIN_LEDState = "OFF";
871
872   // Print the current LED state
873   Serial.println("Current LED State: " + PIN_LEDState);
874
875   // Turn on the LED
876   digitalWrite(LED_BUILTIN, HIGH);
877
878   // Print a message to the serial monitor
879   Serial.println("LED turned ON");
880
881   // Set the LED state to ON
882   PIN_LEDState = "ON";
883
884   // Print the current LED state
885   Serial.println("Current LED State: " + PIN_LEDState);
886
887   // Turn off the LED
888   digitalWrite(LED_BUILTIN, LOW);
889
890   // Print a message to the serial monitor
891   Serial.println("LED turned OFF");
892
893   // Set the LED state to OFF
894   PIN_LEDState = "OFF";
895
896   // Print the current LED state
897   Serial.println("Current LED State: " + PIN_LEDState);
898
899   // Turn on the LED
900   digitalWrite(LED_BUILTIN, HIGH);
901
902   // Print a message to the serial monitor
903   Serial.println("LED turned ON");
904
905   // Set the LED state to ON
906   PIN_LEDState = "ON";
907
908   // Print the current LED state
909   Serial.println("Current LED State: " + PIN_LEDState);
910
911   // Turn off the LED
912   digitalWrite(LED_BUILTIN, LOW);
913
914   // Print a message to the serial monitor
915   Serial.println("LED turned OFF");
916
917   // Set the LED state to OFF
918   PIN_LEDState = "OFF";
919
920   // Print the current LED state
921   Serial.println("Current LED State: " + PIN_LEDState);
922
923   // Turn on the LED
924   digitalWrite(LED_BUILTIN, HIGH);
925
926   // Print a message to the serial monitor
927   Serial.println("LED turned ON");
928
929   // Set the LED state to ON
930   PIN_LEDState = "ON";
931
932   // Print the current LED state
933   Serial.println("Current LED State: " + PIN_LEDState);
934
935   // Turn off the LED
936   digitalWrite(LED_BUILTIN, LOW);
937
938   // Print a message to the serial monitor
939   Serial.println("LED turned OFF");
940
941   // Set the LED state to OFF
942   PIN_LEDState = "OFF";
943
944   // Print the current LED state
945   Serial.println("Current LED State: " + PIN_LEDState);
946
947   // Turn on the LED
948   digitalWrite(LED_BUILTIN, HIGH);
949
950   // Print a message to the serial monitor
951   Serial.println("LED turned ON");
952
953   // Set the LED state to ON
954   PIN_LEDState = "ON";
955
956   // Print the current LED state
957   Serial.println("Current LED State: " + PIN_LEDState);
958
959   // Turn off the LED
960   digitalWrite(LED_BUILTIN, LOW);
961
962   // Print a message to the serial monitor
963   Serial.println("LED turned OFF");
964
965   // Set the LED state to OFF
966   PIN_LEDState = "OFF";
967
968   // Print the current LED state
969   Serial.println("Current LED State: " + PIN_LEDState);
970
971   // Turn on the LED
972   digitalWrite(LED_BUILTIN, HIGH);
973
974   // Print a message to the serial monitor
975   Serial.println("LED turned ON");
976
977   // Set the LED state to ON
978   PIN_LEDState = "ON";
979
980   // Print the current LED state
981   Serial.println("Current LED State: " + PIN_LEDState);
982
983   // Turn off the LED
984   digitalWrite(LED_BUILTIN, LOW);
985
986   // Print a message to the serial monitor
987   Serial.println("LED turned OFF");
988
989   // Set the LED state to OFF
990   PIN_LEDState = "OFF";
991
992   // Print the current LED state
993   Serial.println("Current LED State: " + PIN_LEDState);
994
995   // Turn on the LED
996   digitalWrite(LED_BUILTIN, HIGH);
997
998   // Print a message to the serial monitor
999   Serial.println("LED turned ON");
1000
1001   // Set the LED state to ON
1002   PIN_LEDState = "ON";
1003
1004   // Print the current LED state
1005   Serial.println("Current LED State: " + PIN_LEDState);
1006
1007   // Turn off the LED
1008   digitalWrite(LED_BUILTIN, LOW);
1009
1010   // Print a message to the serial monitor
1011   Serial.println("LED turned OFF");
1012
1013   // Set the LED state to OFF
1014   PIN_LEDState = "OFF";
1015
1016   // Print the current LED state
1017   Serial.println("Current LED State: " + PIN_LEDState);
1018
1019   // Turn on the LED
1020   digitalWrite(LED_BUILTIN, HIGH);
1021
1022   // Print a message to the serial monitor
1023   Serial.println("LED turned ON");
1024
1025   // Set the LED state to ON
1026   PIN_LEDState = "ON";
1027
1028   // Print the current LED state
1029   Serial.println("Current LED State: " + PIN_LEDState);
1030
1031   // Turn off the LED
1032   digitalWrite(LED_BUILTIN, LOW);
1033
1034   // Print a message to the serial monitor
1035   Serial.println("LED turned OFF");
1036
1037   // Set the LED state to OFF
1038   PIN_LEDState = "OFF";
1039
1040   // Print the current LED state
1041   Serial.println("Current LED State: " + PIN_LEDState);
1042
1043   // Turn on the LED
1044   digitalWrite(LED_BUILTIN, HIGH);
1045
1046   // Print a message to the serial monitor
1047   Serial.println("LED turned ON");
1048
1049   // Set the LED state to ON
1050   PIN_LEDState = "ON";
1051
1052   // Print the current LED state
1053   Serial.println("Current LED State: " + PIN_LEDState);
1054
1055   // Turn off the LED
1056   digitalWrite(LED_BUILTIN, LOW);
1057
1058   // Print a message to the serial monitor
1059   Serial.println("LED turned OFF");
1060
1061   // Set the LED state to OFF
1062   PIN_LEDState = "OFF";
1063
1064   // Print the current LED state
1065   Serial.println("Current LED State: " + PIN_LEDState);
1066
1067   // Turn on the LED
1068   digitalWrite(LED_BUILTIN, HIGH);
1069
1070   // Print a message to the serial monitor
1071   Serial.println("LED turned ON");
1072
1073   // Set the LED state to ON
1074   PIN_LEDState = "ON";
1075
1076   // Print the current LED state
1077   Serial.println("Current LED State: " + PIN_LEDState);
1078
1079   // Turn off the LED
1080   digitalWrite(LED_BUILTIN, LOW);
1081
1082   // Print a message to the serial monitor
1083   Serial.println("LED turned OFF");
1084
1085   // Set the LED state to OFF
1086   PIN_LEDState = "OFF";
1087
1088   // Print the current LED state
1089   Serial.println("Current LED State: " + PIN_LEDState);
1090
1091   // Turn on the LED
1092   digitalWrite(LED_BUILTIN, HIGH);
1093
1094   // Print a message to the serial monitor
1095   Serial.println("LED turned ON");
1096
1097   // Set the LED state to ON
1098   PIN_LEDState = "ON";
1099
1100   // Print the current LED state
1101   Serial.println("Current LED State: " + PIN_LEDState);
1102
1103   // Turn off the LED
1104   digitalWrite(LED_BUILTIN, LOW);
1105
1106   // Print a message to the serial monitor
1107   Serial.println("LED turned OFF");
1108
1109   // Set the LED state to OFF
1110   PIN_LEDState = "OFF";
1111
1112   // Print the current LED state
1113   Serial.println("Current LED State: " + PIN_LEDState);
1114
1115   // Turn on the LED
1116   digitalWrite(LED_BUILTIN, HIGH);
1117
1118   // Print a message to the serial monitor
1119   Serial.println("LED turned ON");
1120
1121   // Set the LED state to ON
1122   PIN_LEDState = "ON";
1123
1124   // Print the current LED state
1125   Serial.println("Current LED State: " + PIN_LEDState);
1126
1127   // Turn off the LED
1128   digitalWrite(LED_BUILTIN, LOW);
1129
1130   // Print a message to the serial monitor
1131   Serial.println("LED turned OFF");
1132
1133   // Set the LED state to OFF
1134   PIN_LEDState = "OFF";
1135
1136   // Print the current LED state
1137   Serial.println("Current LED State: " + PIN_LEDState);
1138
1139   // Turn on the LED
1140   digitalWrite(LED_BUILTIN, HIGH);
1141
1142  
```



Download the code to PICO W, open the serial port monitor, set the baud rate to 115200 and you can use it to measure the distance between the ultrasonic module and the object. As shown in the following figure:

The screenshot shows a serial monitor window titled "COM8". The text output includes "Connecting to FYI_2.4G", "WiFi connected.", "IP address:", and "192.168.1.26". The text "WiFi connected." and "IP address: 192.168.1.26" is highlighted with an orange rounded rectangle, and an orange arrow points from this highlighted area towards the bottom left of the window.

When PICO W successfully connects to "ssid_Router", serial monitor will print out the IP address assigned to PICO W by the router. Access <http://192.168.1.26> in a computer browser on the LAN. As shown in the following figure:

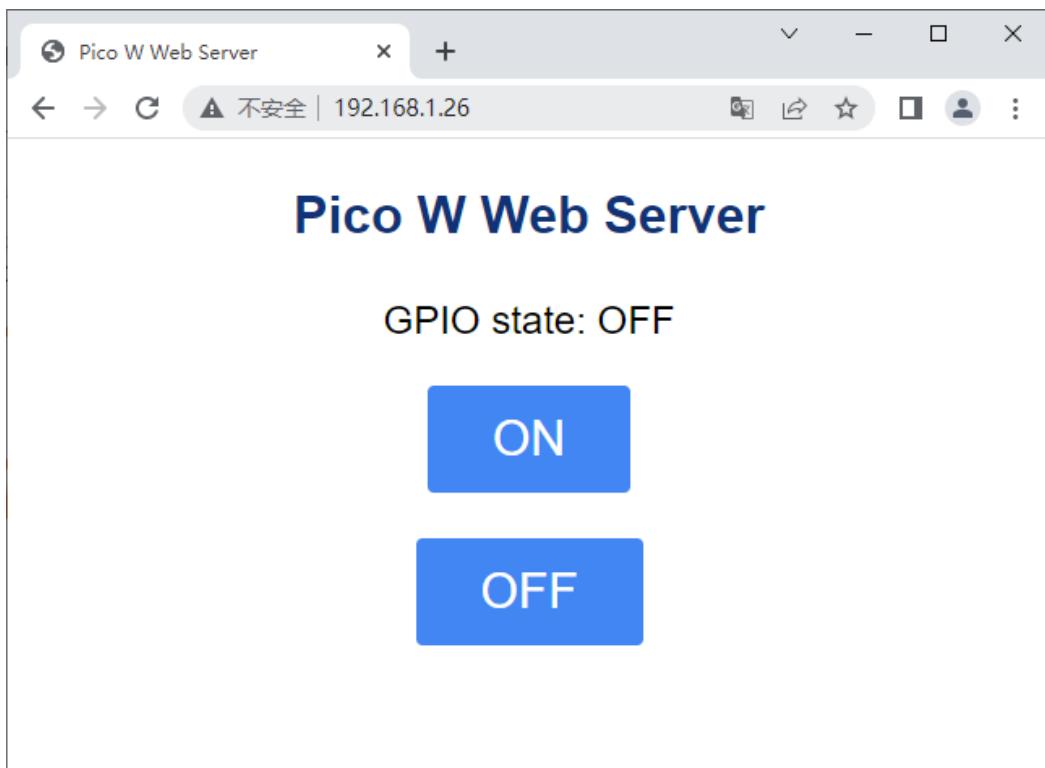

You can click the corresponding button to control the LED on and off.

Any concerns? [✉ support@freenove.com](mailto:support@freenove.com)

The following is the program code:

```
1 #include <WiFi.h>
2
3 // Replace with your network credentials
4 const char* ssid      = "*****";
5 const char* password = "*****";
6
7 // Set web server port number to 80
8 WiFiServer server(80);
9 // Variable to store the HTTP request
10 String header;
11 // Auxiliar variables to store the current output state
12 String PIN_LEDState = "OFF";
13
14 // Current time
15 unsigned long currentTime = millis();
16 // Previous time
17 unsigned long previousTime = 0;
18 // Define timeout time in milliseconds (example: 2000ms = 2s)
19 const long timeoutTime = 2000;
20
21 void setup() {
22     Serial.begin(115200);
23     // Initialize the output variables as outputs
24     pinMode(LED_BUILTIN, OUTPUT);
25     digitalWrite(LED_BUILTIN, LOW);
26
27     // Connect to Wi-Fi network with SSID and password
28     Serial.print("Connecting to ");
29     Serial.println(ssid);
30     WiFi.begin(ssid, password);
31     while (WiFi.status() != WL_CONNECTED) {
32         delay(500);
33         Serial.print(".");
34     }
35     // Print local IP address and start web server
36     Serial.println("");
37     Serial.println("WiFi connected.");
38     Serial.println("IP address: ");
39     Serial.println(WiFi.localIP());
40     server.begin();
41 }
42 void loop() {
43     WiFiClient client = server.available(); // Listen for incoming clients
```

```
44  if (client) {                                // If a new client connects,
45      Serial.println("New Client.");           // print a message out in the serial port
46      String currentLine = "";                // make a String to hold incoming data from the
47      client
48      currentTime = millis();
49      previousTime = currentTime;
50      while (client.connected() && currentTime - previousTime <= timeoutTime) { // loop while
the client's connected
51          currentTime = millis();
52          if (client.available()) { // if there's bytes to read from the client,
53              char c = client.read(); // read a byte, then
54              Serial.write(c);      // print it out the serial monitor
55              header += c;
56              if (c == '\n') { // if the byte is a newline character
57                  // if the current line is blank, you got two newline characters in a row.
58                  // that's the end of the client HTTP request, so send a response:
59                  if (currentLine.length() == 0) {
60                      // HTTP headers always start with a response code (e.g. HTTP/1.1 200 OK)
61                      // and a content-type so the client knows what's coming, then a blank line:
62                      client.println("HTTP/1.1 200 OK");
63                      client.println("Content-type:text/html");
64                      client.println("Connection: close");
65                      client.println();
66                      // turns the GPIOs on and off
67                      if (header.indexOf("GET /LED_BUILTIN/ON") >= 0) {
68                          Serial.println("LED_BUILTIN ON");
69                          PIN_LEDState = "ON";
70                          digitalWrite(LED_BUILTIN, HIGH);
71                      } else if (header.indexOf("GET /LED_BUILTIN/OFF") >= 0) {
72                          Serial.println("LED_BUILTIN OFF");
73                          PIN_LEDState = "OFF";
74                          digitalWrite(LED_BUILTIN, LOW);
75                      }
76                      // Display the HTML web page
77                      client.println("<!DOCTYPE html><html>");
78                      client.println("<head> <title>Pico W Web Server</title> <meta name=\"viewport\""
content="width=device-width, initial-scale=1">");
79                      client.println("<link rel=\"icon\" href=\"data:, \">");
80                      // CSS to style the on/off buttons
81                      // Feel free to change the background-color and font-size attributes to fit your
preferences
82                      client.println("<style>html {font-family: Helvetica; display:inline-block; margin:
0px auto; text-align: center;}</style>");
```

```

83         client.println(".button{background-color: #4286f4; display: inline-block; border:
84             none; border-radius: 4px; color: white; padding: 16px 40px;text-decoration: none; font-size:
85             30px; margin: 2px; cursor: pointer;}");
86         client.println(".button2{background-color: #4286f4;display: inline-block; border:
87             none; border-radius: 4px; color: white; padding: 16px 40px;text-decoration: none; font-size:
88             30px; margin: 2px; cursor: pointer;}</style></head>");
89         // Web Page Heading
90         client.println("<body><h1>Pico W Web Server</h1>");
91         client.println("<p>GPIO state: " + PIN_LEDState + "</p>"); 
92         client.println("<p><a href=\"/LED_BUILTIN/ON\"><button class=\"button
button2\">ON</button></a></p>"); 
93         client.println("<p><a href=\"/LED_BUILTIN/OFF\"><button class=\"button
button2\">OFF</button></a></p>"); 
94         client.println("</body></html>"); 
95         // The HTTP response ends with another blank line
96         client.println(); 
97         // Break out of the while loop
98         break;
99     } else { // if you got a newline, then clear currentLine
100        currentLine = "";
101    }
102  }
103  // Clear the header variable
104  header = "";
105  // Close the connection
106  client.stop();
107  Serial.println("Client disconnected.");
108  Serial.println("");
109 }
110 }
```

Include the WiFi Library header file of PICO W.

```
1 #include <WiFi.h>
```

Enter correct router name and password.

```
3 const char* ssid      = "*****"; //Enter the router name
4 const char* password = "*****"; //Enter the router password
```

Set PICO W in Station mode and connect it to your router.

```
30 WiFi.begin(ssid, password);
```

Check whether PICO W has connected to router successfully every 0.5s.

```
31 while (WiFi.status() != WL_CONNECTED) {
32     delay(500);
```

```
33     Serial.print(".");
34 }
```

Serial monitor prints out the IP address assigned to PICO W.

```
39 Serial.println(WiFi.localIP());
```

Click the button on the web page to control the LED light on and off.

```
65 // turns the GPIOs on and off
66 if (header.indexOf("GET /LED_BUILTIN/ON") >= 0) {
67     Serial.println("LED_BUILTIN ON");
68     PIN_LEDState = "ON";
69     digitalWrite(LED_BUILTIN, HIGH);
70 } else if (header.indexOf("GET /LED_BUILTIN/OFF") >= 0) {
71     Serial.println("LED_BUILTIN OFF");
72     PIN_LEDState = "OFF";
73     digitalWrite(LED_BUILTIN, LOW);
74 }
```

What's Next?

THANK YOU for participating in this learning experience!

We have reached the end of this Tutorial. If you find errors, omissions or you have suggestions and/or questions about the Tutorial or component contents of this Kit, please feel free to contact us:
support@freenove.com

We will make every effort to make changes and correct errors as soon as feasibly possible and publish a revised version.

If you want to learn more about Arduino, Raspberry Pi, Smart Cars, Robotics and other interesting products in science and technology, please continue to visit our website. We will continue to launch fun, cost-effective, innovative and exciting products.

<https://www.freenove.com/>

Thank you again for choosing Freenove products.