Speed: the KOA rate table (Gold node) and the gen3 / gen2 window speed-up

(a) H = 10√(N/100), L0 = N π / (8 H η) (exact box), radius 0.5, M = 300; (b) radius 0.5, η = 0.31, H = 20√(N/400), L0 = 25.34√(N/400), wall mass factor 50

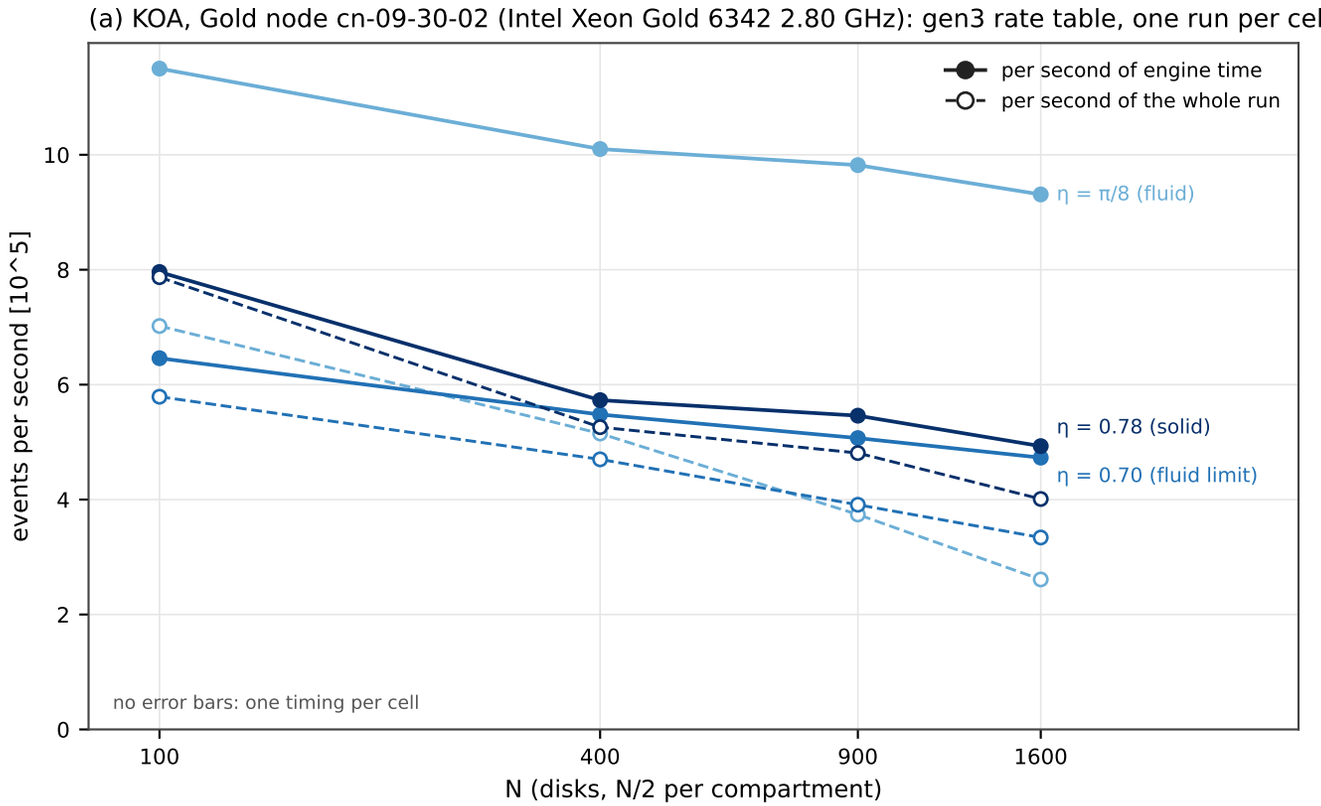

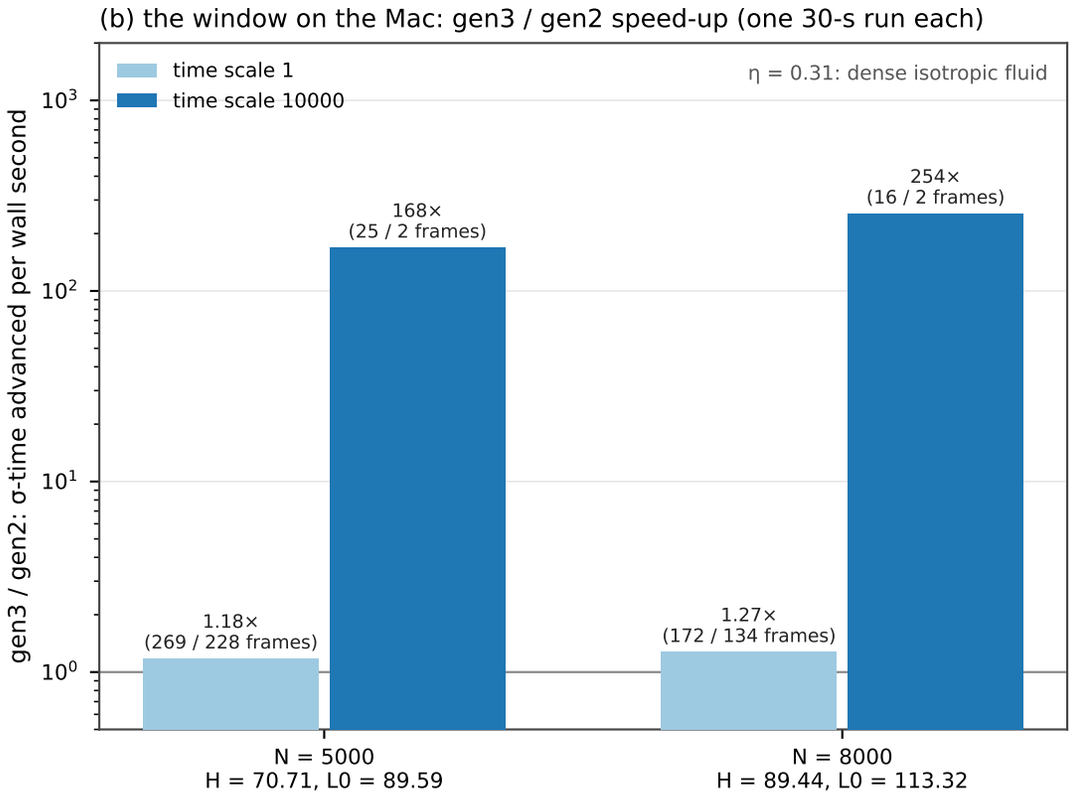

(a) K2-2 part (c), job 15043030: engine-gen3 a643bc7 (target koa), --engine=gen3; 500 sigma-time held, 100 released; one run per cell, one at a time. Solid: events per second of the run record's engine_s; dashed: per second of its run_s (the difference is the record's driver share). Printed with it (information): an E5-2670 v3 node runs at 0.709 of this node's rate (N 400, eta 0.70).
(b) Decision 19 item 2 (sec. 4.7.50): one binary, engine-gen3 7f6adca (target mac-O3-e0pre), --engine=gen2 and --engine=gen3; SDL's dummy video driver and the software renderer, --auto-release, 30 wall seconds per run, one run each. Bar label: the ratio, and the frames drawn by gen3 / gen2.
At time scale 1 the fps ratio is 1.18 and 1.29; sec. 4.7.50's INFERENCE: both engines are limited there by drawing in software. No error bars: single timings.
tables: hspist3/experiments_m1_figures_261011/tables/ (main b7ac7c59); script: hspist3/experiments_m1_figures_261011/m1_figures_261011.py (main 973c1839)