

# TEST REPORT

Applicant Name: Dragino Technology Co., Limited  
Address: Room 202, BaoChengTai industrial park, No.8 CaiYun  
LongCheng Street, LongGang District, Shenzhen China  
Report Number: 2501X31094E-EM-00A1

## Test Standard (s)

FCC Part 15, Subpart B (Class B)

## Sample Description

Product Type: LoRaWAN Sensor Node  
Model No.: DDS75-LB  
Multiple Model(s) No.: Refer to Page 2  
Trade Mark: DRAGINO  
Date Received: 2025/09/26  
Issue Date: 2026/01/04

|              |       |
|--------------|-------|
| Test Result: | Pass▲ |
|--------------|-------|

▲ In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:


*Joson Xiao*

Joson Xiao  
EMC Engineer

## Approved By:

*Moon Liu*

Moon Liu  
EMC Supervisor



Note: The information marked \* is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.  
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China  
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

## **TABLE OF CONTENTS**

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>                           | <b>3</b>  |
| <b>GENERAL INFORMATION .....</b>                                 | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....          | 4         |
| OBJECTIVE .....                                                  | 4         |
| MEASUREMENT UNCERTAINTY .....                                    | 4         |
| TEST FACILITY .....                                              | 5         |
| <b>SYSTEM TEST CONFIGURATION .....</b>                           | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                          | 6         |
| EUT EXERCISE SOFTWARE .....                                      | 6         |
| EQUIPMENT MODIFICATIONS .....                                    | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                         | 6         |
| EXTERNAL I/O CABLE.....                                          | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                                | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>                             | <b>8</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                 | <b>9</b>  |
| <b>FCC §15.109 - RADIATED EMISSIONS .....</b>                    | <b>10</b> |
| APPLICABLE STANDARD .....                                        | 10        |
| EUT SETUP .....                                                  | 10        |
| EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP.....               | 11        |
| TEST PROCEDURE.....                                              | 11        |
| LEVEL & OVER LIMIT CALCULATION .....                             | 12        |
| TEST DATA.....                                                   | 12        |
| <b>EXHIBIT A - EUT PHOTOGRAPHS .....</b>                         | <b>21</b> |
| <b>EXHIBIT B - TEST SETUP PHOTOGRAPHS .....</b>                  | <b>22</b> |
| RADIATED EMISSIONS - FRONT VIEW (BELOW 1 GHz).....               | 22        |
| RADIATED EMISSIONS - REAR VIEW (BELOW 1 GHz).....                | 22        |
| RADIATED EMISSIONS - FRONT VIEW (ABOVE 1 GHz).....               | 23        |
| RADIATED EMISSIONS - REAR VIEW (ABOVE 1 GHz).....                | 23        |
| RADIATED EMISSIONS - FRONT VIEW (BELOW 1 GHz).....               | 24        |
| RADIATED EMISSIONS - REAR VIEW (BELOW 1 GHz).....                | 24        |
| RADIATED EMISSIONS - FRONT VIEW (ABOVE 1 GHz) .....              | 25        |
| RADIATED EMISSIONS - REAR VIEW (ABOVE 1 GHz).....                | 25        |
| <b>EXHIBIT C - PRODUCT SIMILARITY DECLARATION OF LETTER.....</b> | <b>26</b> |

## DOCUMENT REVISION HISTORY

| Revision Number | Report Number          | Description of Revision | Date of Revision |
|-----------------|------------------------|-------------------------|------------------|
| 0               | SZ1230802-44707E-EM-00 | Original Report         | 2023/08/29       |
| 1               | 2501X31094E-EM-00A1    | Amended Report          | 2026/01/04       |

Note:

This is an amended report based on the report SZ1230802-44707E-EM-00, the details as below:

(1) Adding the model number “LDS25-LB, LDS25-LS, LDS25-LB2, CS01-LB, CS01-LS, CS01-LB2, SE01-LS, SE01-LB2, DDS75-LS, DDS75-LB2, DDS45-LS, DDS45-LB2, DDS20-LS, DDS20-LB2, MDS120-LS, MDS120-LB2, SPH01-LS, SPH01-LB2, LMS01-LS, LMS01-LB2, WQS-LB, WQS-LS, WQS-LB2, SE0X-LB, SE0X-LS, SE0X-LB2, WSC2-LB, WSC2-LS, WSC2-LB2, MDS200-LS, MDS200-LB2, LDS40-LB, LDS40-LS, LDS40-LB2, LDS12-LS, LDS12-LB2, DDS04-LS, DDS04-LB2, RS485-LB2, RS485-LS, RS485W-LB, RS485W-LS, RS485W-LB2”.

Based on above differences, it will affect all test data, so the changed items were performed. The data and photos for original model please refer to the original report.

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product                                                                                                                                                                                                                       | LoRaWAN Sensor Node                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Tested Model                                                                                                                                                                                                                  | DDS75-LB, RS485-LS, RS485W-LB2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Multiple Model(s)                                                                                                                                                                                                             | LDS25-LB, LDS25-LS, LDS25-LB2, CS01-LB, CS01-LS, CS01-LB2, SE01-LB, SE01-LS, SE01-LB2, DDS75-LS, DDS75-LB2, DDS45-LB, DDS45-LS, DDS45-LB2, DDS20-LB, DDS20-LS, DDS20-LB2, MDS120-LB, MDS120-LS, MDS120-LB2, SPH01-LB, SPH01-LS, SPH01-LB2, LMS01-LB, LMS01-LS, LMS01-LB2, WQS-LB, WQS-LS, WQS-LB2, SE0X-LB, SE0X-LS, SE0X-LB2, WSC2-LB, WSC2-LS, WSC2-LB2, MDS200-LB, MDS200-LS, MDS200-LB2, LDS40-LB, LDS40-LS, LDS40-LB2, LDS12-LB, LDS12-LS, LDS12-LB2, DDS04-LB, DDS04-LS, DDS04-LB2, RS485-LB, RS485-LB2, RS485W-LB, RS485W-LS |
| Voltage Range                                                                                                                                                                                                                 | RS485-LS: DC 3.7V from battery<br>RS485W-LB2, RS485-LB2, RS485W-LB: DC 3.6V from battery                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Highest operating frequency <sup>#</sup>                                                                                                                                                                                      | 2.48GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Equipment Class                                                                                                                                                                                                               | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Sample number                                                                                                                                                                                                                 | RS485-LS:3AHC-5; RS485W-LB2: 3AHC-7<br>(Assigned by BACL, Shenzhen)                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Sample/EUT Status                                                                                                                                                                                                             | Good condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Adapter Information                                                                                                                                                                                                           | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Note: The Multiple models are electrically identical with the test model except for model no., probes, PCB, battery. Please refer to the declaration letter <sup>#</sup> for more detail, which was provided by manufacturer. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15B Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15B.

### Measurement Uncertainty

| Item                 | Frequency Range |                | Expanded Measurement uncertainty     |
|----------------------|-----------------|----------------|--------------------------------------|
| Conducted Emissions  | AC Mains        | 150 kHz ~30MHz | 3.66dB(k=2, 95% level of confidence) |
| Radiated Disturbance | 30MHz~200MHz    | Horizontal     | 5.32dB(k=2, 95% level of confidence) |
|                      | 30MHz~200MHz    | Vertical       | 5.43dB(k=2, 95% level of confidence) |
|                      | 200MHz~1000MHz  | Horizontal     | 5.77dB(k=2, 95% level of confidence) |
|                      | 200MHz~1000MHz  | Vertical       | 5.73dB(k=2, 95% level of confidence) |
|                      | 1GHz~6GHz       | /              | 5.34dB(k=2, 95% level of confidence) |
|                      | 6GHz~18GHz      | /              | 5.40dB(k=2, 95% level of confidence) |
|                      | 18GHz~40GHz     | /              | 5.64dB(k=2, 95% level of confidence) |

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $K$  with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

## **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

Each test item follows test standards and with no deviation.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in worst case condition.

For RS485-LS

Test Mode 1: Charging

For RS485W-LB2

Test Mode 2: idle

### EUT exercise software

No exercise software was used.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


| Manufacturer | Description       | Model | Serial Number |
|--------------|-------------------|-------|---------------|
| /            | Holder            | /     | /             |
| /            | Incandescent lamp | /     | /             |

### External I/O Cable


| Cable Description                   | Length (m) | From/Port | To    |
|-------------------------------------|------------|-----------|-------|
| Un-Shielding Un-Detachable AC Cable | 1.0        | Holder    | Mains |

## Block Diagram of Test Setup

### Test Mode 1

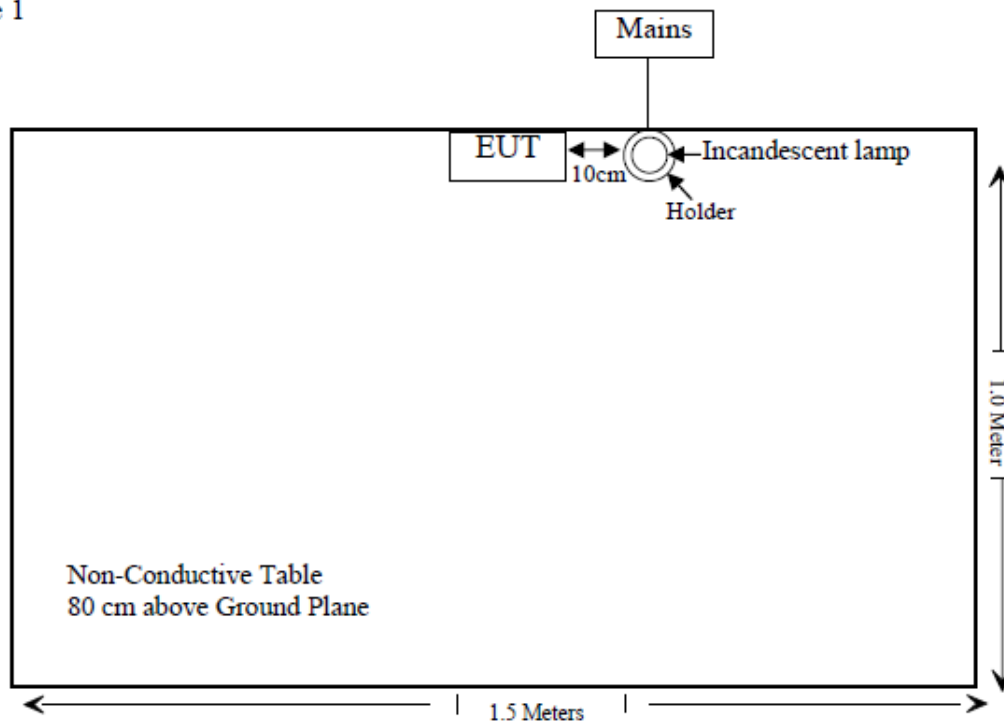

### Test Mode 2

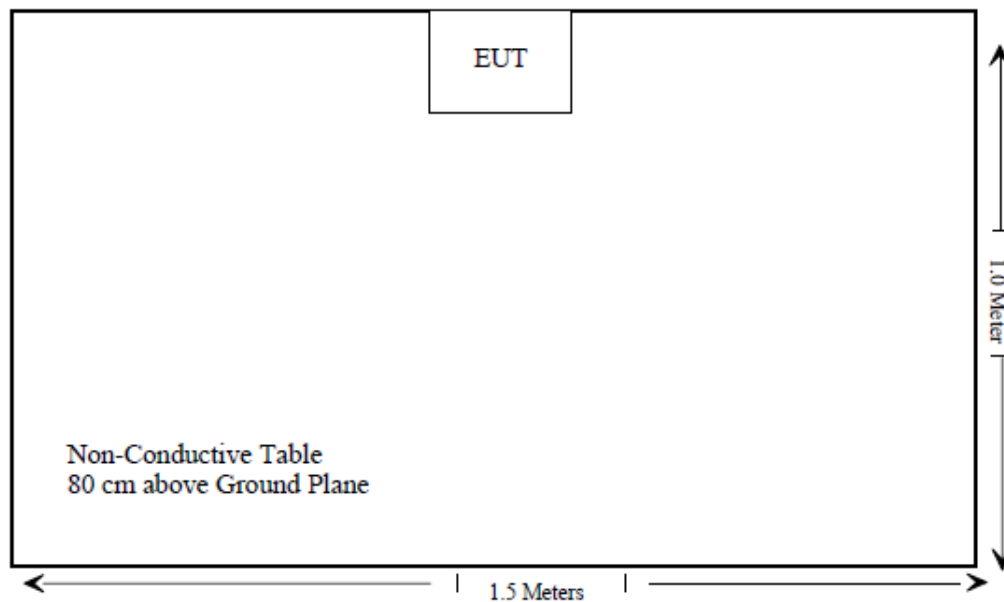

## SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test         | Results        |
|-----------|-----------------------------|----------------|
| §15.107   | AC Line Conducted Emissions | Not Applicable |
| §15.109   | Radiated Emissions          | Compliant      |

Not Applicable: EUT is battery power supply, so AC Line Conducted Emissions is not required.

## TEST EQUIPMENT LIST

| Manufacturer                  | Description                       | Model           | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|-----------------------------------|-----------------|---------------|------------------|----------------------|
| <b>Radiated Emission Test</b> |                                   |                 |               |                  |                      |
| Rohde & Schwarz               | EMI Test Receiver                 | ESR3            | 102455        | 2025/09/01       | 2026/08/31           |
| Sonoma instrument             | Pre-amplifier                     | 310 N           | 186238        | 2025/09/08       | 2026/09/07           |
| Sunol Sciences                | Broadband Antenna                 | JB1             | A040904-1     | 2023/07/20       | 2026/07/19           |
| Unknown                       | Chamber A Cable                   | Cable A1        | Cable A1      | 2025/09/08       | 2026/09/07           |
| Unknown                       | Chamber A Cable                   | Cable A2        | Cable A2      | 2025/09/08       | 2026/09/07           |
| Audix                         | EMI Test software                 | E3              | 19821b(V9)    | NCR              | NCR                  |
| TDK                           | Chamber                           | Chamber A       | 2#            | 2023/07/12       | 2026/07/11           |
| Rohde & Schwarz               | Spectrum Analyzer                 | FSV40           | 101605        | 2025/09/01       | 2026/08/31           |
| A.H.System                    | Preamplifier                      | PAM-0118P       | 489           | 2025/09/08       | 2026/09/07           |
| Schwarzbeck                   | Horn Antenna                      | BBHA9120D(1201) | 1143          | 2023/07/26       | 2026/07/25           |
| Unknown                       | Chamber B Cable                   | Cable B1        | Cable B1      | 2025/09/08       | 2026/09/07           |
| Unknown                       | Chamber B Cable                   | Cable B2        | Cable B2      | 2025/09/08       | 2026/09/07           |
| Unknown                       | Chamber B Cable                   | Cable B3        | Cable B3      | 2025/09/08       | 2026/09/07           |
| JD                            | Filter Switch Unit                | DT7220FSU       | DS79906       | 2025/08/12       | 2026/08/11           |
| JD                            | Multiplex Switch Test Control Set | DT7220SCU       | DS79903       | 2025/08/12       | 2026/08/11           |
| Audix                         | EMI Test software                 | E3              | 191218 V9(c)  | NCR              | NCR                  |
| TDK                           | Chamber                           | Chamber B       | 1#            | 2023/07/14       | 2026/07/13           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


## FCC §15.109 - RADIATED EMISSIONS

### Applicable Standard


FCC §15.109

### EUT Setup


#### Below 1GHz for Radiated Emissions

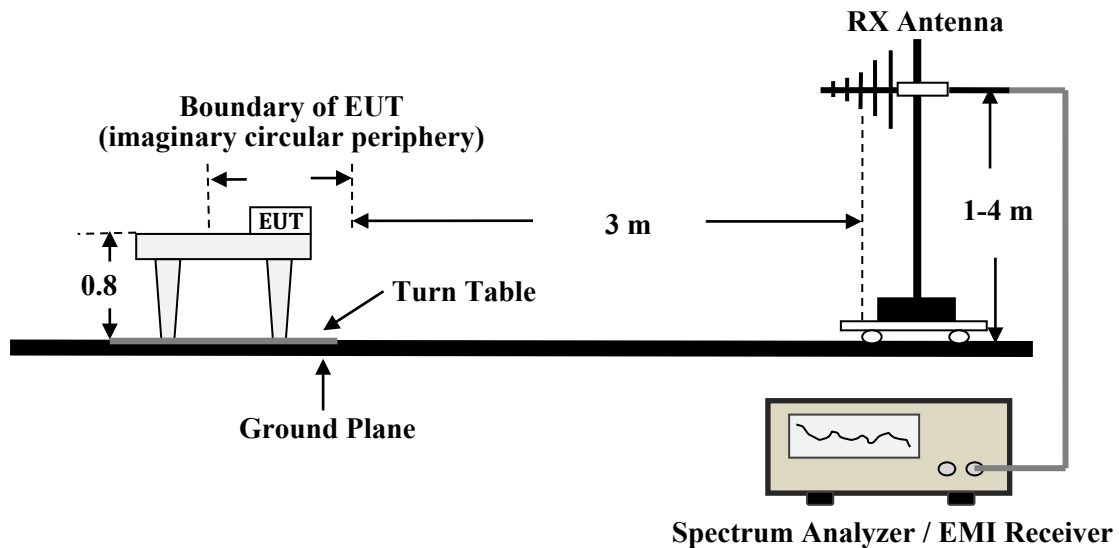

#### Above 1GHz for Radiated Emissions

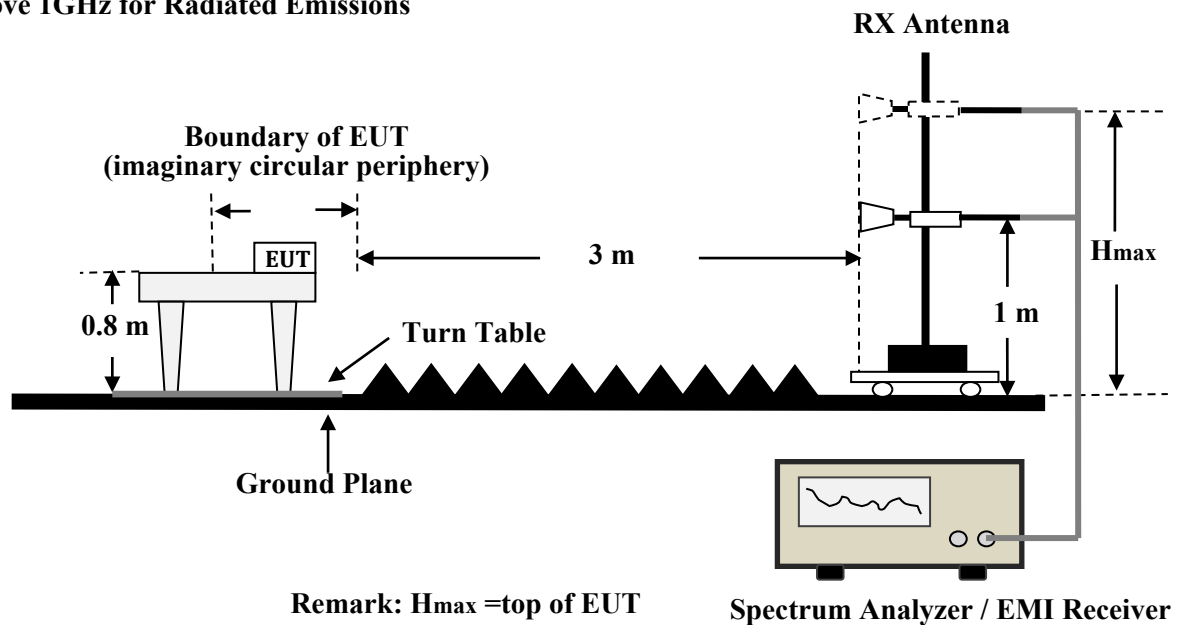

## Radiated Emissions Setup Configuration

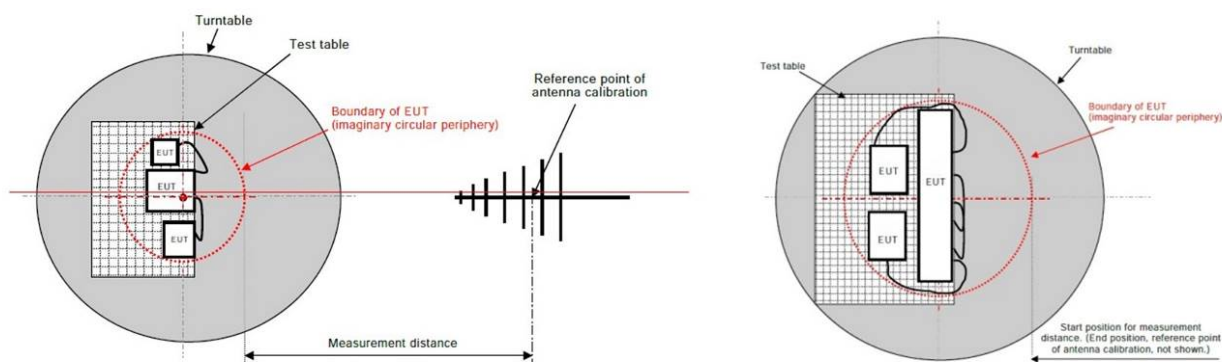

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The related limit was specified in FCC Part 15B.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 120 kHz | 500 kHz   | /       | PK          |
|                   | /       | /         | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK          |
|                   | 1MHz    | 10 Hz     | /       | PK          |

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the emission level of the EUT in Peak mode was 6dB lower than the limit specified, Peak values of EUT will be reported. Otherwise, the emission will be repeated by using the Quasi-Peak method and reported for frequency range below 1GHz.

If emission level of the EUT in Peak measurement mode is 20dB lower than peak limit line (that means the emission level in Peak measurement mode complies with both Peak and average limit lines) then only Peak measurement result is reported. Otherwise, Emission in average measurement mode shall be measured, and reported for frequency range above 1GHz.

## Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

The “Over limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6dB below the limit for Class B. The equation for Over Limit calculation is as follows:

$$\text{Over limit} = \text{Level} - \text{Limit}$$

## Test Data

### Environmental Conditions


|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 22.3~24.7 °C    |
| <b>Relative Humidity:</b> | 59~51 %         |
| <b>ATM Pressure:</b>      | 101.1~101.6 kPa |

*The testing was performed by Anson Su on 2025-11-03 for below 1GHz and Leon Guo on 2025-10-30 for above 1GHz.*

## Test Mode 1

30 MHz~1 GHz


## Horizontal

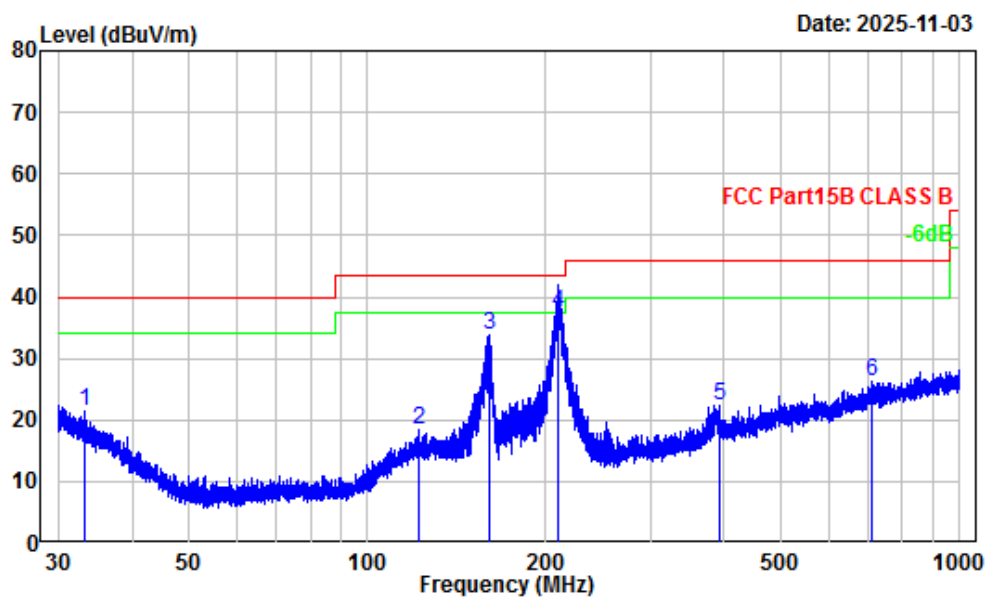

Site : Chamber A  
Condition : 3m Horizontal  
Project Number : 2501X31094E-EMA1  
Test Mode : Mode 1  
Detector: Peak RBW/VBW: 120/500kHz  
Detector: QP RBW : 120kHz  
Tester : Anson Su

|   | Freq   | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|--------|--------|------------|--------|------------|------------|--------|
|   | MHz    | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 33.27  | -7.77  | 29.22      | 21.45  | 40.00      | -18.55     | Peak   |
| 2 | 121.87 | -11.25 | 29.68      | 18.43  | 43.50      | -25.07     | Peak   |
| 3 | 160.06 | -12.72 | 46.44      | 33.72  | 43.50      | -9.78      | Peak   |
| 4 | 209.31 | -13.95 | 51.40      | 37.45  | 43.50      | -6.05      | QP     |
| 5 | 394.34 | -8.68  | 30.99      | 22.31  | 46.00      | -23.69     | Peak   |
| 6 | 709.18 | -3.41  | 29.79      | 26.38  | 46.00      | -19.62     | Peak   |

## Vertical

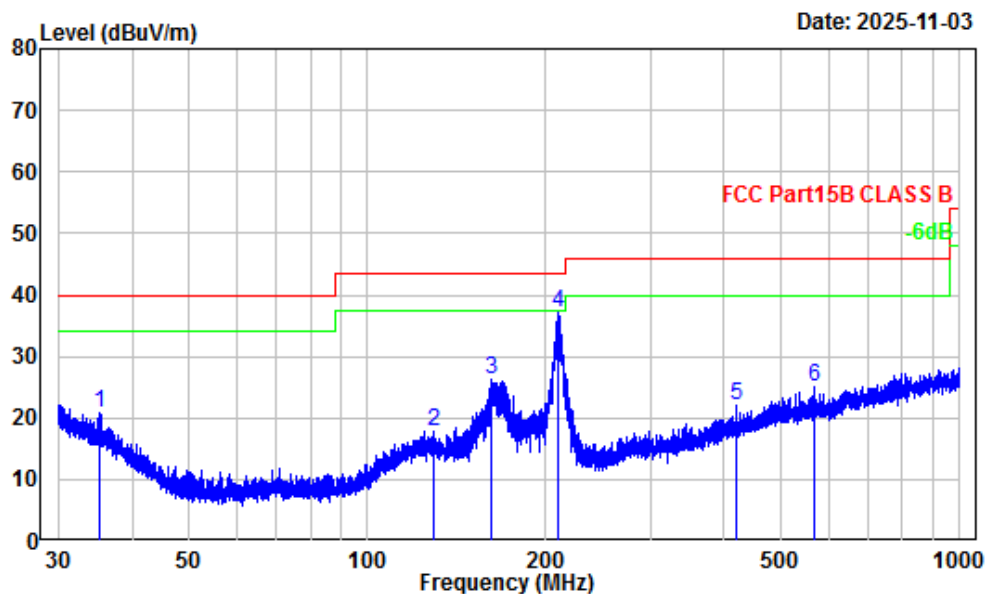


Site : Chamber A  
Condition : 3m Vertical  
Project Number : 2501X31094E-EMA1  
Test Mode : Mode 1  
Detector: Peak RBW/VBW: 120/500kHz  
Tester : Anson Su

|   | Freq Factor |        | Read  |        | Limit  | Over   | Remark |
|---|-------------|--------|-------|--------|--------|--------|--------|
|   | MHz         | dB/m   | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1 | 35.24       | -9.03  | 29.75 | 20.72  | 40.00  | -19.28 | Peak   |
| 2 | 129.18      | -11.21 | 29.17 | 17.96  | 43.50  | -25.54 | Peak   |
| 3 | 161.47      | -12.72 | 39.12 | 26.40  | 43.50  | -17.10 | Peak   |
| 4 | 210.05      | -14.03 | 51.11 | 37.08  | 43.50  | -6.42  | Peak   |
| 5 | 418.19      | -7.97  | 30.10 | 22.13  | 46.00  | -23.87 | Peak   |
| 6 | 566.37      | -5.24  | 30.33 | 25.09  | 46.00  | -20.91 | Peak   |


1 ~ 12.5 GHz

## Horizontal

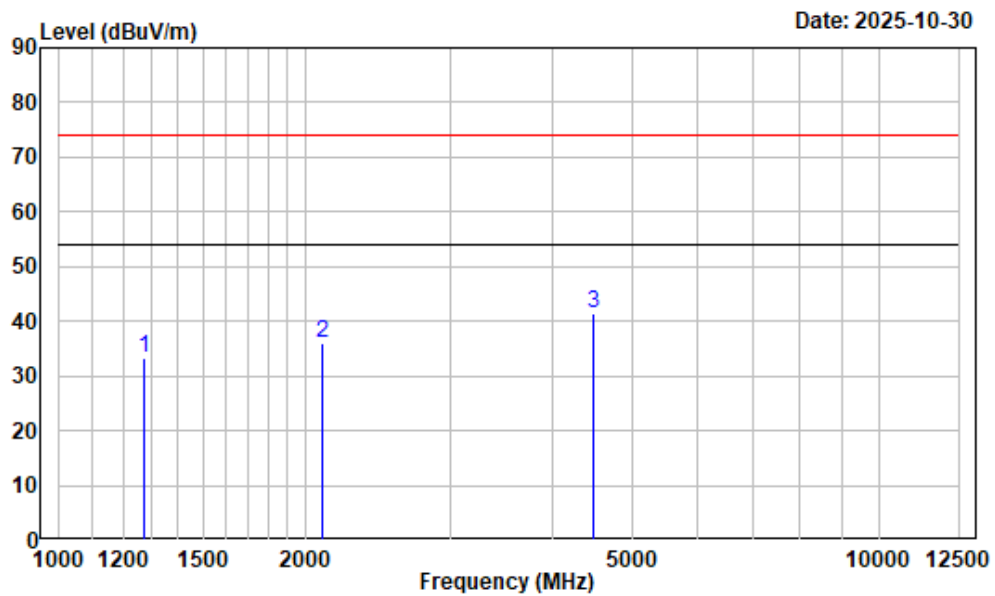

Site : chamber B  
Condition : Horizontal  
Project Number : 2501X31094E-EMA1  
Test mode : Mode 1  
Tester : Leon Guo  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak

|   | Freq Factor |        | Read Level |        | Limit | Over   | Remark |
|---|-------------|--------|------------|--------|-------|--------|--------|
|   | MHz         | dB/m   | dBuV       | dBuV/m | Line  | Limit  |        |
| 1 | 1271.875    | -14.53 | 47.65      | 33.12  | 74.00 | -40.88 | Peak   |
| 2 | 2091.250    | -11.65 | 47.60      | 35.95  | 74.00 | -38.05 | Peak   |
| 3 | 4488.125    | -8.11  | 49.39      | 41.28  | 74.00 | -32.72 | Peak   |

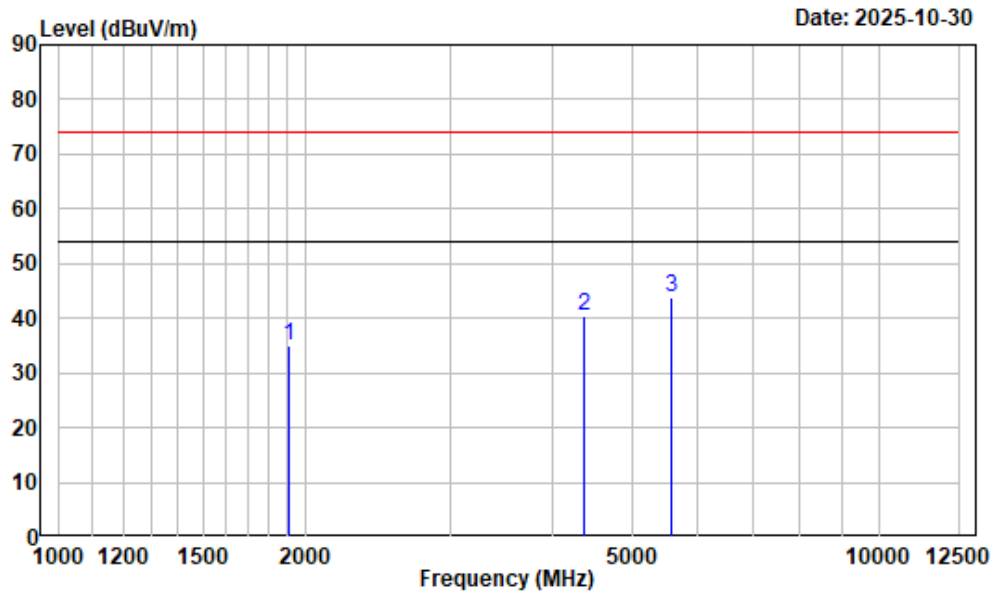**Vertical**


Site : chamber B  
Condition : Vertical  
Project Number : 2501X31094E-EMA1  
Test mode : Mode 1  
Tester : Leon Guo  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak

|   | Freq Factor |        | Read  |        | Limit  | Over   | Remark |
|---|-------------|--------|-------|--------|--------|--------|--------|
|   | MHz         | dB/m   | Level | Level  | Line   | Limit  |        |
|   | MHz         | dB/m   | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1 | 1911.250    | -13.27 | 48.12 | 34.85  | 74.00  | -39.15 | Peak   |
| 2 | 4361.875    | -8.72  | 48.98 | 40.26  | 74.00  | -33.74 | Peak   |
| 3 | 5576.875    | -6.20  | 49.96 | 43.76  | 74.00  | -30.24 | Peak   |

## Test Mode 2

30 MHz~1 GHz


## Horizontal

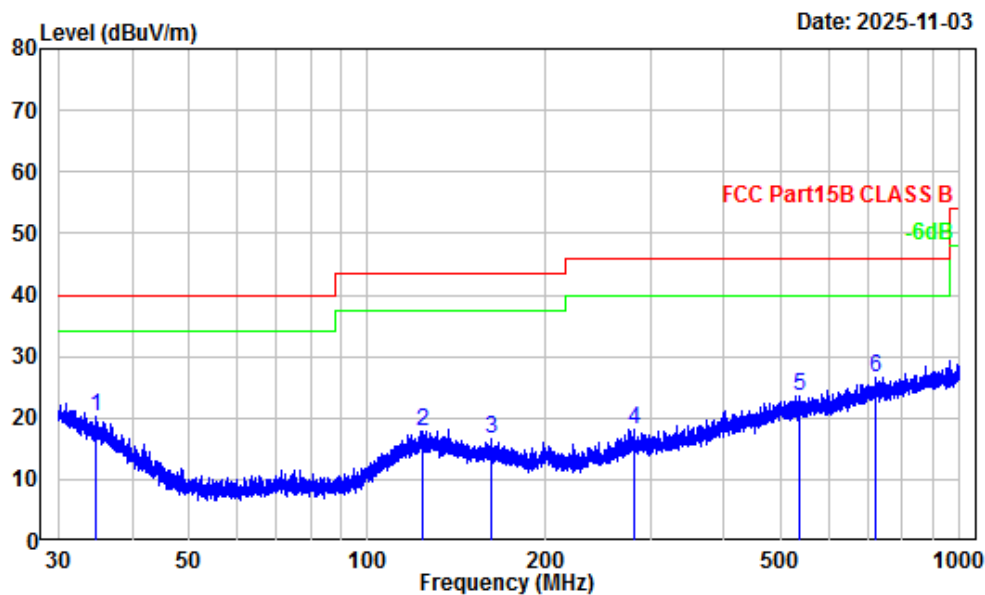

Site : Chamber A  
Condition : 3m Horizontal  
Project Number : 2501X31094E-EMA1  
Test Mode : Mode 2  
Detector: Peak RBW/VBW: 120/500kHz  
Tester : Anson Su

|   | Freq Factor |        | Read  | Limit  | Over   | Remark      |
|---|-------------|--------|-------|--------|--------|-------------|
|   | MHz         | dB/m   | Level | Line   | Limit  |             |
|   | MHz         | dB/m   | dBuV  | dBuV/m | dBuV/m | dB          |
| 1 | 34.76       | -8.75  | 28.98 | 20.23  | 40.00  | -19.77 Peak |
| 2 | 123.86      | -11.14 | 29.00 | 17.86  | 43.50  | -25.64 Peak |
| 3 | 162.04      | -12.72 | 29.34 | 16.62  | 43.50  | -26.88 Peak |
| 4 | 282.24      | -11.24 | 29.35 | 18.11  | 46.00  | -27.89 Peak |
| 5 | 535.94      | -5.69  | 29.27 | 23.58  | 46.00  | -22.42 Peak |
| 6 | 723.63      | -3.21  | 29.91 | 26.70  | 46.00  | -19.30 Peak |

## Vertical

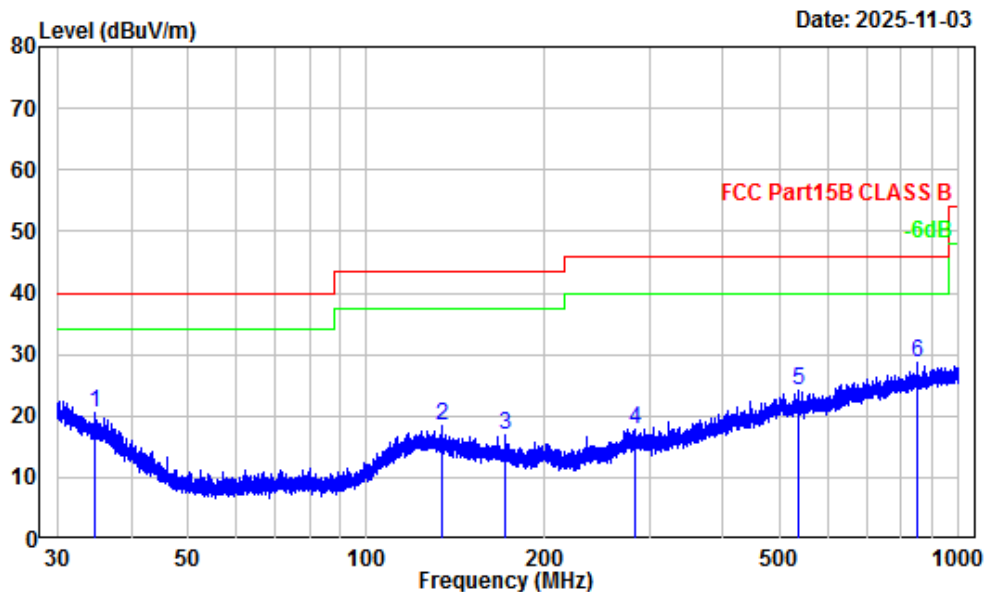


Site : Chamber A  
Condition : 3m Vertical  
Project Number : 2501X31094E-EMA1  
Test Mode : Mode 2  
Detector: Peak RBW/VBW: 120/500kHz  
Tester : Anson Su

|   | Freq Factor |        | Read  |        | Limit  | Over   | Remark |
|---|-------------|--------|-------|--------|--------|--------|--------|
|   | MHz         | dB/m   | Level | Level  | Line   | Limit  |        |
|   | MHz         | dB/m   | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1 | 34.67       | -8.69  | 29.24 | 20.55  | 40.00  | -19.45 | Peak   |
| 2 | 133.74      | -11.40 | 29.68 | 18.28  | 43.50  | -25.22 | Peak   |
| 3 | 170.94      | -13.18 | 30.00 | 16.82  | 43.50  | -26.68 | Peak   |
| 4 | 283.61      | -11.23 | 29.17 | 17.94  | 46.00  | -28.06 | Peak   |
| 5 | 537.59      | -5.66  | 29.68 | 24.02  | 46.00  | -21.98 | Peak   |
| 6 | 850.29      | -1.72  | 30.54 | 28.82  | 46.00  | -17.18 | Peak   |

1 ~ 12.5 GHz


## Horizontal

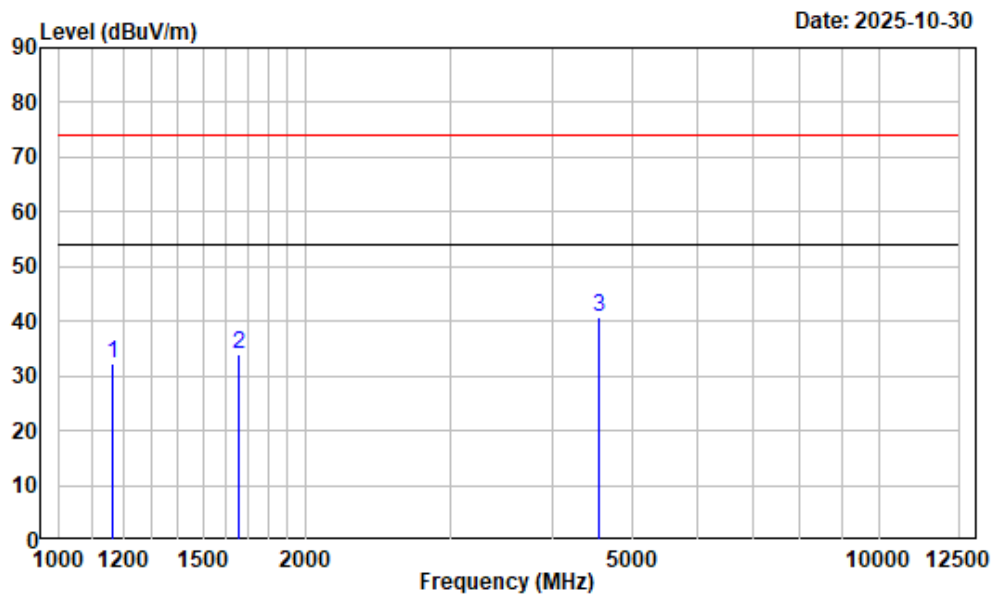

Site : chamber B  
Condition : Horizontal  
Project Number : 2501X31094E-EMA1  
Test mode : Mode 2  
Tester : Leon Guo  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak

|   | Freq Factor |        | Read Level |        | Limit  | Over   | Remark |
|---|-------------|--------|------------|--------|--------|--------|--------|
|   | MHz         | dB/m   | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1 | 1166.875    | -15.26 | 47.67      | 32.41  | 74.00  | -41.59 | Peak   |
| 2 | 1661.875    | -14.02 | 47.90      | 33.88  | 74.00  | -40.12 | Peak   |
| 3 | 4539.375    | -8.13  | 48.83      | 40.70  | 74.00  | -33.30 | Peak   |

## Vertical

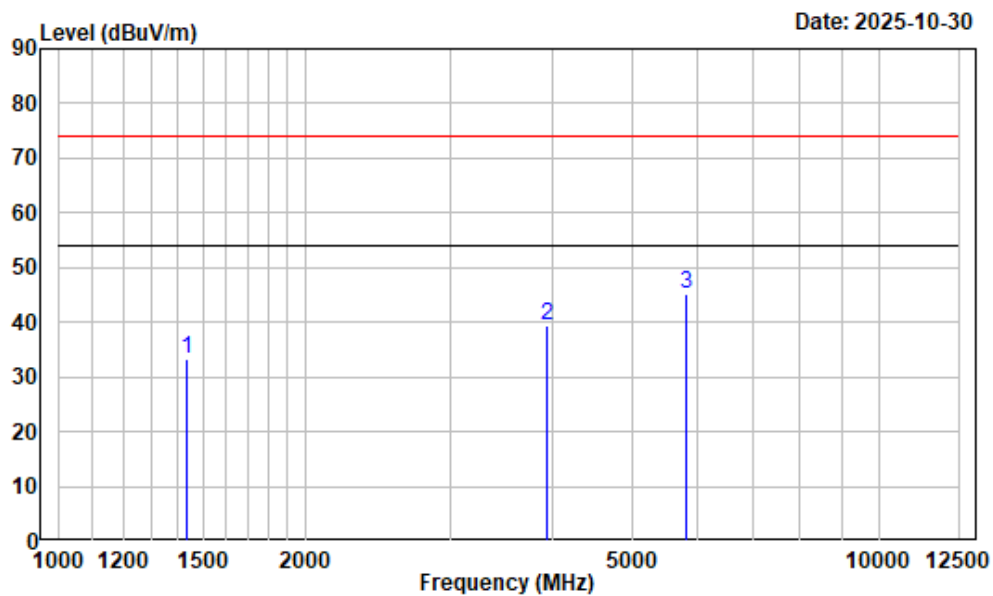

Site : chamber B  
Condition : Vertical  
Project Number : 2501X31094E-EMA1  
Test mode : Mode 2  
Tester : Leon Guo  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak

|   | Freq Factor |        | Read  |        | Limit  | Over   | Remark |
|---|-------------|--------|-------|--------|--------|--------|--------|
|   | MHz         | dB/m   | Level | Level  | Line   | Limit  |        |
|   | MHz         | dB/m   | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1 | 1430.625    | -14.08 | 47.53 | 33.45  | 74.00  | -40.55 | Peak   |
| 2 | 3937.500    | -9.44  | 48.82 | 39.38  | 74.00  | -34.62 | Peak   |
| 3 | 5807.500    | -5.03  | 50.08 | 45.05  | 74.00  | -28.95 | Peak   |

## **EXHIBIT A - EUT PHOTOGRAPHS**

---


Please refer to the report number is 2501X31094E-EUT.

## EXHIBIT B - TEST SETUP PHOTOGRAPHS


Test Mode 1  
Radiated Emissions - Front View (Below 1 GHz)




Radiated Emissions - Rear View (Below 1 GHz)

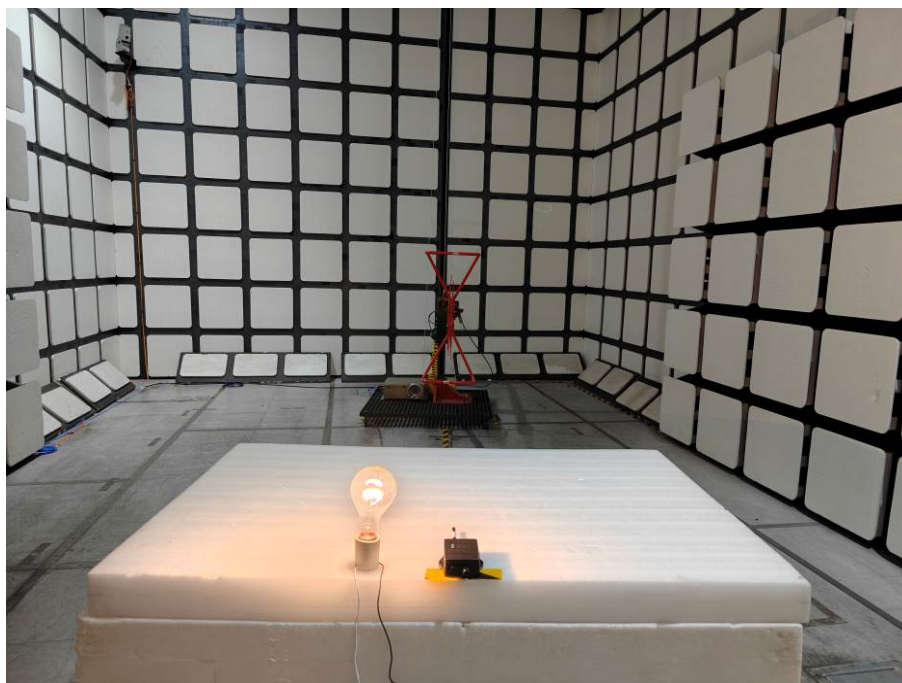


**Radiated Emissions - Front View (Above 1 GHz)**

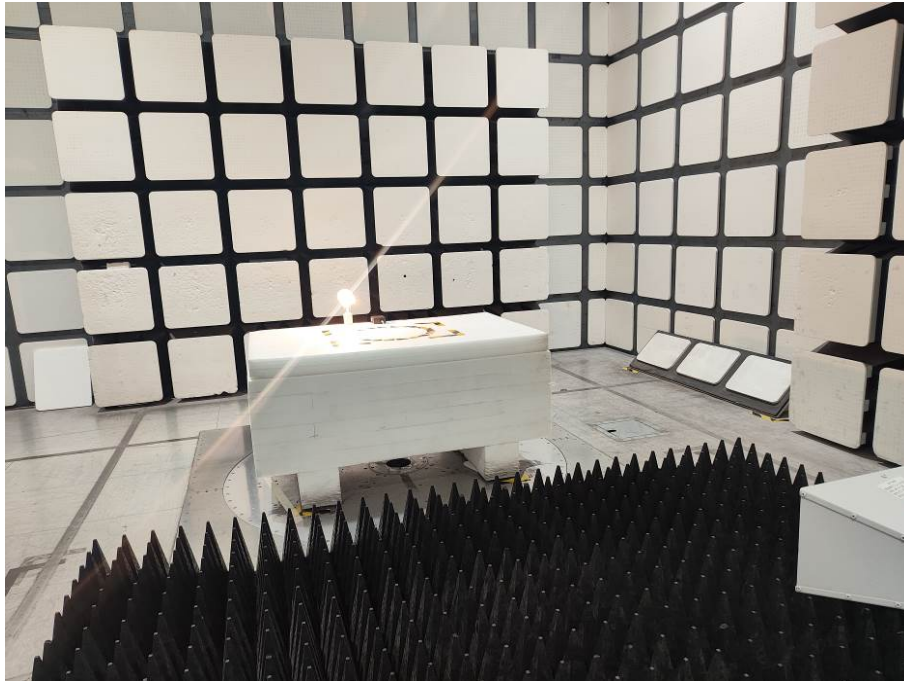


**Radiated Emissions - Rear View (Above 1 GHz)**

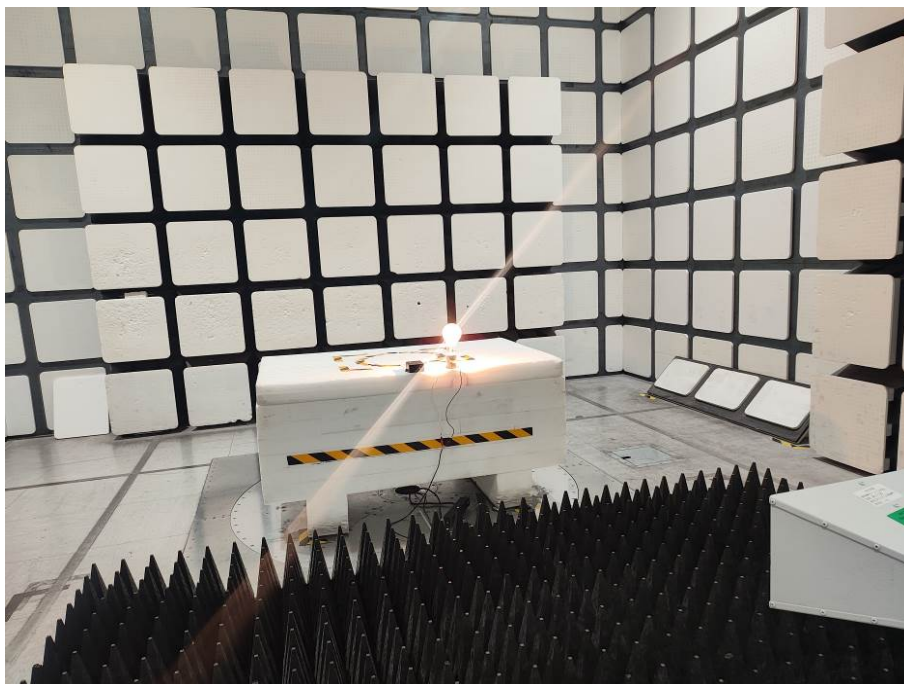


Test Mode 2  
**Radiated Emissions - Front View (Below 1 GHz)**

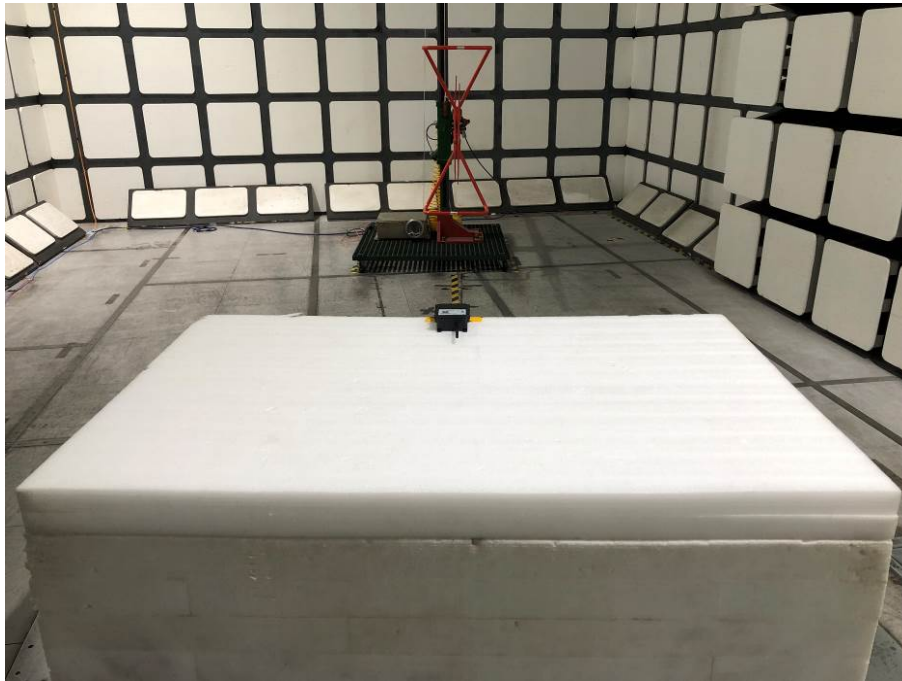


**Radiated Emissions - Rear View (Below 1 GHz)**

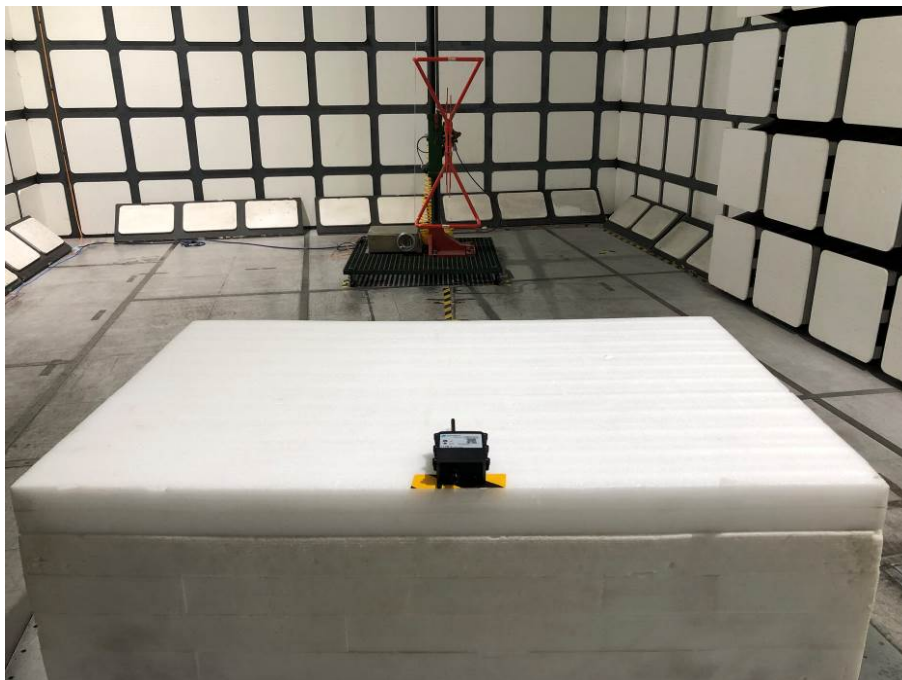

**Radiated Emissions - Front View (Above 1 GHz)**

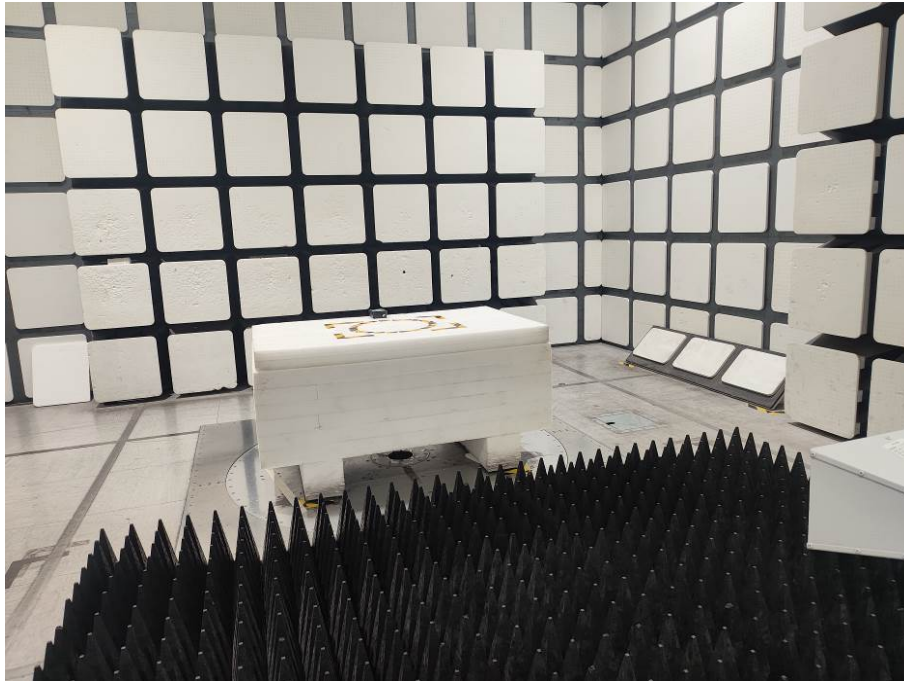

**Radiated Emissions - Rear View (Above 1 GHz)**

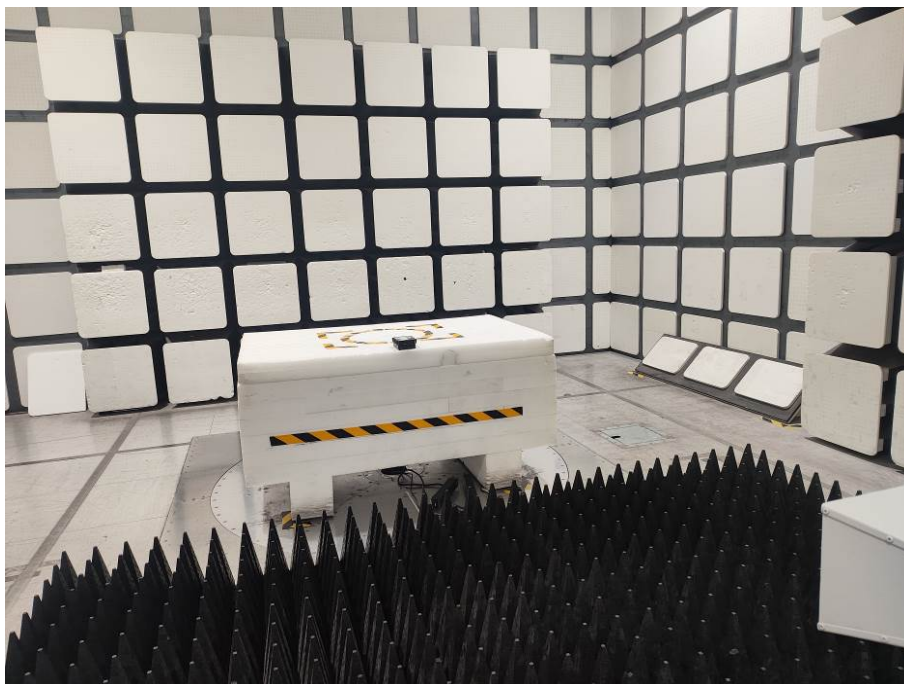

## EXHIBIT C - PRODUCT SIMILARITY DECLARATION OF LETTER

Dragino Technology Co., Limited.

Address: Room 202, BaoChengTai industrial park, No.8 CaiYun LongCheng Street, LongGang District, Shenzhen China

Tel: 86-0755-86610821; Fax: 86-0755-61673660

Email: [edwin@dragino.com](mailto:edwin@dragino.com)

### Product Similarity Declaration

Date: 2025-11-09

Dear Sir/Madam,

We, **Dragino Technology Co., Limited.** hereby declare that we have a product named as LoRaWAN Sensor Node (model: DDS75-LB), were tested by Bay Area Compliance Laboratories Corp. (Shenzhen). Meanwhile, For our marketing purpose, we would like to list a series model (LDS25-LB, LDS25-LS, LDS25-LB2, CS01-LB, CS01-LS, CS01-LB2, SE01-LB, SE01-LS, SE01-LB2, DDS75-LB, DDS75-LS, DDS75-LB2, DDS45-LB, DDS45-LS, DDS45-LB2, DDS20-LB, DDS20-LS, DDS20-LB2, MDS120-LB, MDS120-LS, MDS120-LB2, SPH01-LB, SPH01-LS, SPH01-LB2, LMS01-LB, LMS01-LS, LMS01-LB2, WQS-LB, WQS-LS, WQS-LB2, SE0X-LB, SE0X-LS, SE0X-LB2, WSC2-LB, WSC2-LS, WSC2-LB2, MDS200-LB, MDS200-LS, MDS200-LB2, LDS40-LB, LDS40-LS, LDS40-LB2, LDS12-LB, LDS12-LS, LDS12-LB2, DDS04-LB, DDS04-LS, DDS04-LB2, RS485-LB, RS485-LB2, RS485-LS, RS485W-LB, RS485W-LS, RS485W-LB2) on reports and certificate. All the models are identical in electrically, the differences are shown in the table below. No other changes were made to them.

| Model     | Probes                             | PCB                     | Battery         |
|-----------|------------------------------------|-------------------------|-----------------|
| DDS75-LB  | Ultrasonic Probe                   | without charging module | 8500mAh battery |
| RS485-LB  | N/A                                |                         |                 |
| SE01-LB   | Soil Moisture Probe                |                         |                 |
| DDS45-LB  | Ultrasonic Probe                   |                         |                 |
| DDS20-LB  | Ultrasonic Probe                   |                         |                 |
| MDS120-LB | Microwave Probe                    |                         |                 |
| MDS200-LB | Microwave Probe                    |                         |                 |
| LDS12-LB  | LiDar Probe                        |                         |                 |
| SPH01-LB  | Soil PH probe                      |                         |                 |
| LMS01-LB  | Leaf Moisture Probe                |                         |                 |
| DDS04-LB  | Ultrasonic Probe                   |                         |                 |
| LDS25-LB  | LiDAR Distance Probe               |                         |                 |
| CS01-LB   | Current Probe                      |                         |                 |
| WQS-LB    | Smoke Probe                        |                         |                 |
| SE0X-LB   | DR-SE-6P Soil Moisture & EC. Probe |                         |                 |
| WSC2-LB   | Alarm                              |                         |                 |
| LDS40-LB  | LiDAR Distance Probe               |                         |                 |

|            |                                    |                                        |                              |
|------------|------------------------------------|----------------------------------------|------------------------------|
| DDS75-LS   | Soil Moisture Probe                | Has a charging module                  | 3000mAh rechargeable battery |
| RS485-LS   | without Probe                      |                                        |                              |
| SE01-LS    | Ultrasonic Probe                   |                                        |                              |
| DDS45-LS   | Microwave Probe                    |                                        |                              |
| DDS20-LS   | Microwave Probe                    |                                        |                              |
| MDS120-LS  | LiDar Probe                        |                                        |                              |
| MDS200-LS  | Soil PH probe                      |                                        |                              |
| LDS12-LS   | Leaf Moisture Probe                |                                        |                              |
| SPH01-LS   | Ultrasonic Probe                   |                                        |                              |
| LMS01-LS   | Soil Moisture Probe                |                                        |                              |
| DDS04-LS   | Ultrasonic Probe                   |                                        |                              |
| LDS25-LS   | LiDAR Distance Probe               |                                        |                              |
| CS01-LS    | Current Probe                      |                                        |                              |
| WQS-LS     | Smoke Probe                        |                                        |                              |
| SE0X-LS    | DR-SE-6P Soil Moisture & EC. Probe |                                        |                              |
| WSC2-LS    | Alarm                              |                                        |                              |
| LDS40-LS   | LiDAR Distance Probe               |                                        |                              |
| DDS75-LB2  | Soil Moisture Probe                | Without charging module                | 19000mAh battery             |
| RS485-LB2  | without Probe                      |                                        |                              |
| SE01-LB2   | Ultrasonic Probe                   |                                        |                              |
| DDS45-LB2  | Microwave Probe                    |                                        |                              |
| DDS20-LB2  | Microwave Probe                    |                                        |                              |
| MDS120-LB2 | LiDar Probe                        |                                        |                              |
| MDS200-LB2 | Soil PH probe                      |                                        |                              |
| LDS12-LB2  | Leaf Moisture Probe                |                                        |                              |
| SPH01-LB2  | Ultrasonic Probe                   |                                        |                              |
| LMS01-LB2  | Soil Moisture Probe                |                                        |                              |
| DDS04-LB2  | Ultrasonic Probe                   |                                        |                              |
| LDS25-LB2  | LiDAR Distance Probe               |                                        |                              |
| CS01-LB2   | Current Probe                      |                                        |                              |
| WQS-LB2    | Smoke Probe                        |                                        |                              |
| SE0X-LB2   | DR-SE-6P Soil Moisture & EC. Probe |                                        |                              |
| WSC2-LB2   | Alarm                              |                                        |                              |
| LDS40-LB2  | LiDAR Distance Probe               |                                        |                              |
| RS485W-LS  | Without probe                      | 1. Has a charging module<br>2. Support | 3000mAh rechargeable battery |

|            |               |                                                     |                  |
|------------|---------------|-----------------------------------------------------|------------------|
|            |               | 12Vdc output                                        |                  |
| RS485W-LB  | Without probe | 3. Has a charging module<br>4. Support 12Vdc output | 8500mAh battery  |
| RS485W-LB2 | Without probe | 1. Has a charging module<br>2. Support 12Vdc output | 19000mAh battery |


We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Sincerely Yours,

Signature

edwin chen

Manager



\*\*\*\*\* END OF REPORT \*\*\*\*\*