

# Water Quality Sensor Transmitter

## OVERVIEW:

The Dragino WQS series main unit is advanced instruments designed for comprehensive water quality monitoring across various applications. They are ideal for monitoring tap water, industrial water, environmental water, and wastewater, etc, which offer precise and reliable measurements to ensure water quality standards are met.

The Dragino WQS series main unit **supports 1-3 probes**, supports connecting 1 to 3 water quality probes, including **EC, pH, DO, ORP, TS, CL and COD probes**.

It **detects water quality parameters**, and uploads the value via wireless to **LoRaWAN, NB-IoT, LTE-M, or LTE CAT-1** Server.

With **built-in BLE configuration and wireless OTA firmware updates**, the WQS is simple to set up and maintain.

To support various deployment scenarios, the WQS offers multiple power options — including **8,500 mAh or 19,000 mAh high-capacity non-rechargeable Li-ion battery**, **1,000 mAh rechargeable Li-ion battery**, as well as a **solar-powered version with a rechargeable Li-ion battery** for long-term, maintenance-free operation.



Model WQS series doesn't include probes. Probes are purchased separately.

## Features:

- Measure water quality and provide information for water quality conditions
- Support EC/PH/DO/ORP/TS/CL/COD Type Water Quality Probe
- Support 1 ~ 3 probes

## Applications:



Wastewater Monitoring



Environmental Water Monitoring



General Water Treatment



Tap Water



Industrial Production



Chemical Reaction



Industrial Water



Surface Water

## Dragino Technology Co., Limited

Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad  
LongCheng Street, LongGang District ; Shenzhen 518116, China  
Direct: +86 755 86610829 | Fax: +86 755 86647123

**WWW.DRAGINO.COM**  
sales@dragino.com

# Water Quality Sensor Transmitter -- Probe Option

## DR-ECK1.0 -- EC Digital Electrode Sensor:

- ※ Power supply: DC 7~30V
- ※ Power consumption:  $\leq 0.5W$
- ※ Interface: RS485. 9600 Baud Rate
- ※ EC Range:  $K=1$ : 0 ~ 2000 $\mu S/cm$
- ※ EC Resolution: 1  $\mu S/cm$
- ※ EC Accuracy:  $\pm 1\%FS$
- ※ Temperature Measure Range: -20 ~ 60 °C, Resolution: 0.1°C
- ※ Temperature Accuracy:  $\pm 0.5$  °C
- ※ Working environment: Temperature range: 0~60 °C
- ※ Equipped with salinity and TDS conversion function
- ※ IP Rated: IP68
- ※ Pressure resistance: 0.6MPa
- ※ Wire length: 5 meters
- ※ Service life: 1 year of normal use



## DR-ECK10.0 -- EC Digital Electrode Sensor:

- ※ Power supply: DC 7~30V
- ※ Power consumption:  $\leq 0.5W$
- ※ Interface: RS485. 9600 Baud Rate
- ※ EC Range:  $K=10$ : 10 ~ 20000  $\mu S/cm$
- ※ EC Resolution: 10  $\mu S/cm$
- ※ EC Accuracy:  $\pm 1\%FS$
- ※ Temperature Measure Range: -20 ~ 60 °C, Resolution: 0.1°C
- ※ Temperature Accuracy:  $\pm 0.5$  °C
- ※ Working environment: Temperature range: 0~60 °C
- ※ Equipped with salinity and TDS conversion function
- ※ IP Rated: IP68
- ※ Pressure resistance: 0.6MPa
- ※ Wire length: 5 meters
- ※ Service life: 1 year of normal use



## DR-EC200 -- Four Electrode EC Sensor:

- ※ Power supply: DC 7~30V
- ※ Power consumption:  $< 0.5W$
- ※ Interface: RS485. 9600 Baud Rate
- ※ EC Range: 1 ~ 200,000 $\mu S/cm$ , Resolution: 1  $\mu S/cm$
- ※ EC Accuracy:  $\pm 1\%FS$
- ※ Salinity measurement range: 0 ~ 70PSU, Resolution: 0.1PSU
- ※ Temperature Measure Range: -5 ~ 80 °C, Resolution: 0.1°C
- ※ Temperature Accuracy:  $\pm 0.5$  °C
- ※ Temperature compensation range: -5 ~ 80 °C (default compensation temperature 25°C)
- ※ Temperature compensation coefficient: Default 0.2
- ※ Working environment:
  - \* Ambient Temperature: 0 ~ 60°C
  - \* Relative Humidity:  $< 85\% RH$  (Specifically refers to the cable male and female)
  - \* EC200 Continuous monitoring of cross-section water quality, aquaculture, sewage treatment, environmental protection, pharmaceuticals, food, tap water, seawater and other high conductivity environments.
- ※ IP Rated: IP68
- ※ Pressure resistance: 0.6MPa
- ※ Wire length: 5 meters
- ※ Service life: 1 year of normal use



# Water Quality Sensor Transmitter -- Probe Option

## DR-ORP1 -- Oxidation-Reduction Potential Sensor:

- ※ Power supply: DC 7~30V
- ※ Power consumption:  $\leq 0.5W$
- ※ Interface: RS485. 9600 Baud Rate
- ※ High purity platinum electrode for ORP
- ※ ORP Range: -1999 ~ 1999 mV; Resolution: 1mV
- ※ ORP Accuracy:  $\pm 3$  mV
- ※ Auto Temperature Compensate
- ※ Working environment: Temperature range: 0~60 °C; Humidity < 85% RH
- ※ IP Rated: IP68
- ※ Pressure resistance: 0.6MPa
- ※ Wire length: 5 meters
- ※ Service life: 1 year of normal use



## DR-DO1 -- Dissolved Oxygen Sensor:

- ※ Power supply: DC 5~24V
- ※ Power consumption:  $\leq 0.5W$
- ※ Interface: RS485. 9600 Baud Rate
- ※ Optical Dissolved Oxygen Measurement
- ※ DO Range: 0 ~ 20.00 mg/L, Resolution: 0.01 mg/L
- ※ DO Accuracy:  $\pm 3\%$
- ※ Temperature Measure Range: 0 ~ 50 °C, Resolution: 0.01 °C
- ※ Temperature Accuracy:  $\pm 0.5$  °C
- ※ Working environment: Temperature range: 0~60 °C; Humidity < 95% RH
- ※ The electrode adopts high-quality low-noise cable
- ※ IP Rated: IP68
- ※ Pressure resistance: 0.6MPa
- ※ Wire length: 5 meters
- ※ Service life: 1 year of normal use



## DR-PH01 -- Water PH Sensor:

- ※ Power supply: DC 7~30V
- ※ Power consumption:  $\leq 0.5W$
- ※ Interface: RS485. 9600 Baud Rate
- ※ PH Range: 0 ~ 14.00 PH
- ※ Resolution: 0.01 PH
- ※ PH Accuracy:  $\pm 0.15$  PH
- ※ Auto Temperature Compensate
- ※ Temperature Measure Range: 0 ~ 60 °C, Resolution: 0.1 °C
- ※ Temperature Accuracy:  $\pm 0.5$  °C
- ※ Working environment: Temperature range: 0~60 °C
- ※ The reference electrode adopts a double salt bridge design
- ※ IP Rated: IP68
- ※ Pressure resistance: 0.6MPa
- ※ Wire length: 5 meters
- ※ Service life: 1 year of normal use



# Water Quality Sensor Transmitter -- Probe Option

## DR-TS200/DR-TS4000 -- Water Turbidity Sensor:

- ※ Power supply: DC 10~30V
- ※ Power consumption:  $\leq 0.2W$
- ※ Communication interface: RS485; standard MODBUS-RTU protocol;  
Baud rate: Default: 9600 (configurable to 1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115200)
- ※ TS Range: TS200: 0~200 NTU; TS4000: 0~ 4000NTU
- ※ Resolution: Turbidity TS200: 0.1 NTU / TS4000: 1 NTU; Temperature: 0.1°C
- ※ Accuracy:  $\pm 5\%FS(25^{\circ}C)$ ;  $\pm 0.5^{\circ}C$
- ※ Operating temperature: 0~40°C
- ※ Measurement principle: 90° light scattering
- ※ Lifespan: 2 years under normal use
- ※ IP Rated: IP68
- ※ Electrode cable length: 5m by default
- ※ Service life: 1 year of normal use



## DR-CL-2ML -- Integrated Residual Chlorine Sensor:

- ※ Power supply: DC 7~30V
- ※ Power consumption: 0.19W
- ※ Interface: RS485. 9600 Baud Rate
- ※ CL Range: 0 ~ 2 mg/L , Resolution: 0.01 mg/L
- ※ CL Accuracy:  $\pm 5\% FS$
- ※ Working environment:
  - \* Temperature range: 0 ~ 50 °C
  - \* pH: 4 ~ 9
  - \* Flow rate: 30 ~ 60L/h (flow channel installation)
- ※ IP Rated: IP68
- ※ Pressure resistance: 0.6MPa
- ※ Wire length: 5 meters
- ※ Service life: 1 year of normal use



## DR-CL-10ML -- Integrated Residual Chlorine Sensor:

- ※ Power supply: DC 7~30V
- ※ Power consumption: 0.19W
- ※ Interface: RS485. 9600 Baud Rate
- ※ CL Range: 0 ~ 10 mg/L , Resolution: 0.01 mg/L
- ※ CL Accuracy:  $\pm 5\% FS$
- ※ Working environment:
  - \* Temperature range: 0 ~ 50 °C
  - \* pH: 4 ~ 9
  - \* Flow rate: 30 ~ 60L/h (flow channel installation)
- ※ IP Rated: IP68
- ※ Pressure resistance: 0.6MPa
- ※ Wire length: 5 meters
- ※ Service life: 1 year of normal use



# Water Quality Sensor Transmitter -- Probe Option

## DR-DO2-- Dissolved Oxygen Sensor:

- ※ Especially suitable for dissolved oxygen in seawater
- ※ Power supply: DC 10~30V
- ※ Power consumption: 0.2W
- ※ Interface: RS485. 9600 Baud Rate
- ※ The fluorescence method, which uses a principle that does not consume oxygen and requires no electrolyte, is used for measurement.
- ※ DO Range: 0 ~ 20.00 mg/L , Resolution: 0.01 mg/L; 0.1%; 0.1°C
- ※ DO Accuracy:  $\pm 3\%FS$ ;  $\pm 0.5^{\circ}C$  (25°C)
- ※ Response Time:  $\leq 60s$
- ※ Equipment Operating Conditions: 0~40 °C
- ※ Fluorescent Film Lifespan: Normal Use: 1 year
- ※ Waterproof Rating: IP68
- ※ Pressure Resistance: 0.6MPa
- ※ Electrode Wire Length: 5meter
- ※ Enclosure Material: Corrosion-resistant plastics and stainless steel



## DR-COD -- Chemical Oxygen Demand Sensor:

- ※ An internal self-cleaning system effectively prevents biofouling
- ※ Use modulated light signals to reduce visible light interference
- ※ Dual-path measurement to compensate for the impact of turbidity on COD measurement
- ※ Power supply: DC 9~30V
- ※ Power consumption:  $\leq 0.8W$  (normal operation);  $\leq 1.5W$  (when the self-cleaning system is working)
- ※ Interface: RS485. 9600 Baud Rate
- ※ Measurement Principle: Dual-wavelength ultraviolet absorption method
- ※ Measurement Range: COD: 0~500mg/L equiv.KHP; Turbidity: 0~200NTU
- ※ Measurement Deviation: COD:  $\pm 5\%FS$  equiv.KHP (25°C); Turbidity:  $\pm 5\%FS$  (25°C)
- ※ Measurement Resolution: COD: 0.1mg/L; Turbidity: 0.1NTU
- ※ Temperature Resolution: 0.1°C ; Temperature Deviation:  $\pm 0.5^{\circ}C$
- ※ Repeatability:  $\pm 1\%FS$  equiv.KHP (25°C)
- ※ Response Time:  $\leq 20sec$
- ※ Equipment Operating Conditions: 0~40°C
- ※ Waterproof rating: IP68 ; Flow rate:  $< 3m/s$
- ※ Pressure resistance:  $< 0.1MPa$
- ※ Electrode wire length: 5meter
- ※ Enclosure Material: Corrosion-resistant plastics and stainless steel
- ※ Recommended maintenance and calibration frequency: 3 months
- ※ Self-cleaning system life: 18 months



# Wireless & Battery Selection

|                   | LB                                                                                         | LB2                                                                                        | LS                                                                                         | NB                                                                           | NB2                                                                          | NS                                                                           | CB                                                                                                                                                                 | CB2                                                                                                                                                                | CS                                                                                                                                                                 | KS                                                                                                                                                                                                  | KN                                                                                                                                                                                                  |
|-------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wireless          | LoRaWAN                                                                                    | LoRaWAN                                                                                    | LoRaWAN                                                                                    | NB-IoT                                                                       | NB-IoT                                                                       | NB-IoT                                                                       | NB-IoT & LTE-M                                                                                                                                                     | NB-IoT & LTE-M                                                                                                                                                     | NB-IoT & LTE-M                                                                                                                                                     | LTE CAT-1                                                                                                                                                                                           | LTE CAT-1                                                                                                                                                                                           |
| Module            | LA66                                                                                       | LA66                                                                                       | LA66                                                                                       | BC660K-GL                                                                    | BC660K-GL                                                                    | BC660K-GL                                                                    | BG95-M2                                                                                                                                                            | BG95-M2                                                                                                                                                            | BG95-M2                                                                                                                                                            | EG800xx                                                                                                                                                                                             | EG800xx                                                                                                                                                                                             |
| Frequency Band    | EU433, CN470, EU868, IN865, KR920, MA869, AU915, US915, AS923-1, AS923-2, AS923-3, AS923-4 | EU433, CN470, EU868, IN865, KR920, MA869, AU915, US915, AS923-1, AS923-2, AS923-3, AS923-4 | EU433, CN470, EU868, IN865, KR920, MA869, AU915, US915, AS923-1, AS923-2, AS923-3, AS923-4 | <b>CAT-NB2:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B70/B85 | <b>CAT-NB2:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B70/B85 | <b>CAT-NB2:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B70/B85 | <b>CAT-NB2:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B71/B85<br><br><b>LTE-M:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B27/B28/B66/B85 | <b>CAT-NB2:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B71/B85<br><br><b>LTE-M:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B27/B28/B66/B85 | <b>CAT-NB2:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B28/B66/B71/B85<br><br><b>LTE-M:</b><br>B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B27/B28/B66/B85 | <b>EU:</b><br>For European, Asia, Australia, LTE-FDD: B1/3/5/7/8/20/28<br><b>LA:</b><br>For Latin America, LTE-FDD: B2/3/4/5/7/8/28/66<br><b>NA:</b><br>For North America, LTE-FDD: B2/4/5/12/13/66 | <b>EU:</b><br>For European, Asia, Australia, LTE-FDD: B1/3/5/7/8/20/28<br><b>LA:</b><br>For Latin America, LTE-FDD: B2/3/4/5/7/8/28/66<br><b>NA:</b><br>For North America, LTE-FDD: B2/4/5/12/13/66 |
| Uplink Method     | LoRaWAN, OTAA, ABP                                                                         | LoRaWAN, OTAA, ABP                                                                         | LoRaWAN, OTAA, ABP                                                                         | MQTT, MQTTs, TCP, UDP or CoAP                                                | MQTT, MQTTs, TCP, UDP or CoAP                                                | MQTT, MQTTs, TCP, UDP or CoAP                                                | MQTT, MQTTs, TCP, UDP or CoAP                                                                                                                                      | MQTT, MQTTs, TCP, UDP or CoAP                                                                                                                                      | MQTT, MQTTs, TCP, UDP or CoAP                                                                                                                                      | MQTT, MQTTs, TCP or UDP                                                                                                                                                                             | MQTT, MQTTs, TCP or UDP                                                                                                                                                                             |
| Enclosure         | Type B                                                                                     | Type B2                                                                                    | Type S                                                                                     | Type B                                                                       | Type B2                                                                      | Type S                                                                       | Type B                                                                                                                                                             | Type B2                                                                                                                                                            | Type S                                                                                                                                                             | Type S                                                                                                                                                                                              | Type N                                                                                                                                                                                              |
| Battery           | 8500mAh                                                                                    | 19000mAh                                                                                   | 3000mAh                                                                                    | 8500mAh                                                                      | 19000mAh                                                                     | 3000mAh                                                                      | 8500mAh                                                                                                                                                            | 19000mAh                                                                                                                                                           | 3000mAh                                                                                                                                                            | 3000mAh                                                                                                                                                                                             | 1000mAh                                                                                                                                                                                             |
| Battery Type      | Li-SOCI2                                                                                   | Li-SOCI2                                                                                   | Li-ion                                                                                     | Li-SOCI2                                                                     | Li-SOCI2                                                                     | Li-ion                                                                       | Li-SOCI2                                                                                                                                                           | Li-SOCI2                                                                                                                                                           | Li-ion                                                                                                                                                             | Li-ion                                                                                                                                                                                              | Li-ion                                                                                                                                                                                              |
| Rechargeable      | --                                                                                         | --                                                                                         | Yes                                                                                        | --                                                                           | --                                                                           | Yes                                                                          | --                                                                                                                                                                 | --                                                                                                                                                                 | Yes                                                                                                                                                                | Yes                                                                                                                                                                                                 | Yes                                                                                                                                                                                                 |
| Solar Panel       | --                                                                                         | --                                                                                         | Yes                                                                                        | --                                                                           | --                                                                           | Yes                                                                          | --                                                                                                                                                                 | --                                                                                                                                                                 | Yes                                                                                                                                                                | Yes                                                                                                                                                                                                 | --                                                                                                                                                                                                  |
| Solar Panel Power | --                                                                                         | --                                                                                         | 0.9W                                                                                       | --                                                                           | --                                                                           | 0.9W                                                                         | --                                                                                                                                                                 | --                                                                                                                                                                 | 0.9W                                                                                                                                                               | 0.9W                                                                                                                                                                                                | --                                                                                                                                                                                                  |
| DC Connector      | --                                                                                         | --                                                                                         | Optional                                                                                   | --                                                                           | --                                                                           | Optional                                                                     | --                                                                                                                                                                 | --                                                                                                                                                                 | Optional                                                                                                                                                           | Optional                                                                                                                                                                                            | Provides 12V DC power                                                                                                                                                                               |
| GNSS              | --                                                                                         | --                                                                                         | --                                                                                         | --                                                                           | --                                                                           | --                                                                           | Yes                                                                                                                                                                | Yes                                                                                                                                                                | Yes                                                                                                                                                                | --                                                                                                                                                                                                  | --                                                                                                                                                                                                  |
| BLE Config        | Yes                                                                                        | Yes                                                                                        | Yes                                                                                        | Yes                                                                          | Yes                                                                          | Yes                                                                          | Yes                                                                                                                                                                | Yes                                                                                                                                                                | Yes                                                                                                                                                                | Yes                                                                                                                                                                                                 | Yes                                                                                                                                                                                                 |
| IP Rate           | IP66                                                                                       | IP66                                                                                       | IP66                                                                                       | IP66                                                                         | IP66                                                                         | IP66                                                                         | IP66                                                                                                                                                               | IP66                                                                                                                                                               | IP66                                                                                                                                                               | IP66                                                                                                                                                                                                | IP54                                                                                                                                                                                                |

# Enclosure Type

## Enclosure Type B



- Battery: 8500 mAh
- None-rechargeable
- Dimension: 118 x 57 x 47 mm

## Enclosure Type B2



- Battery: 19000 mAh
- None-rechargeable
- Dimension: 145 x 105 x 45 mm

## Enclosure Type S



- Battery: 3000 mAh
- Rechargeable
- 0.9w Solar Panel
- Dimension: 108 x 102 x 40 mm


## Enclosure Type N



- Battery: 1000 mAh
- Rechargeable
- Provides 12V DC power
- Dimension: 118 x 57 x 47 mm


## What is 1T version for Cellular version?

The 1T version of NB-IoT/LTE-M/LTE CAT-1 Water Quality Sensor Transmitter is with 1) 1NCE SIM Card & 2) ThingsEye Pre-configured.  
**1NCE SIM Card** (10 Years Cellular service with 500MB Data Traffic, Enough for devices to uplink 10 years at 1hour interval).

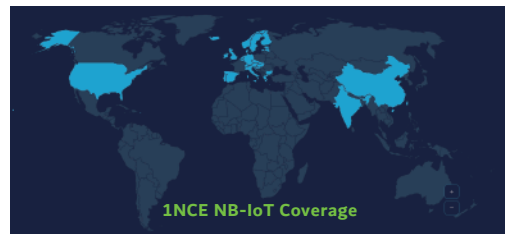

## ThingsEye.io platform:

1T version with ThingsEye IoT service pre-installed. This save a lot of work from user side to configure IoT server.  
 Below is Dash Board is the demo in ThingsEye.io.

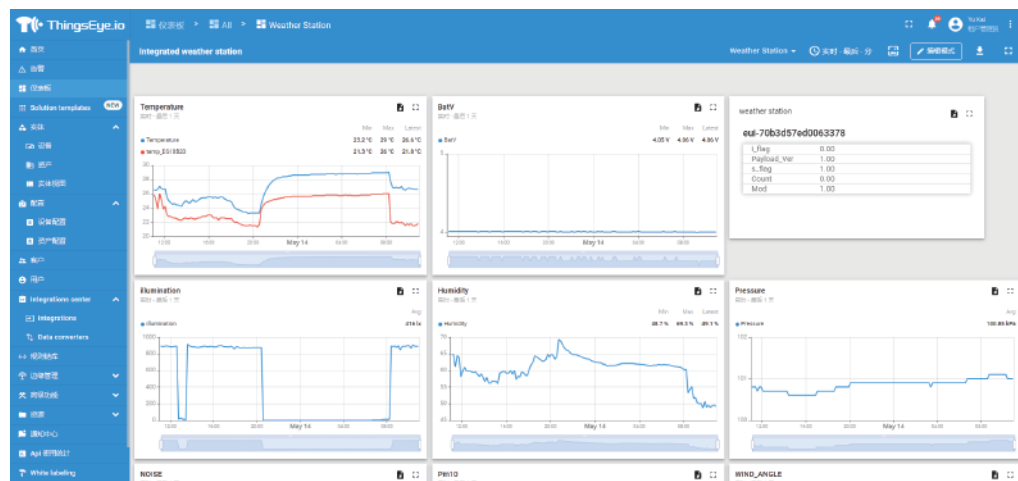

## Dragino Technology Co., Limited

Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoad  
 LongCheng Street, LongGang District ; Shenzhen 518116,China  
 Direct: +86 755 86610829 | Fax: +86 755 86647123

**WWW.DRAGINO.COM**  
 sales@dragino.com

# Ordering Information

## Example:

**WQS-LB-EU868**

### Model Name:

**WQS** ( Supports 1-3 probes to measure water quality and provide information on water quality conditions. )

### Wireless Tech:

**L:** LoRaWAN  
**N:** NB-IoT  
**C:** NB-IoT & LTE-M  
**K:** LTE CAT-1

### Battery Type:

**B:** 8500 mAh Li-SOIC2 Battery  
**B2:** 19000 mAh Li-SOIC2 Battery  
**S:** Solar Panel + 3000 mAh Li-ion Battery  
**N:** 1000 mAh Li-ion Battery

### Frequency Band or Cellular SIM:

#### Frequency Band:

**For LoRaWAN version:** EU433, CN470, EU868, IN865, KR920, MA869, AU915, US915, AS923-1, AS923-2, AS923-3, AS923-4

**For CAT-1 version:** **EU:** For European, Asia, Australia  
**LA:** For Latin America  
**NA:** For North America

#### Cellular SIM option (For NB-IoT, LTE-M, CAT-1):

**GE** -- General version (Exclude SIM card)  
**1T** -- With 1NCE & ThingsEye Pre-configured

## Probe Option (Order Separately):

**DR-ECK1.0:** EC Digital Electrode Sensor, EC Range: K=1: 0 ~ 2000µs/cm  
**DR-ECK10.0:** EC Digital Electrode Sensor, EC Range: K=10: 10 ~ 20000 µs/cm  
**DR-EC200:** Four Electrode EC Sensor, EC Range: 1 ~ 200,000µs/cm  
**DR-ORP1:** Oxidation-Reduction Potential Sensor, ORP Range: -1999 ~ 1999 mVr  
**DR-DO1:** Dissolved Oxygen Sensor, DO Range: 0 ~ 20.00 mg/L  
**DR-PH01:** Water PH Sensor, PH Range: 0 ~ 14.00 PH  
**DR-TS200:** Water Turbidity Sensor, TS Range: 0 ~ 200 NTU  
**DR-TS4000:** Water Turbidity Sensor, TS Range: 0 ~ 4000 NTU  
**DR-CL-2ML:** Integrated Residual Chlorine Sensor, CL Range: 0 ~ 2 mg/L  
**DR-CL-10ML:** Integrated Residual Chlorine Sensor, CL Range: 0 ~ 10 mg/L  
**DR-DO2:** Dissolved Oxygen Sensor(**Suitable for seawater**), DO Range: 0 ~ 20.00 mg/L  
**DR-COD:** Chemical Oxygen Demand Sensor, COD Range: 0 ~ 500 mg/L